


15-147-20071-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

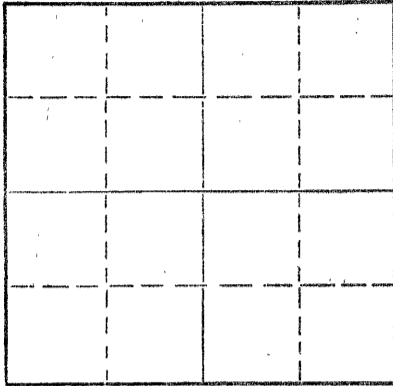

Locate well correctly on above  
Section Plat

Phillips County, Sec. 18 Twp. 5 Rge. 20 (E) (W) X  
Location as "NE/CNW/SW" or footage from lines SE NE NW  
Lease Owner Leland Baird  
Lease Name States Well No. #1  
Office Address Logan, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 10-7-72 19  
Application for plugging approved 19  
Plugging commenced 10-12-72 19  
Plugging completed 10-23-72 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3520' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3519'	2320.29'
				8 5/8"	217'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3250'. Mix3d and ran 4 sacks cement thru dump bailer.  
Squeezed hole with 3 sacks hulls - 20 sacks gel and 2 sacks hulls - 70 sacks cement 10 sacks gel. Released plug and displaced with 50 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 26 1972  
CONSERVATION DIVISION  
Wichita, Kansas

10-26-72

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364 Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 25 day of October, 1972

My commission expires October 1976



Sidney D. Miller  
Notary Public.

# B & B DRILLING, INC.

548 Petroleum Building  
Wichita, Kansas 67202

15-147-20071-00-00

June 2, 1969

## DRILLERS LOG

Re: Leland Baird #1 States  
SE NE NW Sec. 18-5S-20W  
Phillips County, Kansas

COMPANY: Leland R. Baird  
CONTRACTOR: B & B Drilling, Inc  
TOTAL DEPTH: 3520'  
COMMENCED: May 24, 1969  
COMPLETED: May 31, 1969

0	217	Sand & Sale
217	840	Shale & Shells
840	990	Sand
990	1057	Sand
1057	1110	Lime
1110	1145	Red Bed
1145	1343	Sand
1343	1614	Shale & Sand
1614	1652	Anhydrite
1652	1860	Shale
1860	2380	Shale
2680	3019	Shale & Lime
3019	3152	Lime & Shale
3152	3255	Lime
3255	3302	Lime
3302	3390	Lime
3390	3410	Shale & Lime
3410	3440	Lime
3440	3513	Lime
3513	3520	Arbuckle
3520		Total Depth

RECEIVED  
STATE CORPORATION COMMISSION

OCT 10 1972

CONSERVATION DIVISION  
Wichita, Kansas

10-10-72

Set 3519' 4 1/2" casing w/150 sx  
60-40 Poz ss 3/4% CFR2 12 1/2  
Gilsonite & 50 60/40 Poz

We certify the the above and foregoing to be  
true and correct copy of the log on the  
#1 States, located in Phillips County, Kans.

Bill Lahar President

Alma G. Kiser Notary Public  
Subscribed and sworn to before me this  
2nd day of June, 1969  
My commission expires May 31, 1970