

15-147-19112-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Phillips County. Sec. 27 Twp. 5 Rge. 20 (E) (W) X
Location as "NE/CNW/SW" or footage from lines SW SW NE
Lease Owner Shirer Oil Co.
Lease Name Steele Well No. #1
Office Address Box 118 Hoisington, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 6-18-71 19
Application for plugging approved 19
Plugging commenced 6-22-71 19
Plugging completed 6-24-71 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

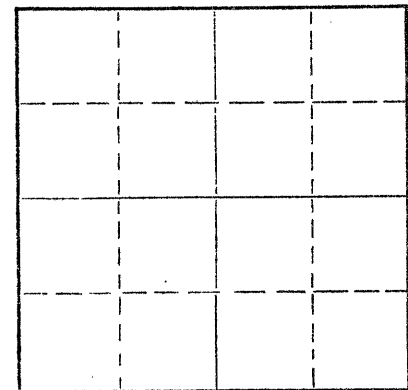

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3580' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3570'	2471.65'
				8 5/8"	215'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3540'. Mixed and ran 5 sacks cement thru dump bailer.
Squeezed hole with 5 sacks hulls - 1 1/4 sacks gel. Hole in 8 5/8" casing 20'. Circulated cement thru hole in 8 5/8" casing with 25 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
JUN 29 1971
CONSERVATION DIVISION
Wichita, Kansas

6-29-71

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364, Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 28 day of June, 1971

Sidney D. Miller
Notary Public.

My commission expires October 1972

