

JUL 22 1971

CONSERVATION DIVISION
Wichita, Kansas

15-147-00519-00-00

Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Phillips County, Sec. 30 Twp. 5S Rge. (E) 20 (W)

Location as "NE/CNW/SW" or footage from lines 1650' FNL & 990' FWL

Lease Owner Cities Service Oil Company

Lease Name States "B" Well No. 7

Office Address Box 553 Russell, Kansas 67665

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 11-16 1950

Application for plugging filed 6-18 1971

Application for plugging approved 6-22 1971


Plugging commenced 7-6 1971

Plugging completed 7-9 1971

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production September 19 70

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

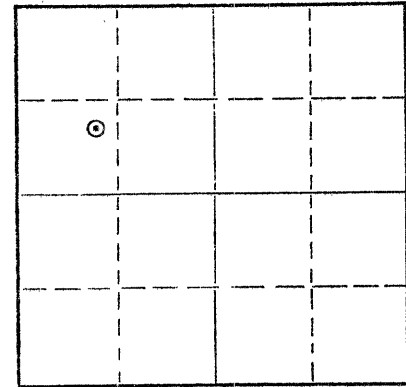

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. W. L. Nichols

Producing formation Reagan Depth to top 3647 Bottom 7' Pen. Total Depth of Well 3654 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	198'	None
				5 1/2"	3648'	890'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped sand in 3654' to 3630', 5 sacks cement to 3595'
Pulled 27 joints 5 1/2" casing 890' - welded collar on 8 5/8" pipe
Pumped in mud 3595' to 1480', 15 sacks gel 1480' to 760', 3 sacks hulls, and 70 sacks cement 760' to 550', 10 sacks gel 550' to 150', 50 sacks cement 150' to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Co., Inc.

Address Chase, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
E. W. Peterman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *E. W. Peterman*

Box 553 Russell, Kansas 67665

(Address)

Subscribed and sworn to before me this 21st day of July, 1971

10-5-72

James F. Kyger
Notary Public.

