


15-137-00734-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Norton County. Sec. 22 Twp. 5S Rge. 21 (E) E (W)  
Location as "NE/CNW&SW&" or footage from lines SE SE SW  
Lease Owner Varn Petroleum Company  
Lease Name Kemper Well No. 1  
Office Address 502 Central Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 10-22-58 19  
Application for plugging filed 7-14-65 19  
Application for plugging approved 7-15-65 19  
Plugging commenced 7-29-65 19  
Plugging completed 7-31-65 19  
Reason for abandonment of well or producing formation Reached economical limit

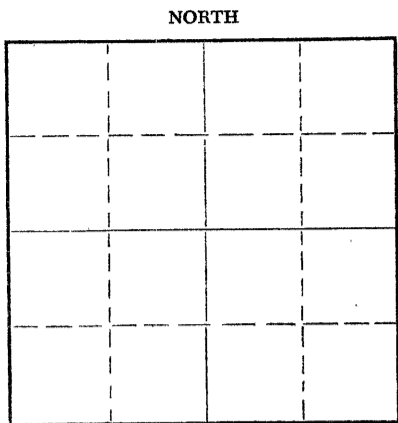

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production June 30 19 65  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation Arbuckle Depth to top 3616 Bottom 3623 Total Depth of Well 3623 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Topeka	Fair Poros.	3300	3307	8-5/8	215	---
Toronto	Trace of Stn.	3373	3377	5 1/2	3619	2304
Lansing Kansas City	" " "	3504	3507			
Arbuckle	Oil	3616	3623			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dumped five sacks cement from 3610' to 3570'. Pumped 20 sacks jel mud & 20 sacks cement through casing @560'. Pumped 20 sacks cement through casing @210'. Set rock bridge from 35' to 30'. Dumped 10 sacks cement from 30' to surface.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 11 1965

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Santa Fe Pipe & Supply  
Address PO Box 562, Great Bend, Kansas

8-11-65

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Otis E. Anderson (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Otis E. Anderson

Varn Petroleum Company, 502 Central Bldg.  
(Address) Wichita, Kansas

SUBSCRIBED AND SWORN TO before me this 6th day of August, 1965

Joan White

My commission expires 6-25-68

Notary Public.

