


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

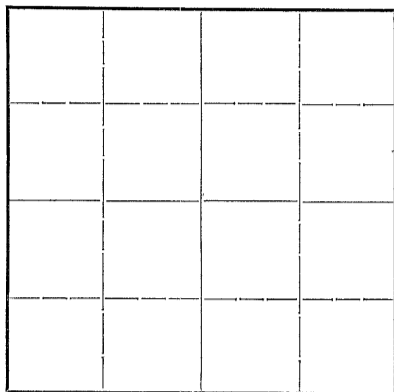

Locate well correctly on above
Section Plat

Norton County, Sec. 19 Twp. 5 Rge. (E) 21 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NE NE SE
Lease Owner Helmerich & Payne, Inc.
Lease Name Voss Well No. 1
Office Address 415 Philtower Building, Tulsa, Oklahoma.
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 1-22 19 42
Application for plugging filed 1-22 19 42
Application for plugging approved 1-22 19 42
Plugging commenced 1-22 19 42
Plugging completed 1-22 19 42
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander
Producing formation Depth to top Bottom Total Depth of Well 3733 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	259'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Raised drill pipe 500' from bottom and circulated water out and replaced with heavy mud, raised drill pipe to 259' of surface and circulated and filled with heavy mud placed a permanent plug and cemented with 10 sacks of cement to 229'. Raised drill pipe to 35' and filled with heavy mud and cemented with 10 sacks of cement to the base of the cellar. (5' below the surface.) Filled with heavy mud to surface.

PLUGGING
FILE E-19-5-R211
BOOK PAGE 22 LINE 34

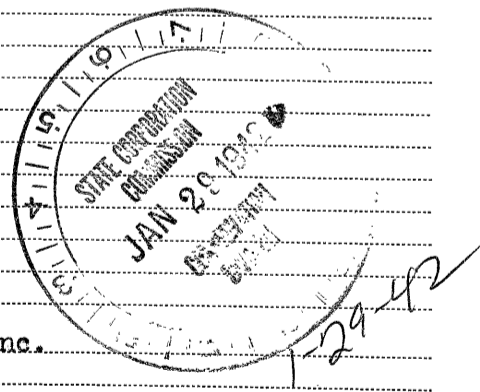

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Helmerich & Payne, Inc.
Address 415 Philtower Building, Tulsa, Oklahoma.

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.
I, C. M. Copeland (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. M. Copeland Production Supt.
415 Philtower Building, Tulsa, Oklahoma.
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of January, 1942.
A. H. Griffin
Notary Public.

My commission expires July 22, 1943.