


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Norton County. Sec. 13 Twp. 5 Rge. (E) 21 (W)  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{4}$ " or footage from lines NE NW SW  
Lease Owner Murfin Drilling Company et al  
Lease Name BAIRD Well No. 1  
Office Address 507 Union Nat'l Bank Bldg - Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil well  
Date well completed 2-4 1954  
Application for plugging filed 6-18 1954  
Application for plugging approved 19  
Plugging commenced 6-1 1954  
Plugging completed 6-1 1954  
Reason for abandonment of well or producing formation dry hole

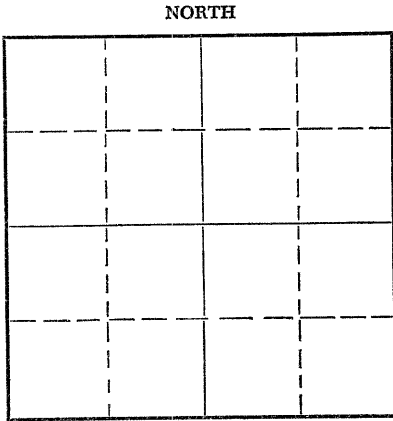

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production May 1954  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation Arbuckle Depth to top 3544 Bottom 3554 Total Depth of Well 3554 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	188	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with crushed rock from 3568' to 3540'.  
Mixed and dumped 4 sacks of cement with dump bailer at 3540'.  
Top of cement, 3520'/  
Filled hole with mud to 188', set rock bridge, mixed and dumped 15 sacks cement.  
Top of cement at 140'.  
Filled with heavy mud to 35', set rock bridge, mixed and dumped 10 sacks cement for cap.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J & M Casing Pulling Company  
Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
W. R. Murfin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W R Murfin  
507 Union Nat'l Bank Bldg. - Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of June, 1954.

My commission expires 6-4-55.

Abby Heimerman  
Notary Public.

24-7368-S 3-53-20M

PLUGGING  
FILE SEC 13 T 5 R 21W  
BOOK PAGE 37 LINE 29

6-22-54