


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-147-00002-00-00
WELL PLUGGING RECORD

NORTH

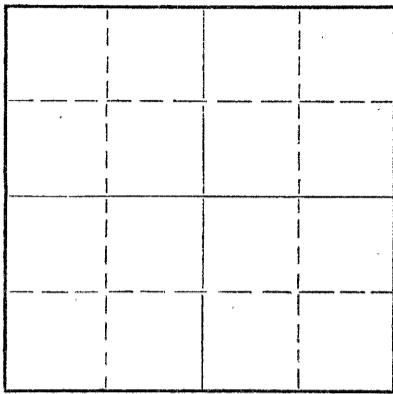

Locate well correctly on above
Section Plat

Phillips County. Sec. 36 Twp. 5S Rge. 20W (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. C NE NE SW
Lease Owner Cities Service Petroleum Company
Lease Name Wiltrout B Well No. #1
Office Address Box 553, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2/12/1962
Application for plugging filed 2/12/1962
Application for plugging approved 2/13/1962
Plugging commenced 2/13/1962
Plugging completed 2/13/1962
Reason for abandonment of well or producing formation Non Commercial

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Elden Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3629 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	240'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole w/heavy mud 3629' to 550' thru drill pipe,
Spotted 20 sx. cement thru drill pipe by Howco at 550',
Filled hole w/heavy mud thru drill pipe 550' to 230',
Spotted 20 sx. cement thru drill pipe by Howco to 230',
Filled hole w/heavy mud thru drill pipe 230' to 35',
Set Howco wooden plug w/1/2 sack cotton seed hulls at 35',
Filled hole w/10 sx. cement from 35' to surface,
Job complete 2/13/62, 3:00 P.M.

RECEIVED
STATE CORPORATION COMMISSION
MAR 2 1962
CONSERVATION DIVISION
Wichita, Kansas

3-2-62

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Peel Brothers, Inc.
Address Hoisington, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
M. M. Hardin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M M Hardin

Box 553, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of February, 1962

W. E. Smith

My commission expires March 17, 1963

Notary Public.

