

**KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION**
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15-007-20967-00-01 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 12/06/80.

Well Operator: Chesapeake Operating, Inc. KCC License #: 32334
(Owner/Company Name) (Operator's)

Address: P. O. Box 18496 City: Oklahoma City, OK 73154-0496

State: OK Zip Code: 73154-0496 Contact Phone: (405) 848-8000

Lease: Sternberger E Well #: 1-2 Sec. 2 Twp. 35S. S. R. 14 East West

C NE Spot Location / QQQQ County: Barber

1320 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

1320 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8-5/8 Set at: 377' Cemented with: 300 Sacks

Production Casing Size: 4-1/2 Set at: 4855 Cemented with: 225 Sacks

List (ALL) Perforations and Bridgeplug Sets: 4772'-4790' Mississippian

Elevation: 1513' (G.L. / K.B.) T.D.: 4855 PBTD: _____ Anhydrite Depth: _____
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): MIRU wireline unit, set CIBP @4054', dump bail 2 sx cmt on plug, load csg w/abandonment mud, shoot off csg @free point, POOH w/csg to 600', pump 10 sx gel ahead of 50 sx cmt plug, displace to 600', POOH w/csg to 400', pump 50 sx cmt plug, POOH to 40', pump cmt plug to surf, POOH w/csg, tie onto 4-1/2"x 8-5/8 annulus, if able to pump in, pump 50 sx cmt, RDMO. Weld on cap, clean location.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: _____

Bud Neff Phone: (620) 277-0803

Address: 4532 W. Jones Avenue City / State: Garden City, KS 67846

Plugging Contractor: Allied Cementing Co., Inc. KCC License #: _____
(Company Name) (Contractor's)

Address: P. O. Box 31, Russell, KS 67665 Phone: () -

Proposed Date and Hour of Plugging (if known?): _____


Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 11/19/04 Authorized Operator / Agent: Jim Reisch (Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

RECEIVED
NOV 22 2004
KCC WICHITA

6/05

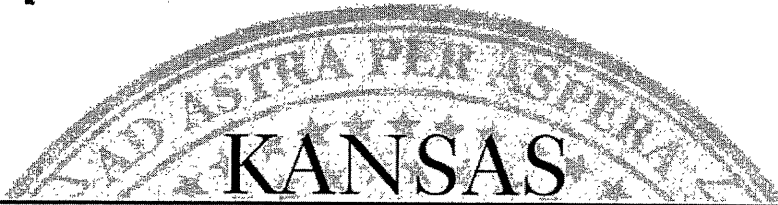

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Chesapeake Operating, Inc.
PO Box 18496
6200 N Western Ave.
Oklahoma City, OK 73154-0496

December 07, 2004

Re: STERNBERGER E #1-2
API 15-007-20967-00-01
NE 2-35S-14W, 1320 FNL 1320 FEL
BARBER COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely

David P. Williams
Production Supervisor