

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-097-20648-00-00  
Spot: NENW Sec/Twnshp/Rge: 13-28S-19W  
660 feet from N Section Line, 1980 feet from W Section Line  
Lease Name: BECKER RICE Well #: 2  
County: KIOWA Total Vertical Depth: 4825 feet

Operator License No.: 5118  
Op Name: TGT PETROLEUM CORPORATION  
Address: 7570 W 21ST ST N, STE1010D PO BOX  
WICHITA, KS 67275

PROD Size: 5.5 feet: 4824 WITH 250 SX CMT  
SURF Size: 8.625 feet: 368 WITH 350 SX CMT

\$156<sup>81</sup>

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/10/2004 3:15 PM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: JERRY SULLIVAN Company: TGT PETROLEUM Phone: (316) 773-2266

Proposed Plugging Method: SAND BACK TO 4750' WITH 5 SX CMT. PLUG AT 1250' WITH 12 SX GEL & 50 SX CMT. PLUG AT 390' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 11/10/2004 5:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

PBTD 4821'. SANDED BACK TO 3680' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 1250' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 390' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4812	4816		

RECEIVED  
DEC 06 2004  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICE. RECOVERED 2430' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

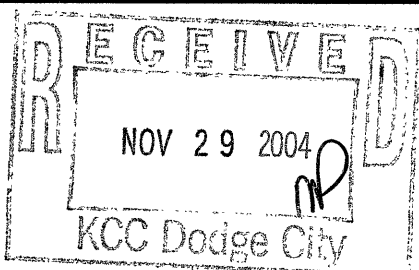

Signed

*Stephen J. Pfeifer*  
(TECHNICIAN)

INVOICED

DATE 12-7-04

INV. NO. 2005060899

Form C-29/B