

15-147-00706-00-00

OCT 28 1943

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

WELL PLUGGING APPLICATION FORM

Well Location SW $\frac{1}{4}$  SW $\frac{1}{4}$  SE $\frac{1}{4}$  Sec. 21 Twp. 5 Rge. (E) 20 (W)     

Field Name (if any) Ray County Phillips

Lease (Farm Name) Hansen Fee Well No. 2

Was well log filed with application? Yes If not, explain circumstances and give available data (Use an additional sheet if necessary) --

Date and hour plugging is desired to begin October 24, 1943

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary) --

Name of the person on the lease in charge of well for owner E. F.

Abplanalp Address 521 First Nat'l. Bank Bldg., Wichita, Kansas


Name of well owner or Acting Agent D. G. Hansen

Address Logan, Kansas

Invoice covering assessment for plugging this well should be sent to:

D. G. Hansen Address Logan, Kansas

and payment will be guaranteed by applicant.



BARNETT DRILLING COMPANY

By W. R. Hunter  
Operator or Acting Agent

Date October 29, 1943

**PLUGGING**  
FILE SEC. 21 E 5 R 20  
BOOK PAGE 27 LINE 4

D. G. HANSEN

LOG OF HANSEN FEE WELL #2

SW $\frac{1}{4}$  SW $\frac{1}{4}$  SE $\frac{1}{4}$  SEC. 21-5-20, PHILLIPS COUNTY, KANSAS

15-147-00706-00-00


<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Cellar	0	8	
Clay	8	50	
Sand	50	95	
Shale & Shells	95	167	Set 10 3/4" Surface pipe @ 165'.
Shale	167	715	
Shale & Shells	715	1170	
Sand	1170	1420	
Shale & Shells	1420	1655	
Shale	1655	1710	
Anhydrite	1710	1750	
Shale & Shells	1750	2145	
Lime & Shale	2145	2200	
Shale & Shells	2200	2295	
Lime	2295	2330	
Shale & Shells	2330	2400	
Lime	2400	2510	
Shale	2510	2540	
Lime	2540	2670	
Shale & Shells	2670	2720	
Lime	2720	2885	
Lime & Shale	2885	3125	Circulated 1 Hr. @ 3064'.
Lime	3125	3200	
Lime & Shale	3200	3275	
Lime	3275	3290	
Lime & Shale	3290	3305	Circulated 1 1/2 hrs. @ 3294' and 1 1/2 hrs. @ 3297'.
Lime	3305	3448	Circulated 2 hrs. @ 3391'. Oil show from 3426' to 3434'.
Lime & Chert	3448	3478	
Lime	3478	3553	
Shale	3553	3660	Circulated 1 1/2 hrs. @ 3580', 1 1/2 hrs. @ 3585', 2 1/4 hrs. @ 3590', 1 1/2 hrs. @ 3592', 2 1/4 hrs @ 3595', 1 3/4 hrs @ 3599', 1 1/2 hrs. @ 3603', 1 1/2 hrs. @ 3604', 1 1/2 hrs. @ 3607', 1 1/2 hrs. @ 3609', 1 1/2 hrs. @ 3614', 1 1/2 hrs. @ 3621' and 1 1/2 hrs. @ 3660'.
Total Depth		3660	Dry and abandoned

CERTIFICATE

I hereby certify that the above is a true and correct log of the Hansen Fee Well # 2, located in the SW $\frac{1}{4}$  SW $\frac{1}{4}$  SE $\frac{1}{4}$  of Section 21-5-20, Phillips County, Kansas.

**PLUGGING**  
 FILE SEC 21-5-R20W  
 BOOK PAGE 97 LINE 4

*W. R. Hunter*  
 Office Manager - Barnett Drilling Company

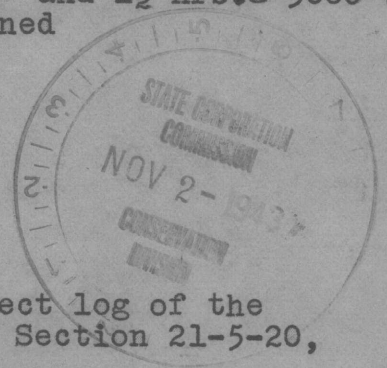

Subscribed and sworn to before me, a Notary Public in and for the County of Sedgwick, State of Kansas, this thirtieth day of October 1943.

*Notary Public*  
 Notary Public

My commission expires July 17, 1944.



15-147-00706-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

November 5, 1943

Well No. 2  
Farm Hansen Tee  
Description SW $\frac{1}{4}$  SW $\frac{1}{4}$  SE $\frac{1}{4}$  21-5-20W  
County Phillips  
File 97-4

D. G. Hansen  
Logan, Kansas

Dear Sir:

This letter is your permit to plug  
the above subject well, in accordance  
with the Rules and Regulations of the  
STATE CORPORATION COMMISSION

Very truly yours,

STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR  
CONSERVATION DIVISION

HA

By: J. P. Roberts  
J. P. Roberts

NOTICE:

C. T. Alexander  
Great Bend, Kansas