

15-147-00623-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
211 NORTH BROADWAY
WICHITA, KANSAS

RECEIVED
STATE CORPORATION COMMISSION
09-22-1959
SEP 22 1959
CONSERVATION DIVISION
Wichita, Kansas

WELL PLUGGING APPLICATION FORM
File One Copy

Lease Owner Colorado Oil and Gas Corp. Address Box 1030, Wichita, Kansas
(Applicant)

Lease (Farm Name) DEMUTH Well No. 3

Well Location SE NW NE Sec. 22 Twp. 5 Rge. (E) 20 (W)

County Phillips Field Name (if any) Hansen

Total Depth 3599 (PBTD) Oil Gas Dry Hole

Was well log filed with application? Yes If not, explain: _____

Date and hour plugging is desired to begin September 25, 1959

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission.

Name of the person on the lease in charge of well for owner _____

O. B. Grubbs Address Plainville, Kansas

Plugging Contractor Knight Casing Pulling Company

Plugging Contractor's License No. 436

Address Chase, Kansas

Invoice covering assessment for plugging this well should be sent to _____

Colorado Oil and Gas Corporation Address Box 1030, Wichita, Kansas

and payment will be guaranteed by applicant.

Bill K. Henrichs
Applicant or Acting Agent
Bill K. Henrichs

Date September 21, 1959

PLUGGING

File Sec. 22 T 5 R 20W

Book Page 4 Line 8

THE DERBY OIL COMPANY

15-147-00023-00-00

Record of Well No. 3

DEMUTH

Farm

Location SE NW NE

Sec. 22

Twp. 5

Rge. 20

Contractor G. W. Peal Drig. Co.

County

Phillips

Drilling Commenced March 19, 1949

State

Kansas

Elevation 2160

Drilling Completed March 27, 1949

CASING RECORD

RECEIVED

STATE CORPORATION COMMISSION

SIZE	FEET	KIND	WEIGHT	
8-5/8	278	-	-	Cemented with 200 sacks
4-1/2	3616	New J55 S.S.	11.6	Cemented with 125 sacks

SEP 22 1959

CONSERVATION DIVISION
Wichita, Kansas

FORMATION		BOTTOM	FORMATION		BOTTOM
Sand		75	GEOLOGICAL DATA:		
Shale		278	Lansing	3263	-1103 VSSO @ 3361-64
Shale, Clay & Shells		1090	Arbuckle	3537	-1377
Sand		1150			
Shale & Shells		1658	COMPLETION RECORD:		
Anhydrite		1696	Drilled cement to 3599. Perf. 2 3/4 / 3578-85.		
Shale & Lime		1850	SO & rotary mud. Acidized 1500 10 hr.		
Lime & Shale		2000	Swab test average .88 BOPH, no water.		
Broken Lime		2155	Acidized/1000 gal. 4 hr. Swab test made		
Shale & lime		2365	3-1/2 BO plus 1-1/2 BWPH. Set L.W. plug		
Broken Lime		2500	3574'. Perf. 2 1/4 / 3564-72. Rec. 700' salt		
Shale & Lime		2670	water/2 hrs. Set Baker retainer @ 3549.		
Lime & Shale		2800	Squeezed of perf/3564-72. Drilled out		
Broken Lime		3085	cement plug. Perf. 2 1/4 / 3548-56. SSO.		
Lime		3195	Acidized w/500 gal. Swab test 1/4 BOPH/		
Broken Lime		3263	2 1/4 hrs. Acidized w/1000 gal. Swab test		
Lime		3616	made 1.68 BOPH plus 50% water. Set plug		
	RTD	3616	3543. Perf. 12/3536-40. Made 8 1/4 BOPH plus		
			2.26 BWPH. Drilled out all plugs except bot		
			tom cement plug. Ran tubing & rods.		

PLUGGING

File No. 22 T 5 R 20W


Book Page 4 Line 8

FORMATION

BOTTOM

FORMATION

BOTTOM



State of Kansas



15-147-00623-00-00

GEORGE DOCKING Governor
HARRY G. WILES Chairman
MARION BEATTY Commissioner
RICHARD C. BYRD Commissioner
RAYMOND B. HARVEY Secretary
J. ROBERT WILSON Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market

WICHITA, KANSAS

JEWEL M. OGDEN, Director

WELL PLUGGING AUTHORITY

September 23, 1959

Well No. 3
Lease Danforth
Description 22-9-204
County Halligan
File No. 1-4


Colorado Oil & Gas Corp.
Box 1030
Wichita, Kansas

Consent

This is your authority to plug the above subject well in accordance with the Rules and Regulations of the State Corporation Commission.

This authority is void after 90 days from the above date.

Very truly yours,

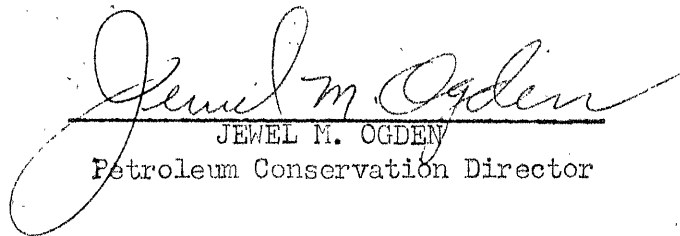
JEWEL M. OGDEN
Petroleum Conservation Director

Mr. _____
is hereby assigned to supervise the plugging of the above named well.

In the event you need any further information regarding this well fell free to write or call me at any time.

J. Lewis Brock
Western Kansas Field Supervisor
P. O. Box 569
Great Bend, Kansas
Phone: GL-33022