

15-137-00092-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Norton County. Sec. 25 Twp. 5S Rge. (E) 21 (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW $\frac{1}{4}$  SW $\frac{1}{4}$  NE $\frac{1}{4}$

Lease Owner Barnett Oil Company, et al

Lease Name Kemper Well No. 1

Office Address 417 First Nat'l Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 23, 1952

Application for plugging filed April 23, 1952

Application for plugging approved April 23, 1952


Plugging commenced April 23, 1952

Plugging completed April 23, 1952

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - - 19 - -

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

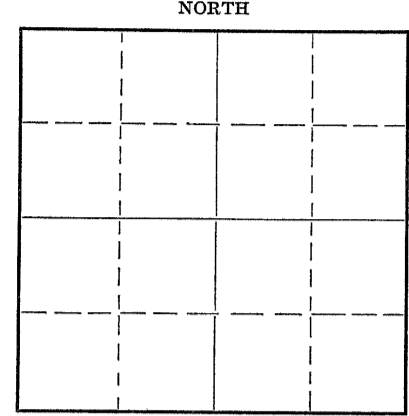

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3720 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface Casing		-0-	179'	8 5/8"	179'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from 3720 feet to 175 feet. Set wooden plug at 175 feet and filled surface casing with 1/2 sack of hulls and 15 sacks of cement to 128 feet. Filled surface casing with heavy mud from 128 feet to 40 feet. Set wooden plug at 40 feet and filled surface casing with 1/2 sack of hulls and 10 sacks of cement to bottom of cellar.

RECEIVED  
CORPORATION  
MAY 21 1952  
CONSERVATION DIVISION  
WICHITA, KANSAS

5-26-52

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Barnett Oil Company

Address 417 First Nat'l Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
W. R. Hunter

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Hunter  
First Nat'l Bank Bldg., Wichita, Kansas

SUBSCRIBED AND SWORN TO before me this 13th day of May, 1952

Mildred F. Willis  
Notary Public.

My commission expires February 27, 1956.

22-7877-s 4-49-10M

