

15-137-30068-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Norton County. Sec. 23 Twp. 5 Rge. 21 (E) (W) X

Location as "NE/CNWESW" or footage from lines C of S/2 NE NE

Lease Owner Leland R. Baird

Lease Name Baird Fee Well No. #1

Office Address Logan, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 8-26-74 19

Plugging completed 10-2-74 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

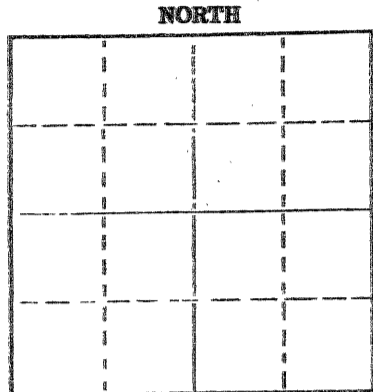

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3611' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3607'	2436.57'
				8 5/8"	207'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3590'. Mixed and ran 4 sacks cement thru dump bailer.
Squeezed hole with 5 sacks hulls and 16 sacks gel.
110 cu. ft. cement from 1000' - 675'
11 sacks gel from 675' - 215'
Released plug - 30 cu. ft. cement from 215' - 140'
3 sacks gel from 140' - 20'
10 cu. ft. cement from 20' to base of cellar

RECEIVED
STATE CORPORATION COMMISSION
OCT 7 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.

Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.

Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.

Box 364 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 4 day of October, 1974

Sidney D. Miller
Notary Public.

