



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-051-25,921-00-00

Company DaMar Resources, Inc.

Well Haddock 'D' No. 1

Field Wildcat

County Ellis State Kansas

Location 590' FNL & 1970' FWL

Sec: 2 Twp: 13 S Rge: 18 W

Permanent Datum Ground Level Elevation 2071

Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Other Services
CNL/CDL
DIL

Elevation
K.B. 2076
D.F.
G.L. 2071

Date 10/22/2009

Run Number Two

Depth Driller 3675

Depth Logger 3672

Bottom Logged Interval 3671

Top Log Interval 3000

Casing Driller 8.625 @ 262

Casing Logger 260

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 3.000

Density / Viscosity 9.1 52

pH / Fluid Loss 10.0 8.0

Source of Sample Flowline

Rm @ Meas. Temp .57 @ 58

Rmf @ Meas. Temp .43 @ 58

Rmc @ Meas. Temp .77 @ 58

Source of Rmf / Rmc Charts

Rm @ BHT .29 @ 115

Operating Rig Time 4 Hours

Max Rec. Temp. F 115

Equipment Number 4

Location Hays

Recorded By K. Bange

Witnessed By Randy Kilian

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Hays, N to Feedlot rd, 1 E, 1 N, 1/2 E, S into

Database File: c:\warrior\data\damar_haddock 'd' no. 1\damar102209hd.db
Dataset Pathname: dil\damar2in
Presentation Format: micro
Dataset Creation: Thu Oct 22 15:10:26 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

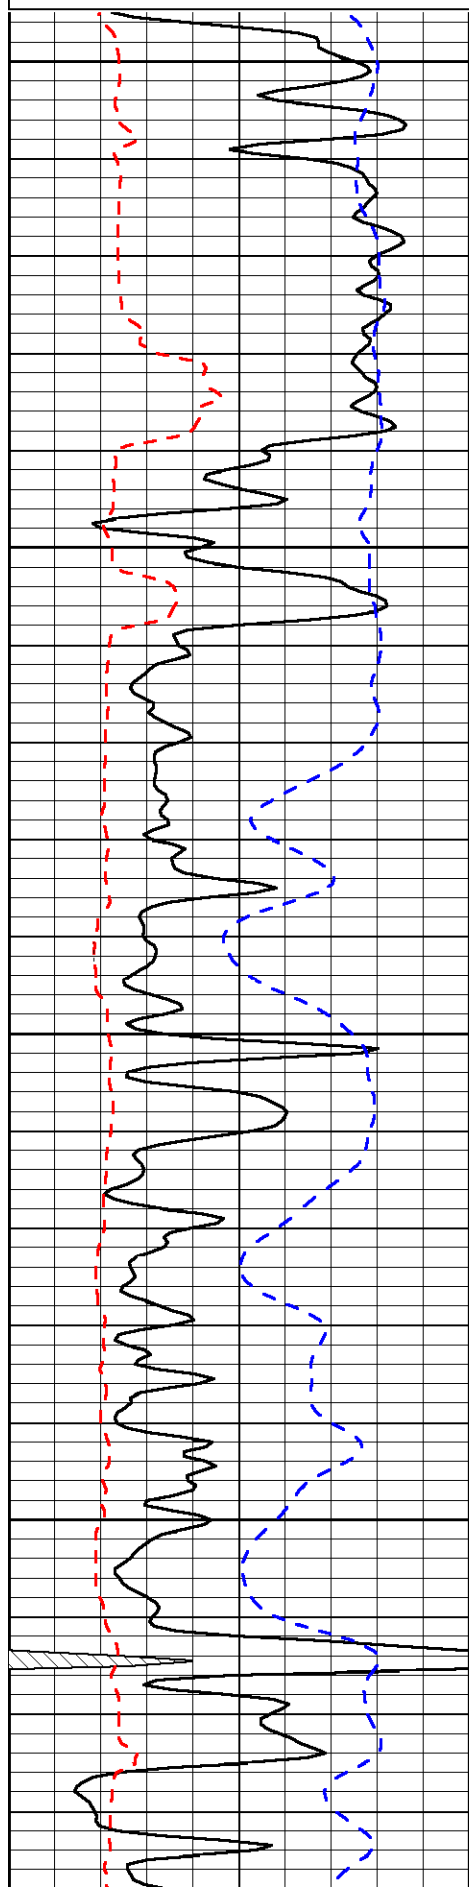


3000

3050

3100

3150

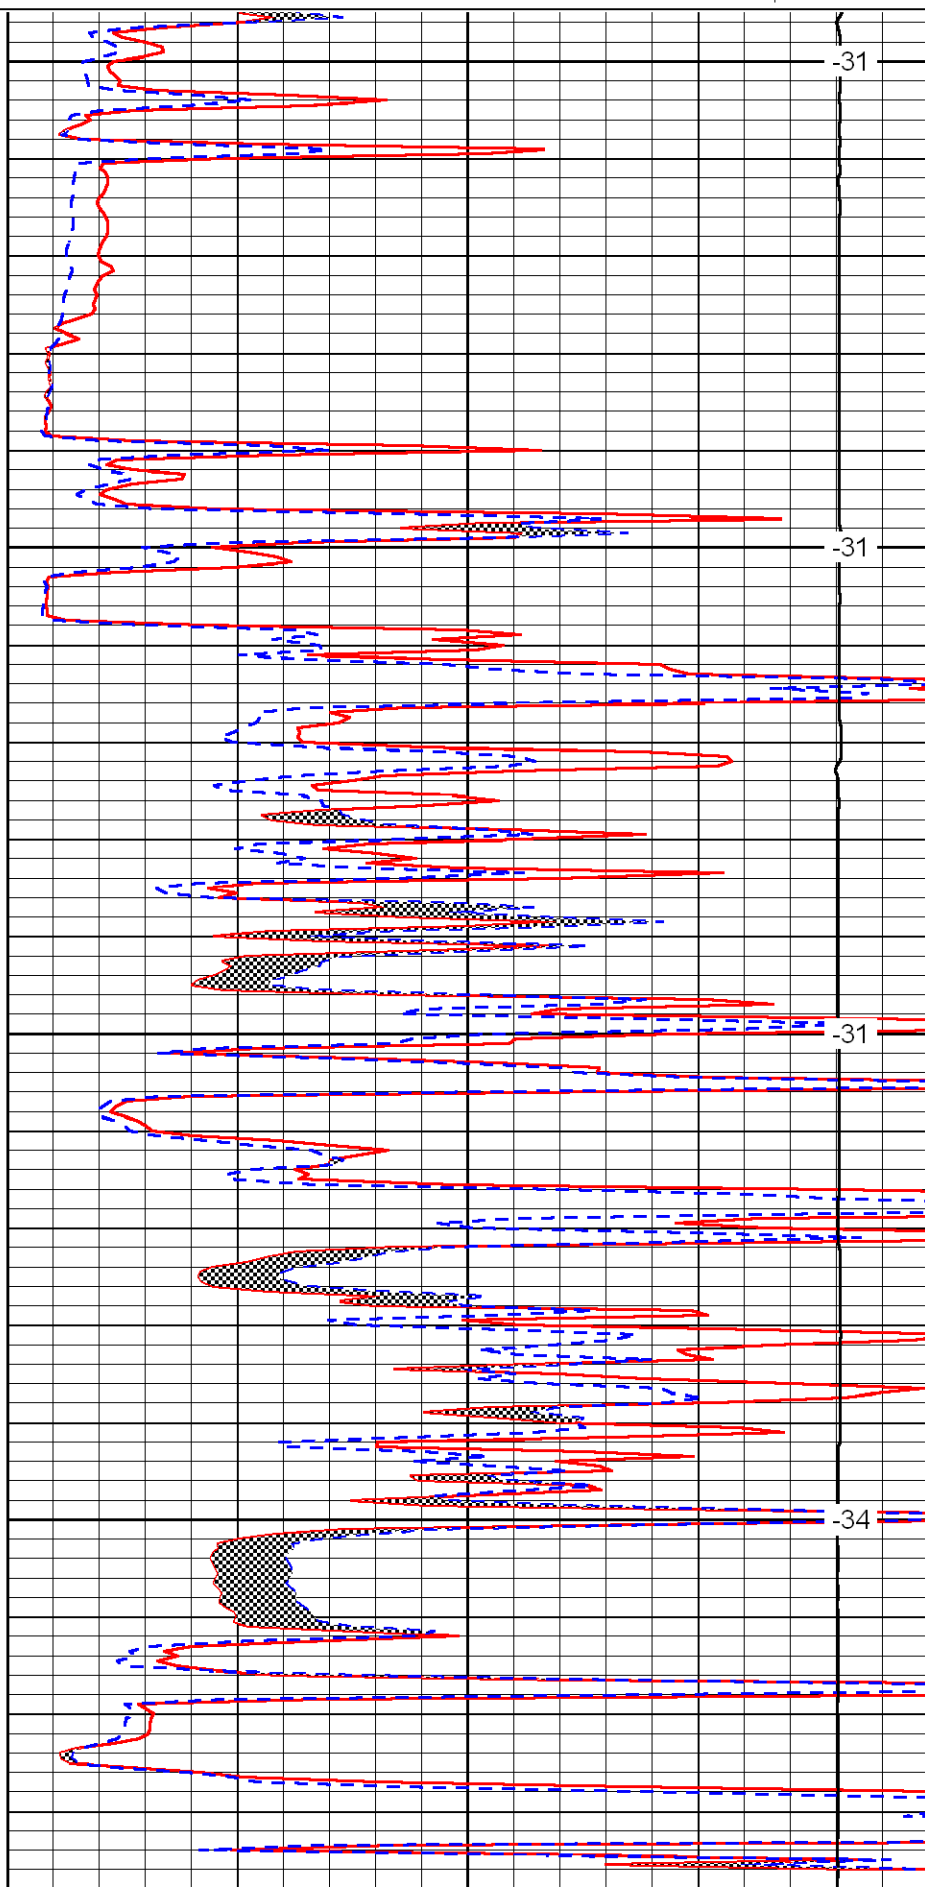


-31

-31

-31

-34

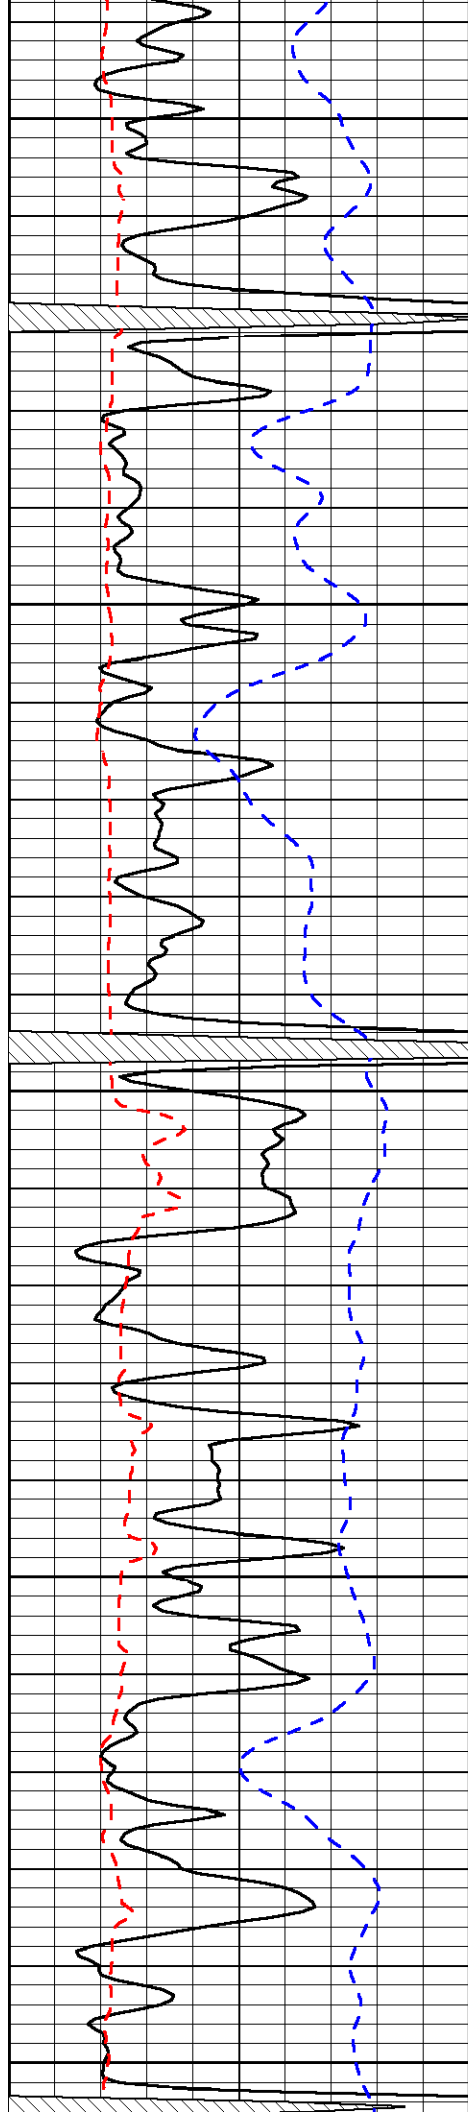


3200

3250

3300

3350

3400

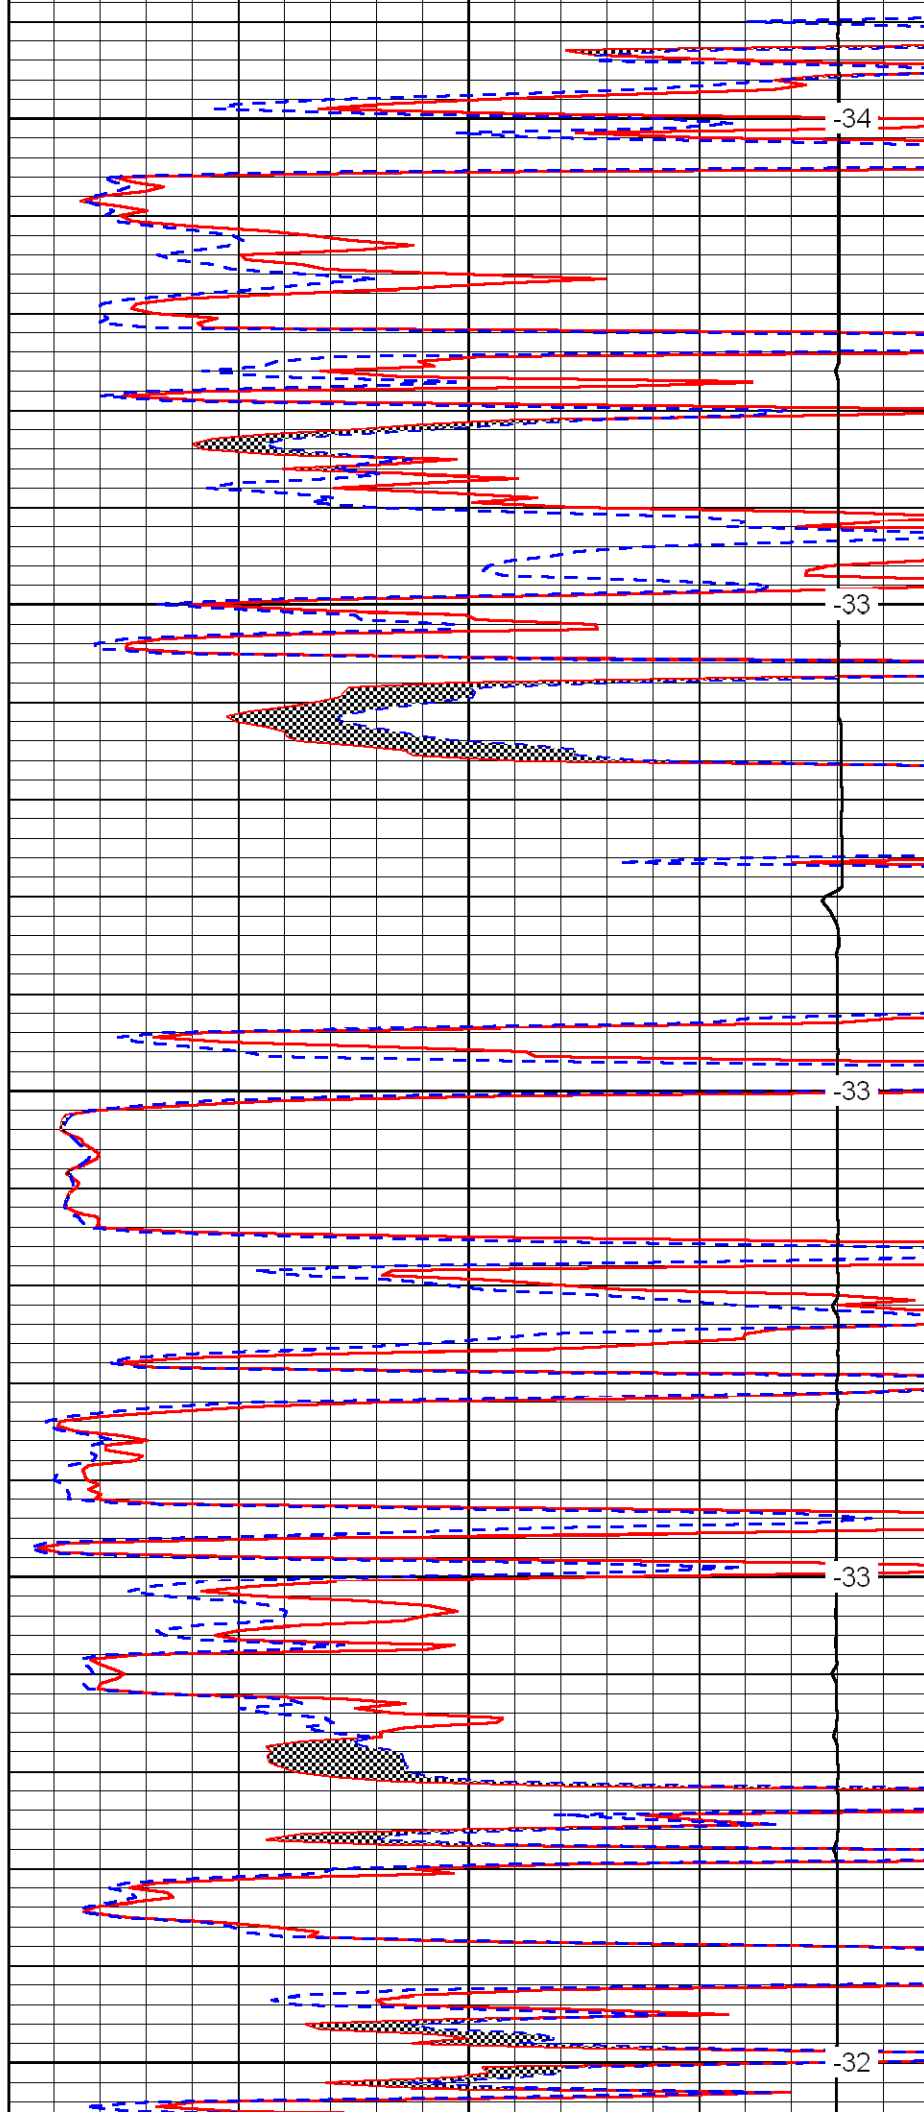


-34

-33

-33

-33

-32

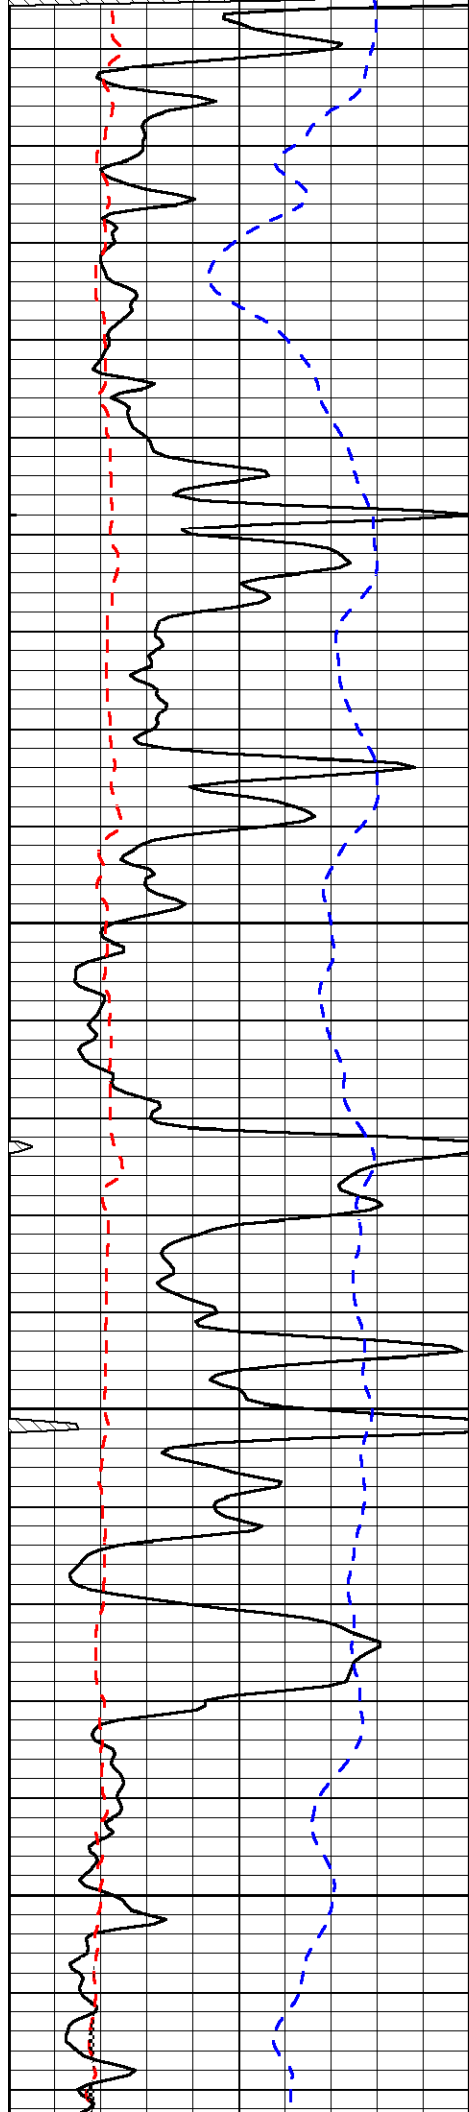


3450

3500

3550

3600

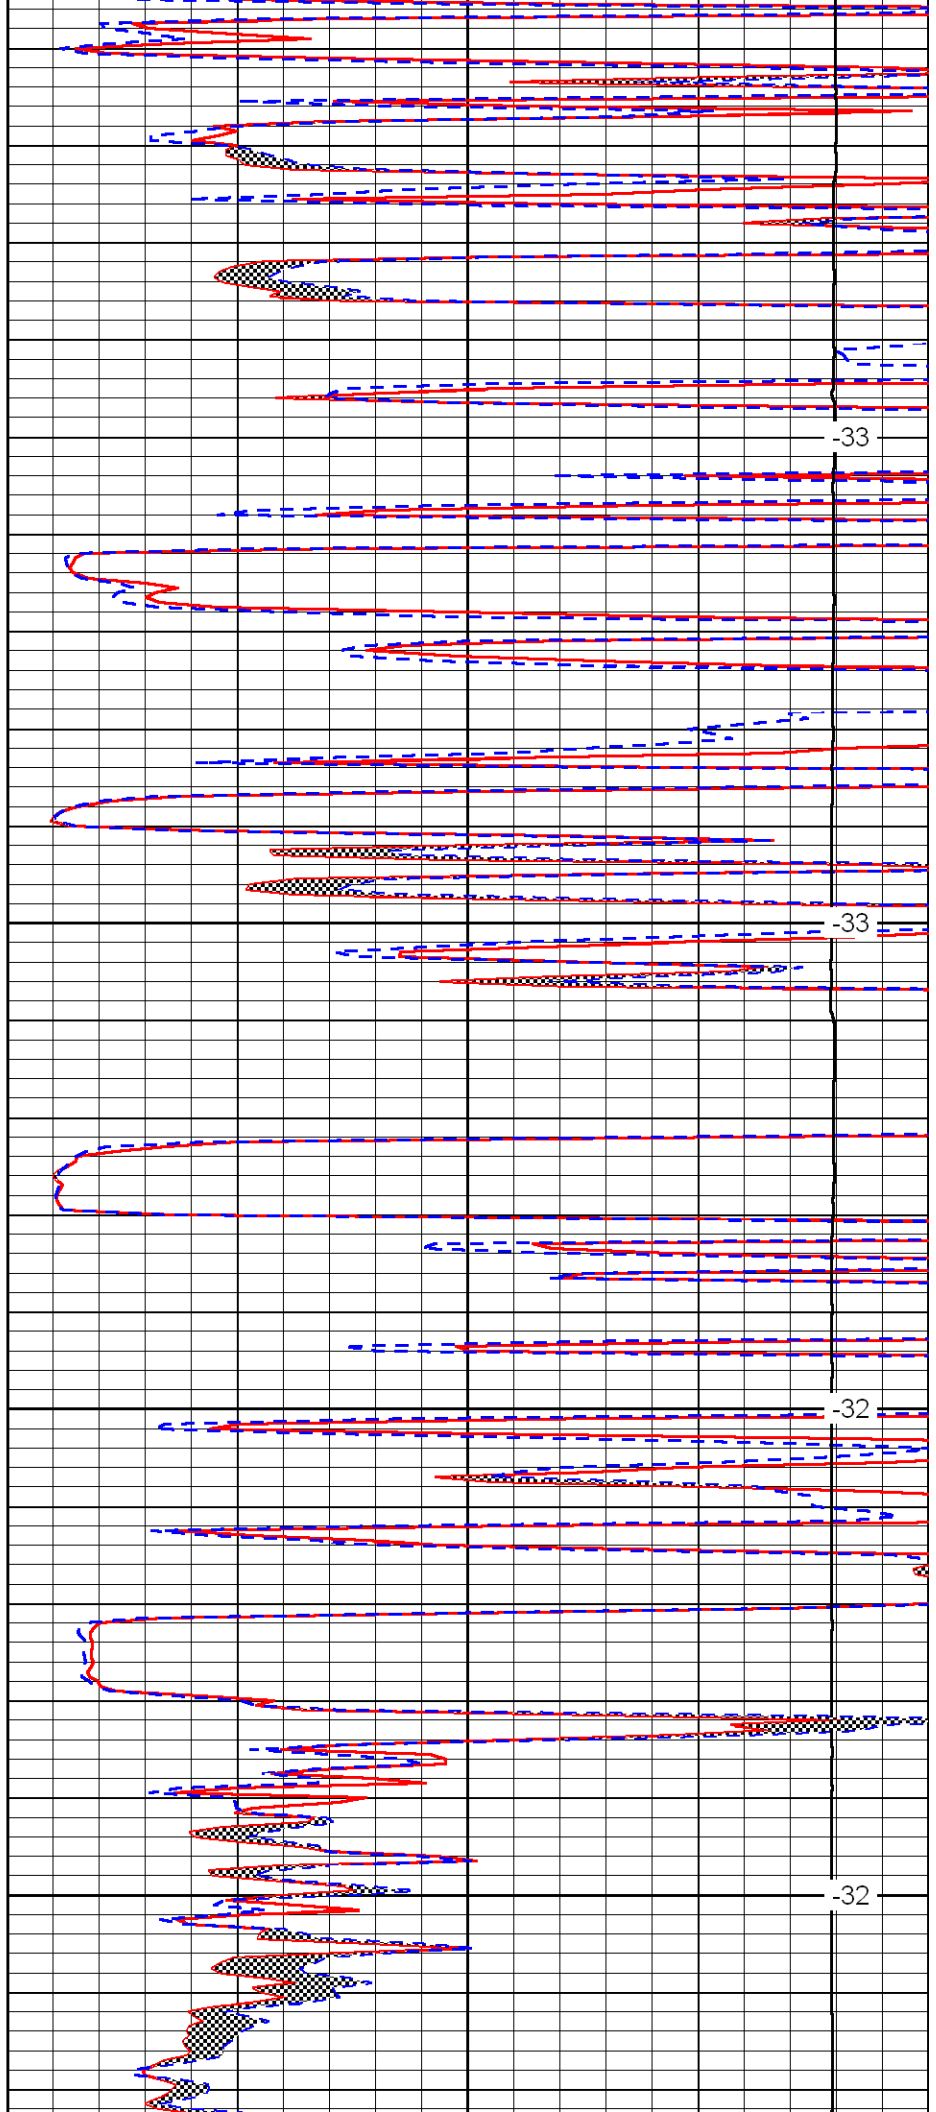

-33

-33


-32

-32



3650

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

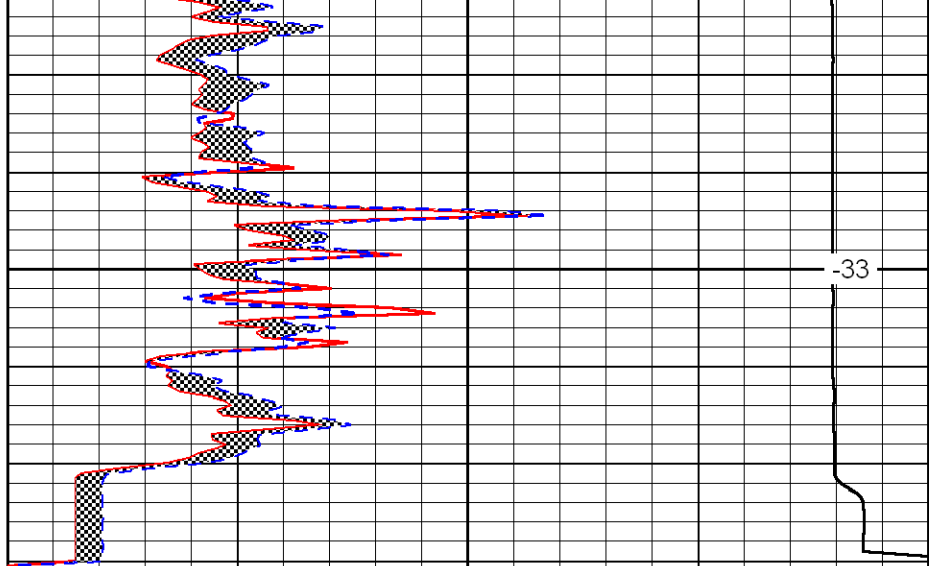

-33

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)