LOG-TECH

DIGITAL LOG (785) 625-3858

Microresistivity Log

API No.	
15-051-25,898-00-00	

Company	Raymond Oil Co.		
Well	Pfeifer No. 1		
Field	Wildcat		
County	Ellis	State	Kansas

Location: 968' FSL & 1712' FWL

Sec: 14 Twp: 12 S Rge: 19 W

Other Services: CNL/CDL, DIL/BHCS

Permanent Datum	Ground Level	Elevation 2230
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	

Elevation
K.B. 2235
D.F.
G.L. 2230

Date	9/23/2009		
Run Number	Two		
Depth Driller	3940		
Depth Logger	3940		
Bottom Logged Interval	3939		
Top Log Interval	3000		
Casing Driller	8.625 @ 217		
Casing Logger	216		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	4,800		
Density / Viscosity	9.0 / 50		
pH / Fluid Loss	10.0 / 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	0.85 @ 75		
Rmf @ Meas. Temp	0.64 @ 75		
Rmc @ Meas. Temp	1.15 @ 75		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.55 @ 115		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	115		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Kevin Kessler		

<<< Fold Here >>>

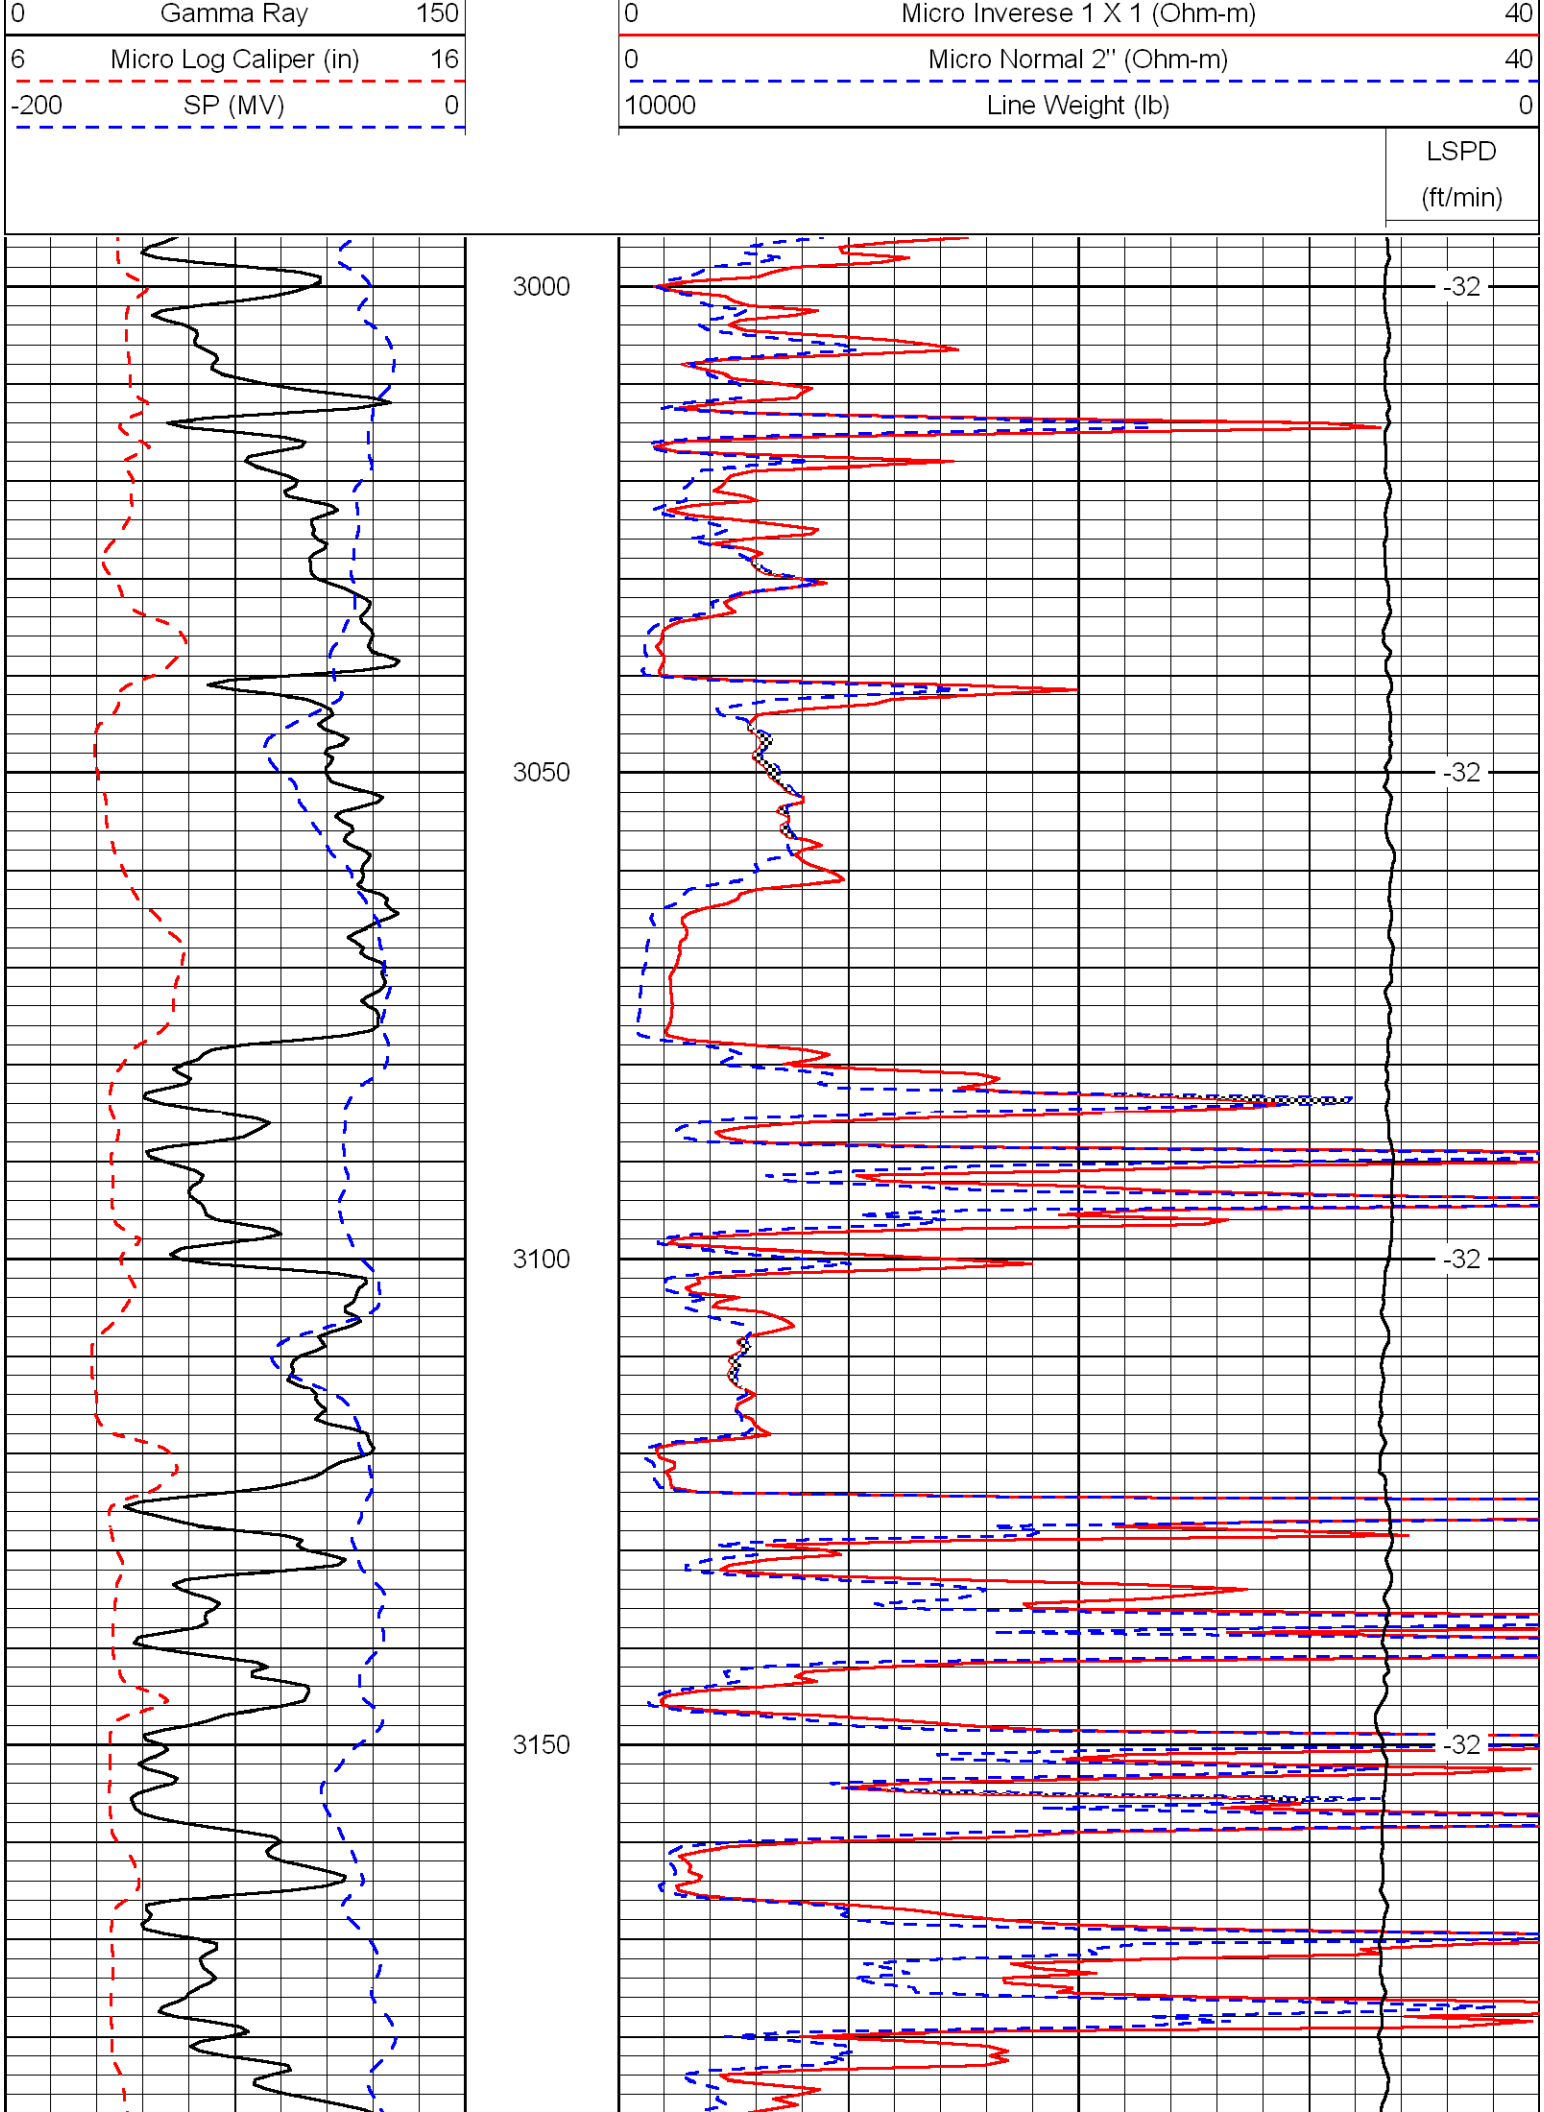
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

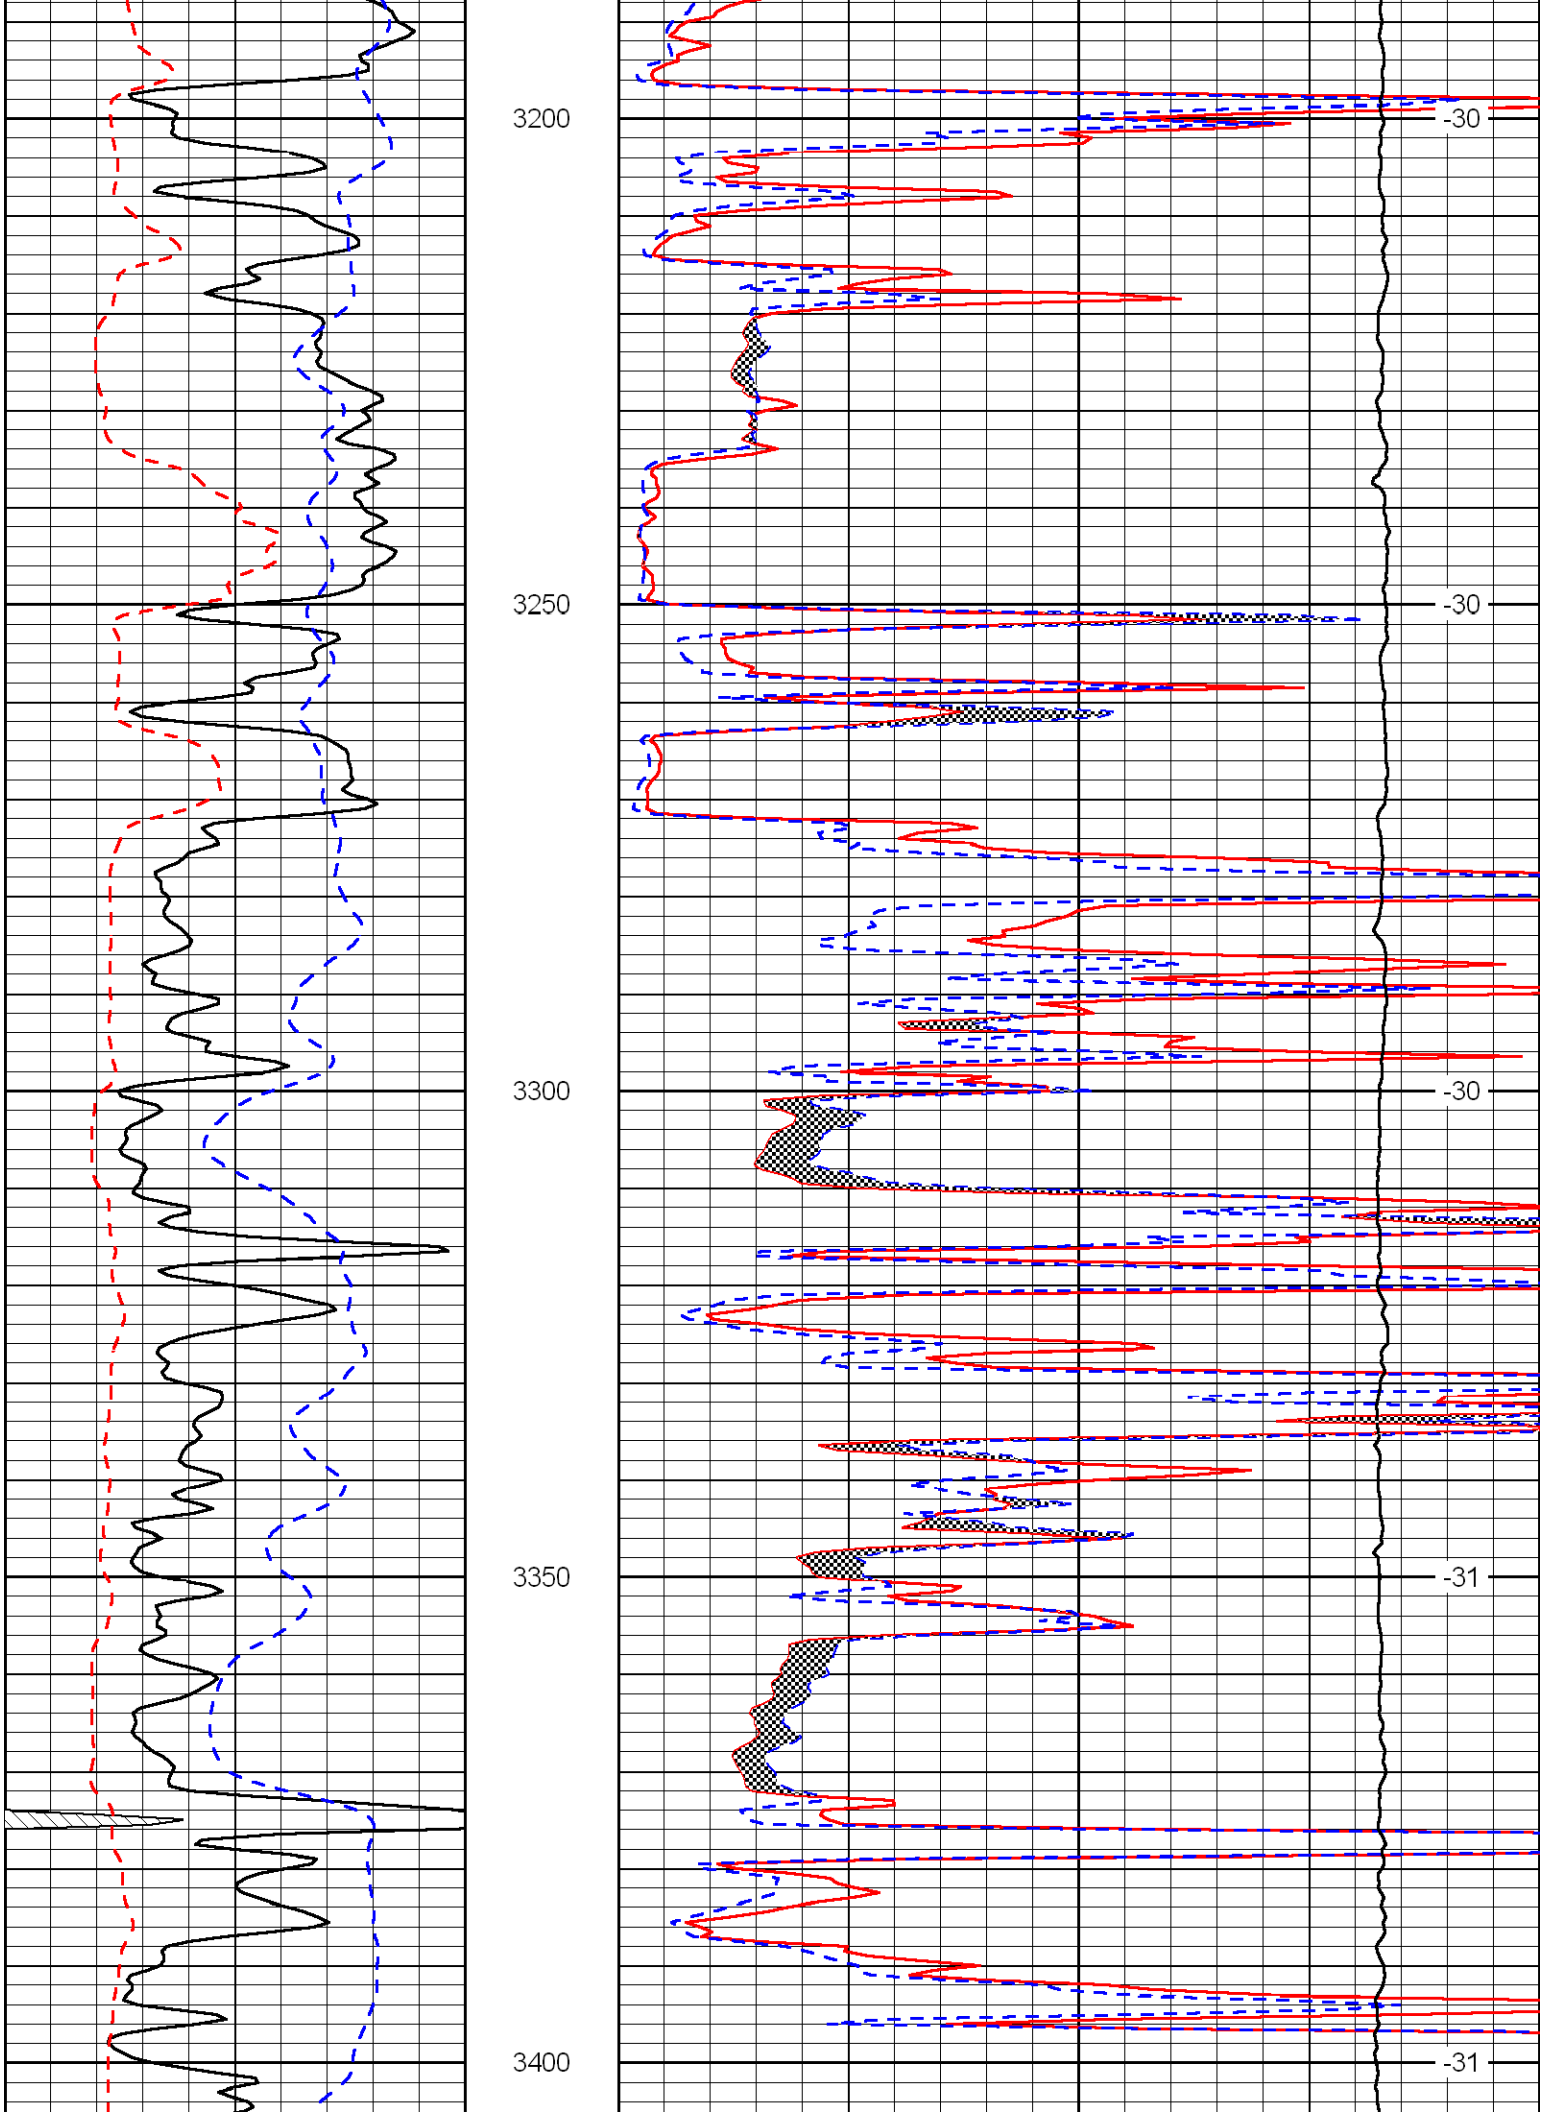
Comments

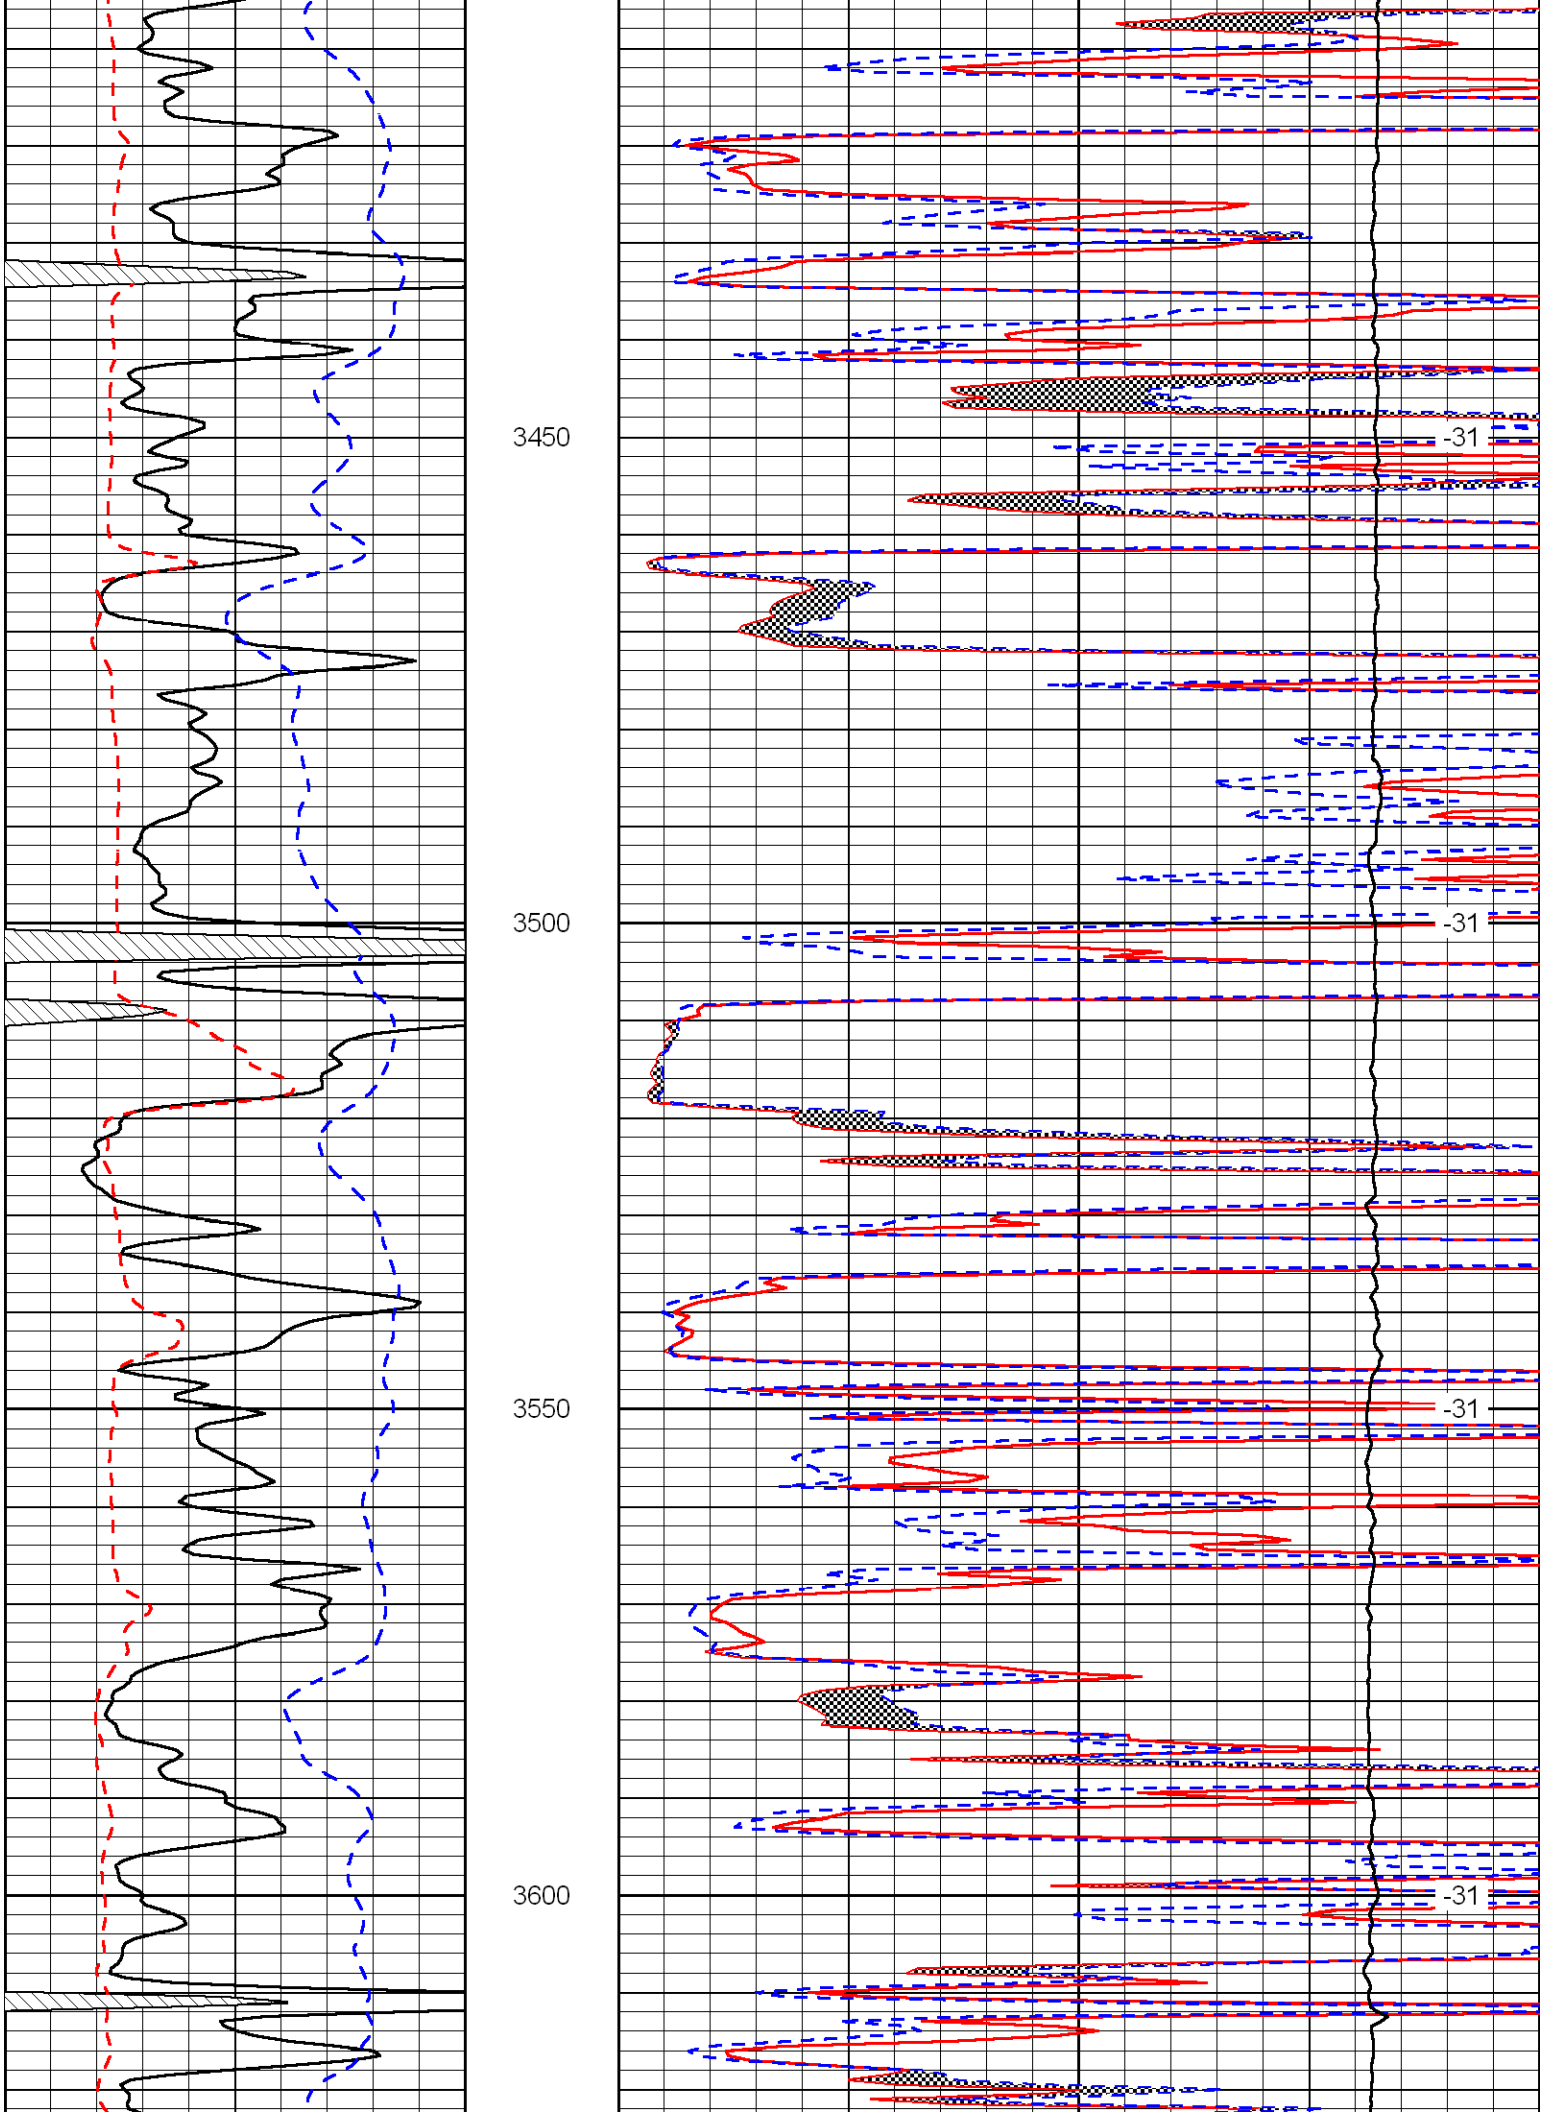
Thank you for using Log-Tech, Inc.
(785) 625-3858

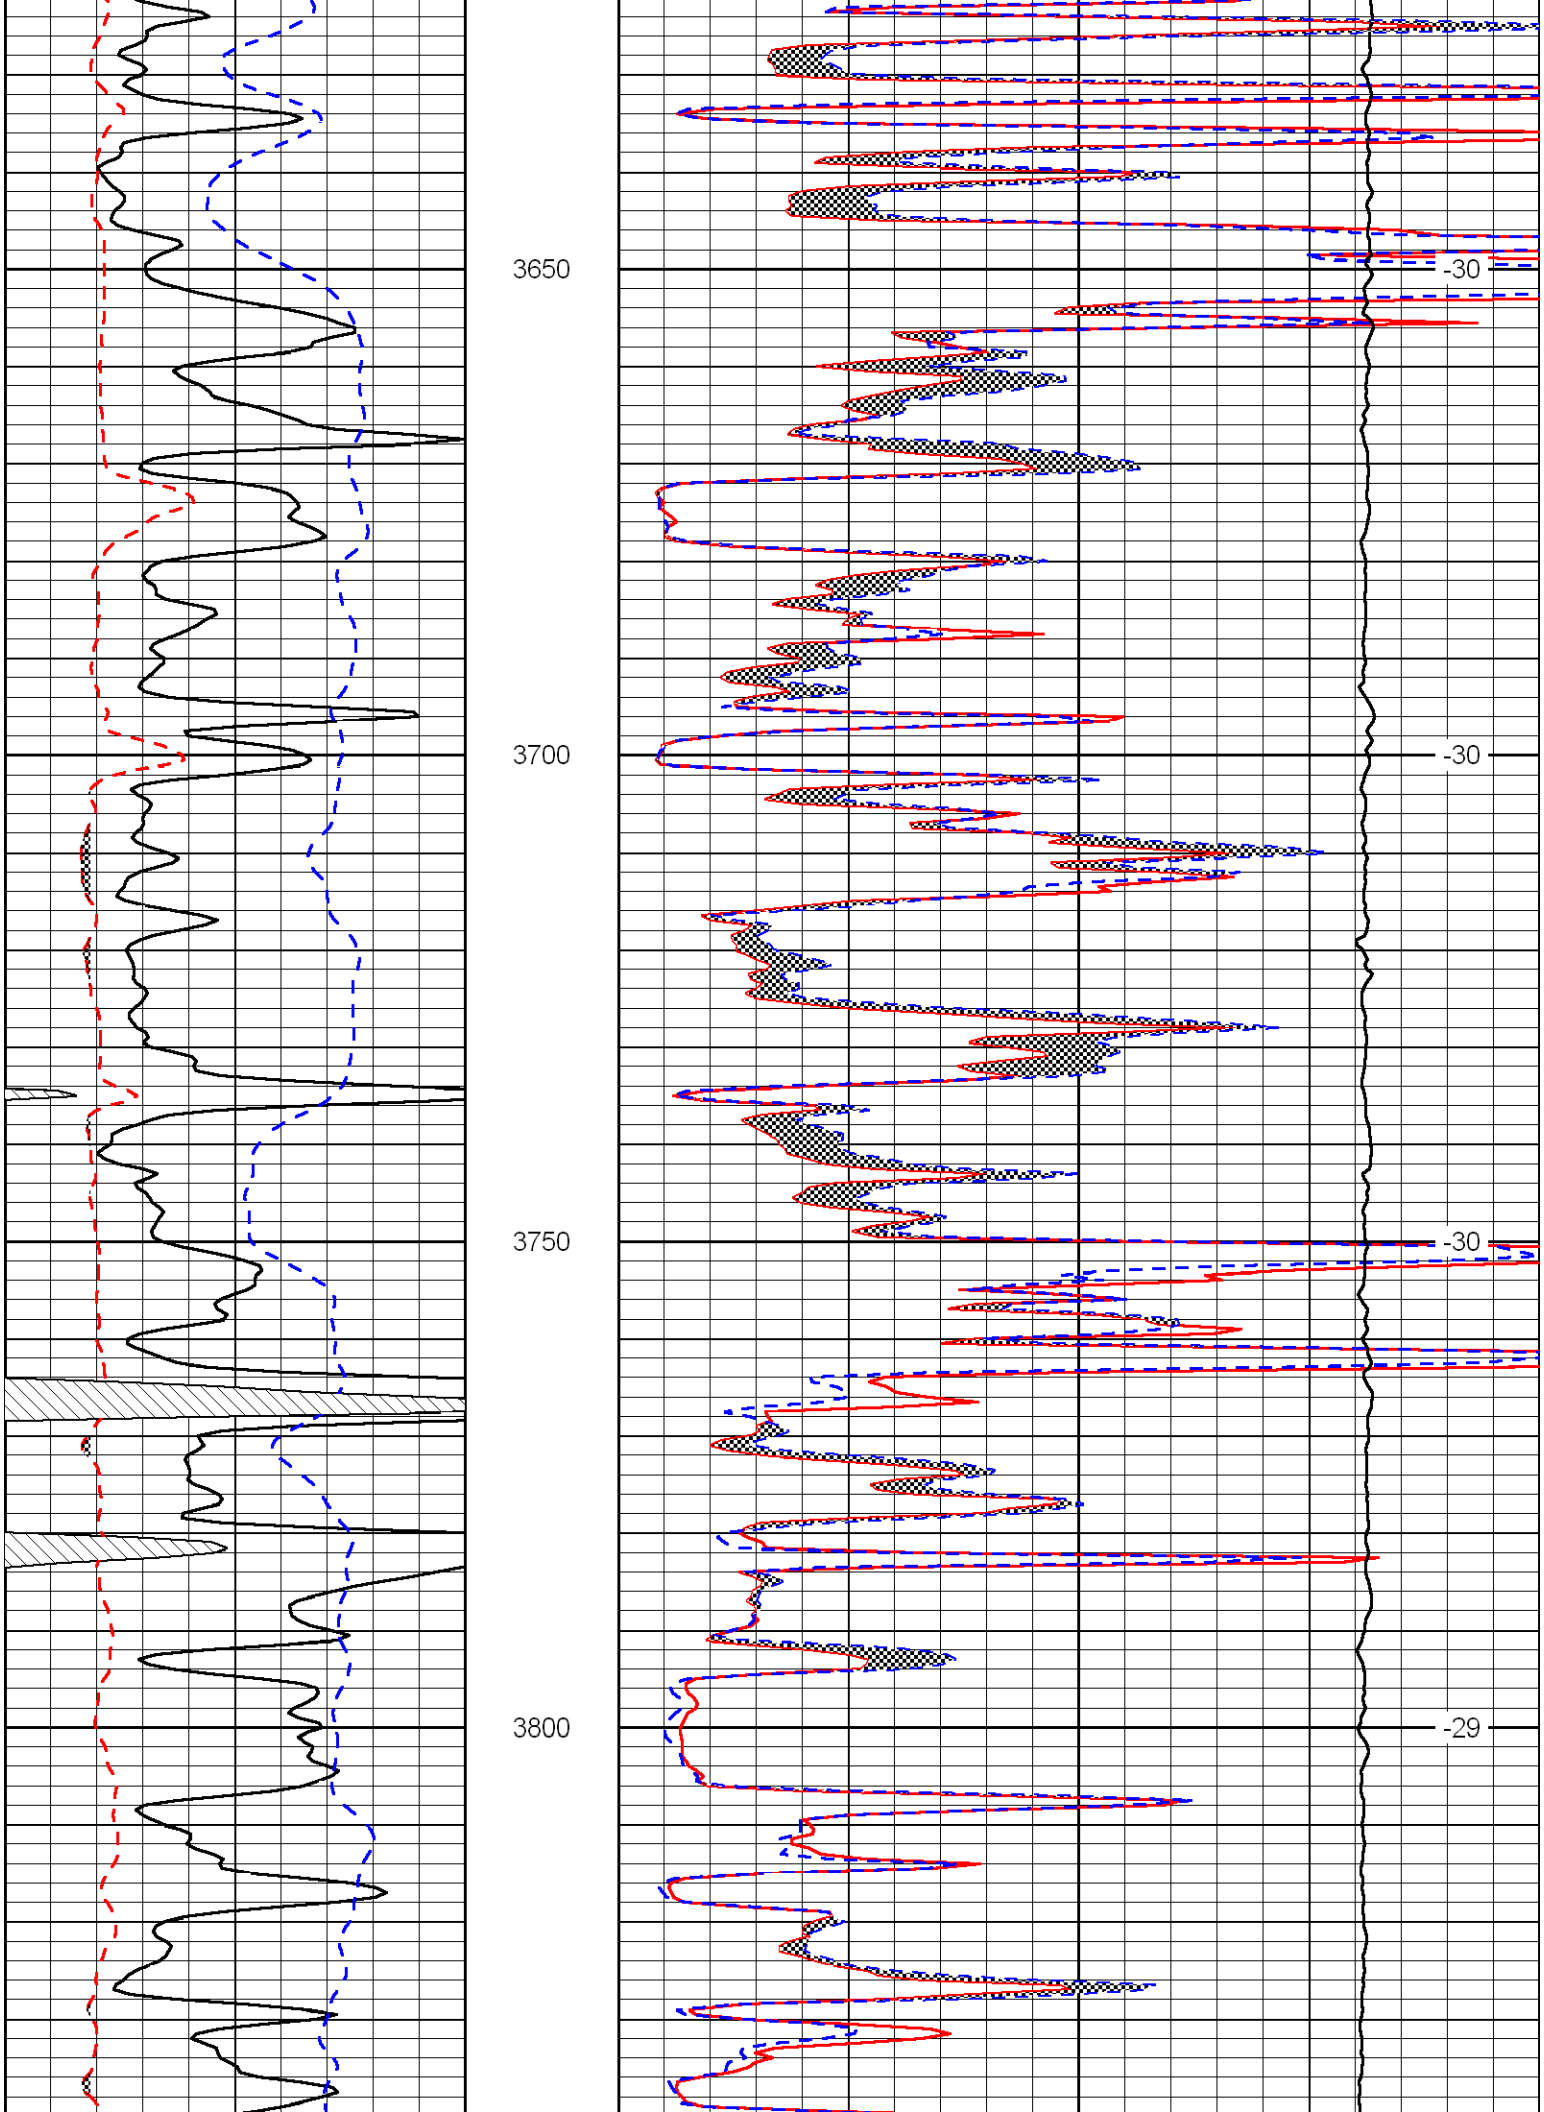
Hays, Ks; North to Buckeye Rd;
4-1/2 West; North Into

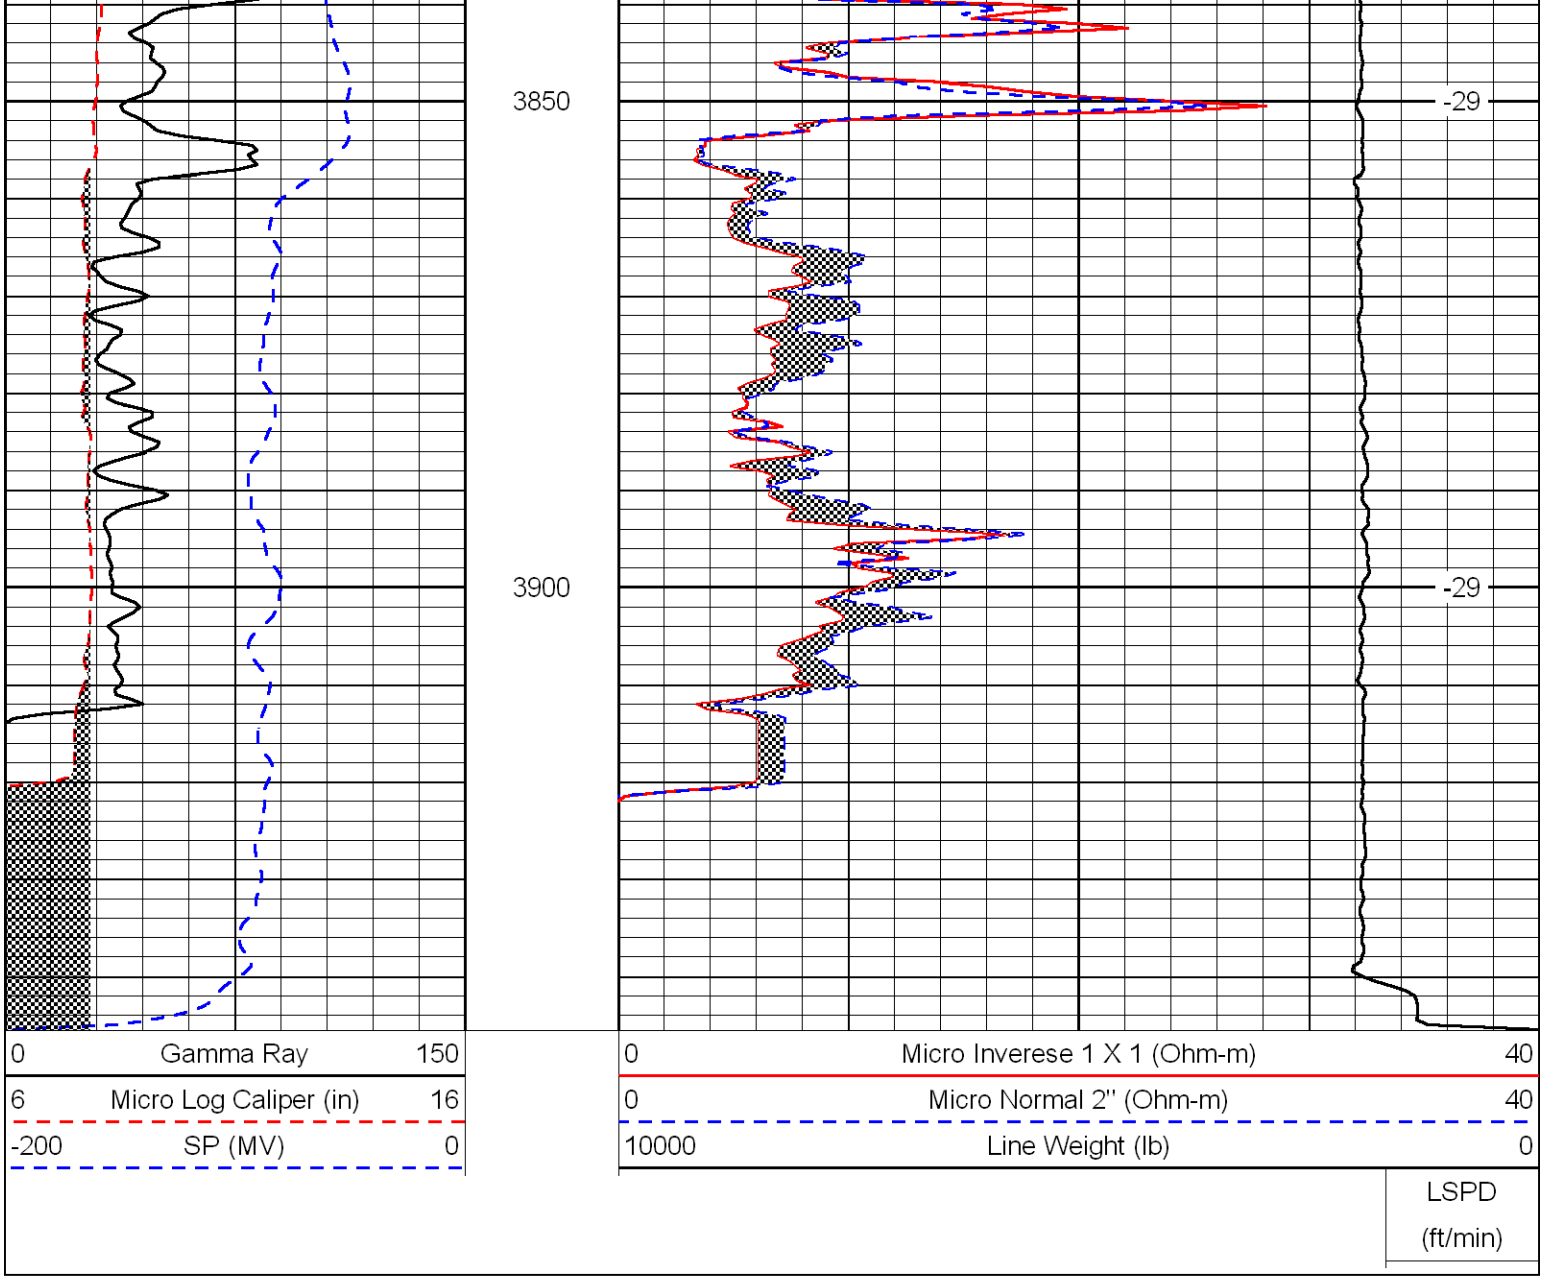
Database File:	c:\warrior\data\raymond_pfeifer no. 1\rayhd.db
Dataset Pathname:	DIL/raystk
Presentation Format:	micro
Dataset Creation:	Wed Sep 23 19:40:01 2009
Charted by:	Depth in Feet scaled 1:240


0 Gamma Ray 150
6 Micro Log Caliper (in) 16
-200 SP (MV) 0
0 Micro Inverese 1 X 1 (Ohm-m) 40
0 Micro Normal 2" (Ohm-m) 40
10000 Line Weight (lb) 0
LSPD
(ft/min)
3000
3050
3100
3150
-32
-32
-32
-32


3200
3250
3300
3350
3400
-30
-30
-30
-31
-31


3450
-31
3500
-31
3550
-31
3600
-31


3650
3700
3750
3800
-30
-30
-30
-29


3850
3900
-29
-29
0 Gamma Ray 150
6 Micro Log Caliper (in) 16
-200 SP (MV) 0
0 Micro Inverese 1 X 1 (Ohm-m) 40
0 Micro Normal 2" (Ohm-m) 40
10000 Line Weight (lb) 0
LSPD
(ft/min)