



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-025-21,484-00-00		
Company	Falcon Exploration, Inc.		
Well	YBC No. 1-31		
Field	Wildcat		
County	Clark	State	Kansas
Location	SW SE SE NE 2480' FNL & 370' FEL		Other Services CNL/CDL DIL
Sec: 31	Twp: 30S	Rge: 22W	Elevation

Permanent Datum	Ground Level	Elevation 2431
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	D.B. 2441 D.F. 2431 G.L. 2431
Date	09/08/2009	
Run Number	Two	
Depth Driller	6485	
Depth Logger	6482	
Bottom Logged Interval	6481	
Top Log Interval	3100	
Casing Driller	8.625 @ 652	
Casing Logger	646	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity, ppm CL	6.500	
Density / Viscosity	9.3 57	
pH / Fluid Loss	10.5 8.8	
Source of Sample	Flowline	
Rm @ Meas. Temp	.7 @ 75	
Rmf @ Meas. Temp	.53 @ 75	
Rmc @ Meas. Temp	.95 @ 75	
Source of Rmf / Rmc	Charts	
Rm @ BHT	.37 @ 143	
Operating Rig Time	6 Hours	
Max Rec. Temp. F	143	
Equipment Number	17	
Location	Hays	
Recorded By	Mike Garrison	
Witnessed By	Jim Hall	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Kingsdown, 9 1/2 South, West Into

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)

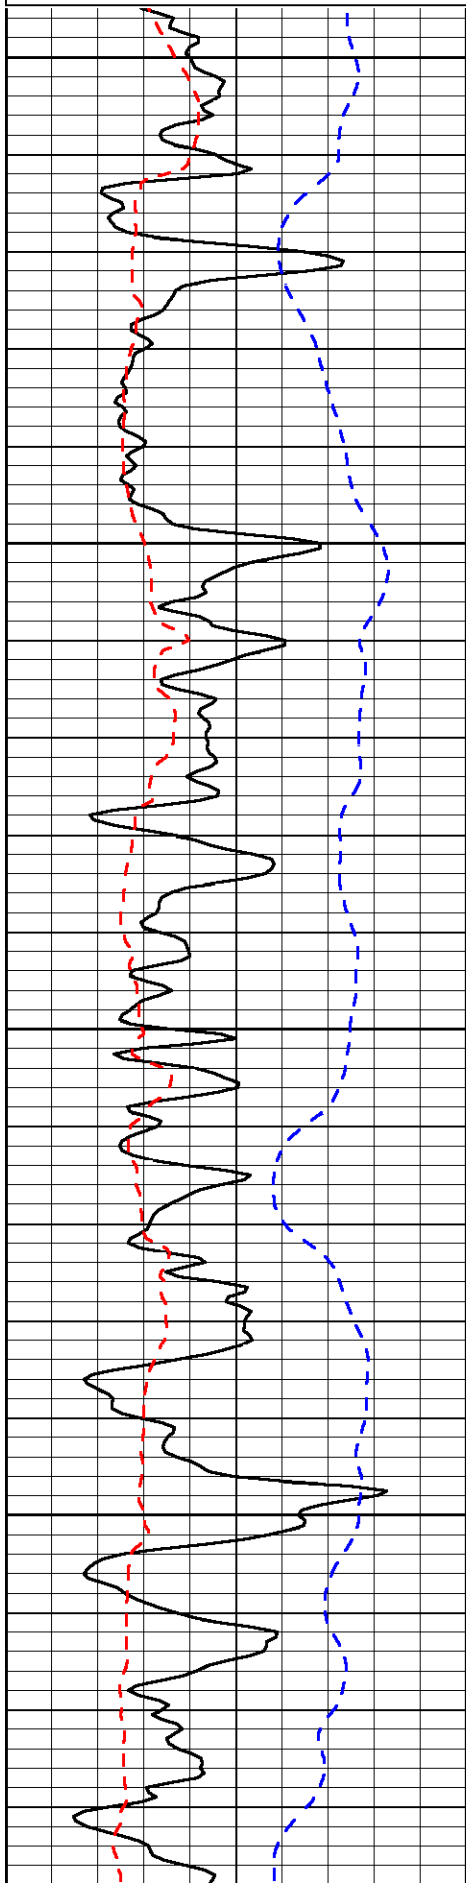




3100



3150


3200

3250

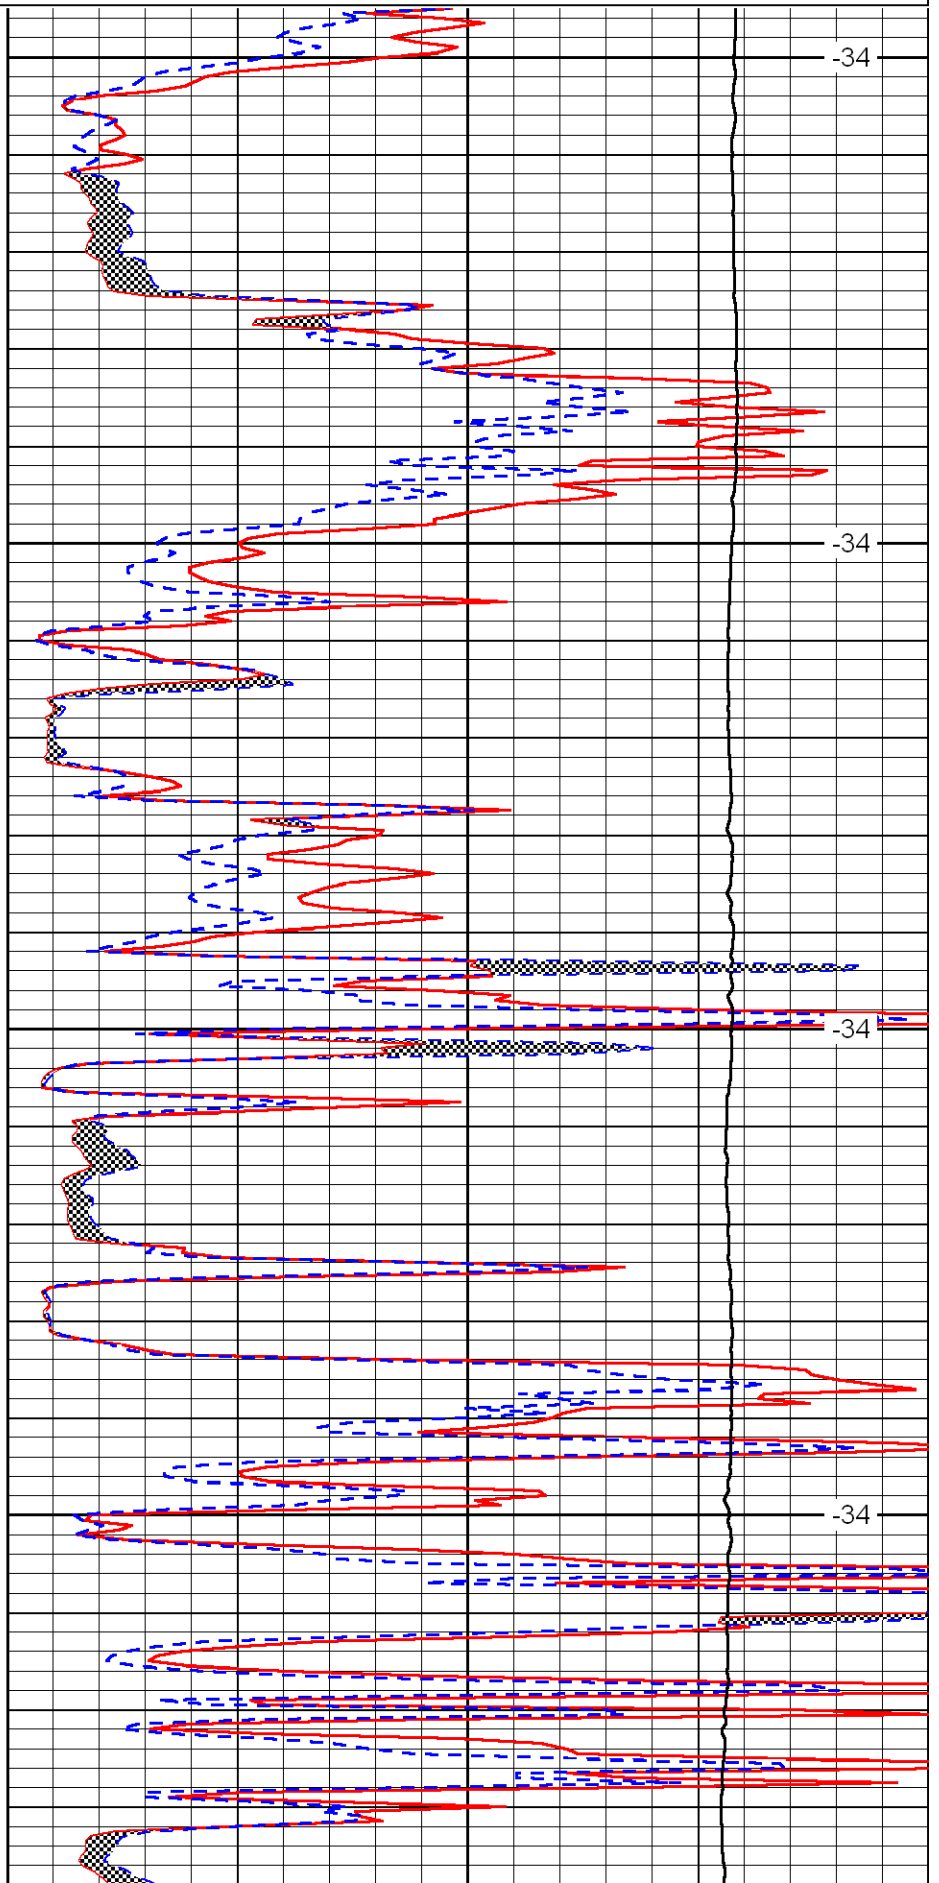

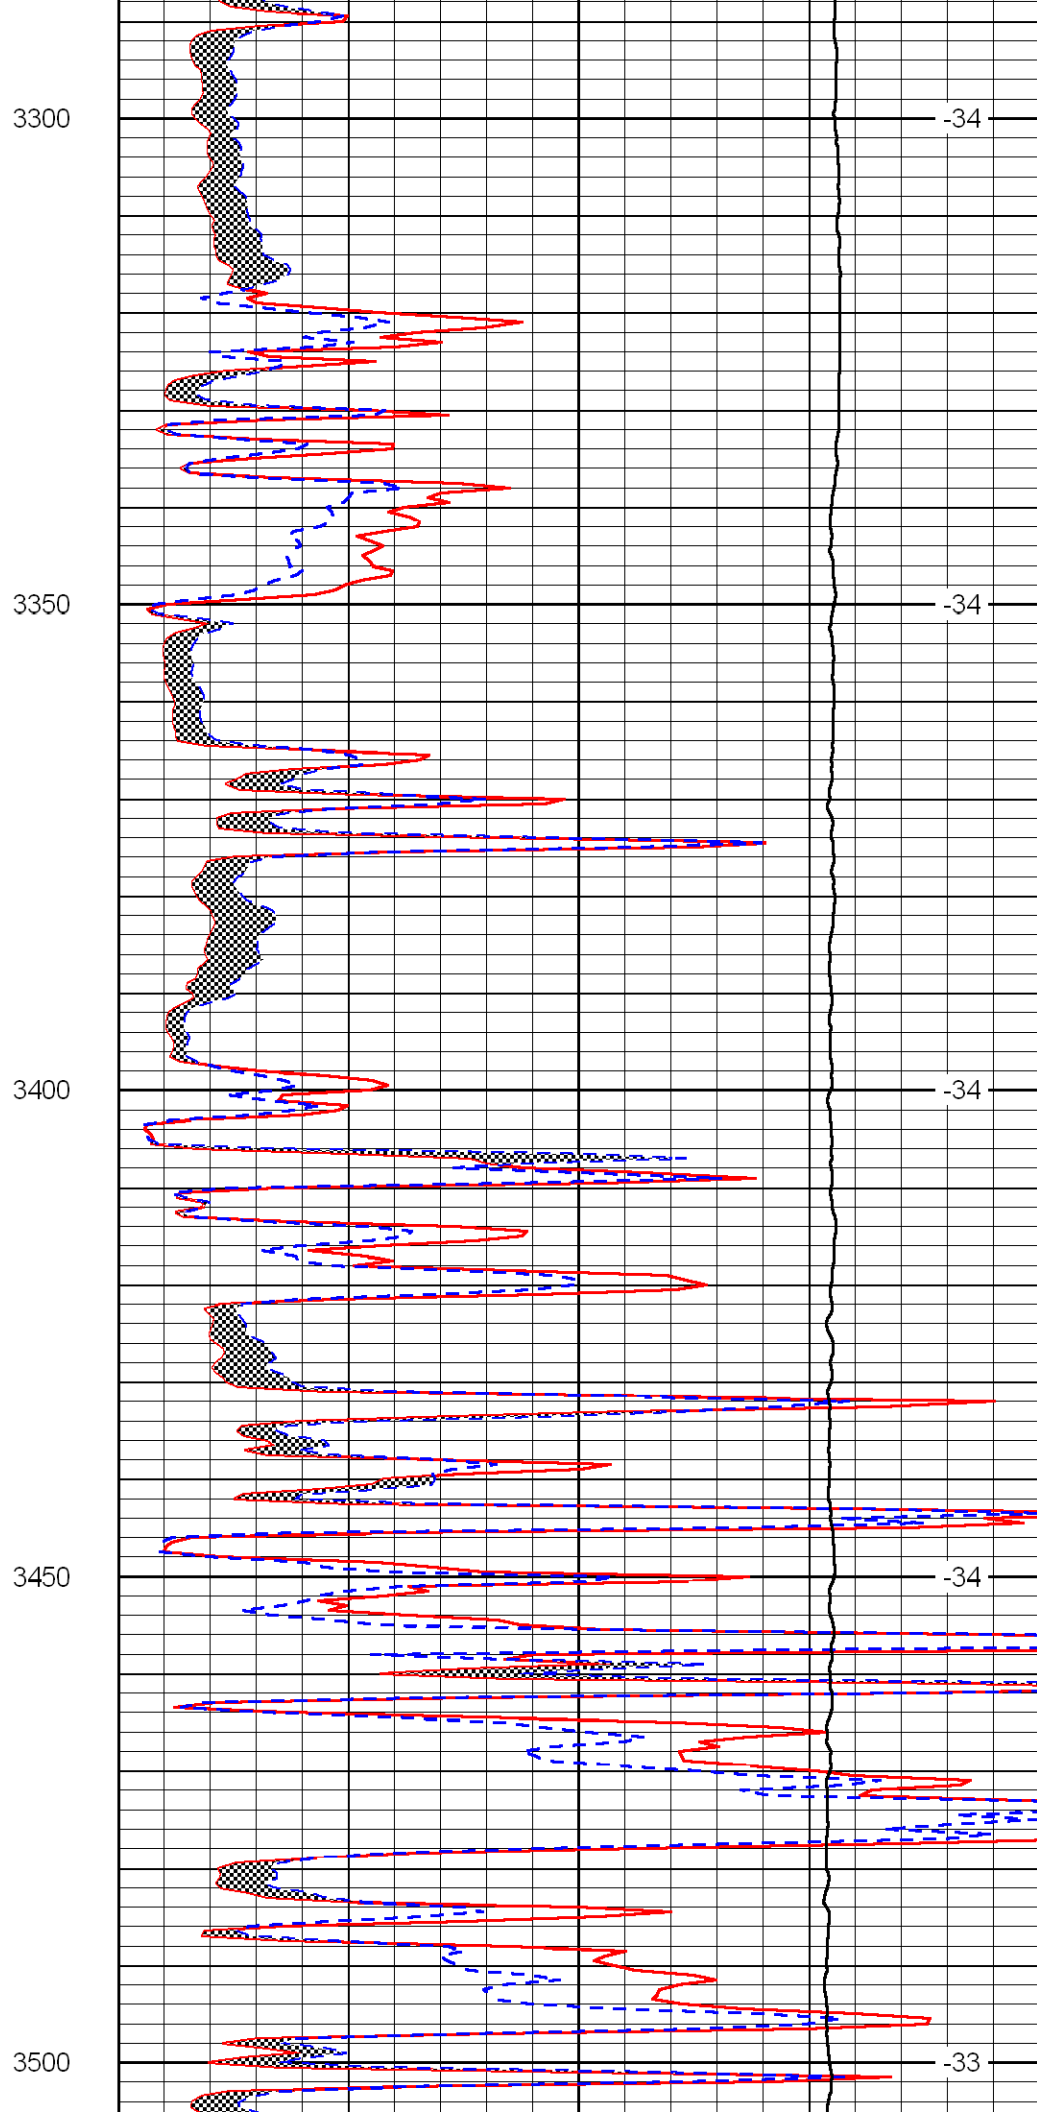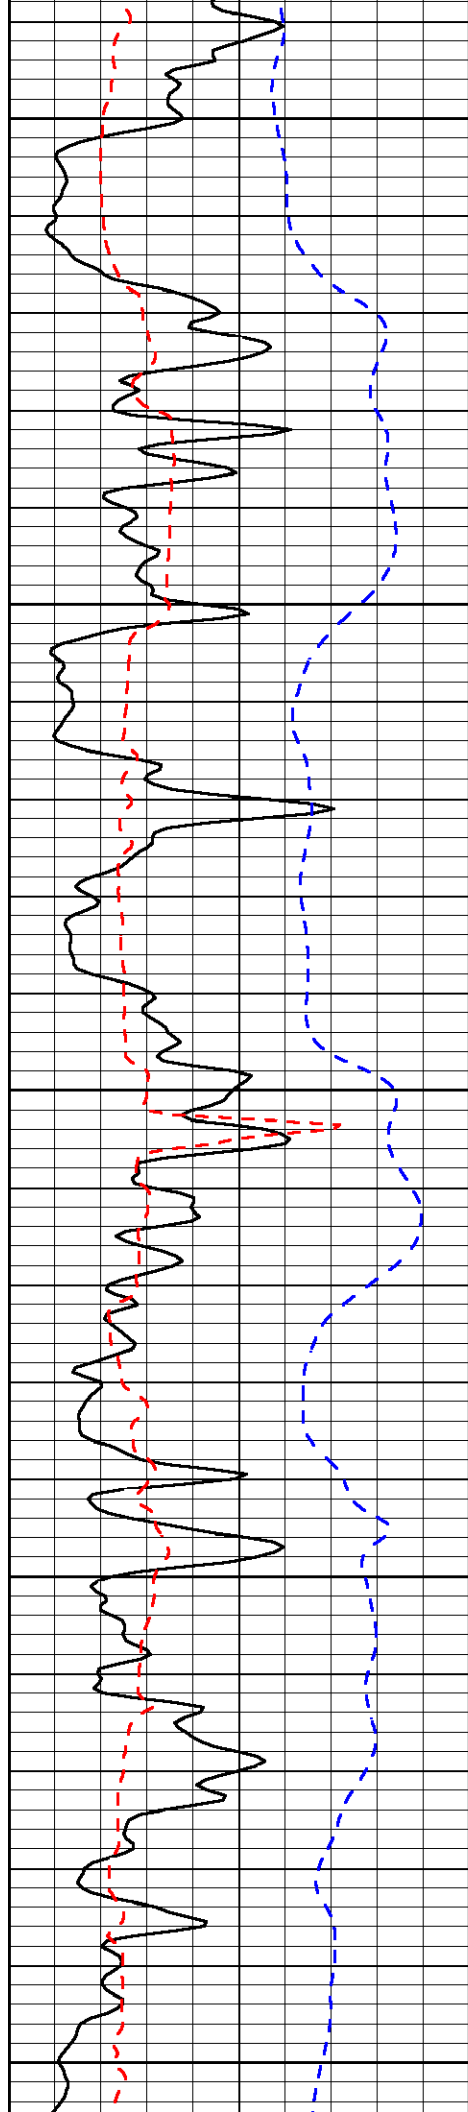

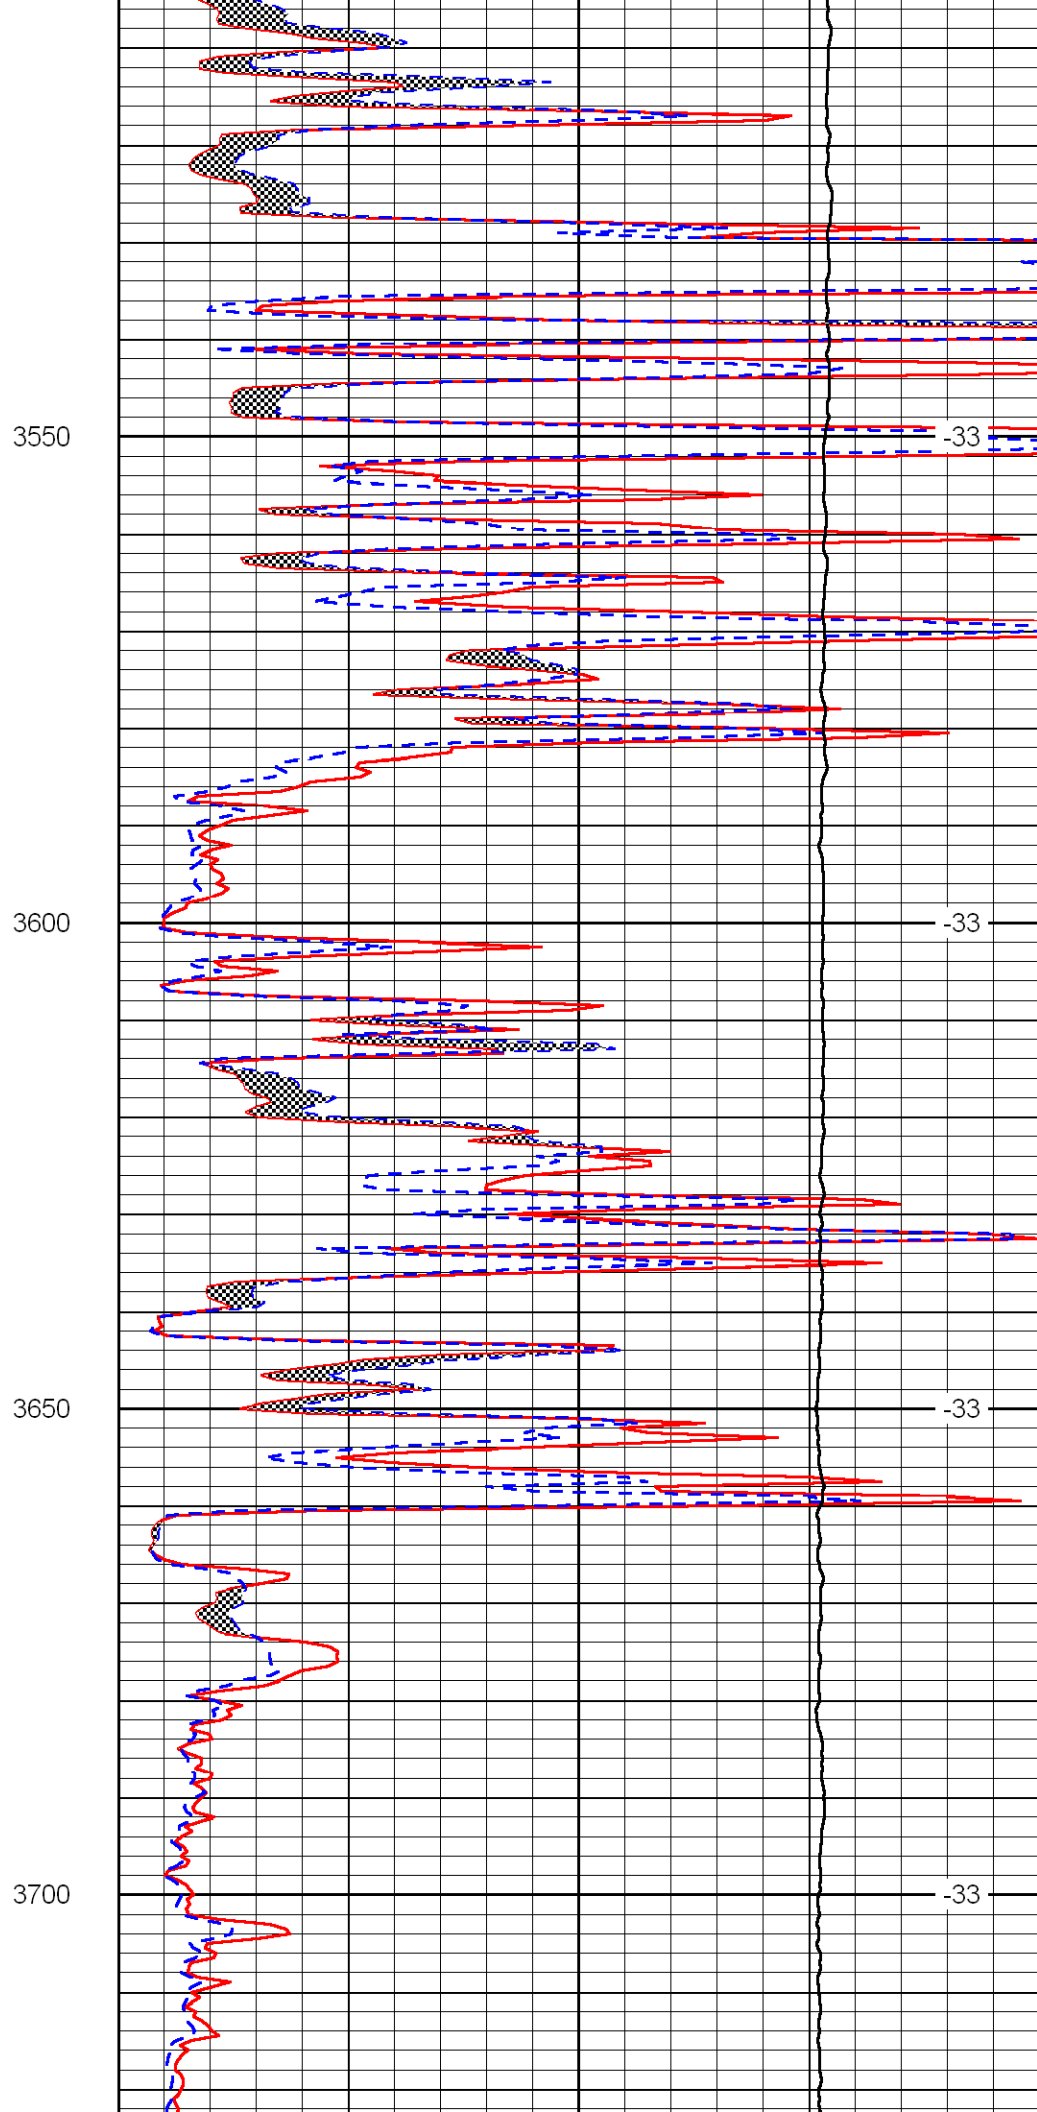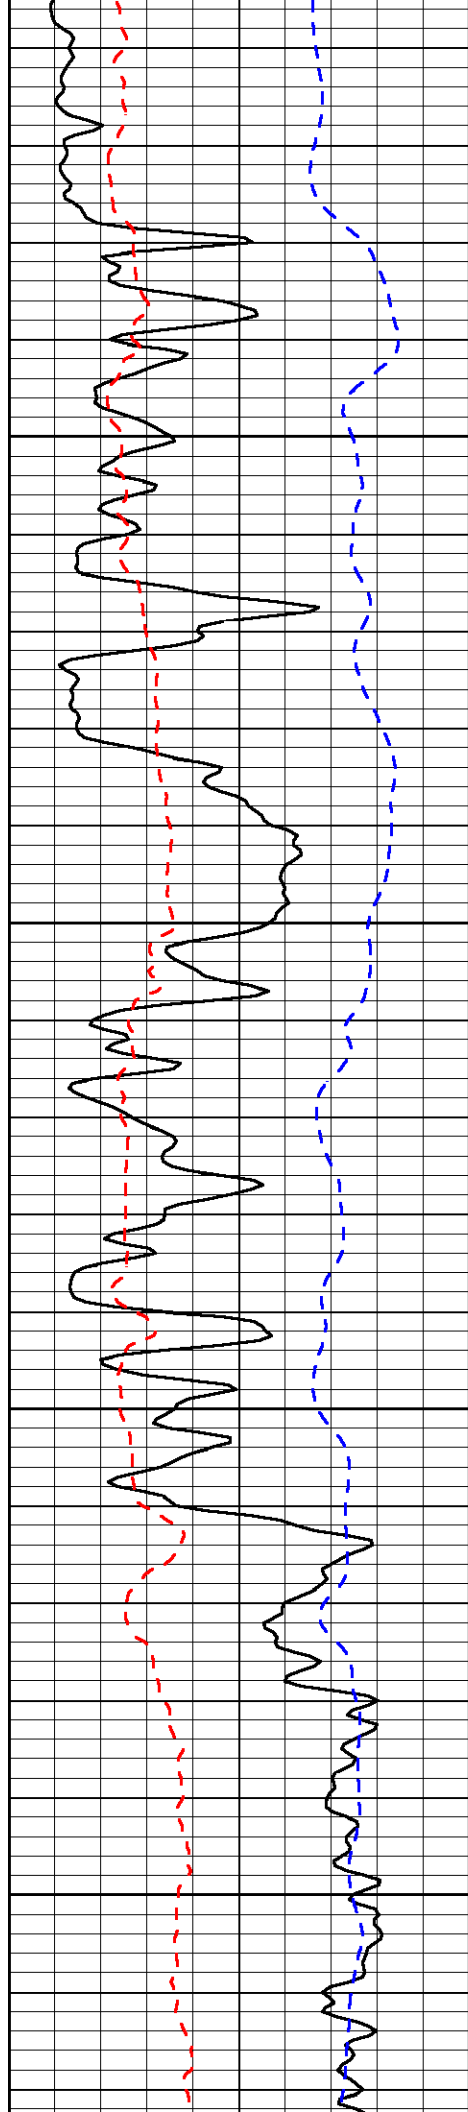

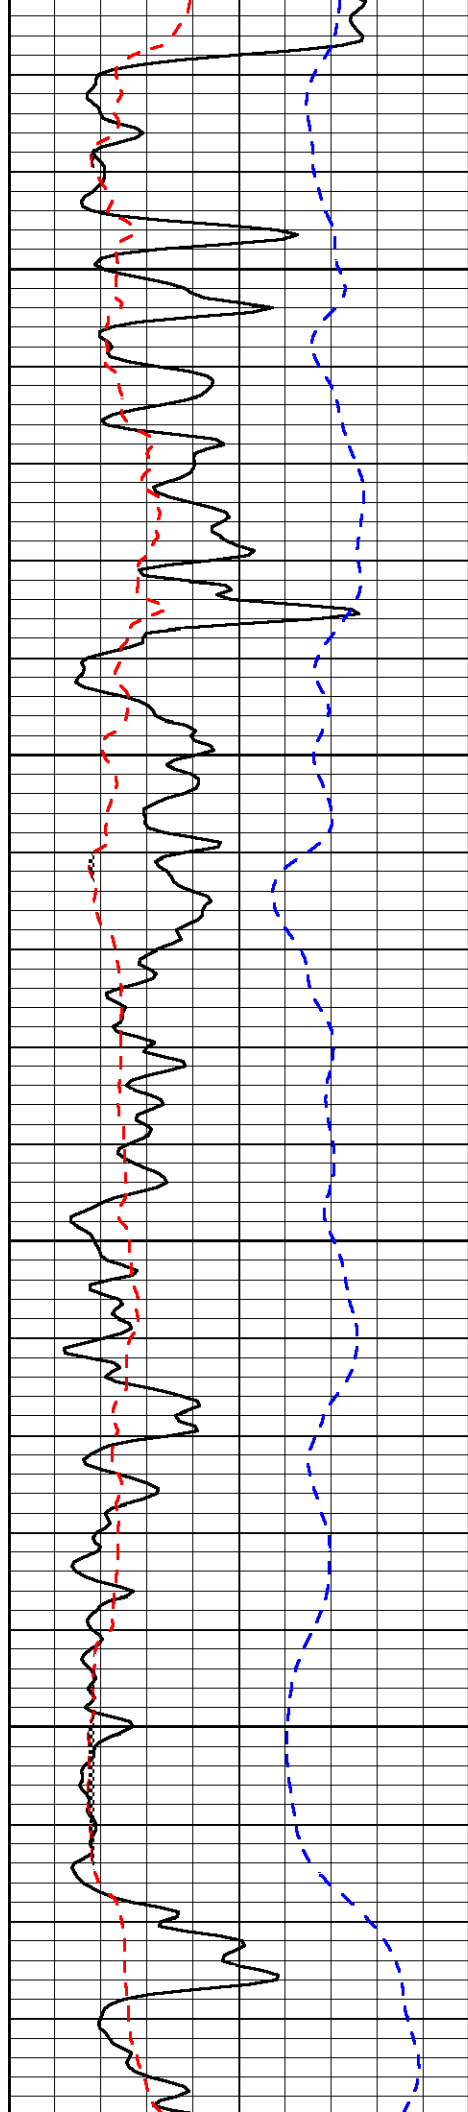


3750

3800

3850

3900


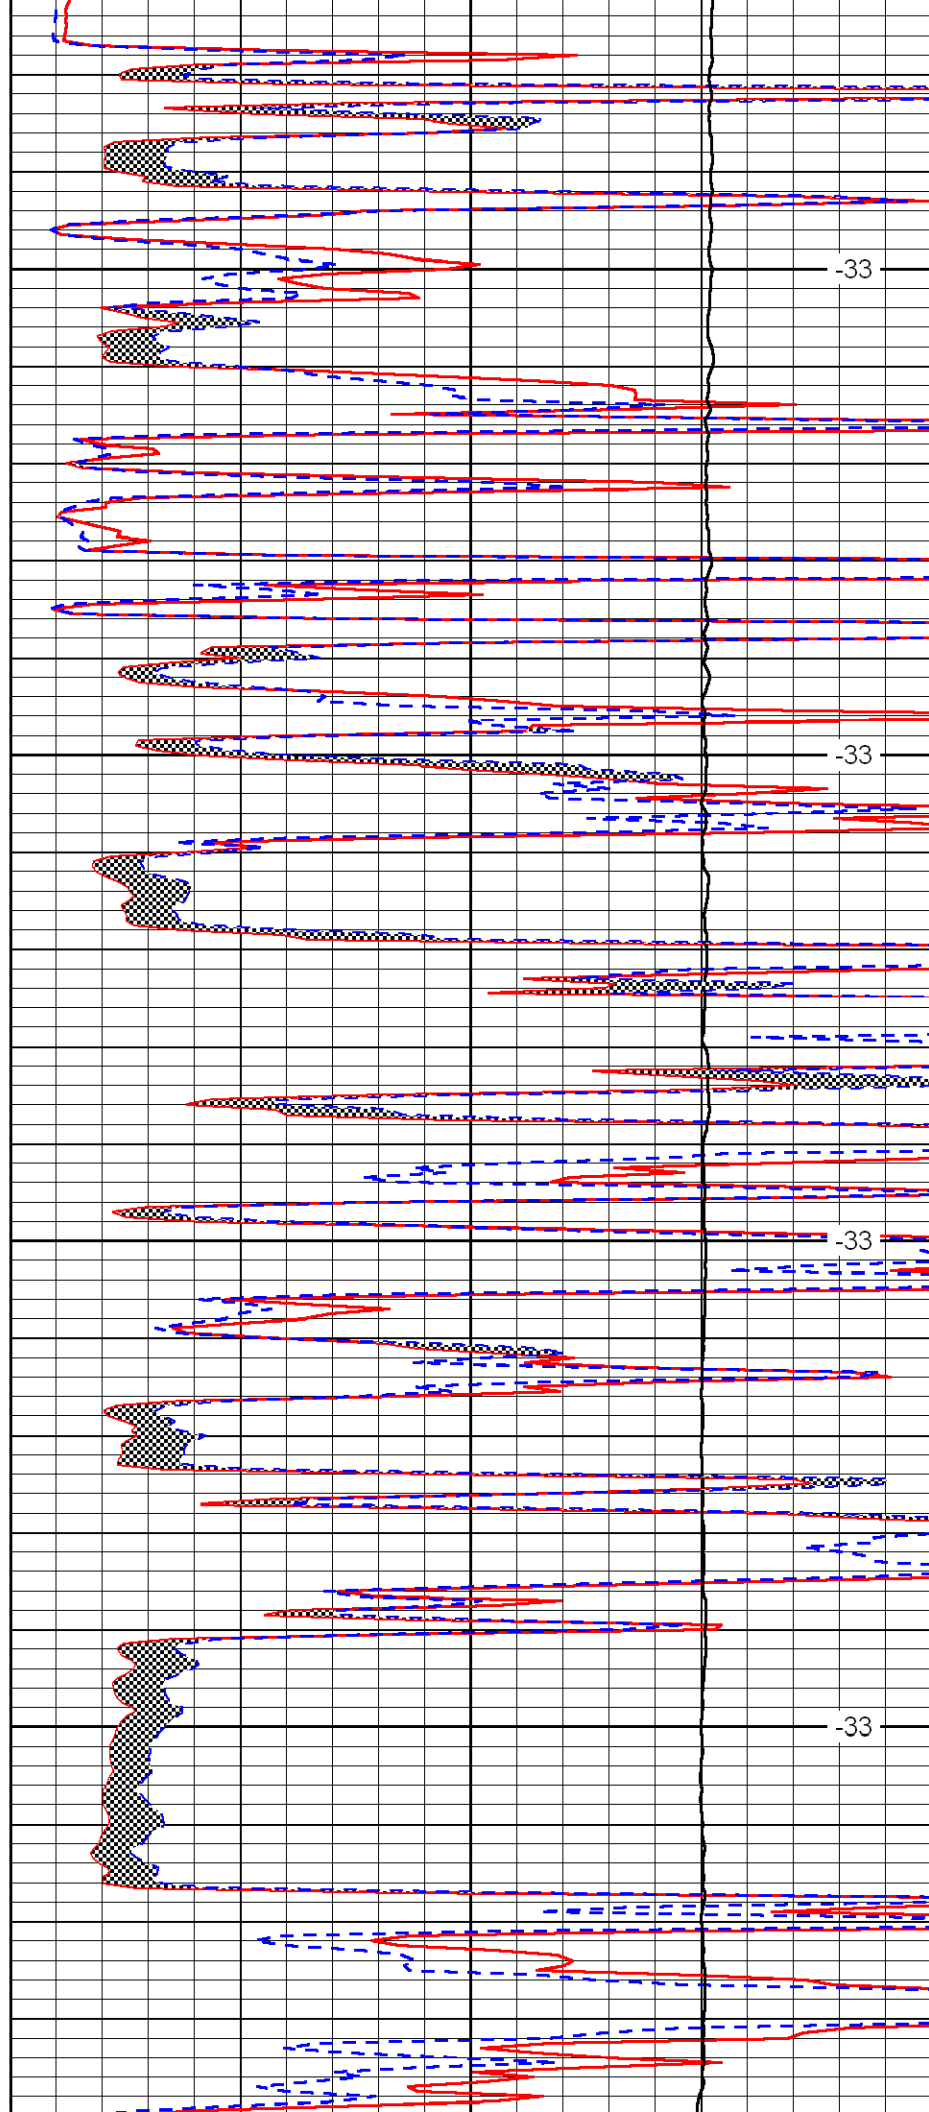



-33

-33

-33

-33

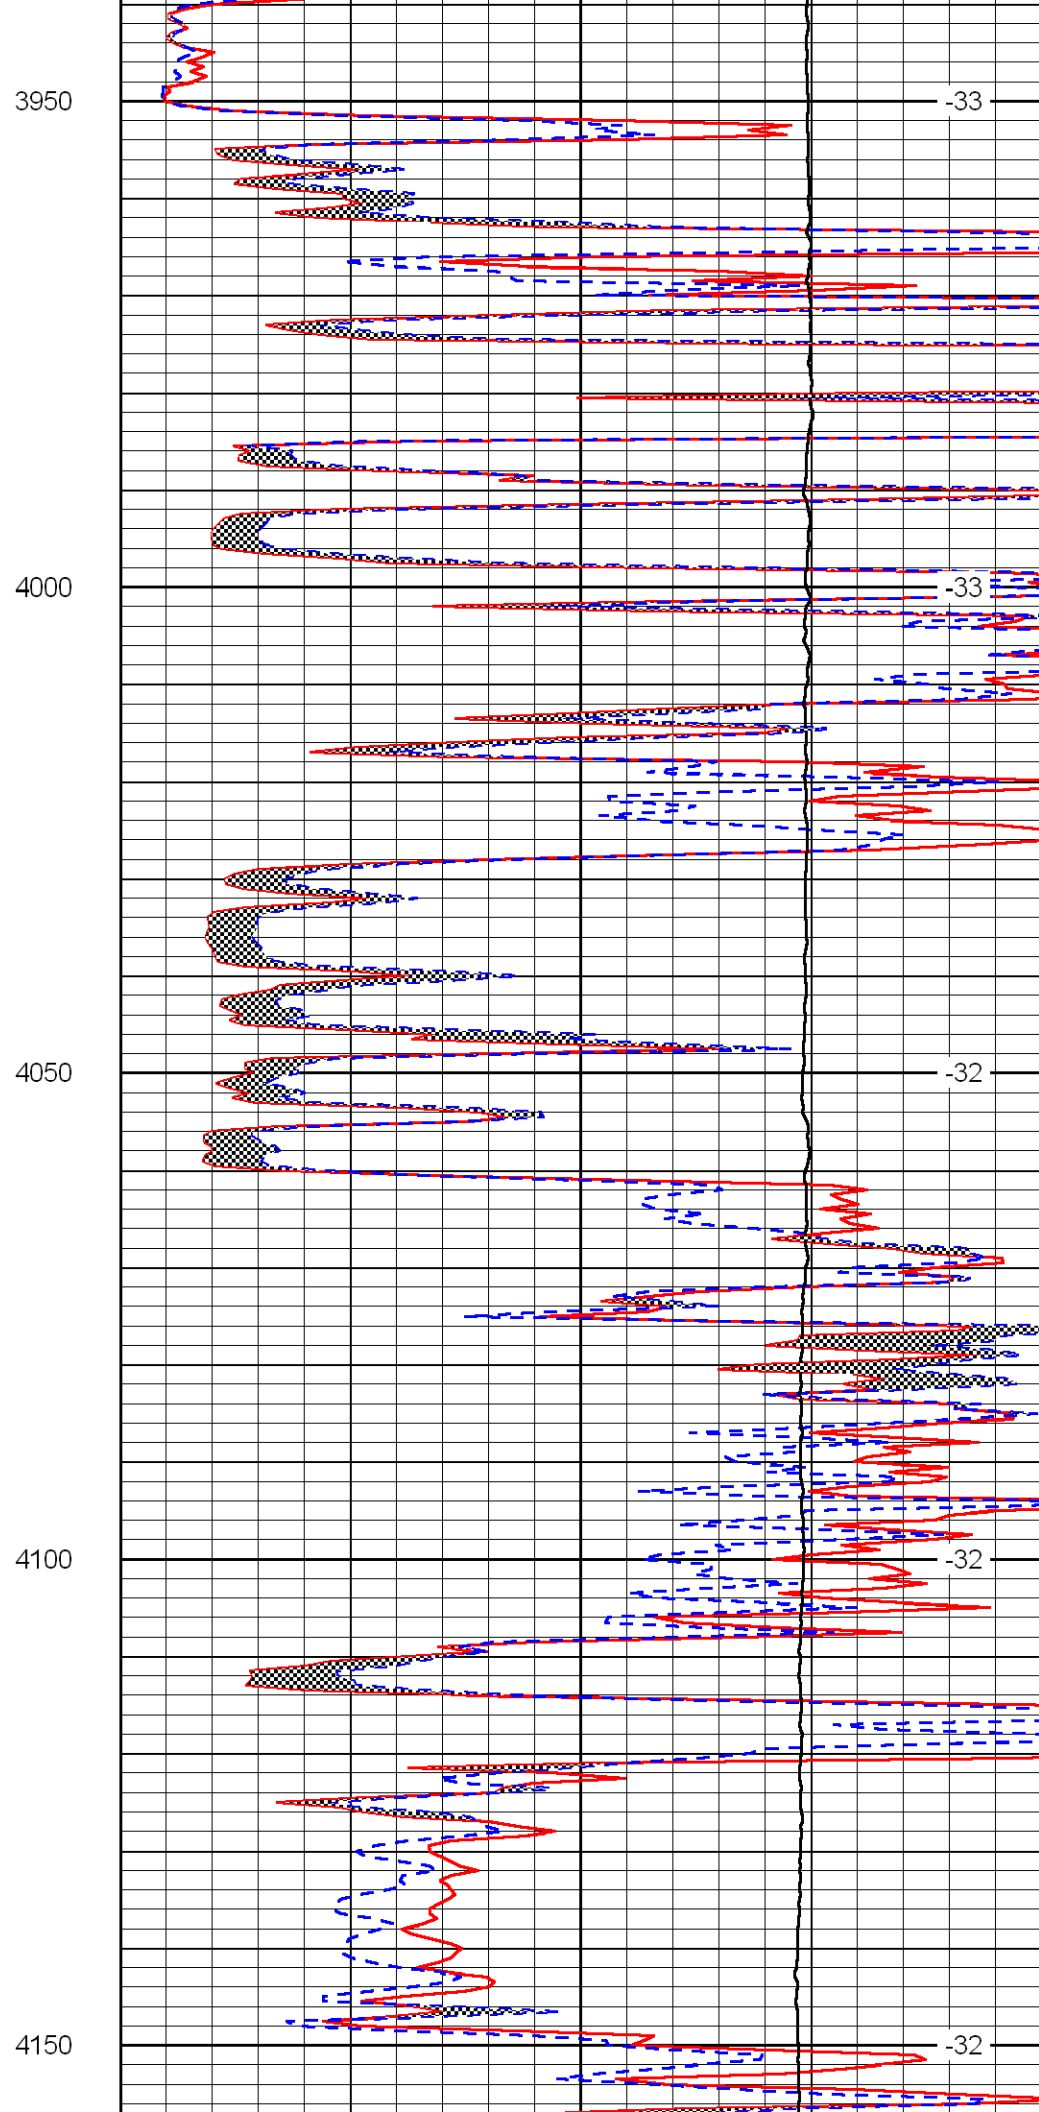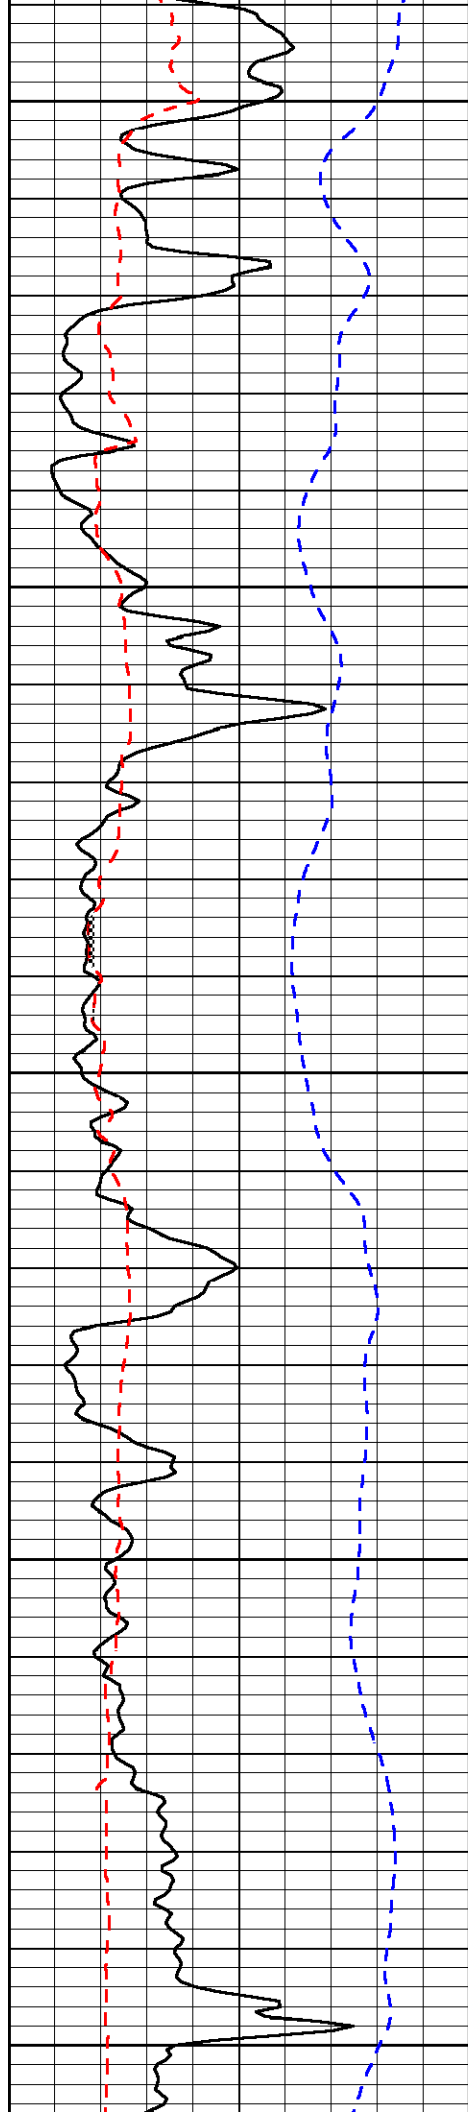

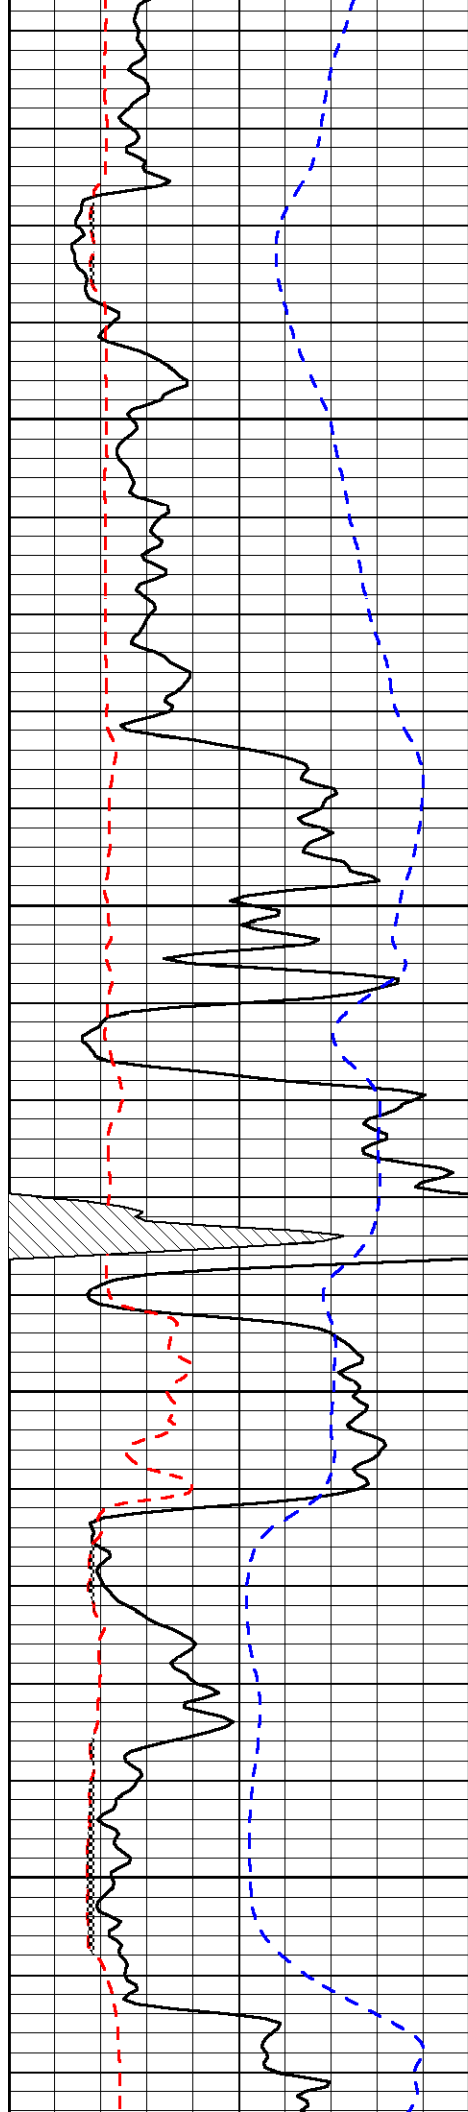



4200

4250

4300

4350

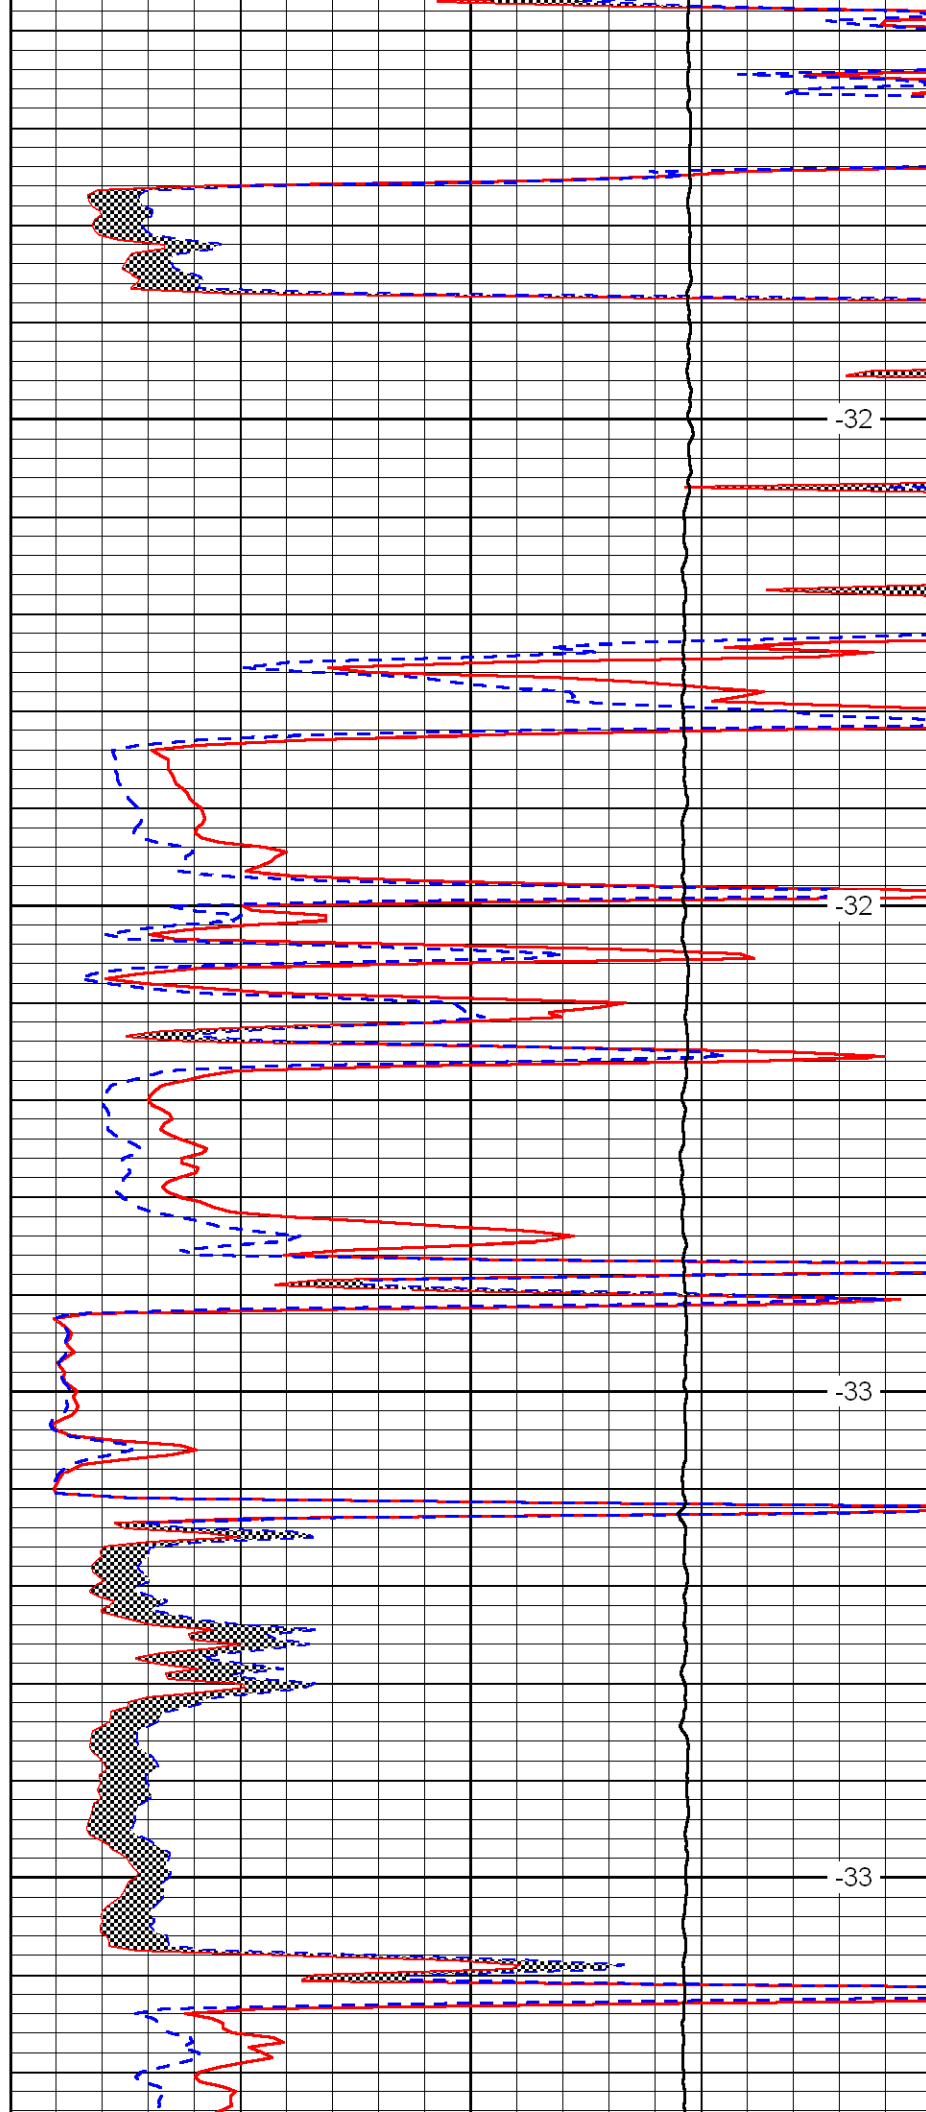

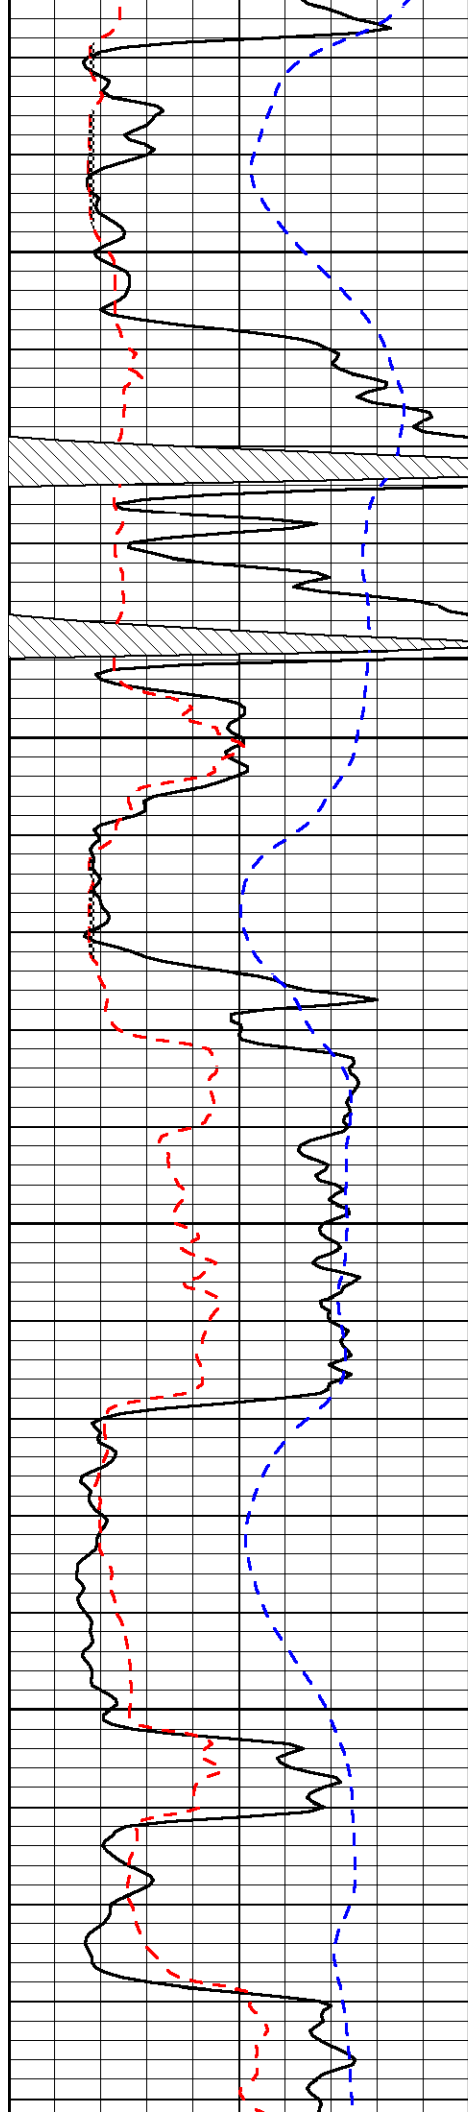



4400

4450

4500

4550

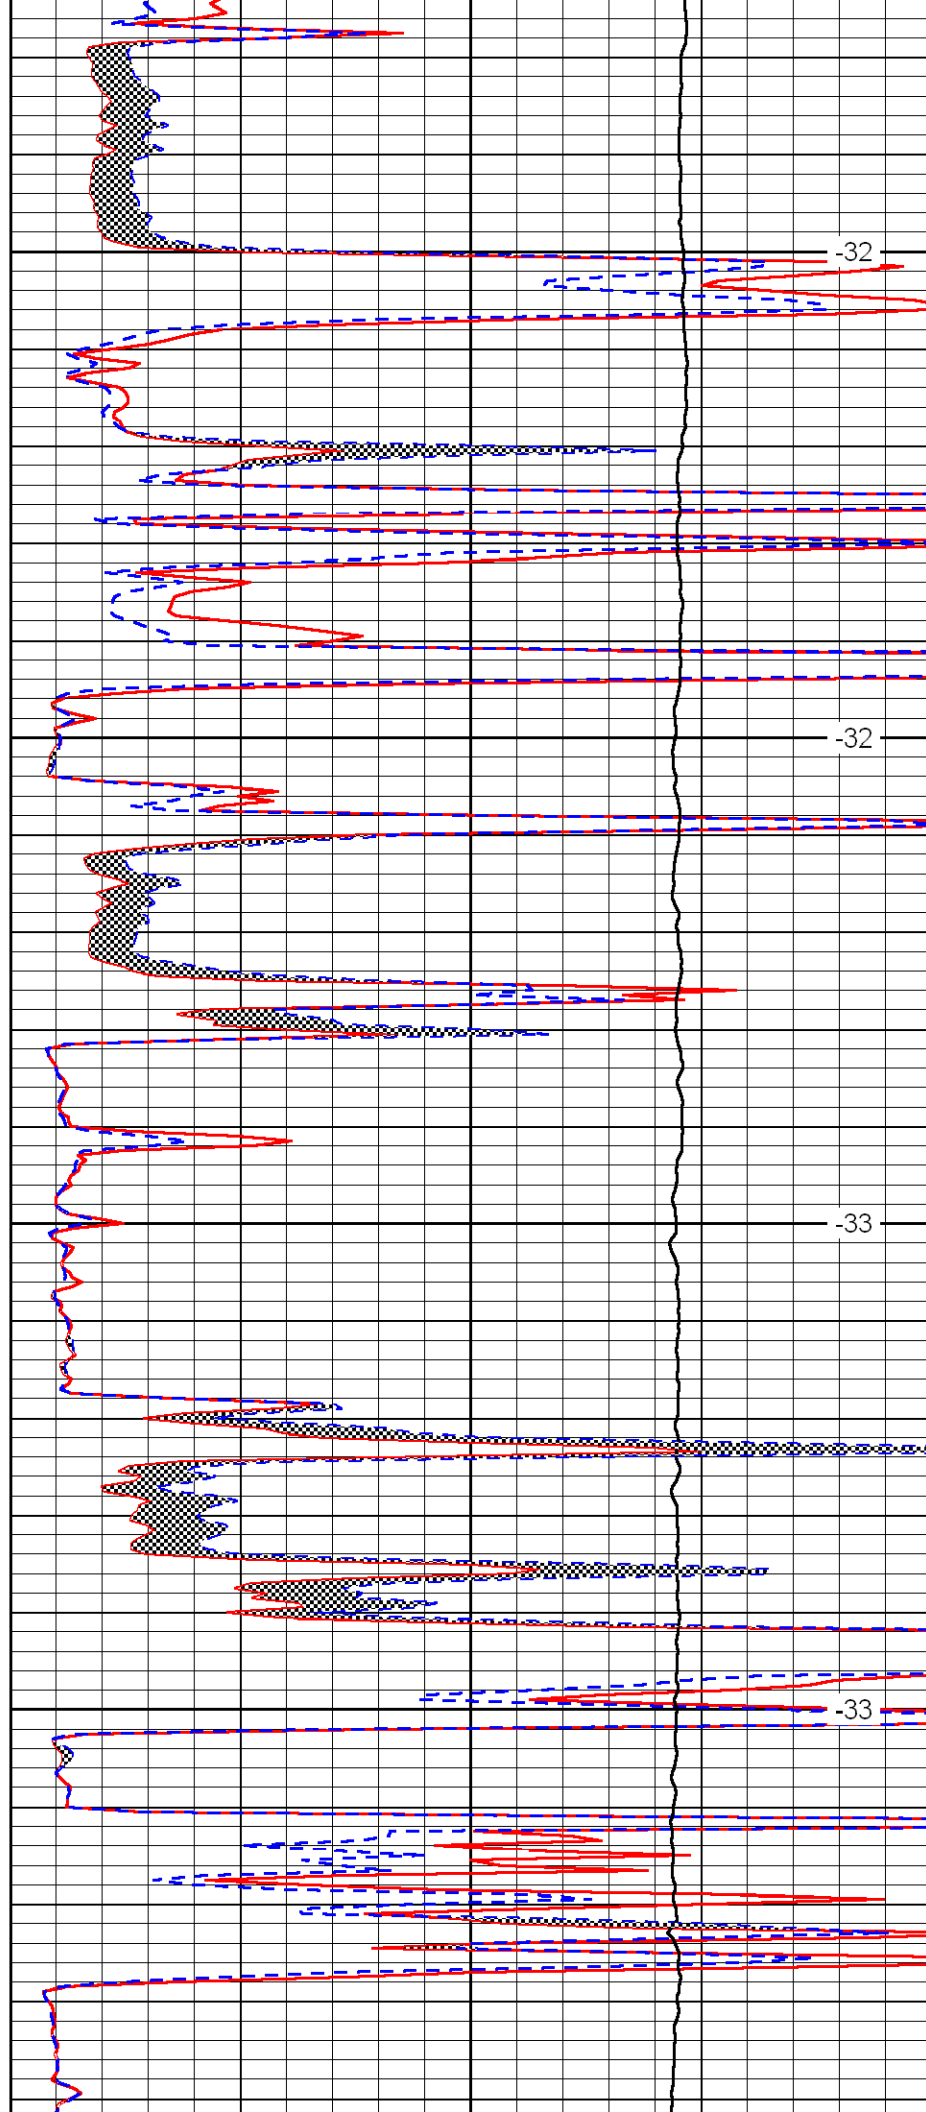

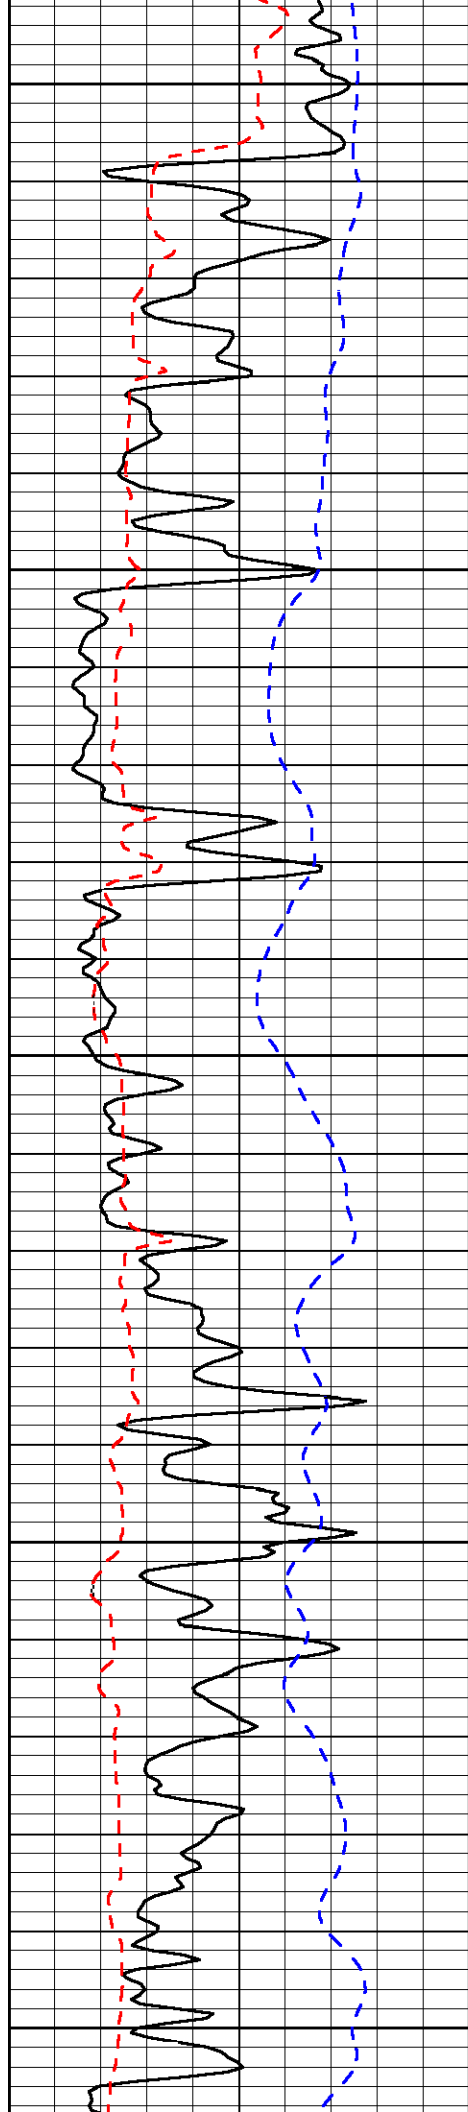


4600

4650

4700

4750

4800

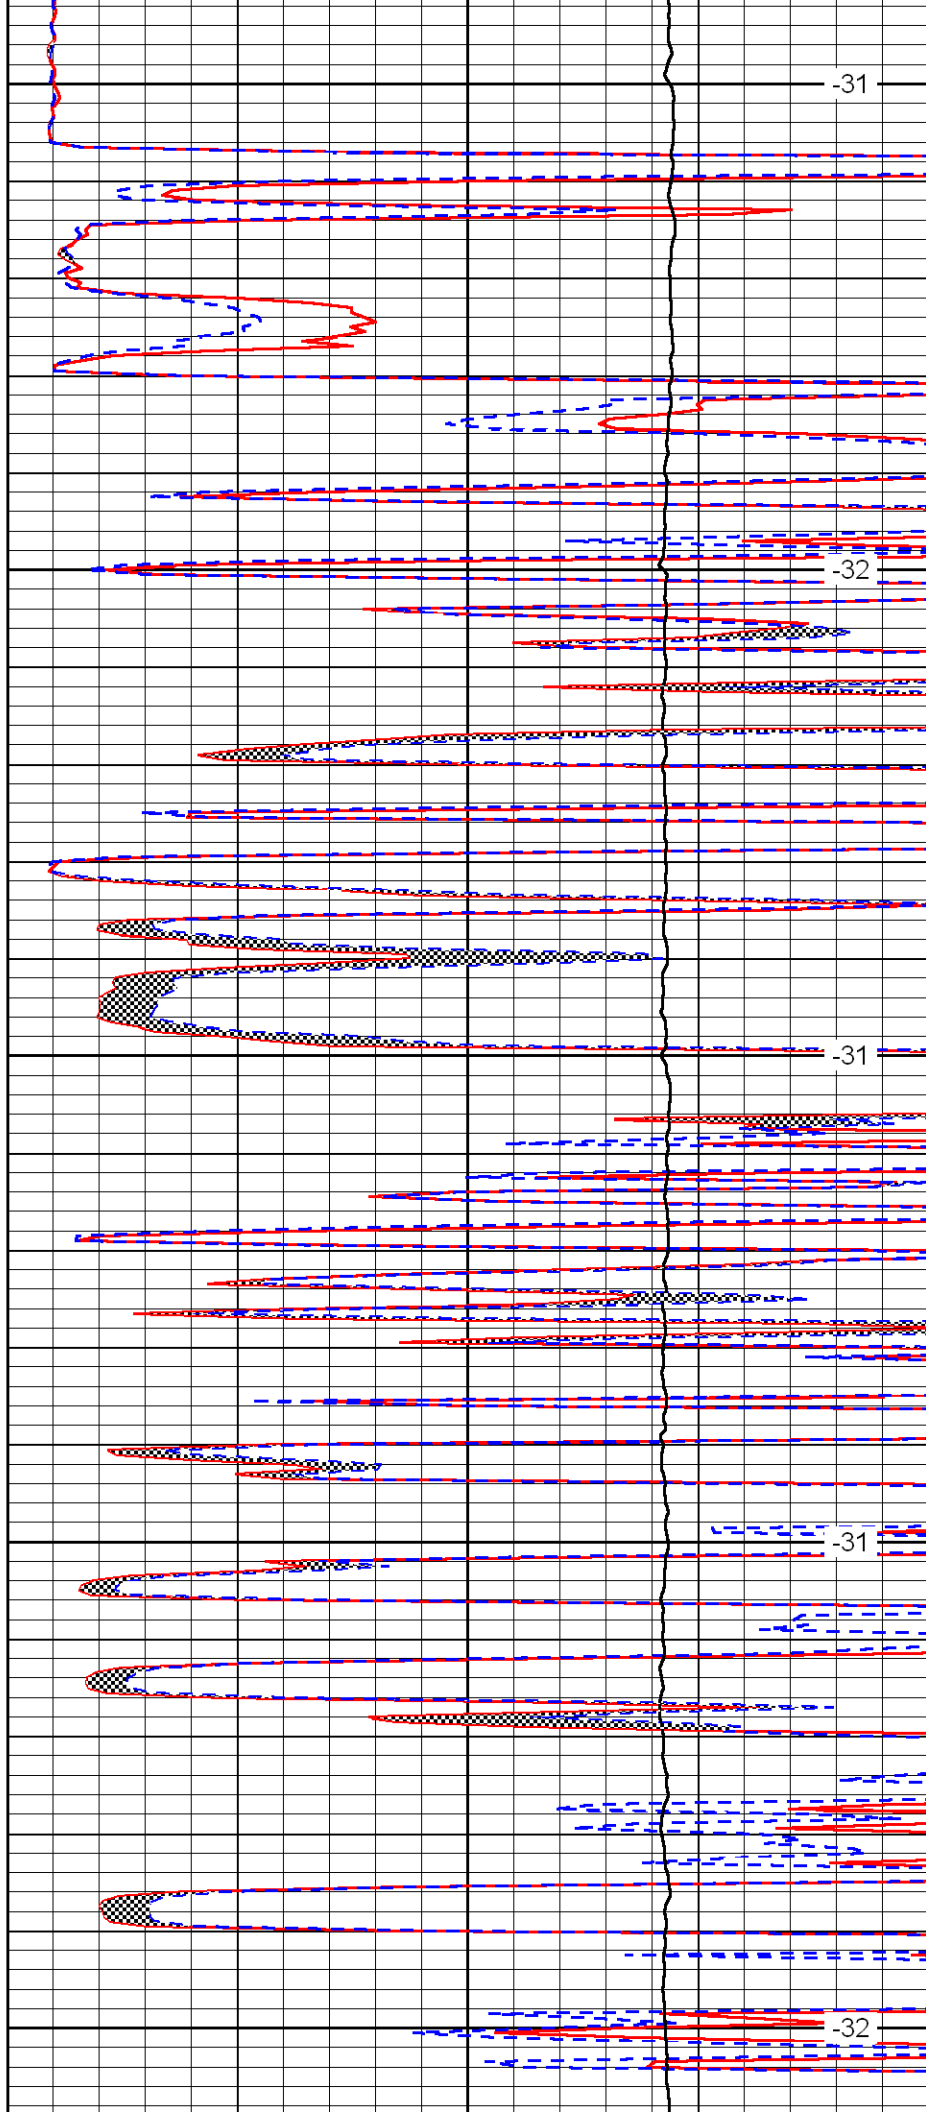


-31

-32

-31

-31

-32

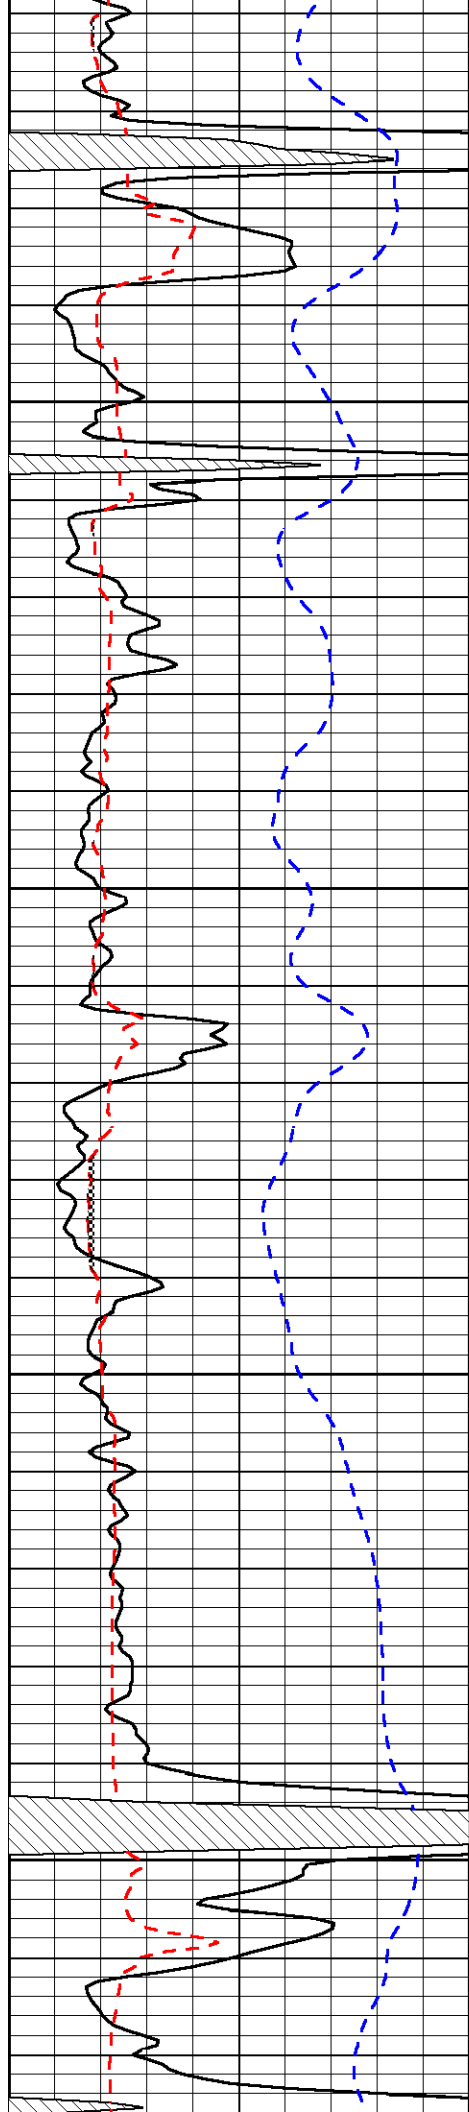


4850

4900

4950

5000

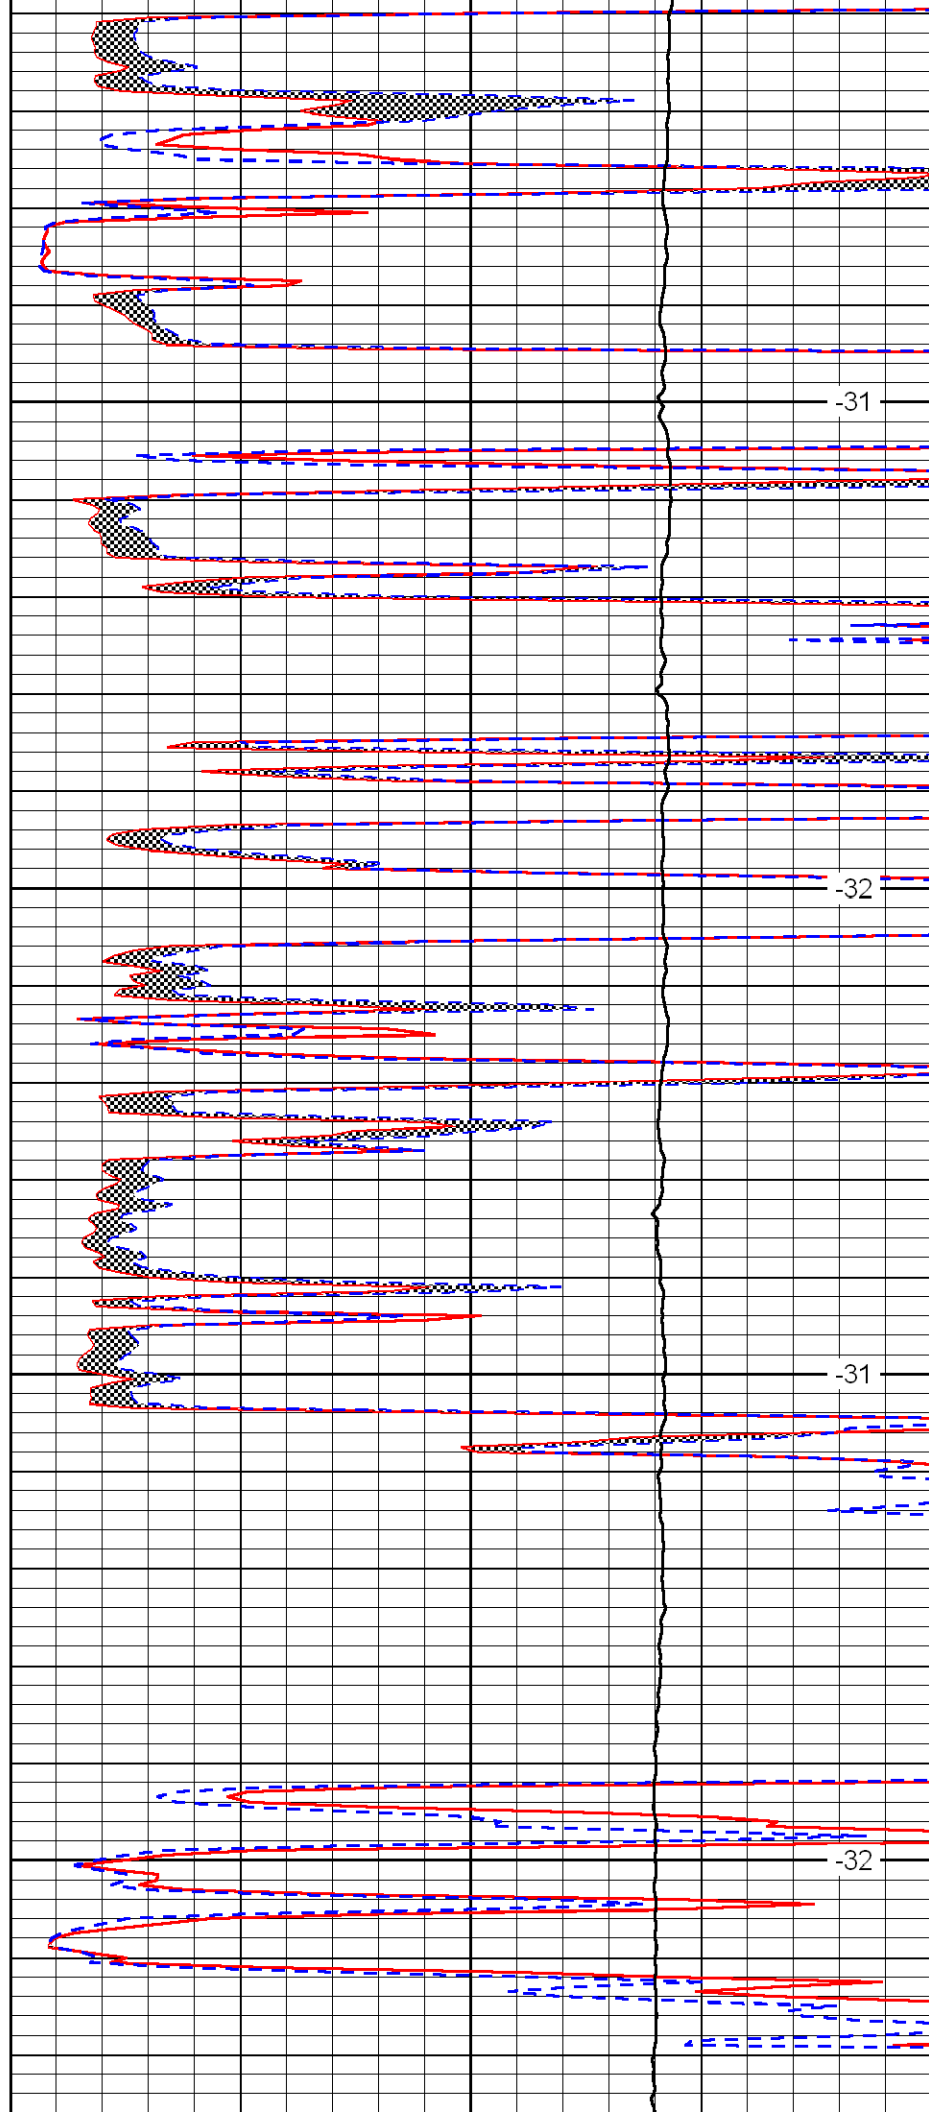


-31

-32

-31

-32

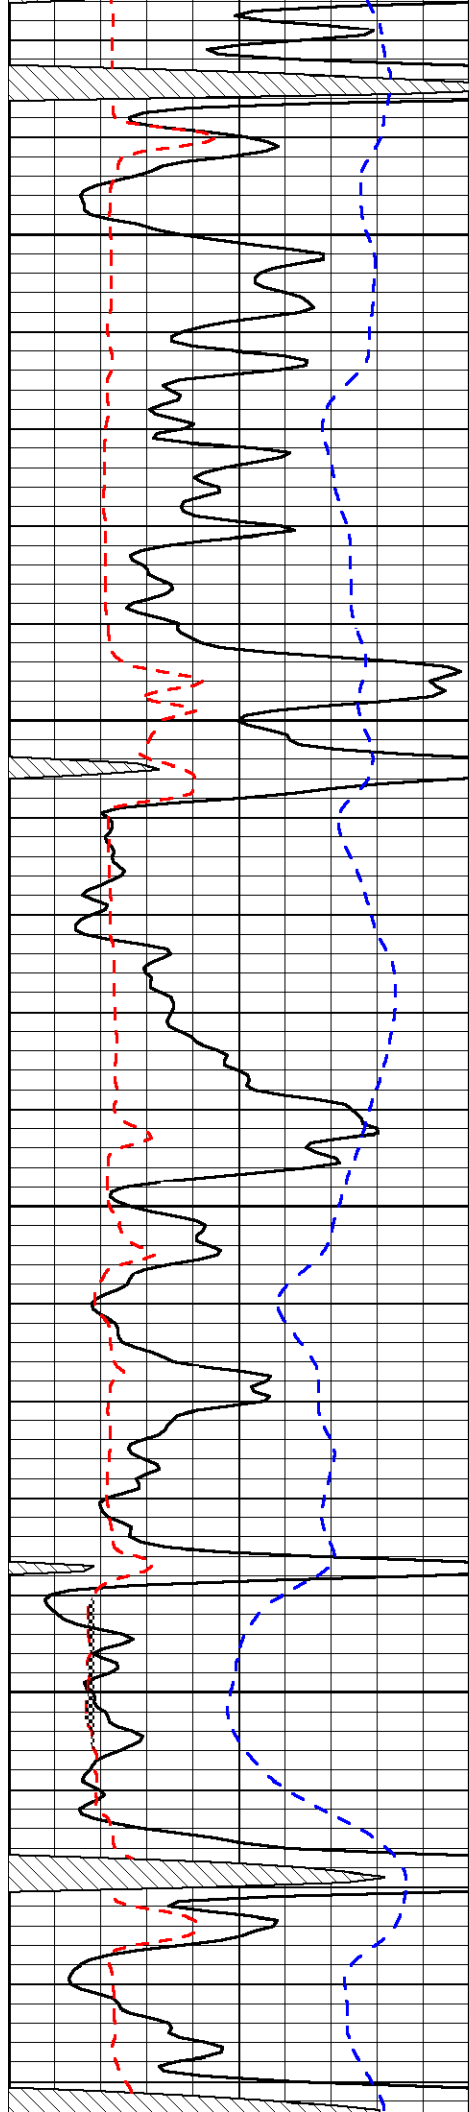



5050

5100

5150

5200

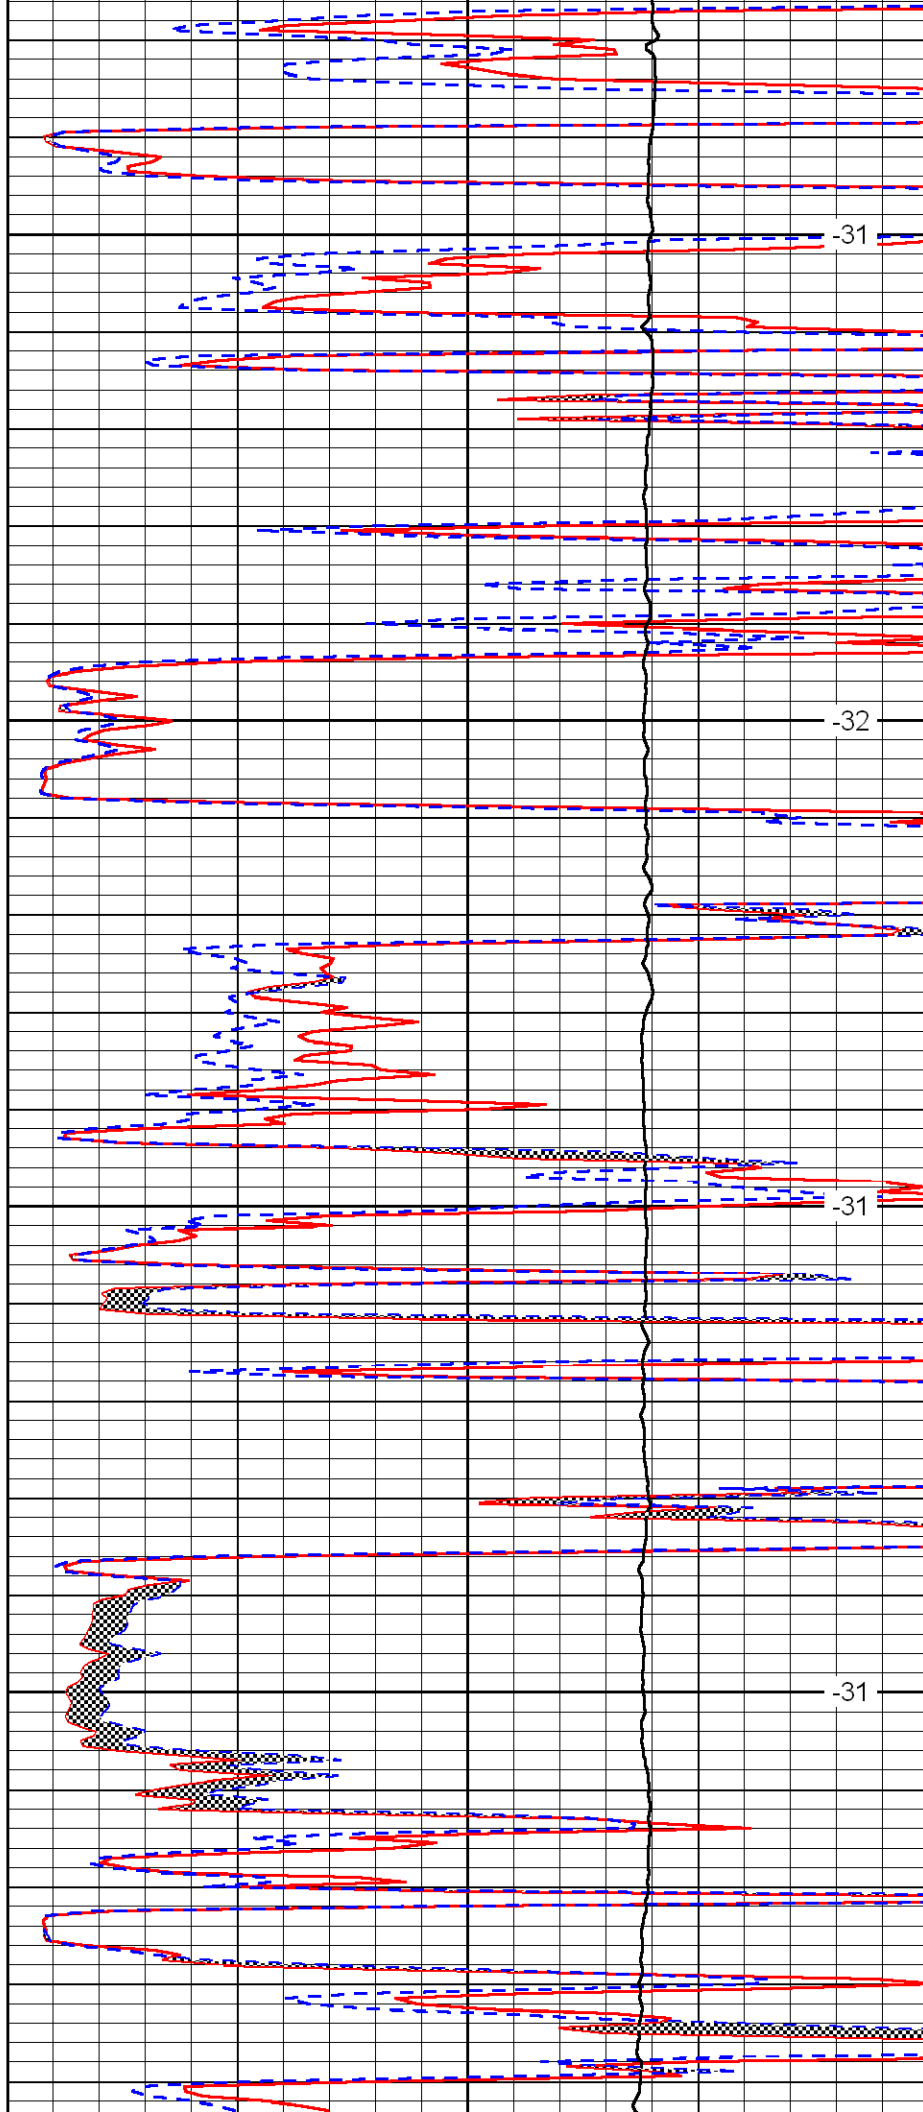

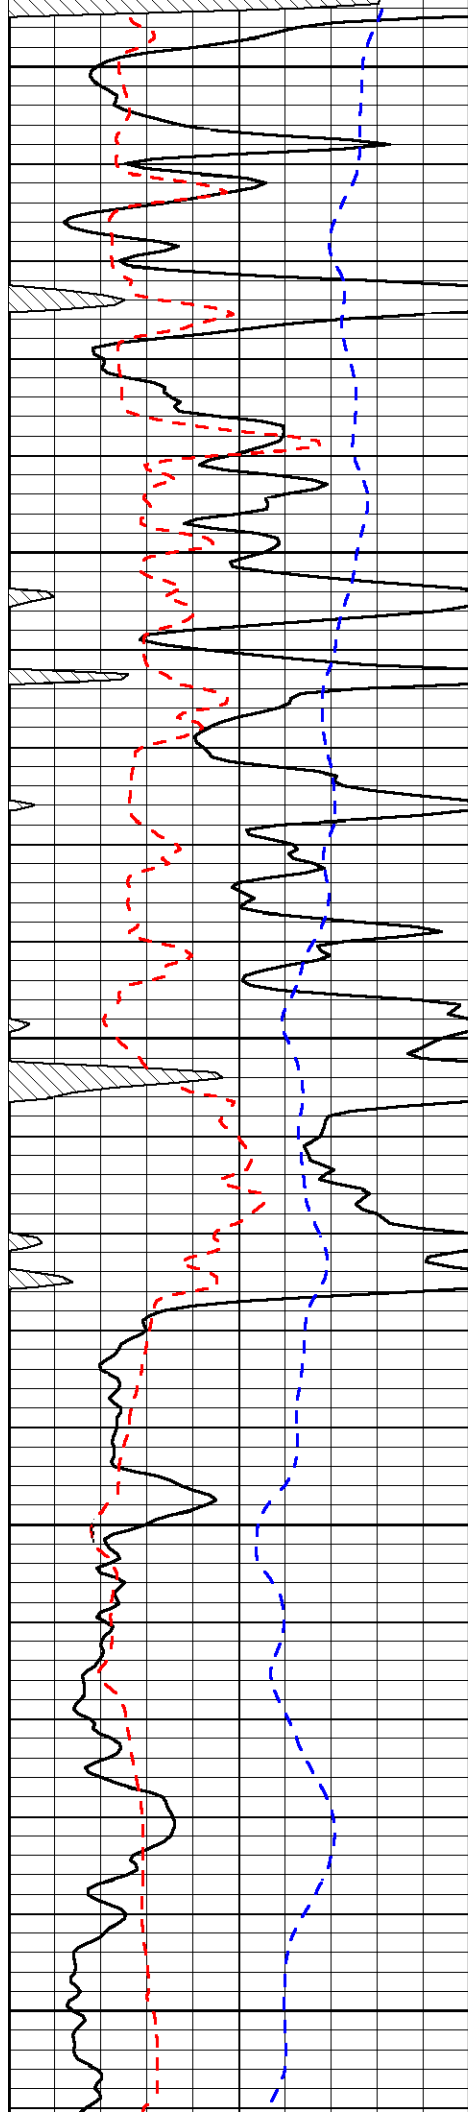


5250


5300

5350

5400

5450

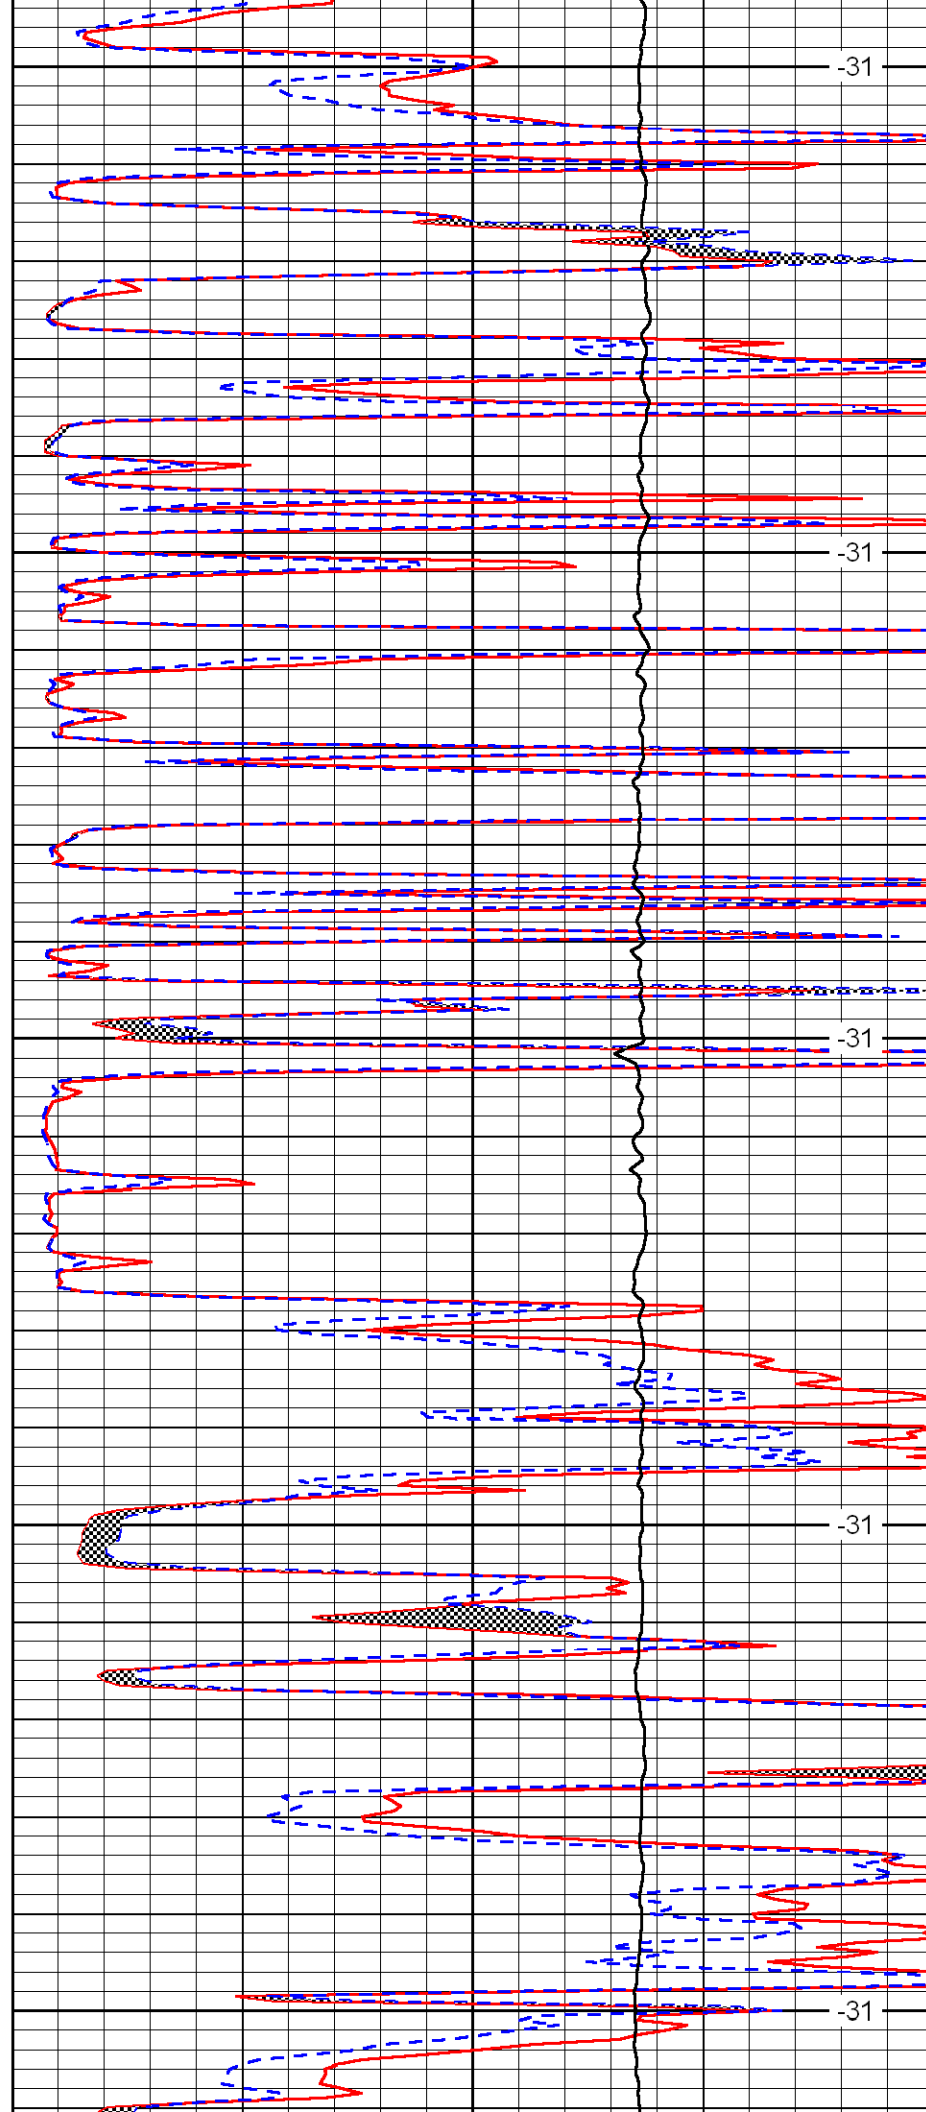

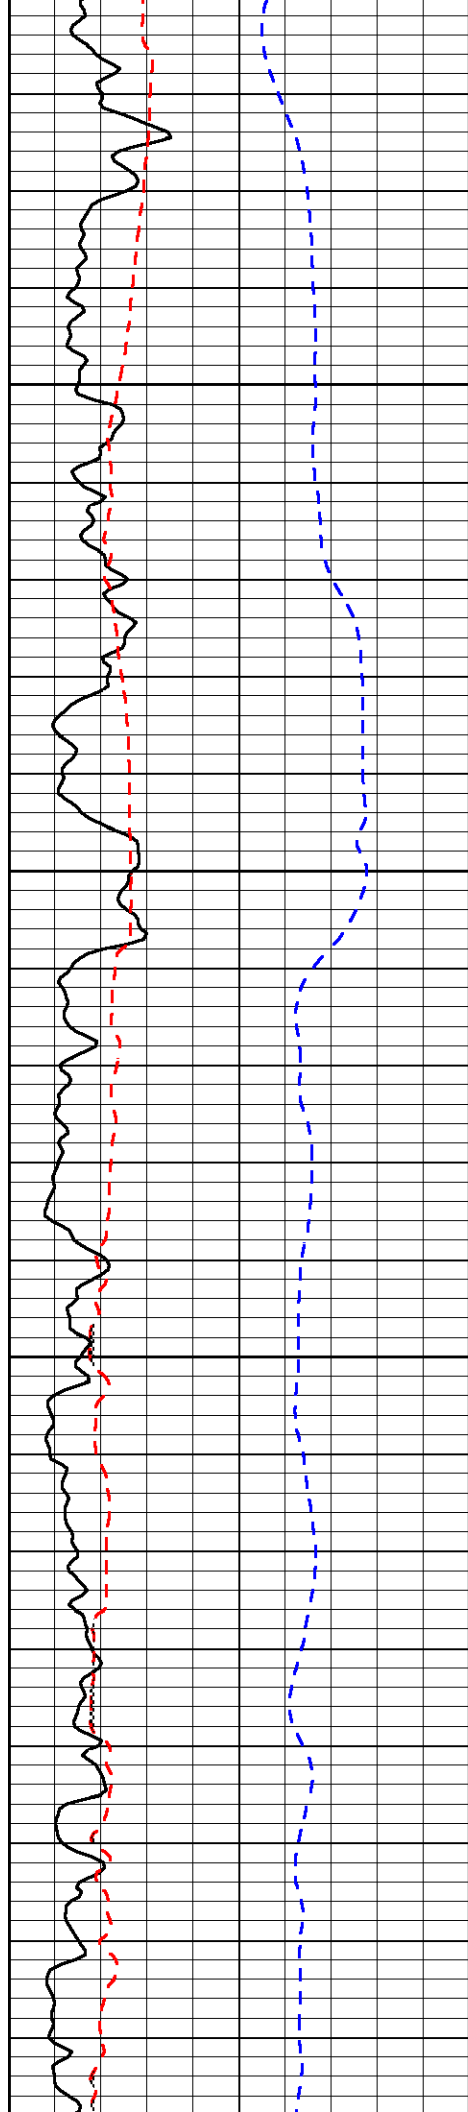



5500

5550

5600

5650

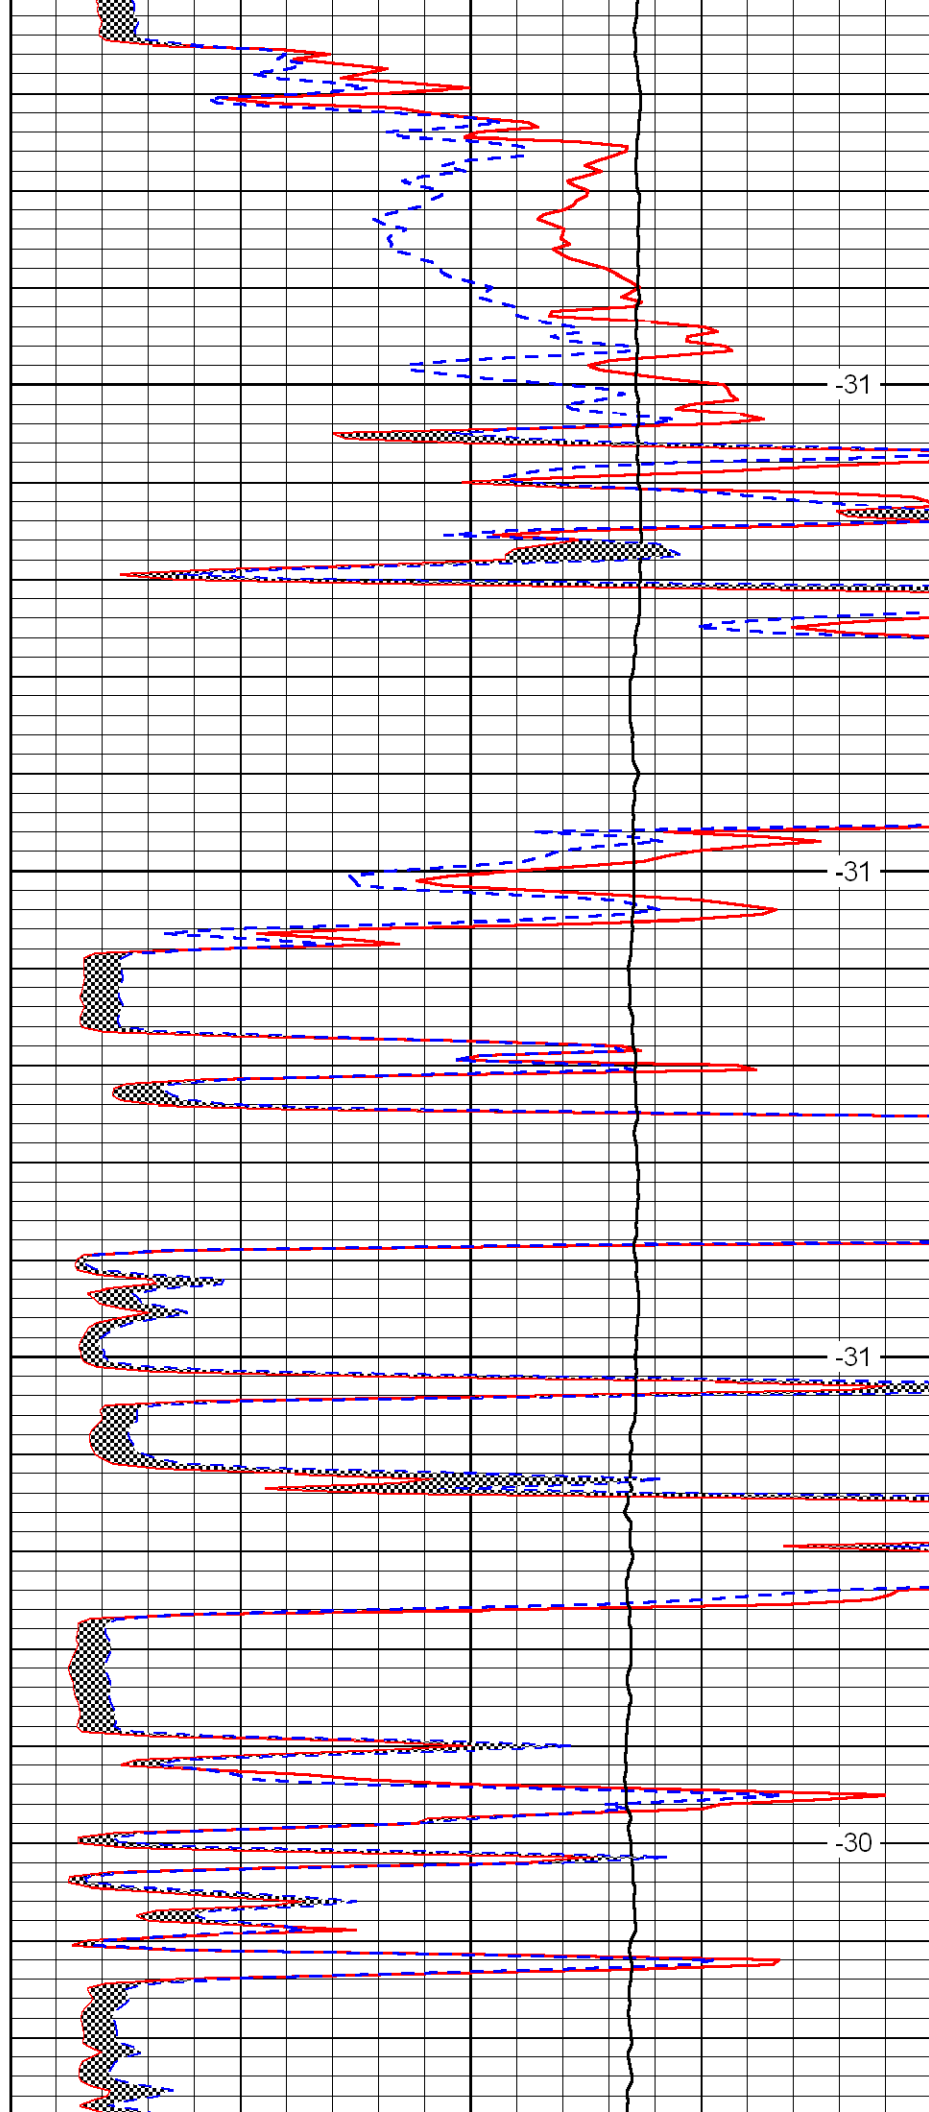

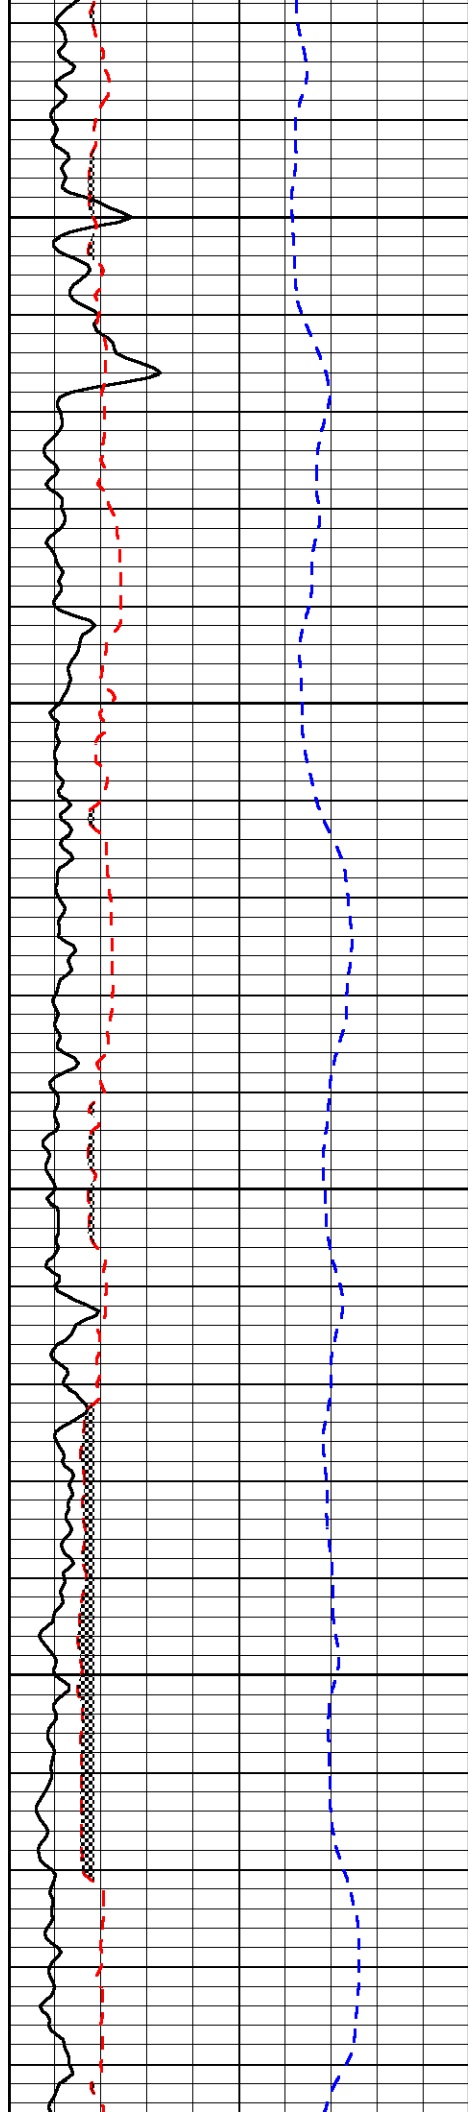



5700

5750

5800

5850

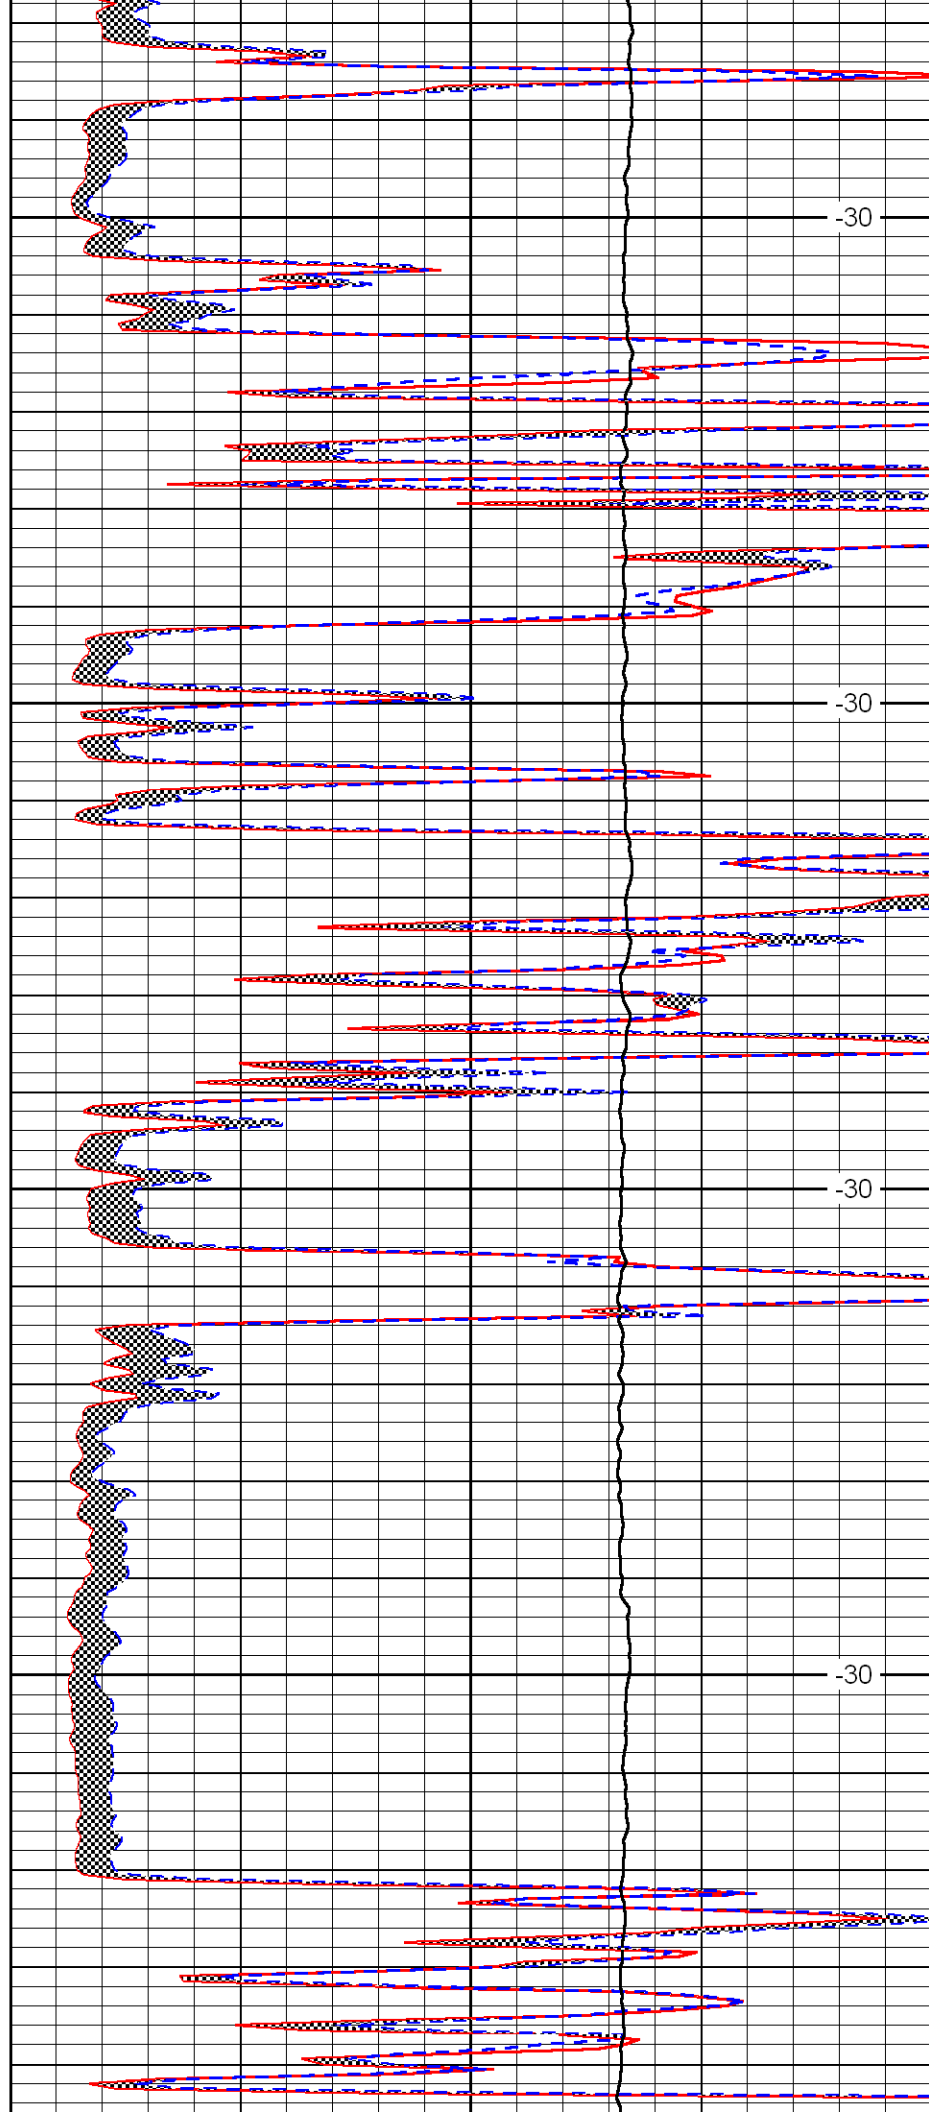

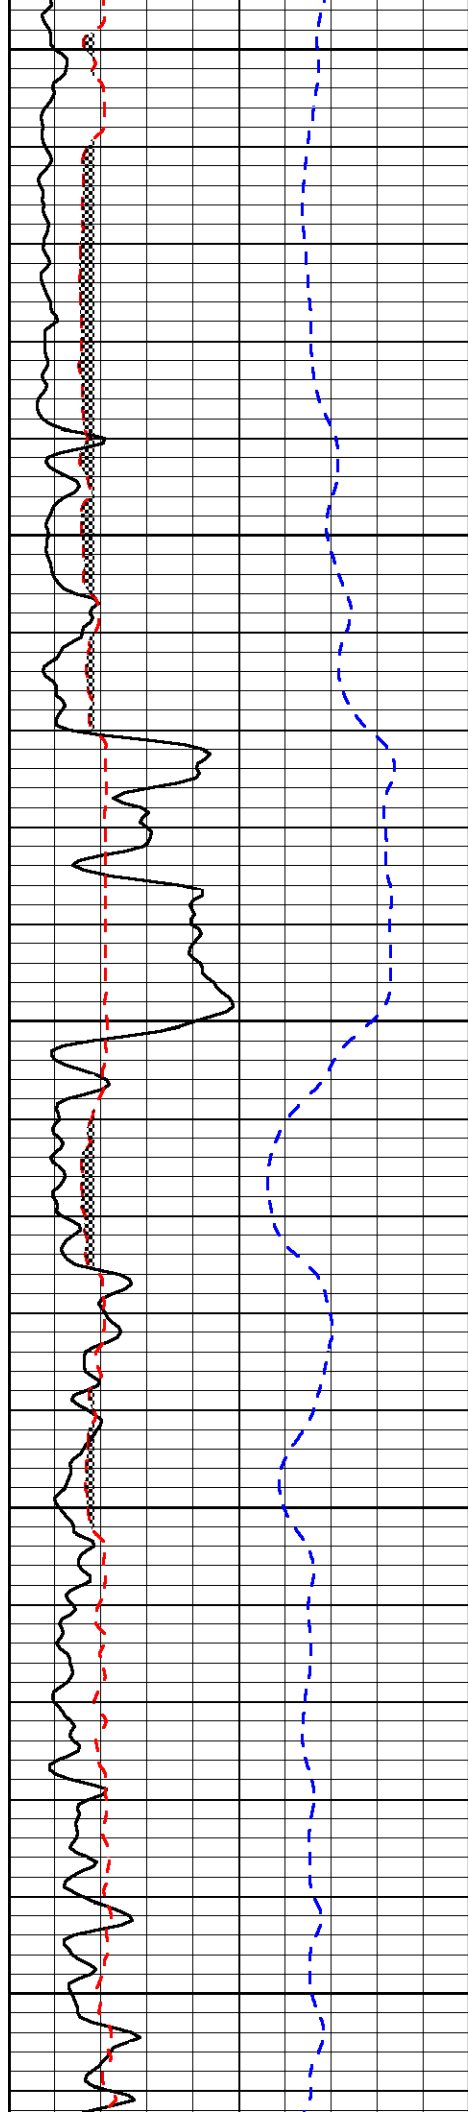


5900

5950

6000

6050

6100

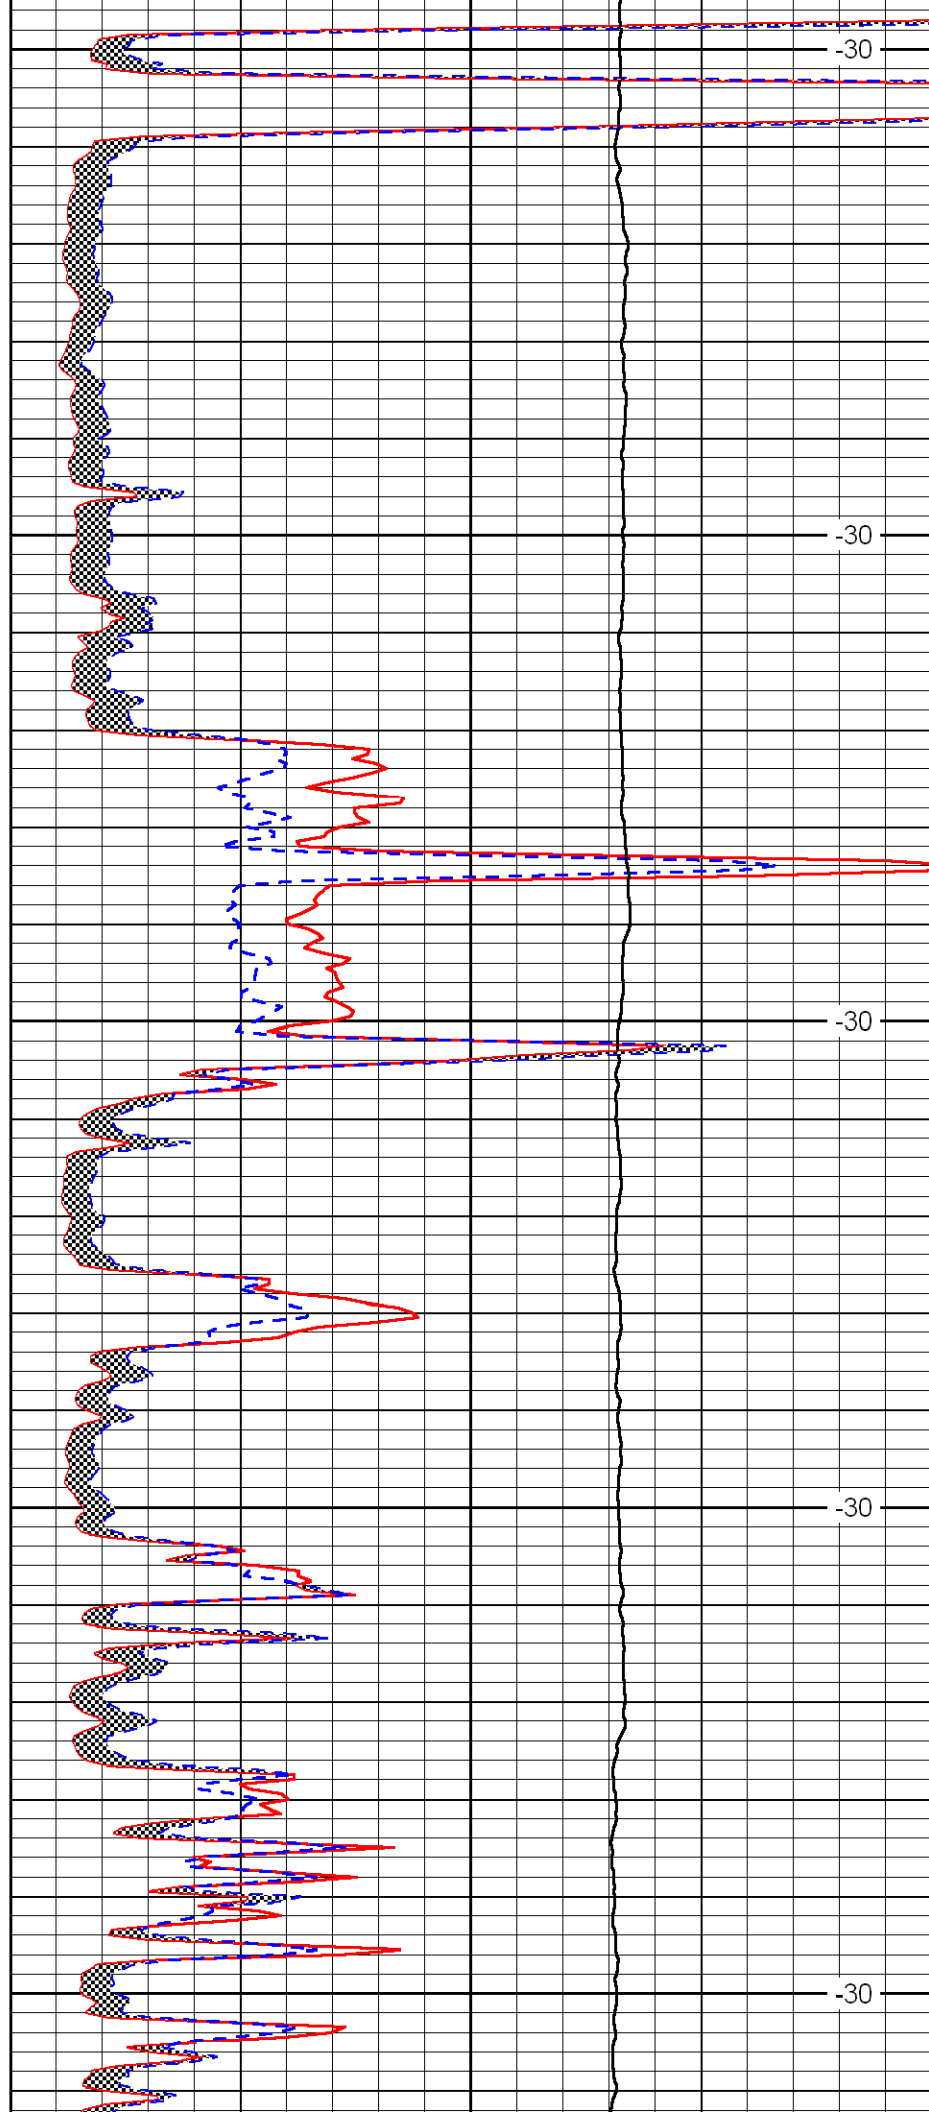


-30

-30

-30

-30

-30

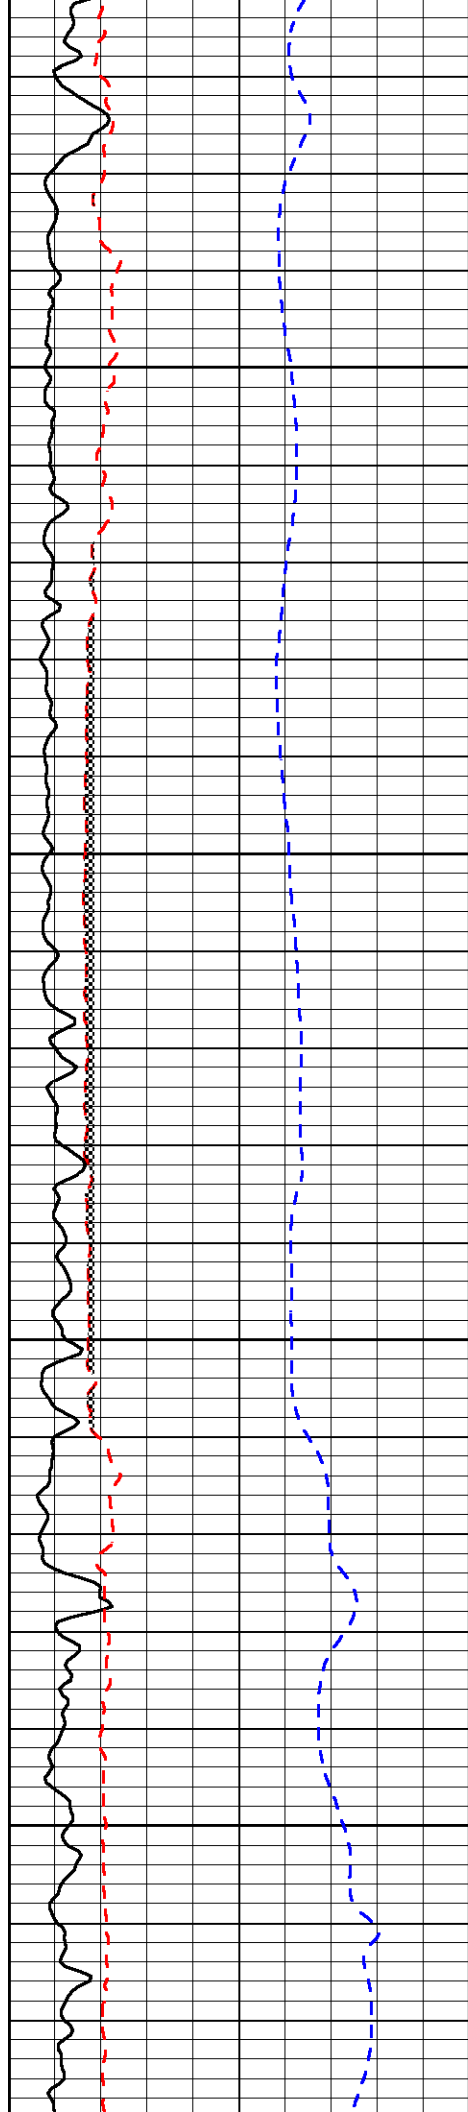




6150

6200

6250

6300

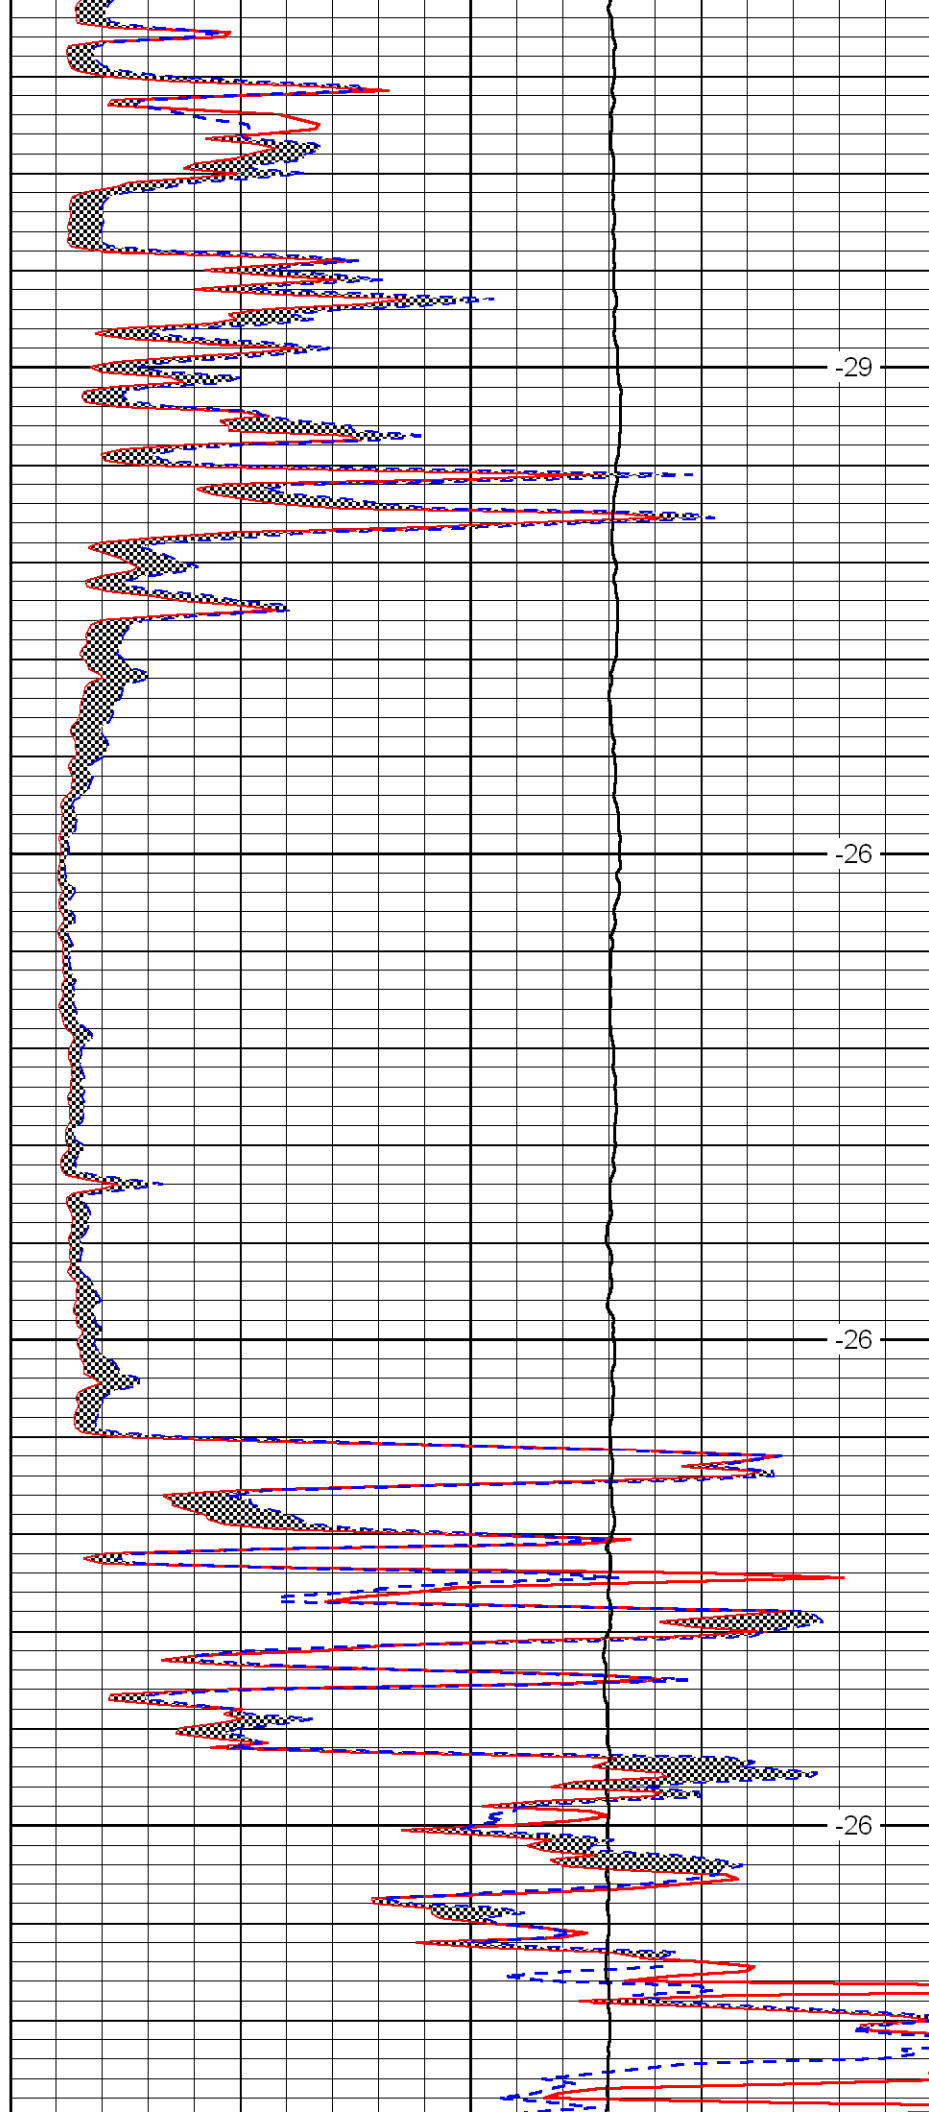

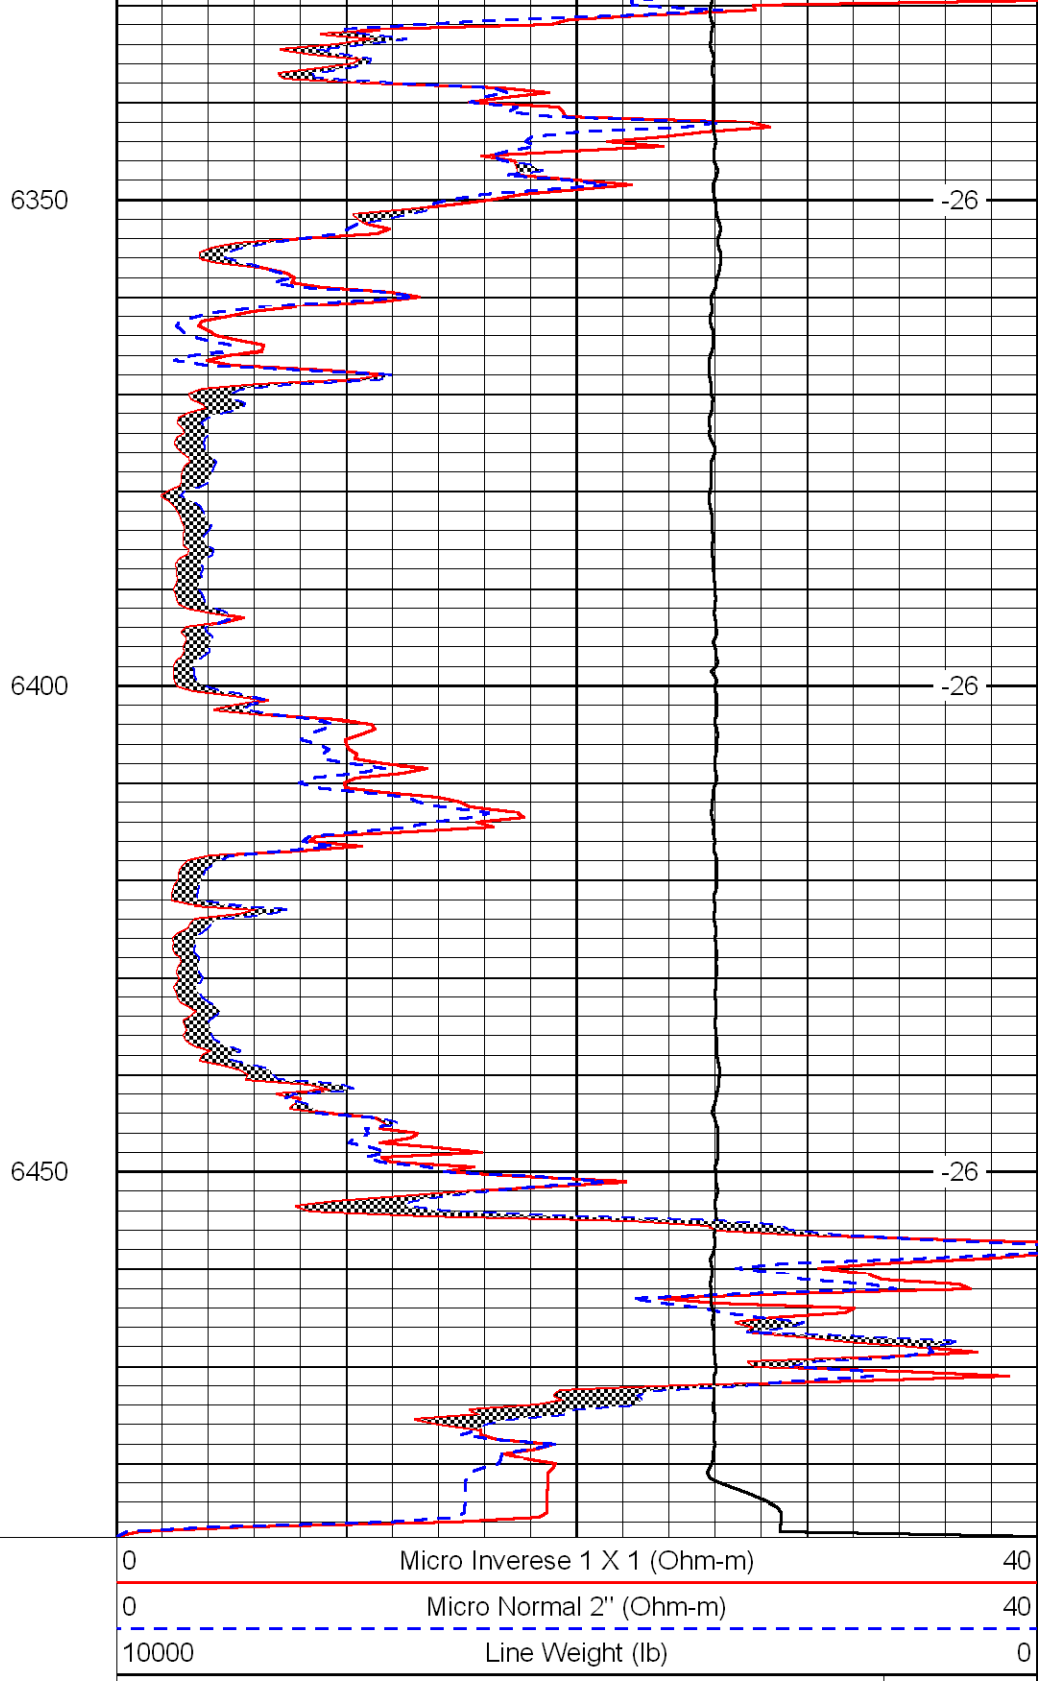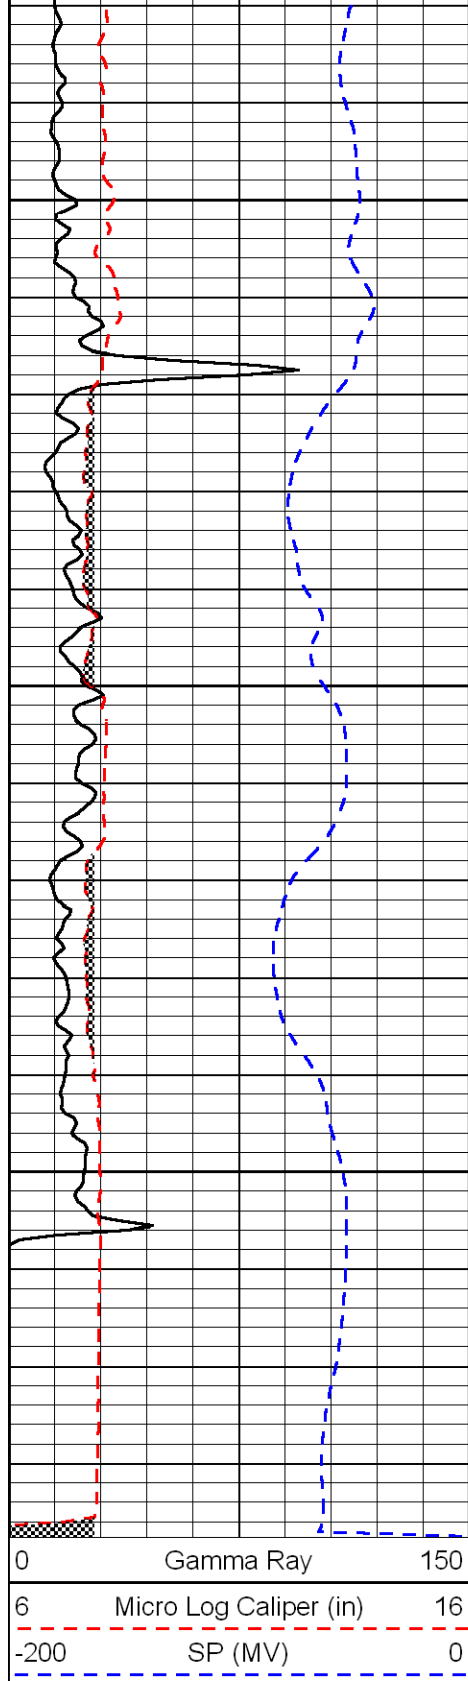

LSPD
(ft/min)