SUPERIOR WELL SERVICES

SUPERIOR
Hays,
Kansas

DUAL INDUCTION LOG

Company	LARIO OIL & GAS COMPANY
Well	STEVENSON TRUST"A" #1-10
Field	WILDCAT
County	GOVE
State	KANSAS

Company LARIO OIL & GAS COMPANY

Well STEVENSON TRUST"A" #1-10

Field WILDCAT

County GOVE State KANSAS

Location: API # : 15-063-21740-0000

1110' FSL & 2310' FWL

SEC 10 TWP 13S RGE 31W

Permanent Datum GROUND LEVEL Elevation 2947

Log Measured From KELLY BUSHING 10' A.G.L.

Drilling Measured From KELLY BUSHING

Other Services: CDL/CNL/PE

Elevation:
K.B. 2957
D.F. 2955
G.L. 2947

Date	11/5/08		
Run Number	ONE		
Depth Driller	4750		
Depth Logger	4751		
Bottom Logged Interval	4749		
Top Log Interval	00		
Casing Driller	8 5/8"@255'		
Casing Logger	268		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,800 PPM	
Density / Viscosity	9.3/57		
pH / Fluid Loss	9.5/8.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	2.40@76F		
Rmf @ Meas. Temp	1.80@76F		
Rmc @ Meas. Temp	2.88@76F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	1.48@123F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	9:45 P.M.		
Maximum Recorded Temperature	123F		
Equipment Number	0836		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	STEVE DAVIS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785)628-6395

DIRECTIONS

OAKLEY, KS. (OLD 40 & HWY 83 JUNCTION) 11S. TO GOVE RD., 5E., 2S., 1/2E., N. INTO

SUPERIOR WELL SERVICES

SUPERIOR
Hays,
Kansas

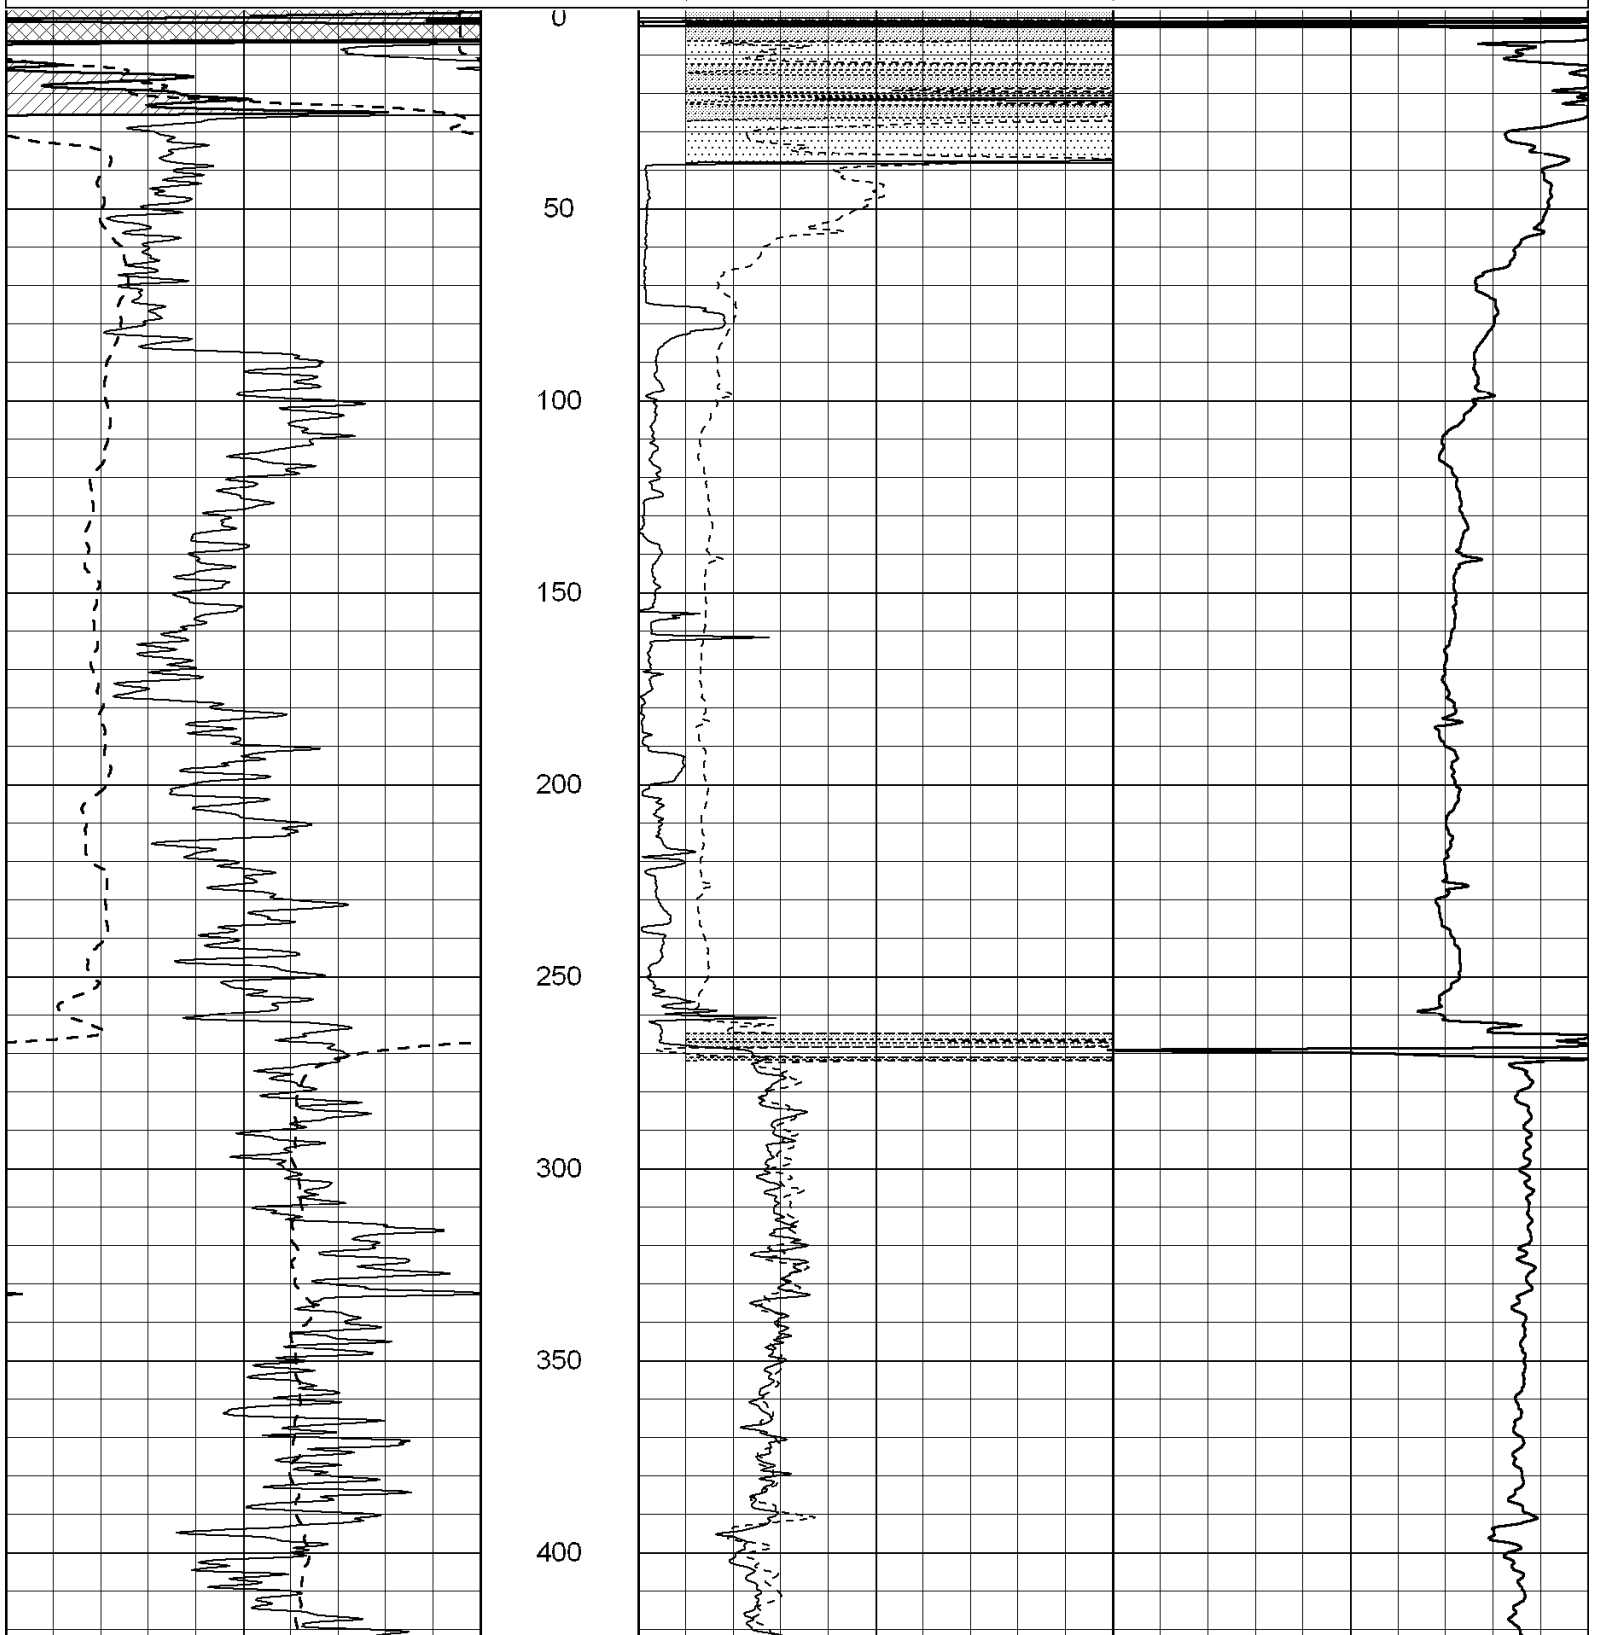
MAIN SECTION

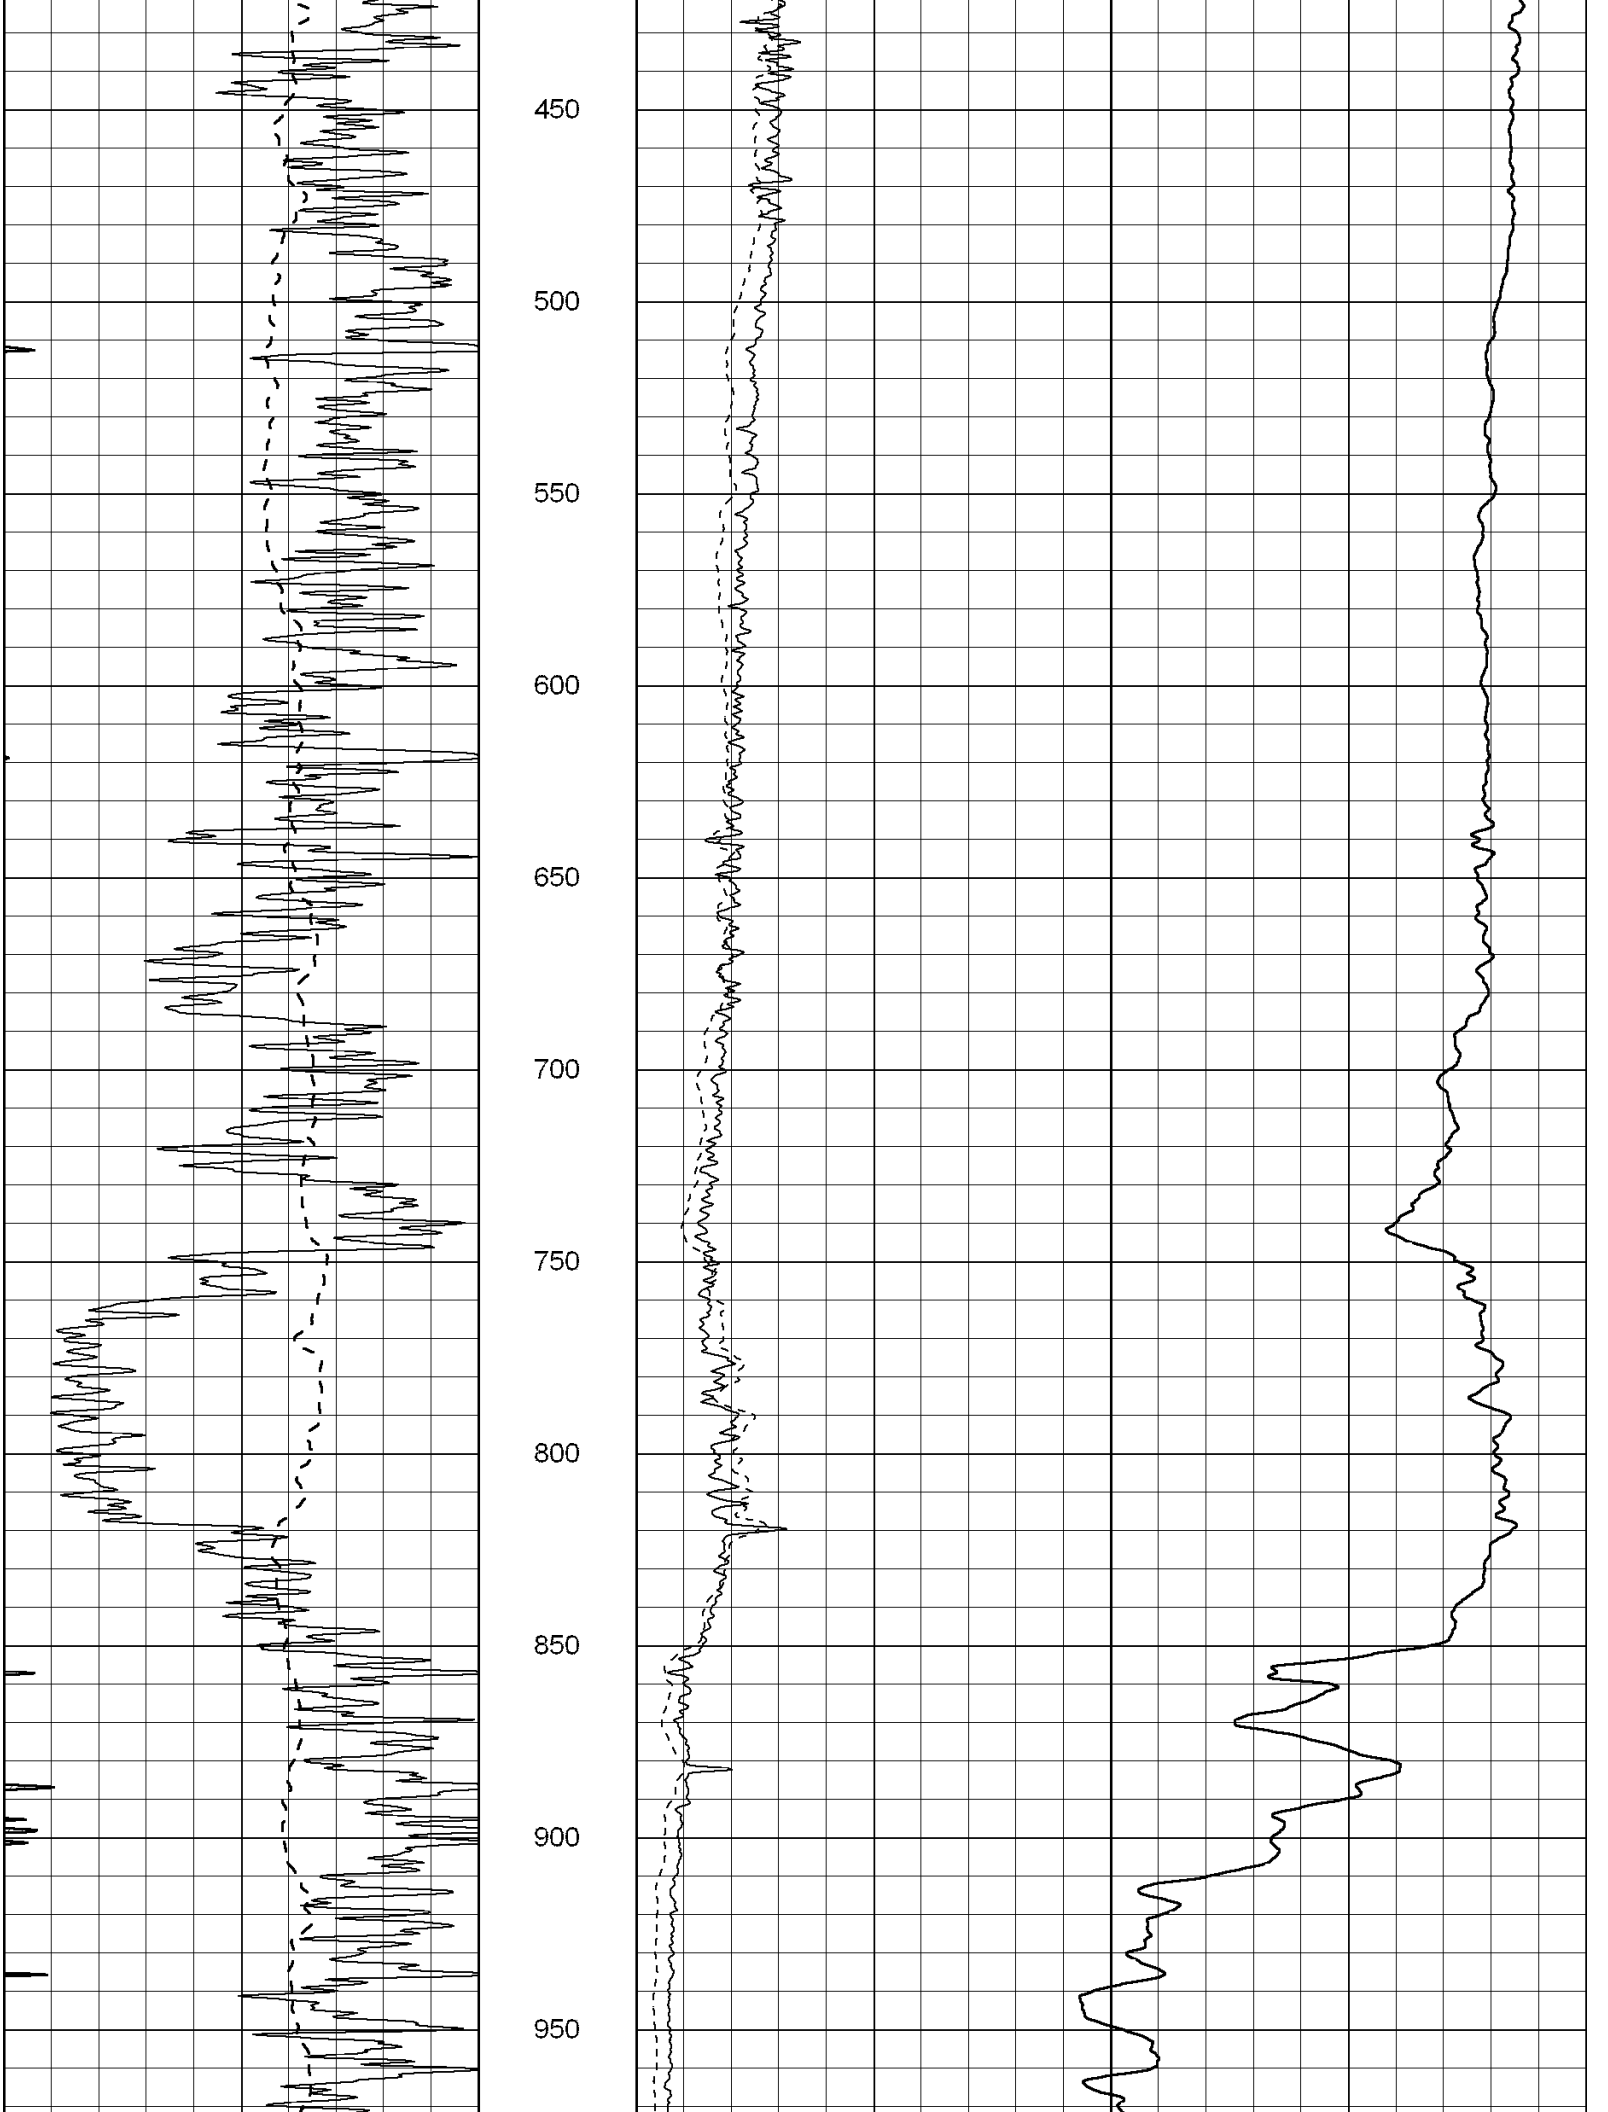
Kansas

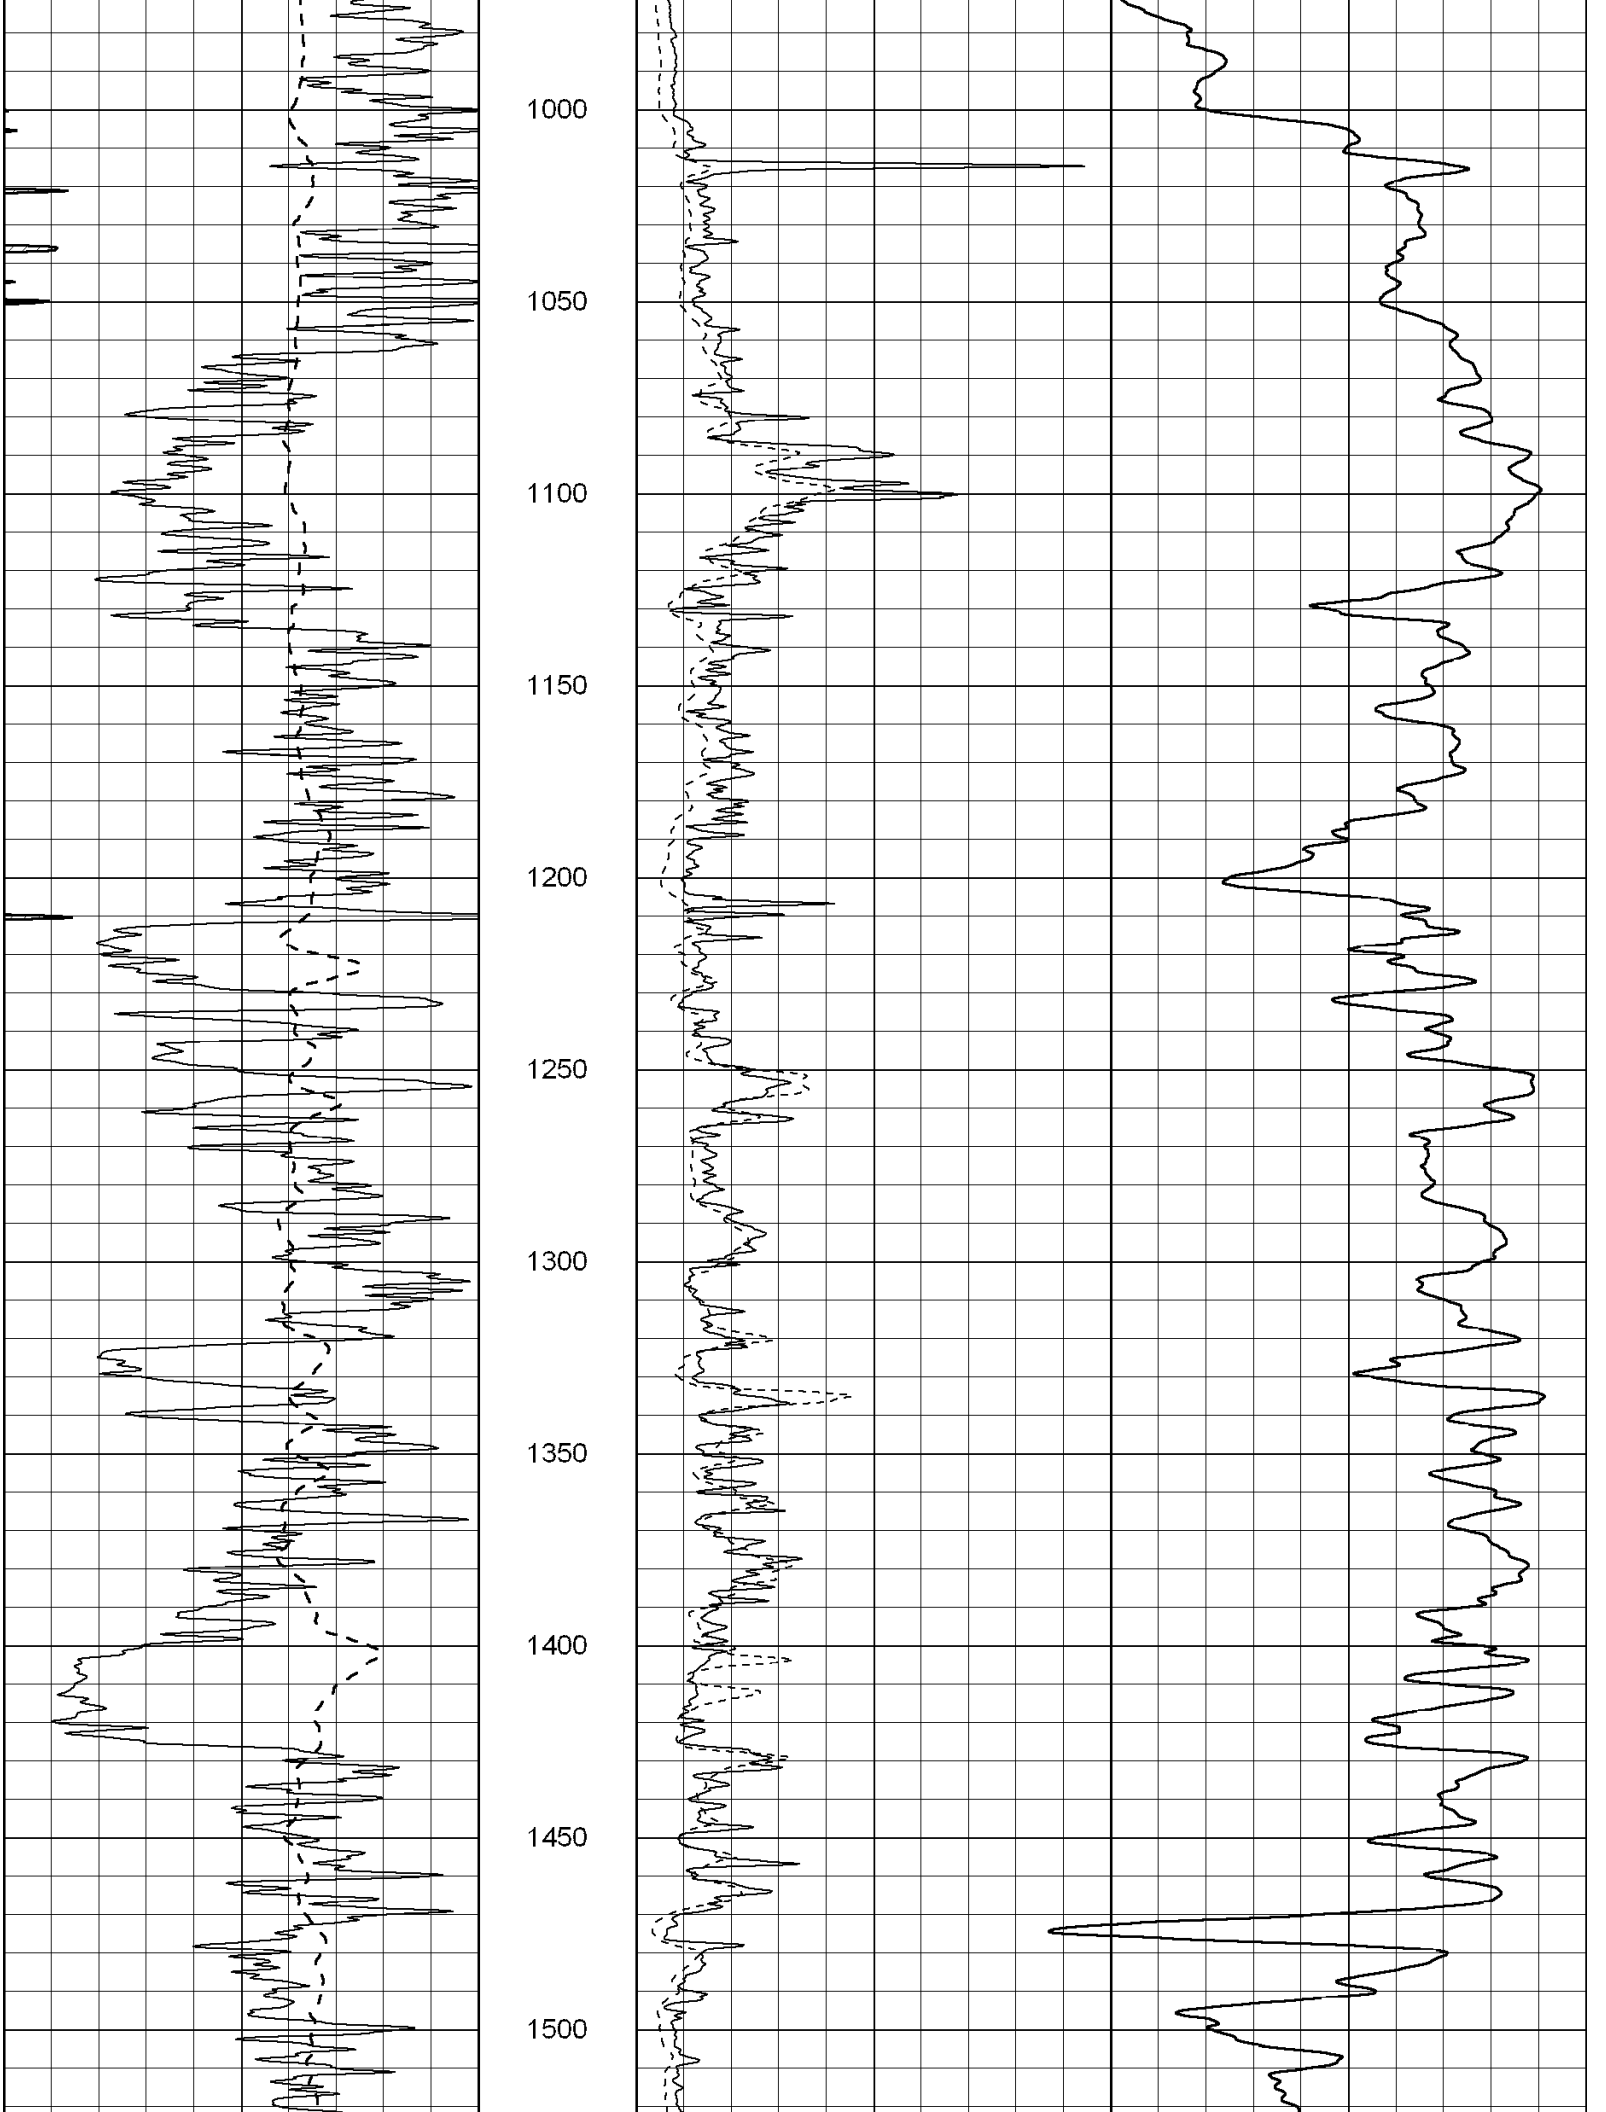
Database File: 002759pe.db
Dataset Pathname: pass3.6
Presentation Format: dil2
Dataset Creation: Wed Nov 05 23:19:02 2008 by Calc Open-Cased 060407
Charted by: Depth in Feet scaled 1:600

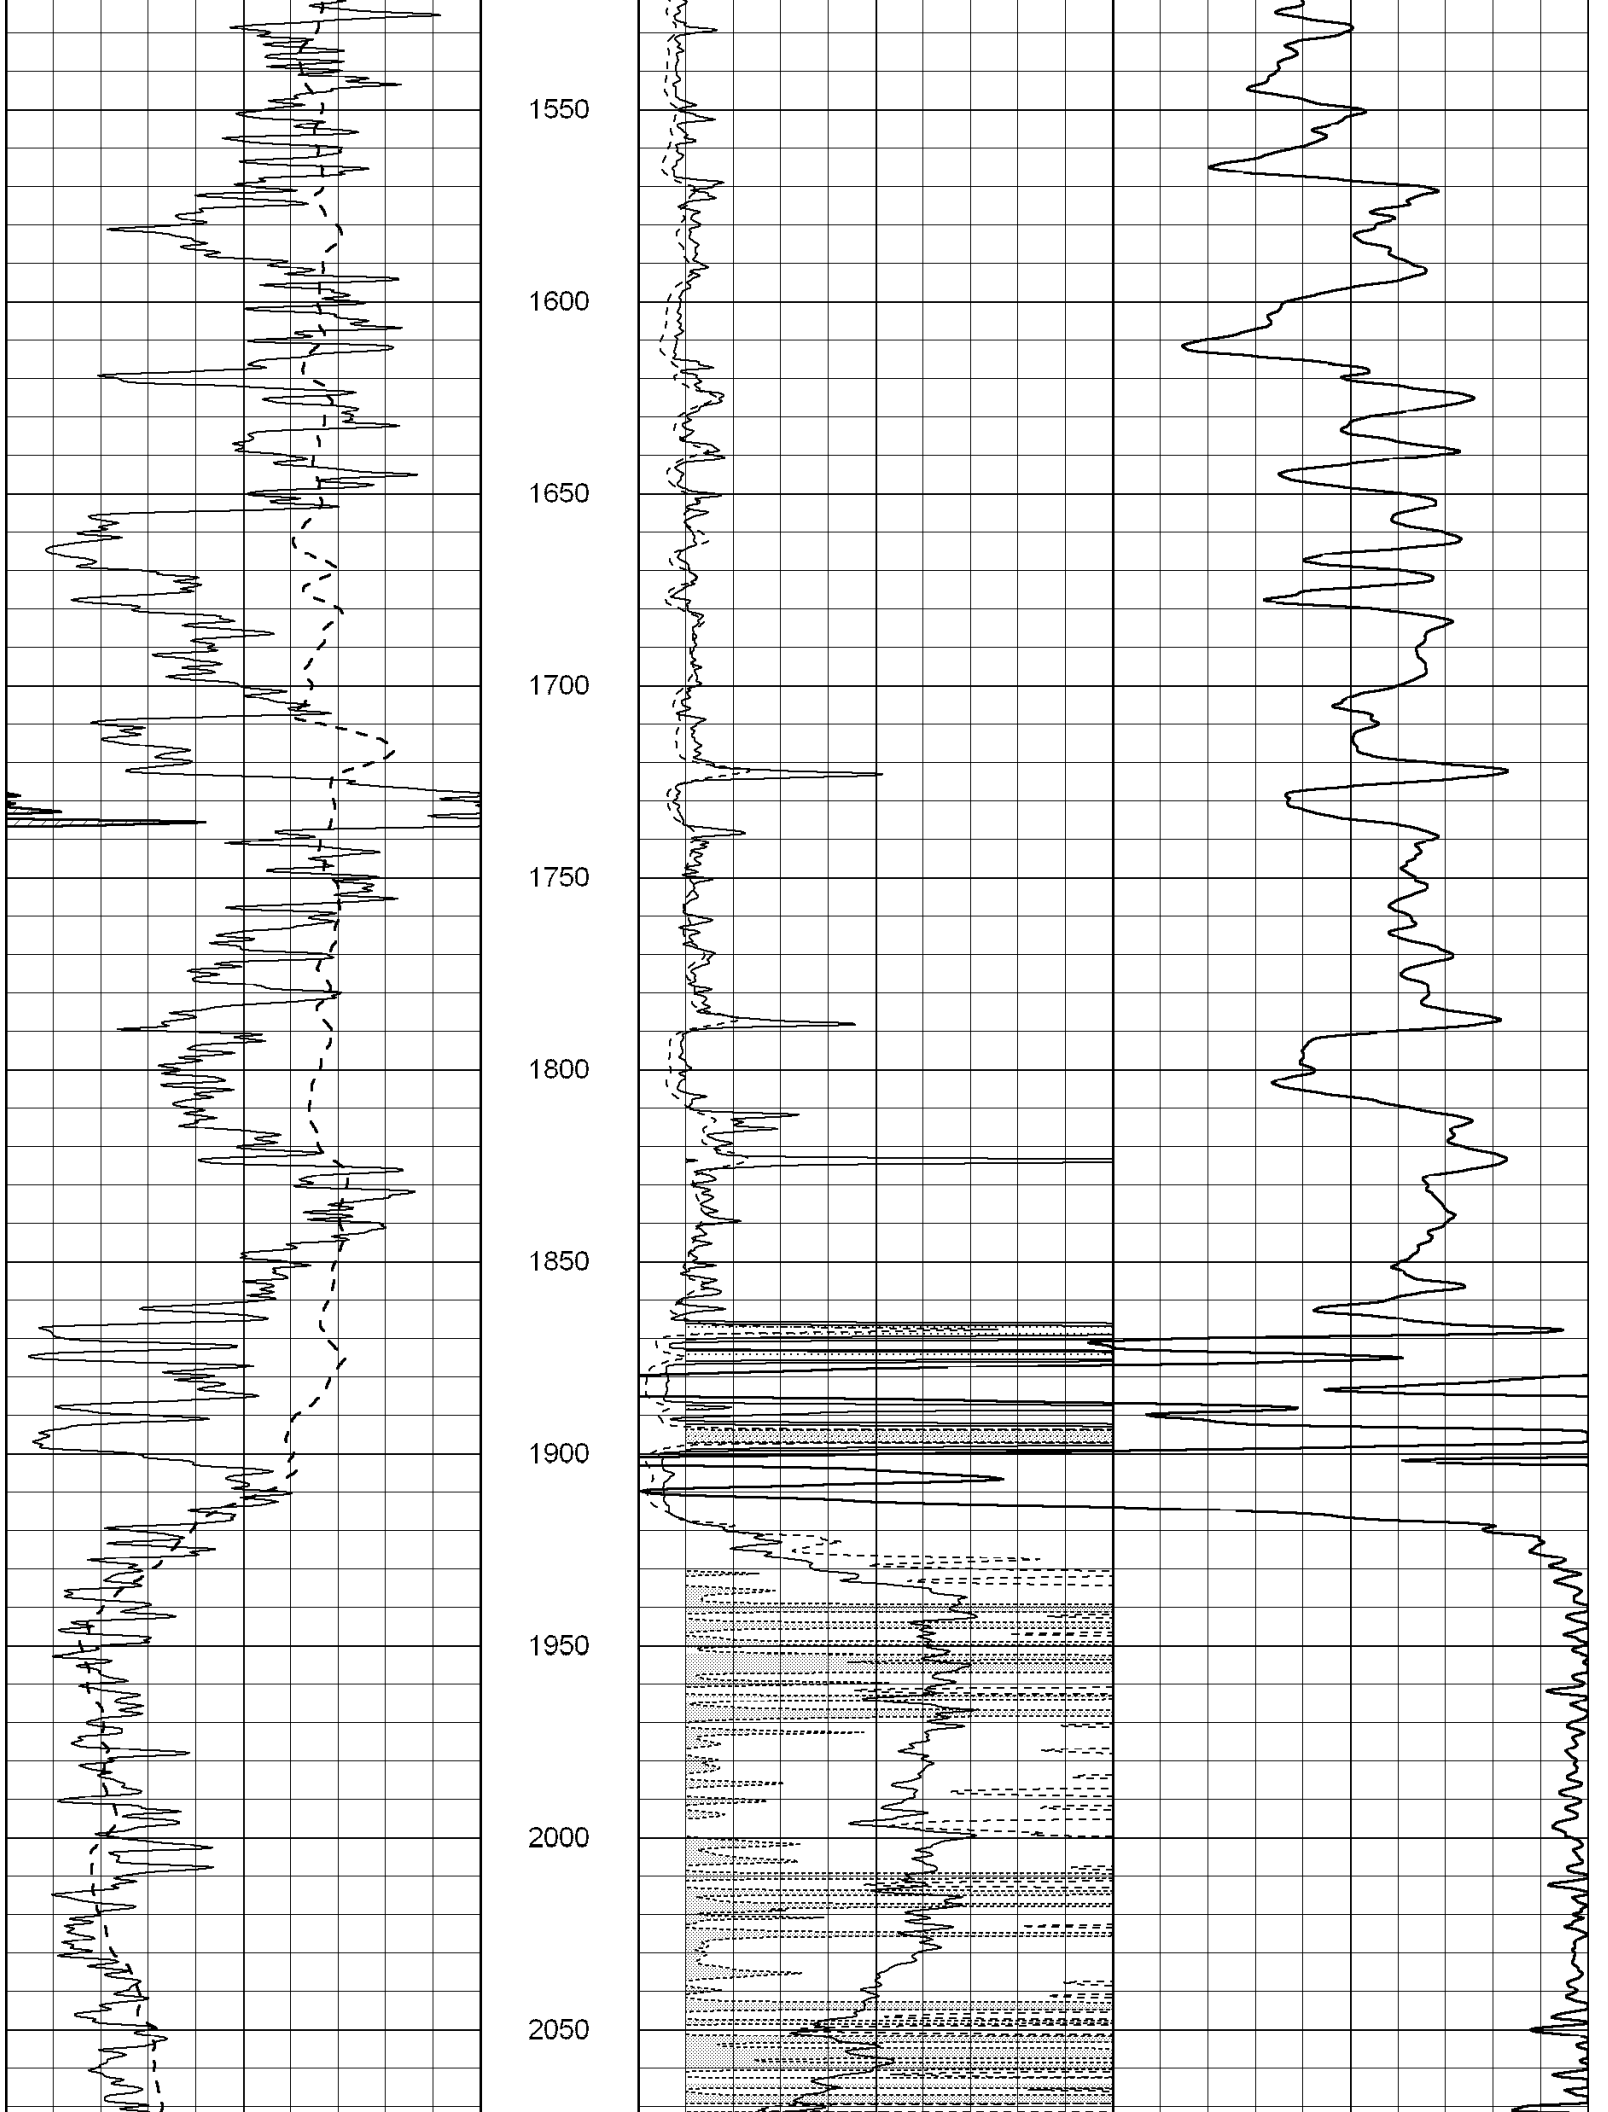
0	Gamma Ray (GAPI)	150
-100	SP (mV)	100

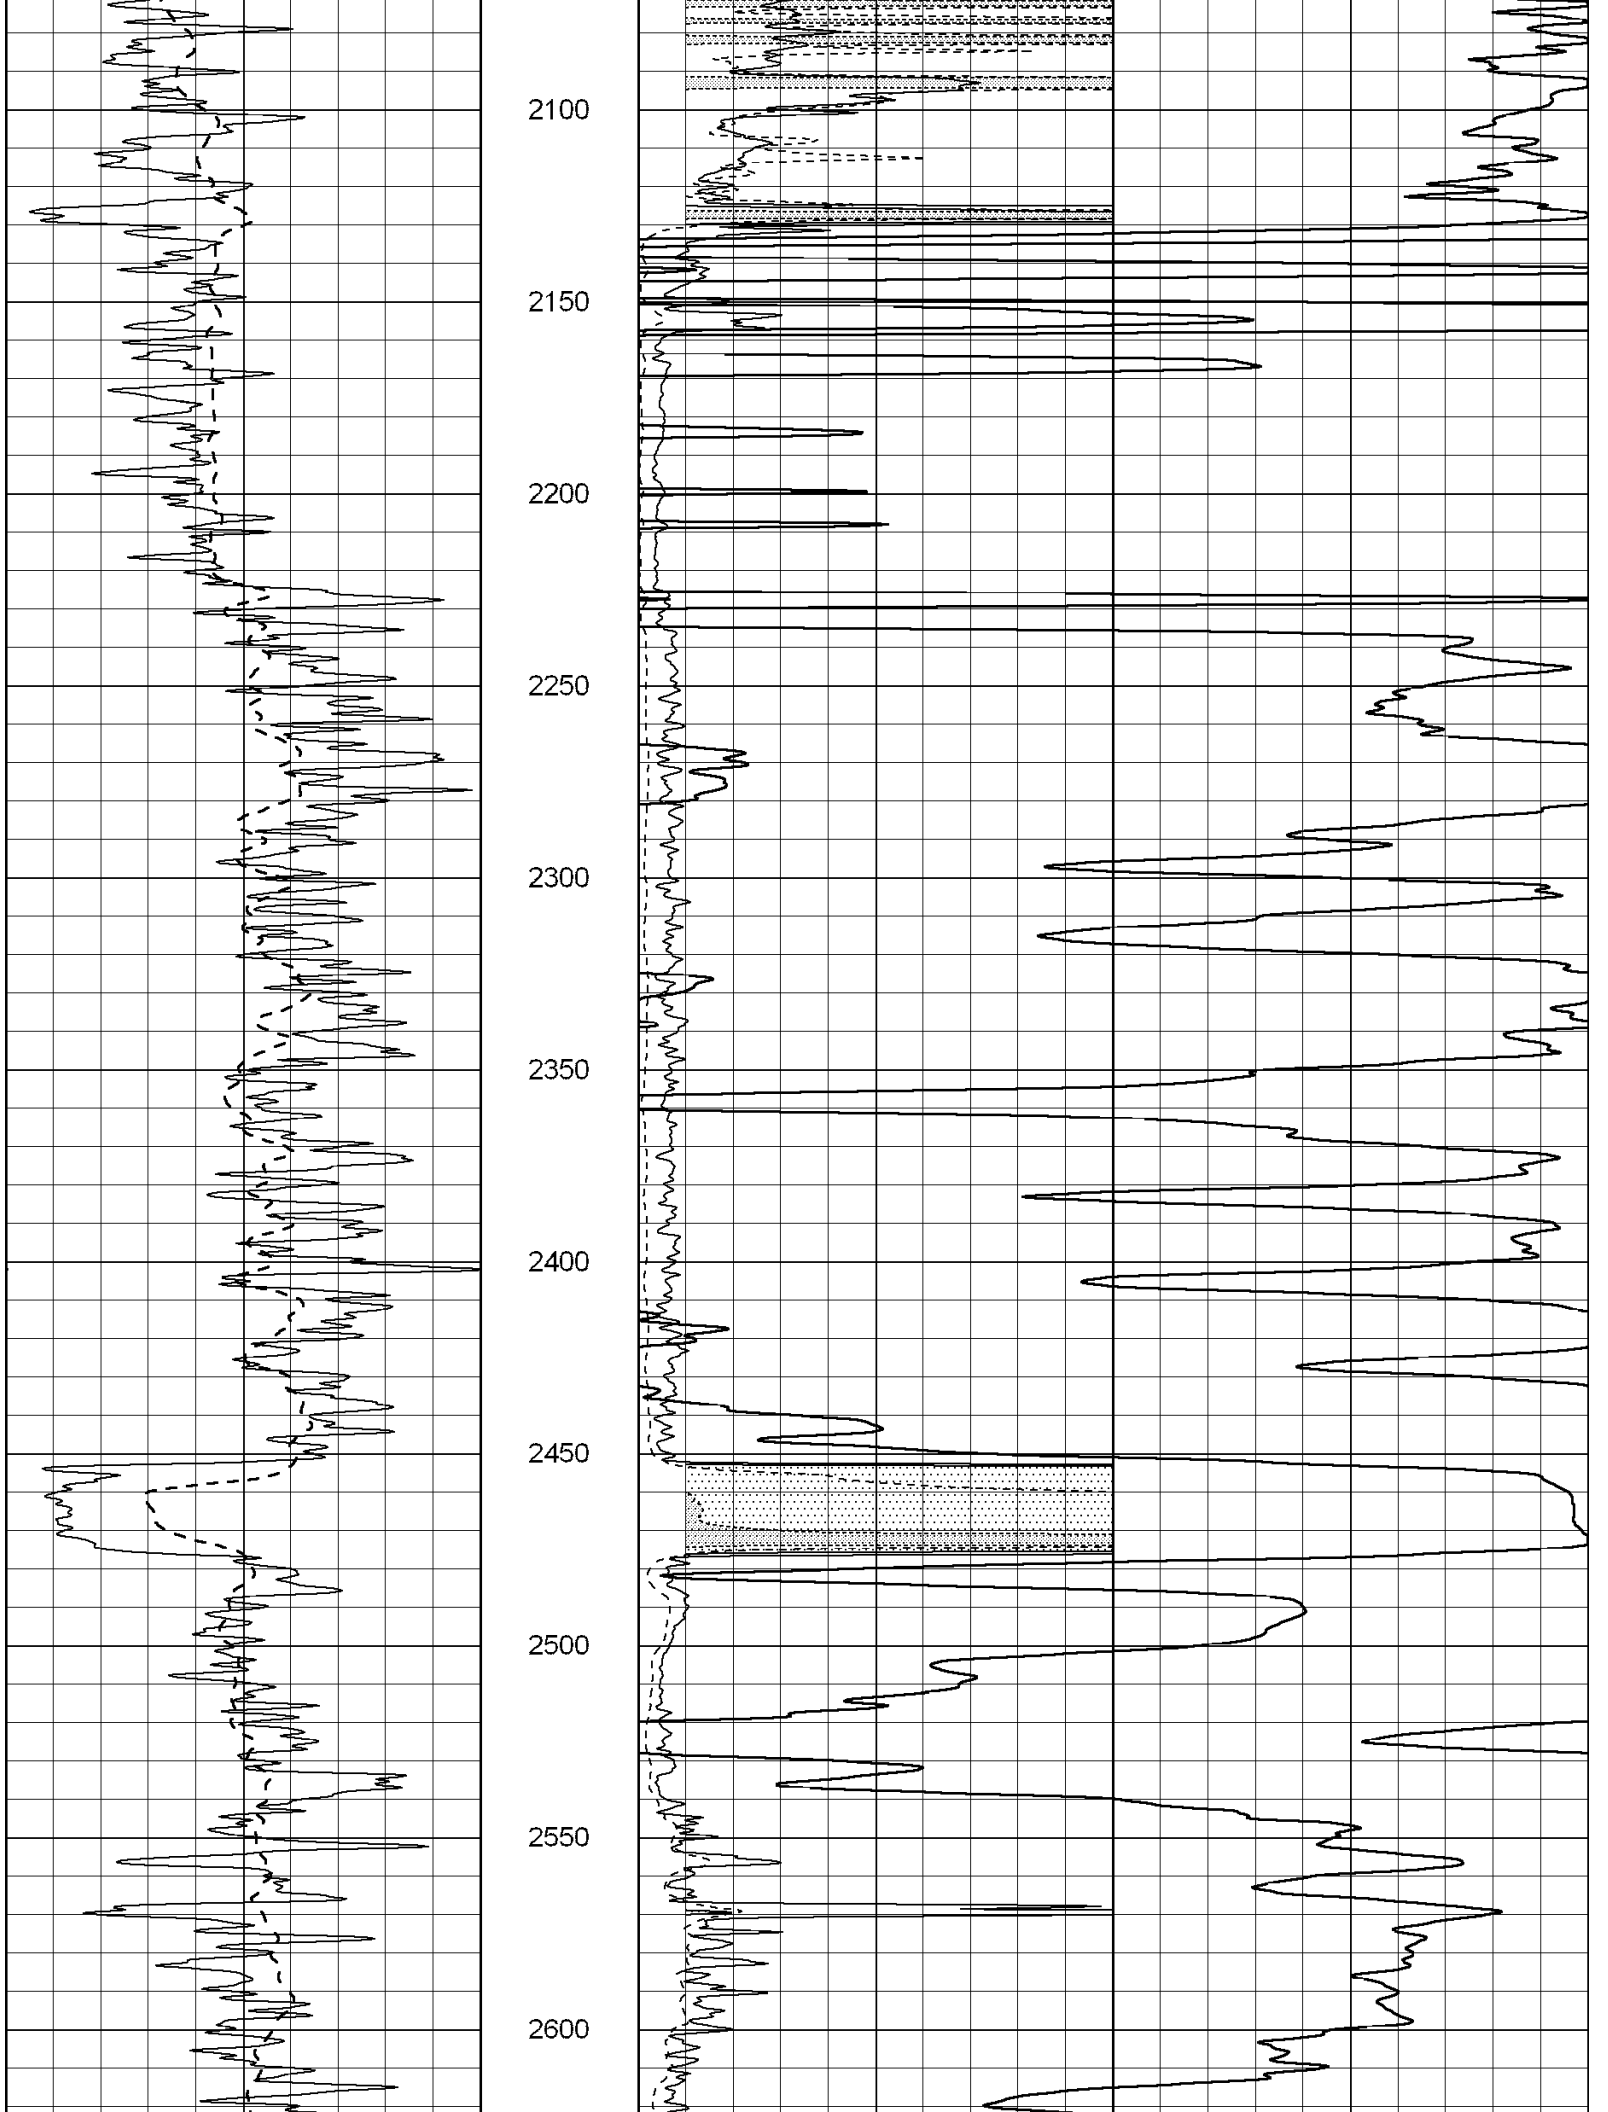
0	RLL3 (Ohm-m)	50
0	Deep Induction (Ohm-m)	50
1000	CILD (mmho-m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

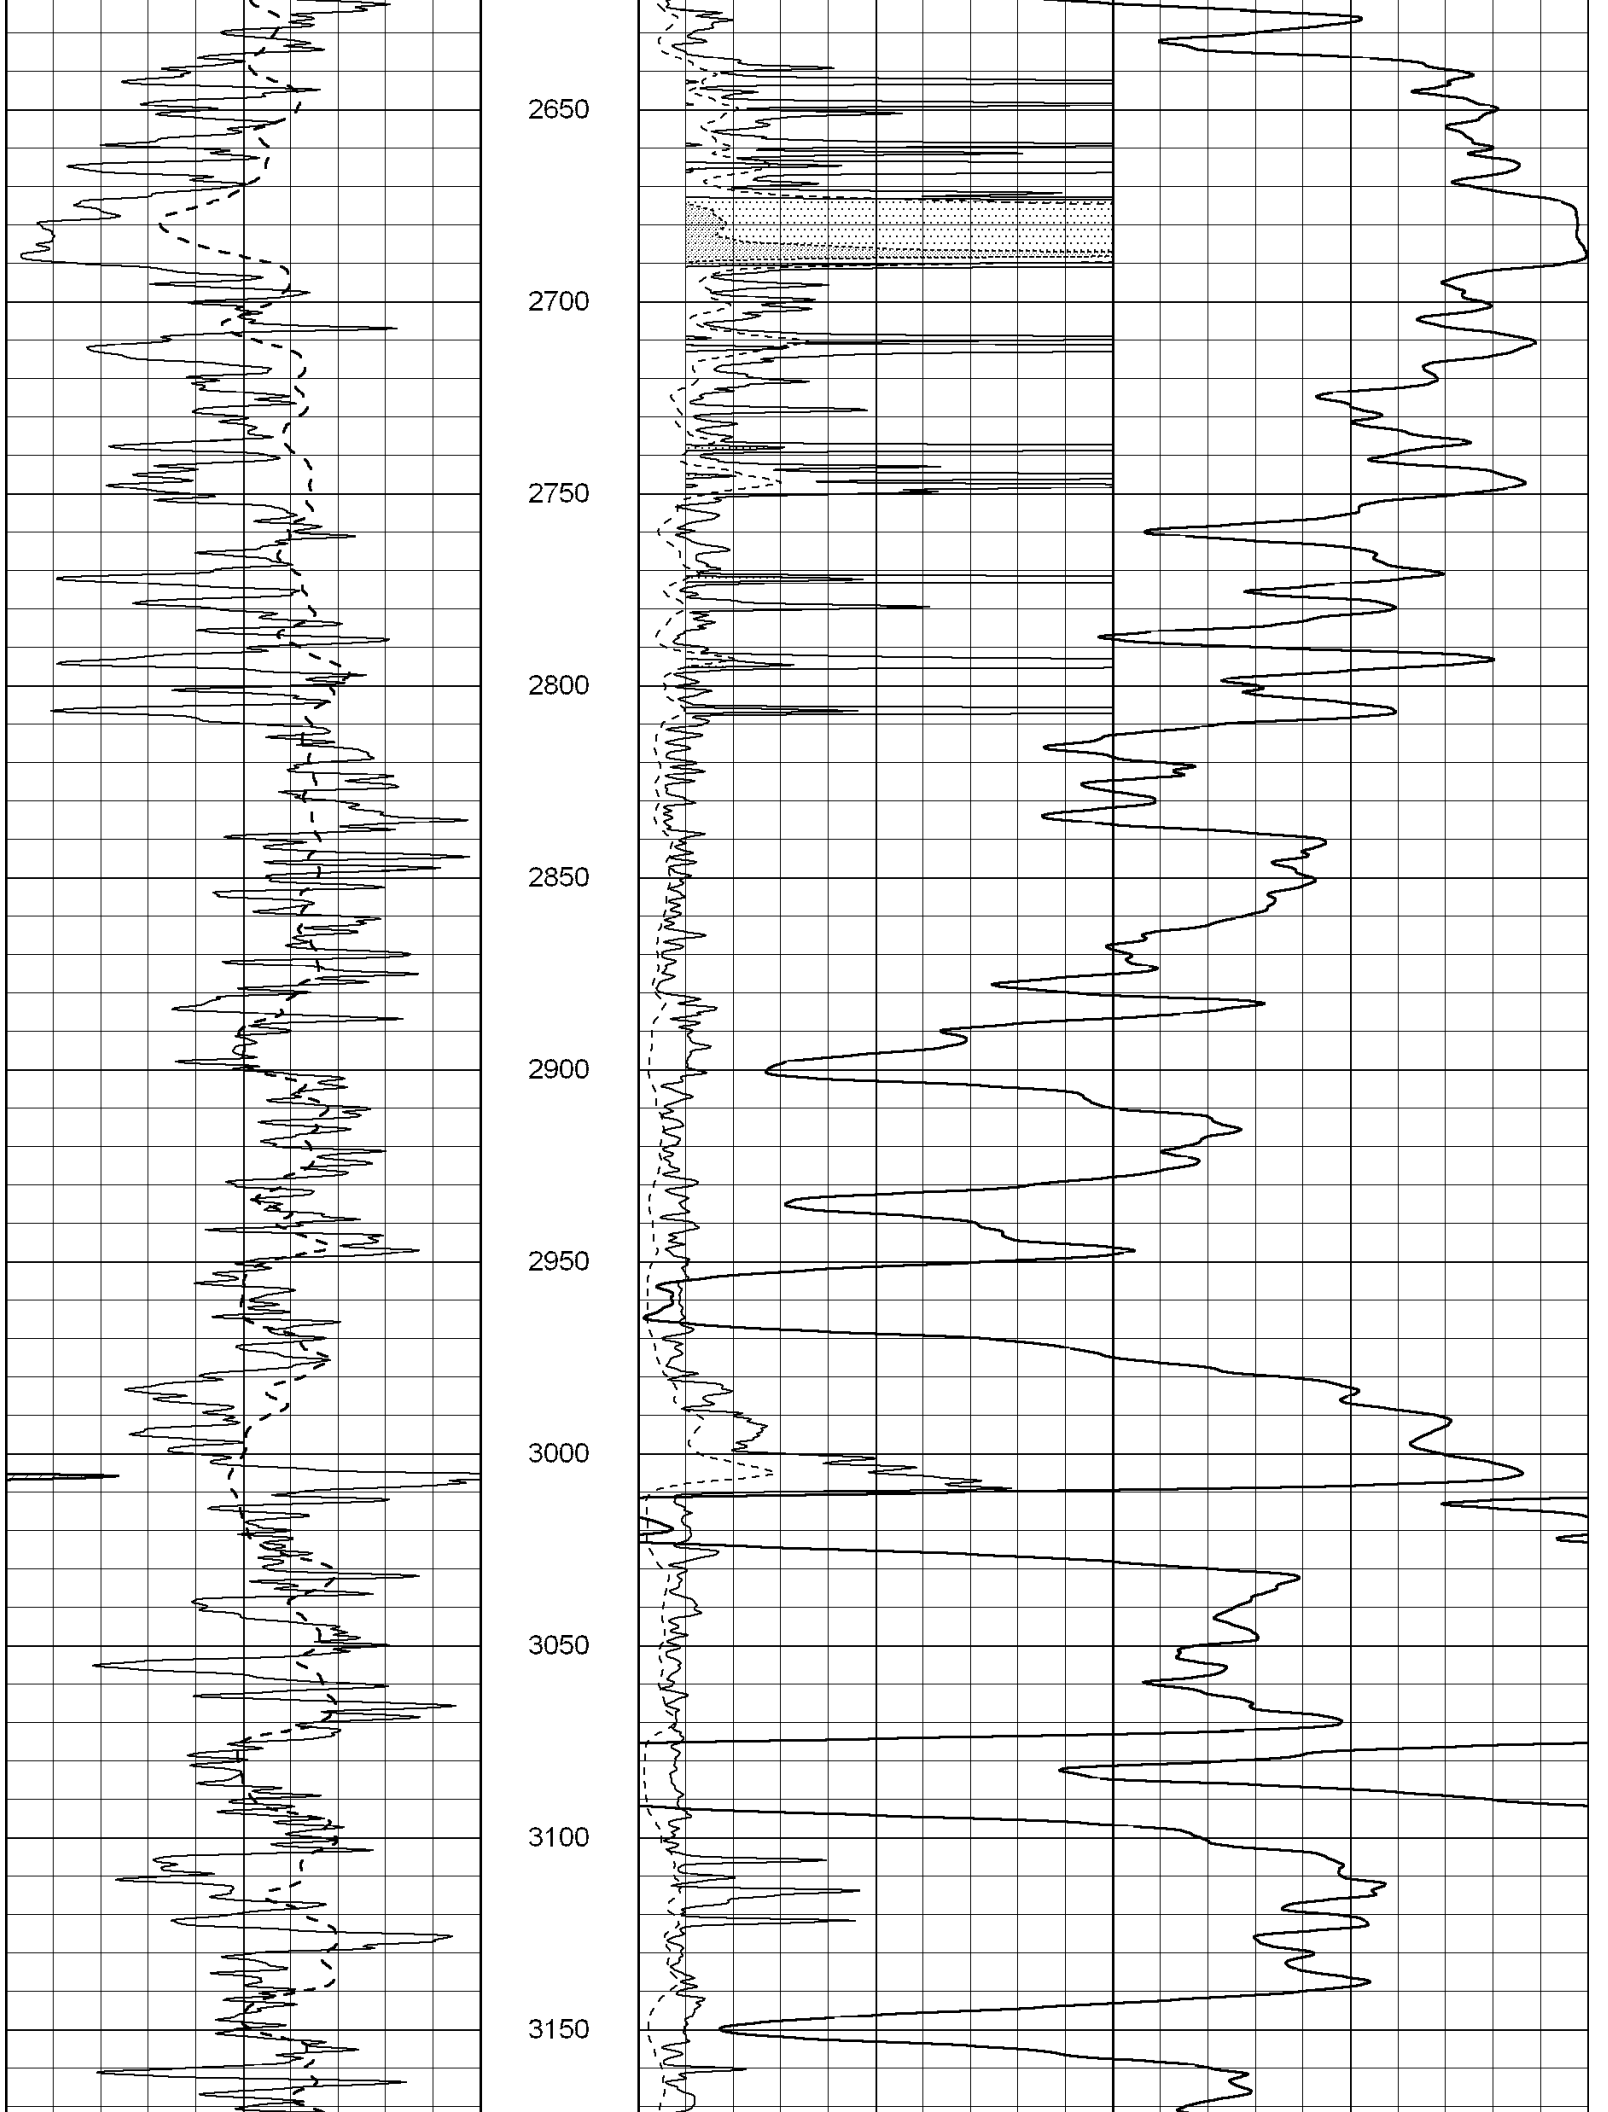


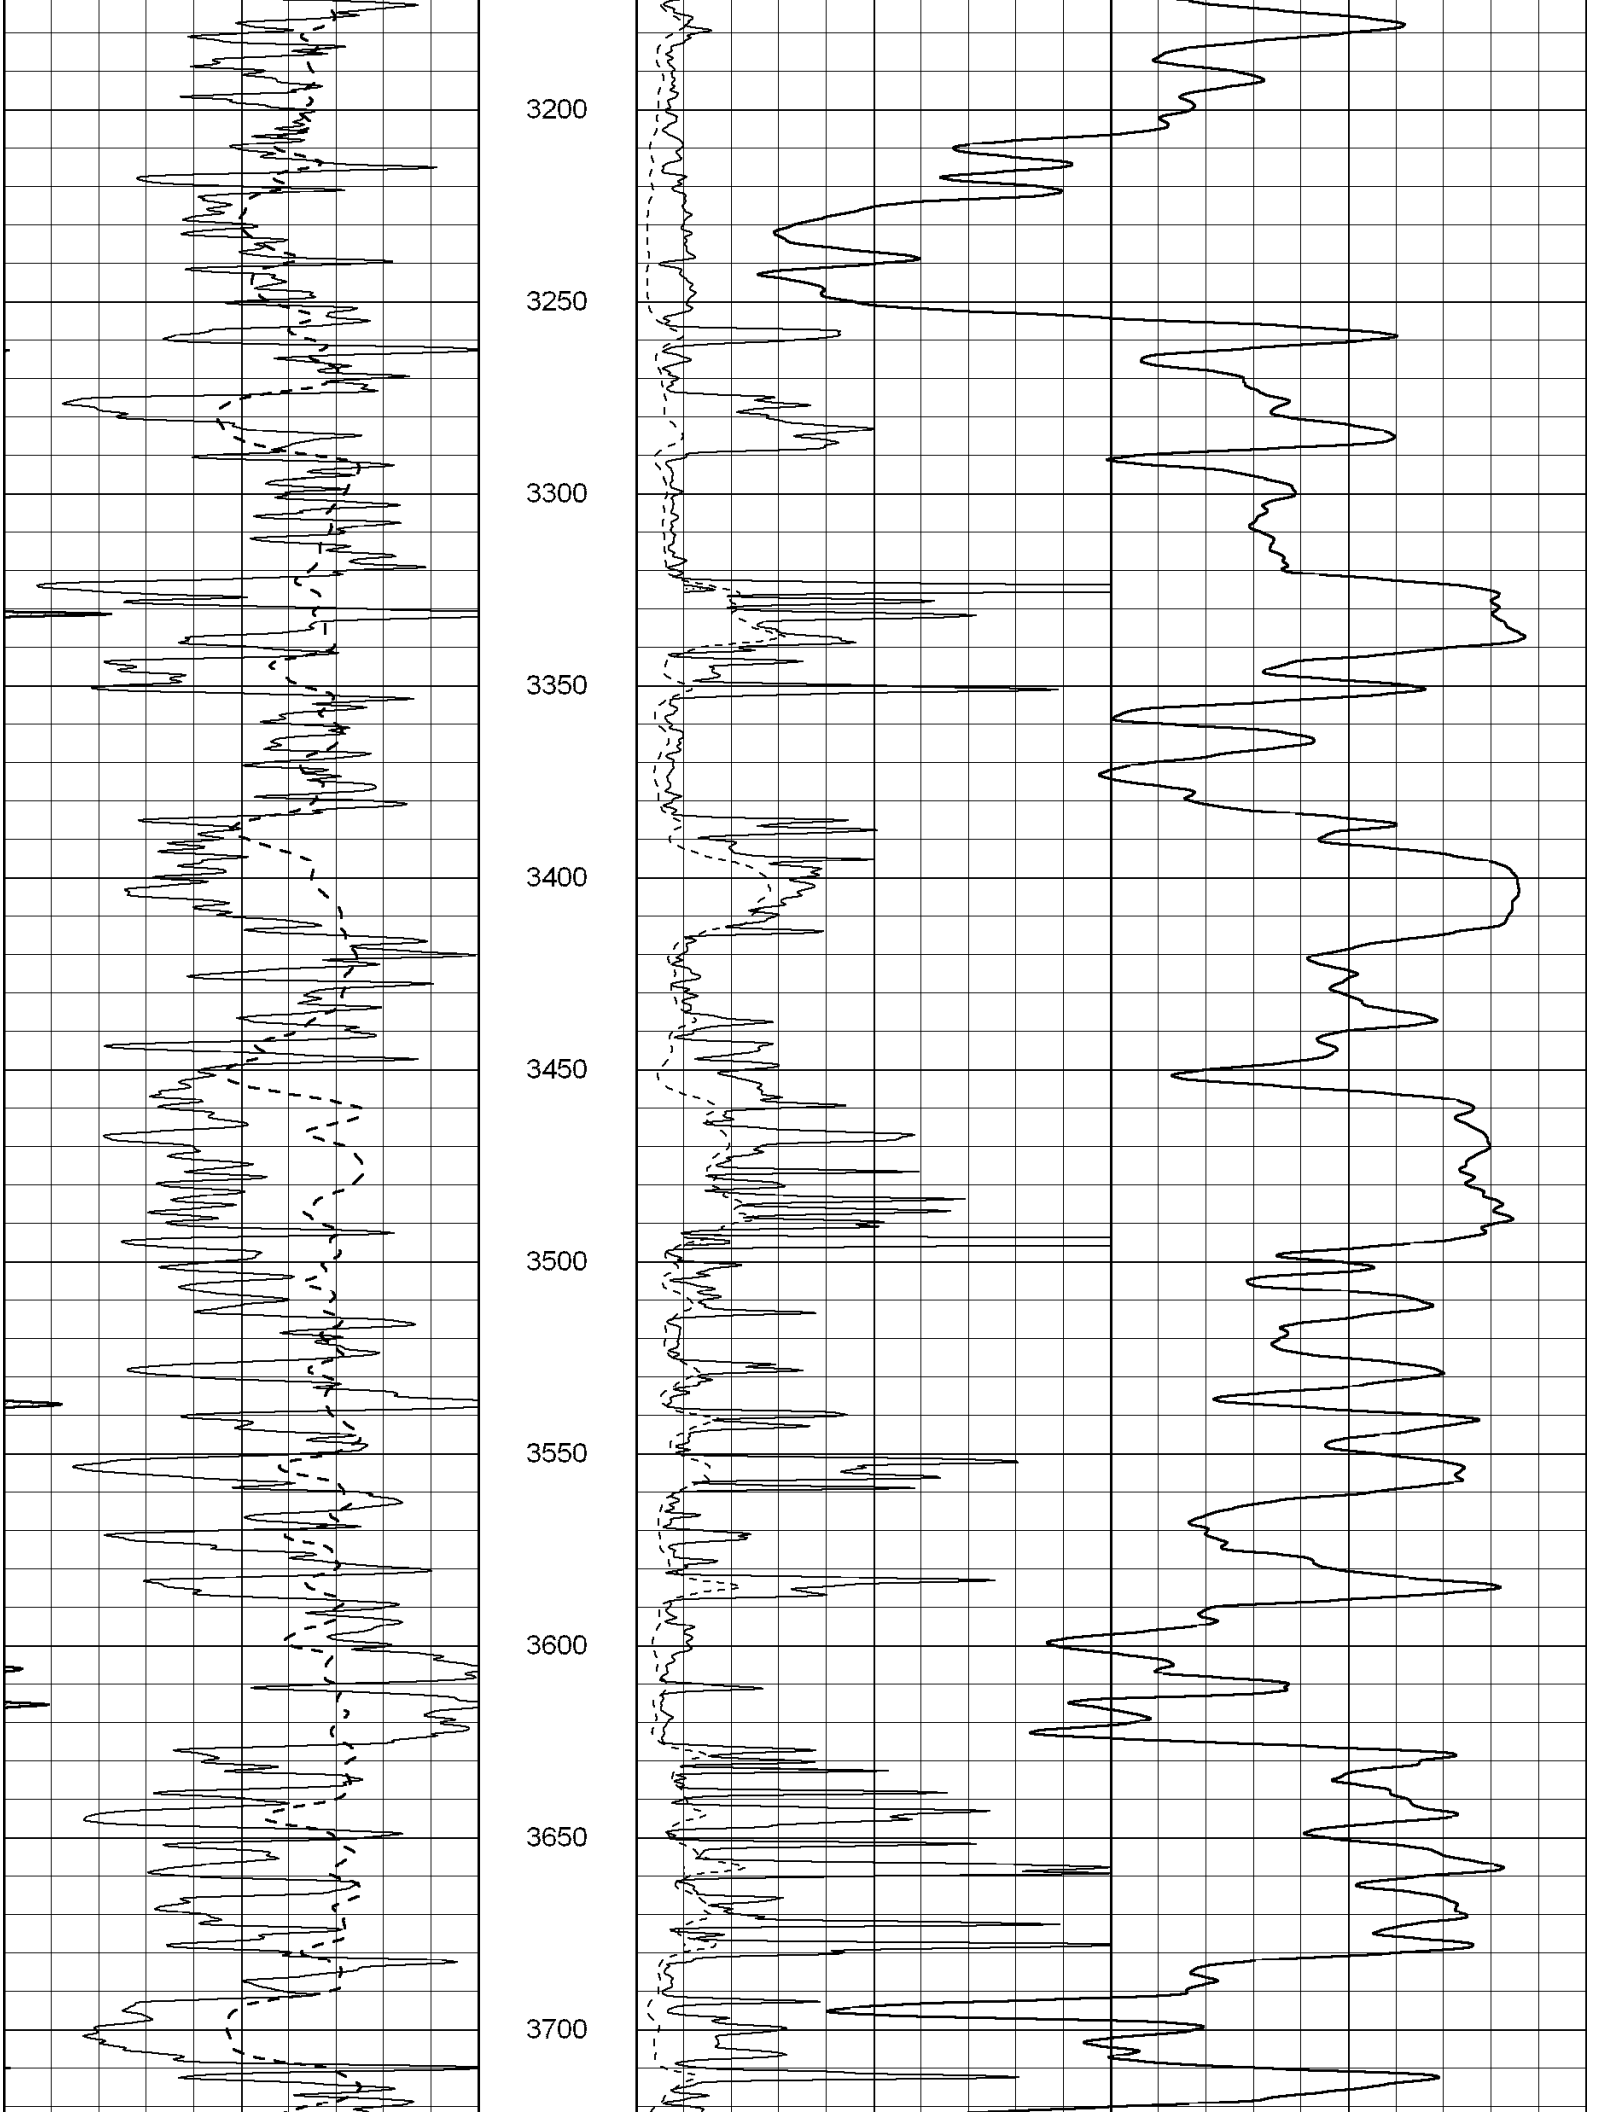

450
500
550
600
650
700
750
800
850
900
950

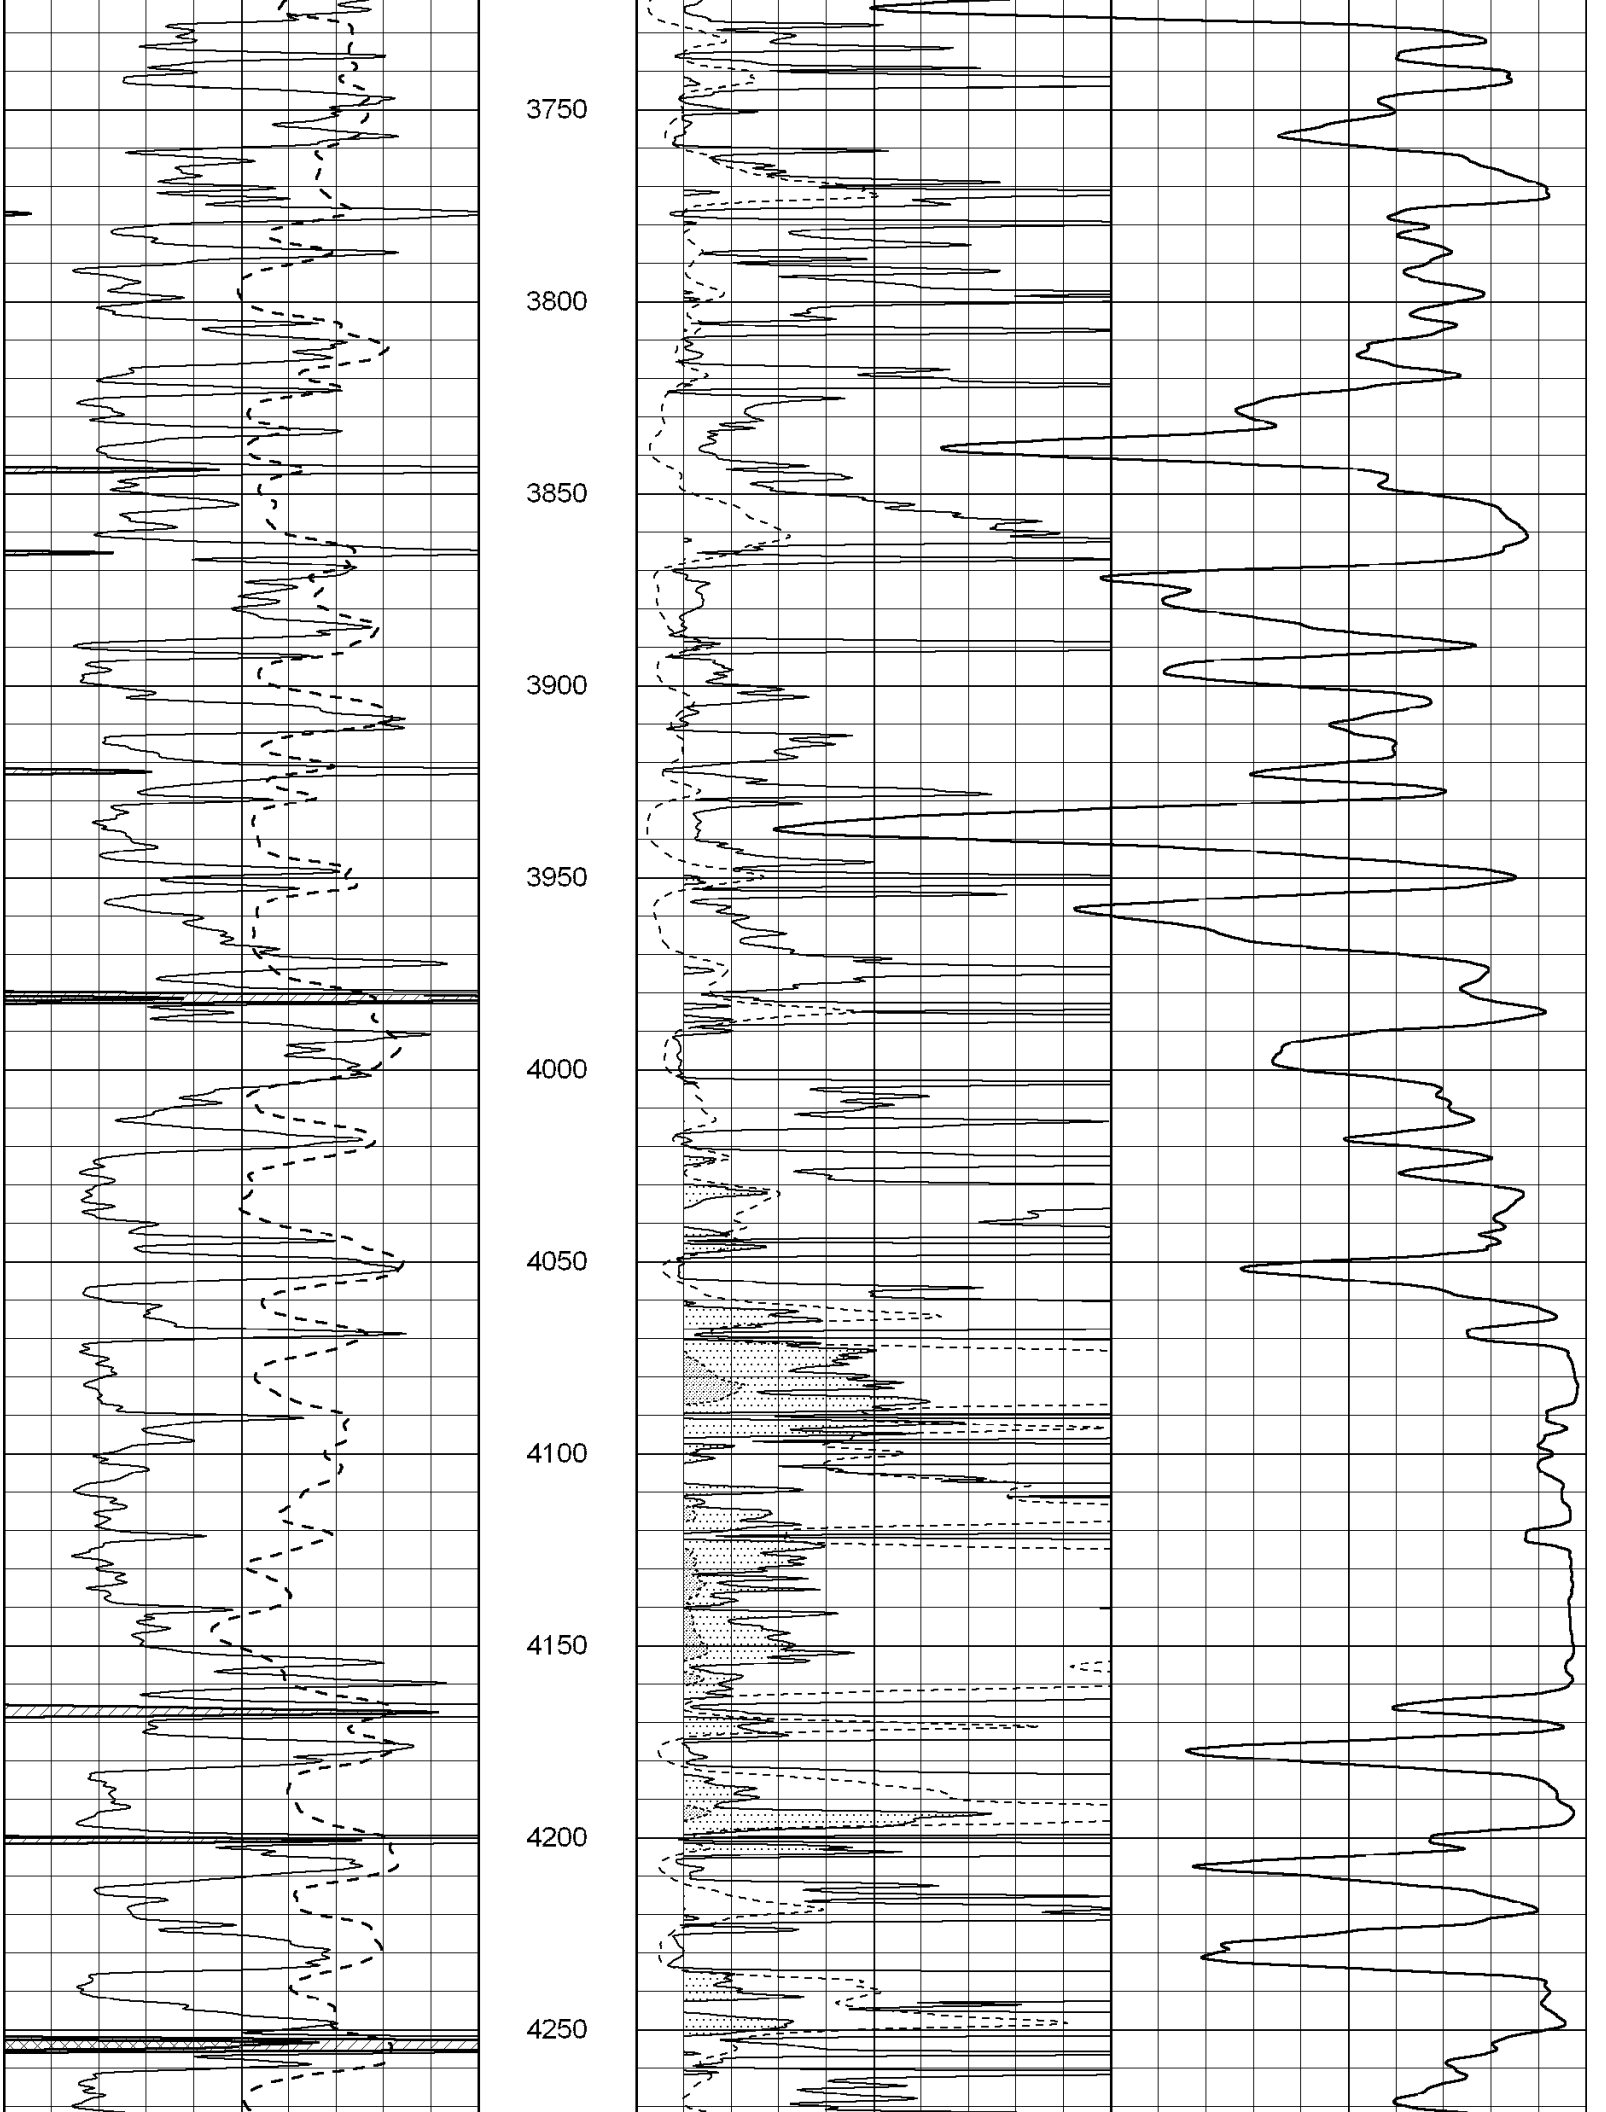

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

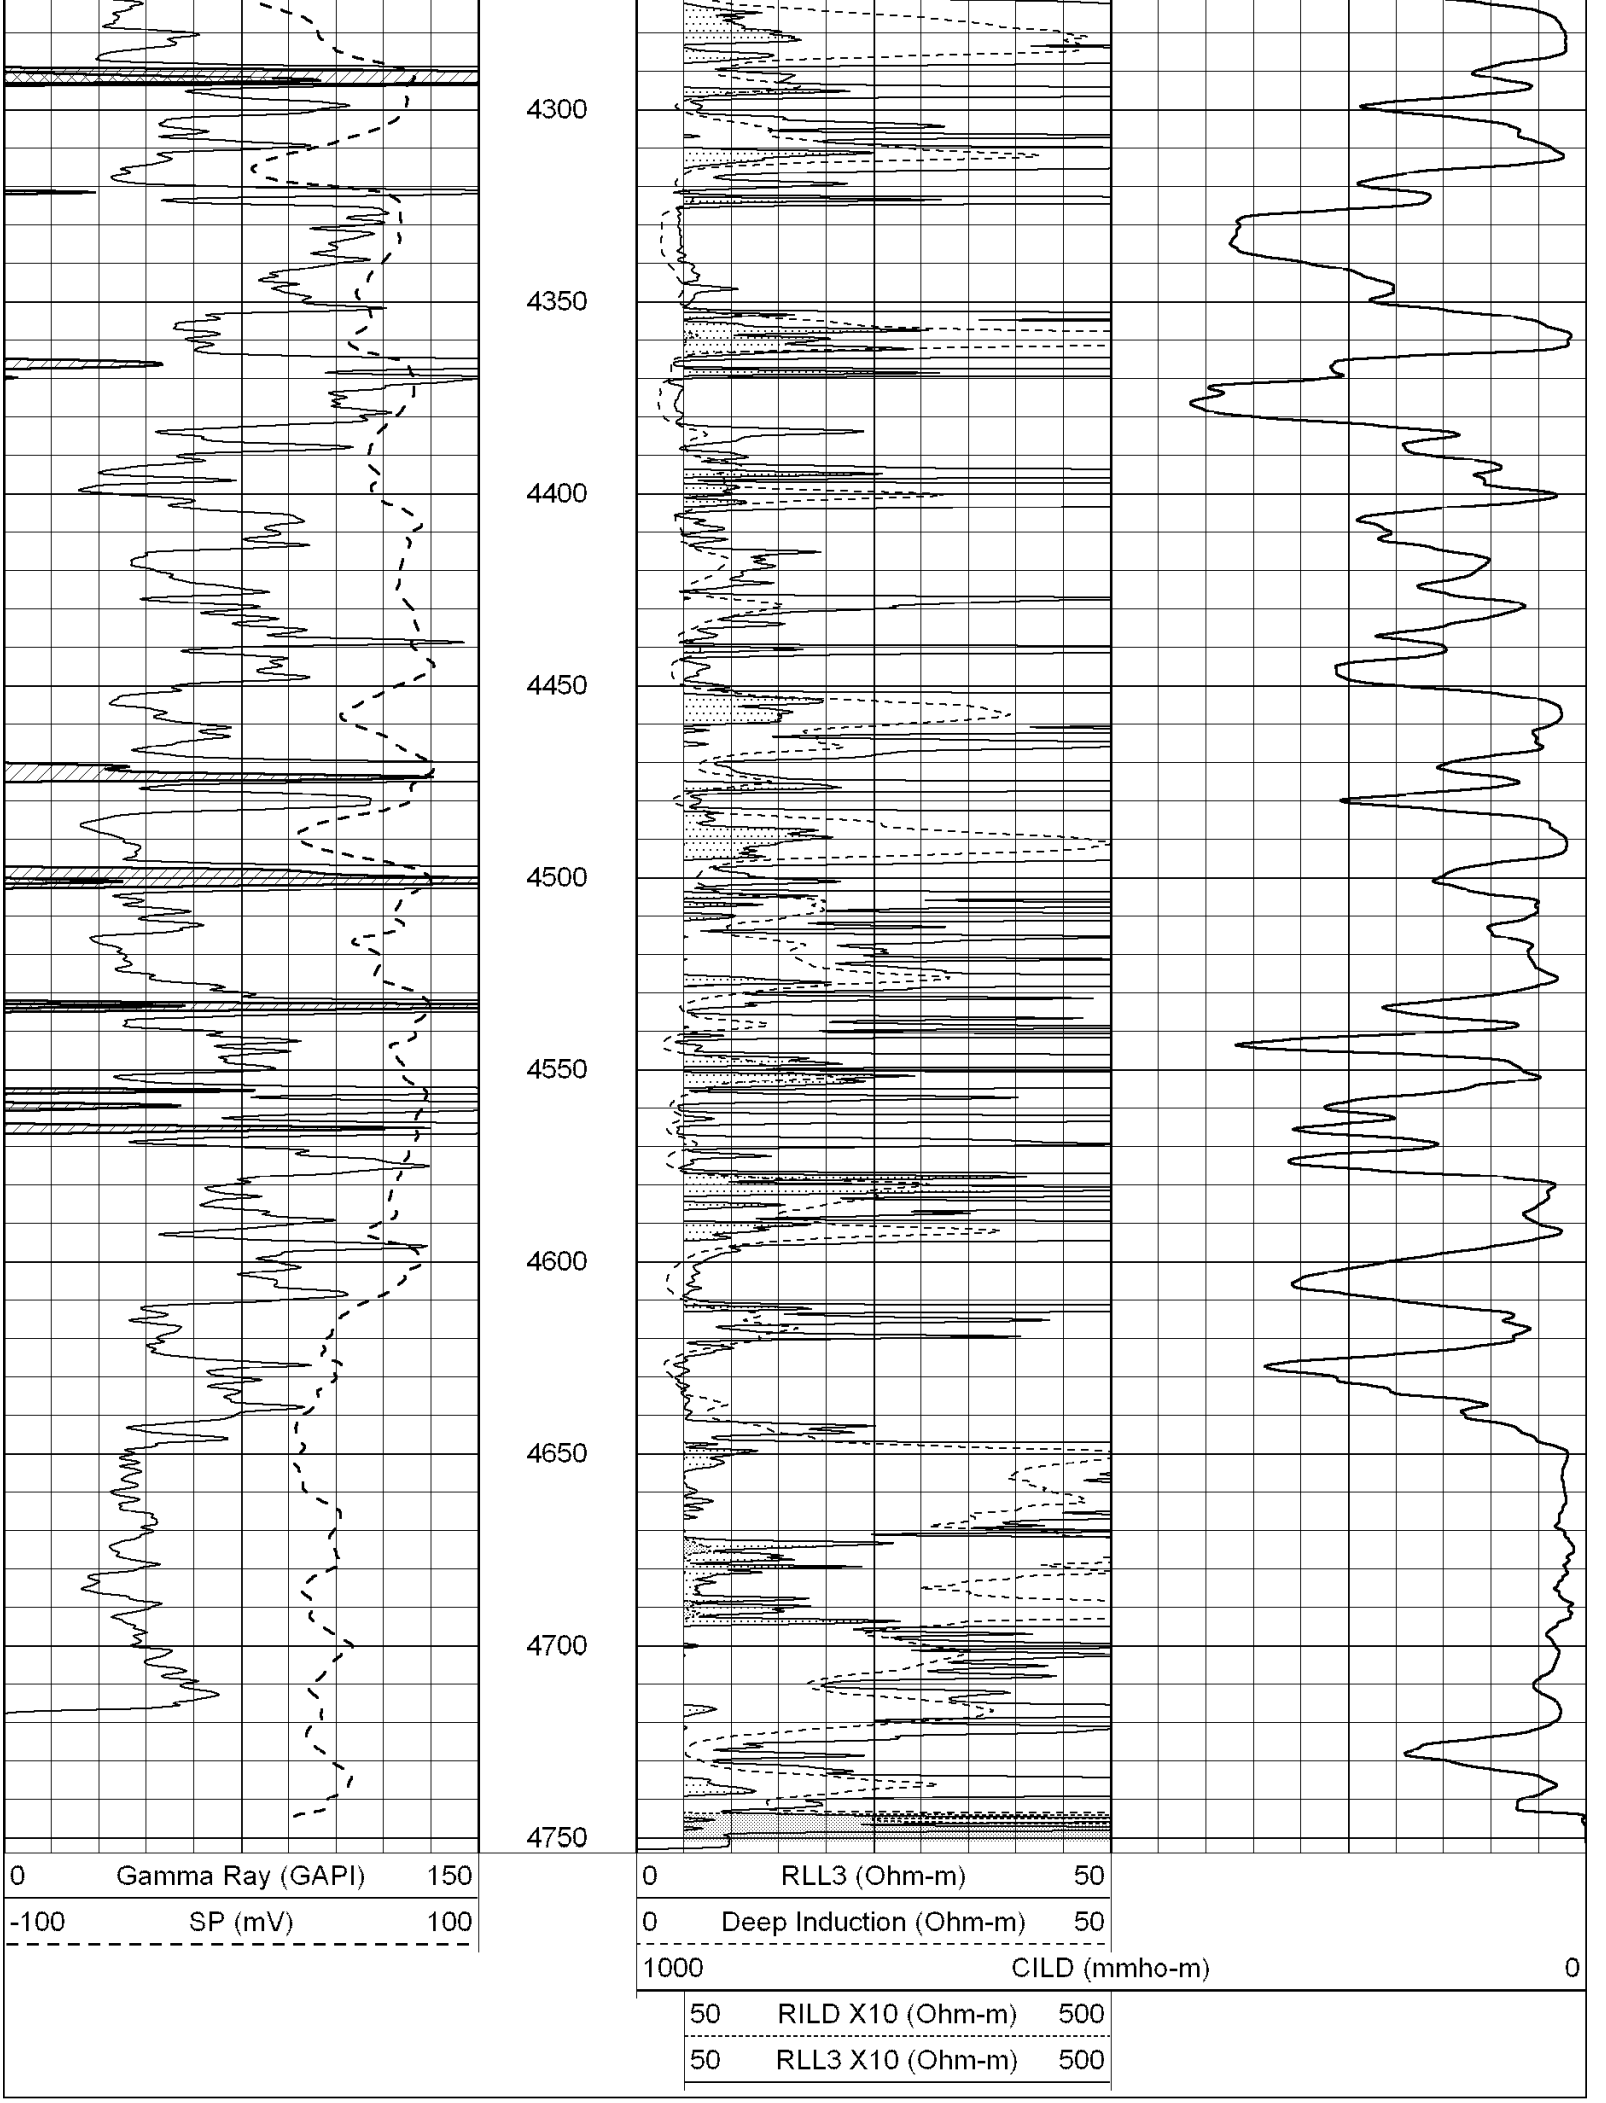

1550
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050


2100
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600


2650
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150


3200
3250
3300
3350
3400
3450
3500
3550
3600
3650
3700


3750
3800
3850
3900
3950
4000
4050
4100
4150
4200
4250


4300
4350
4400
4450
4500
4550
4600
4650
4700
4750
0 Gamma Ray (GAPI) 150
-100 SP (mV) 100
0 RLL3 (Ohm-m) 50
0 Deep Induction (Ohm-m) 50
1000 CILD (mmho-m) 0
50 RILD X10 (Ohm-m) 500
50 RLL3 X10 (Ohm-m) 500

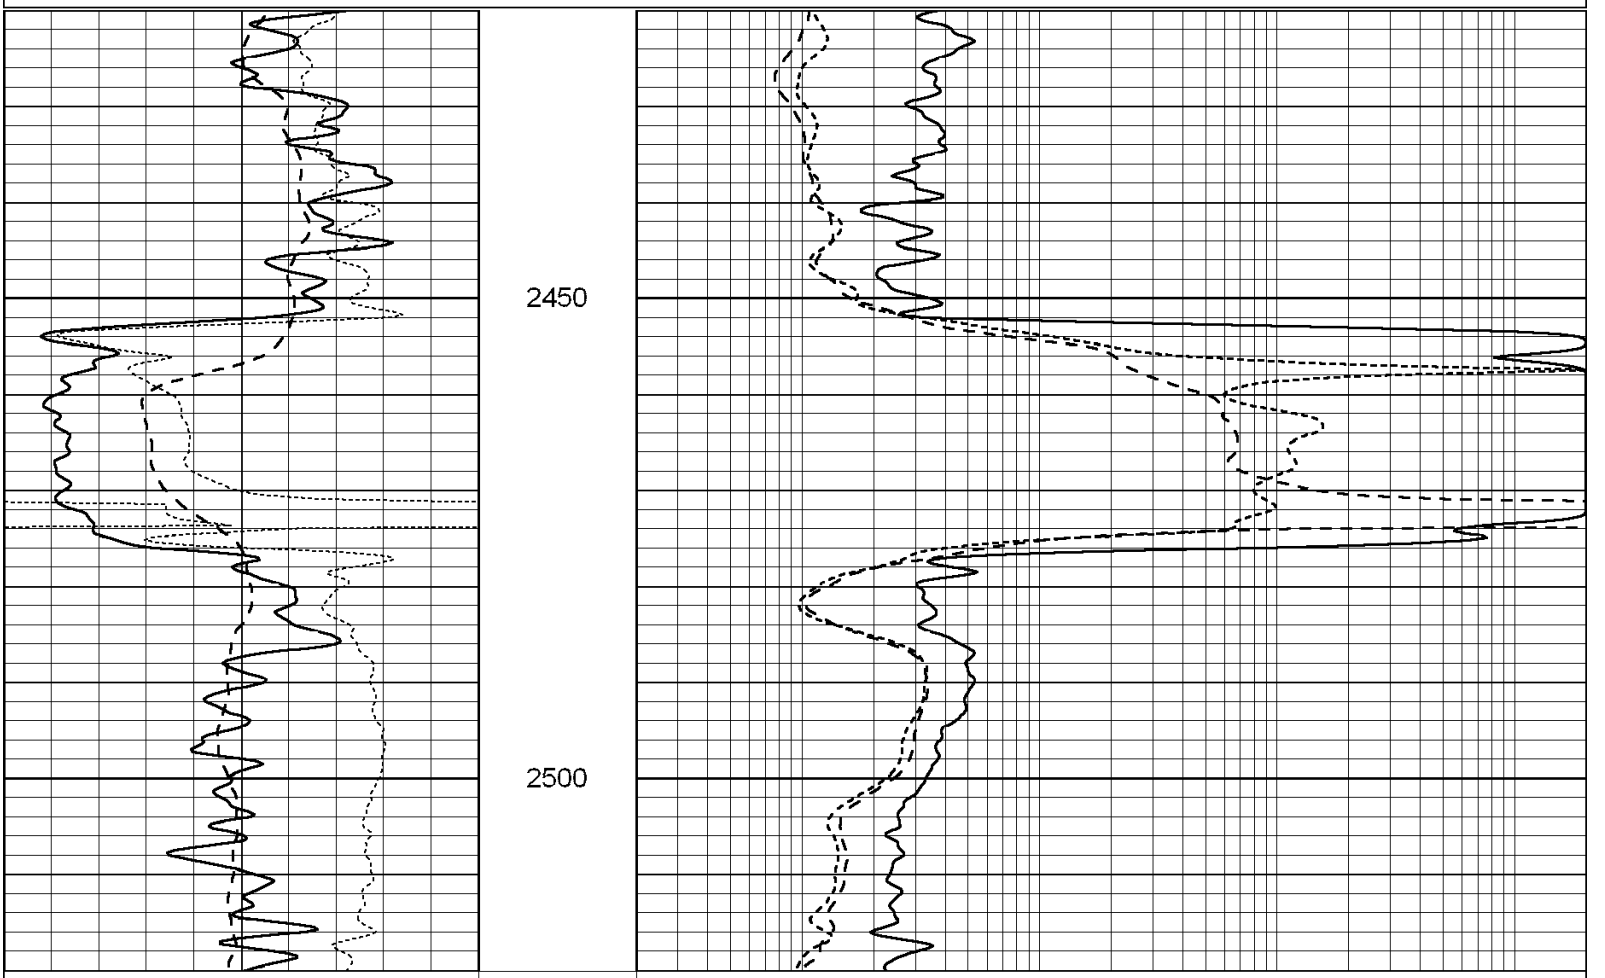
SUPERIOR
Hays,
Kansas

ANHYDRITE

Database File: 002759pe.db
Dataset Pathname: pass3.7
Presentation Format: dil
Dataset Creation: Wed Nov 05 23:19:39 2008 by Calc Open-Cased 060407
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

SUPERIOR
Hays,
Kansas

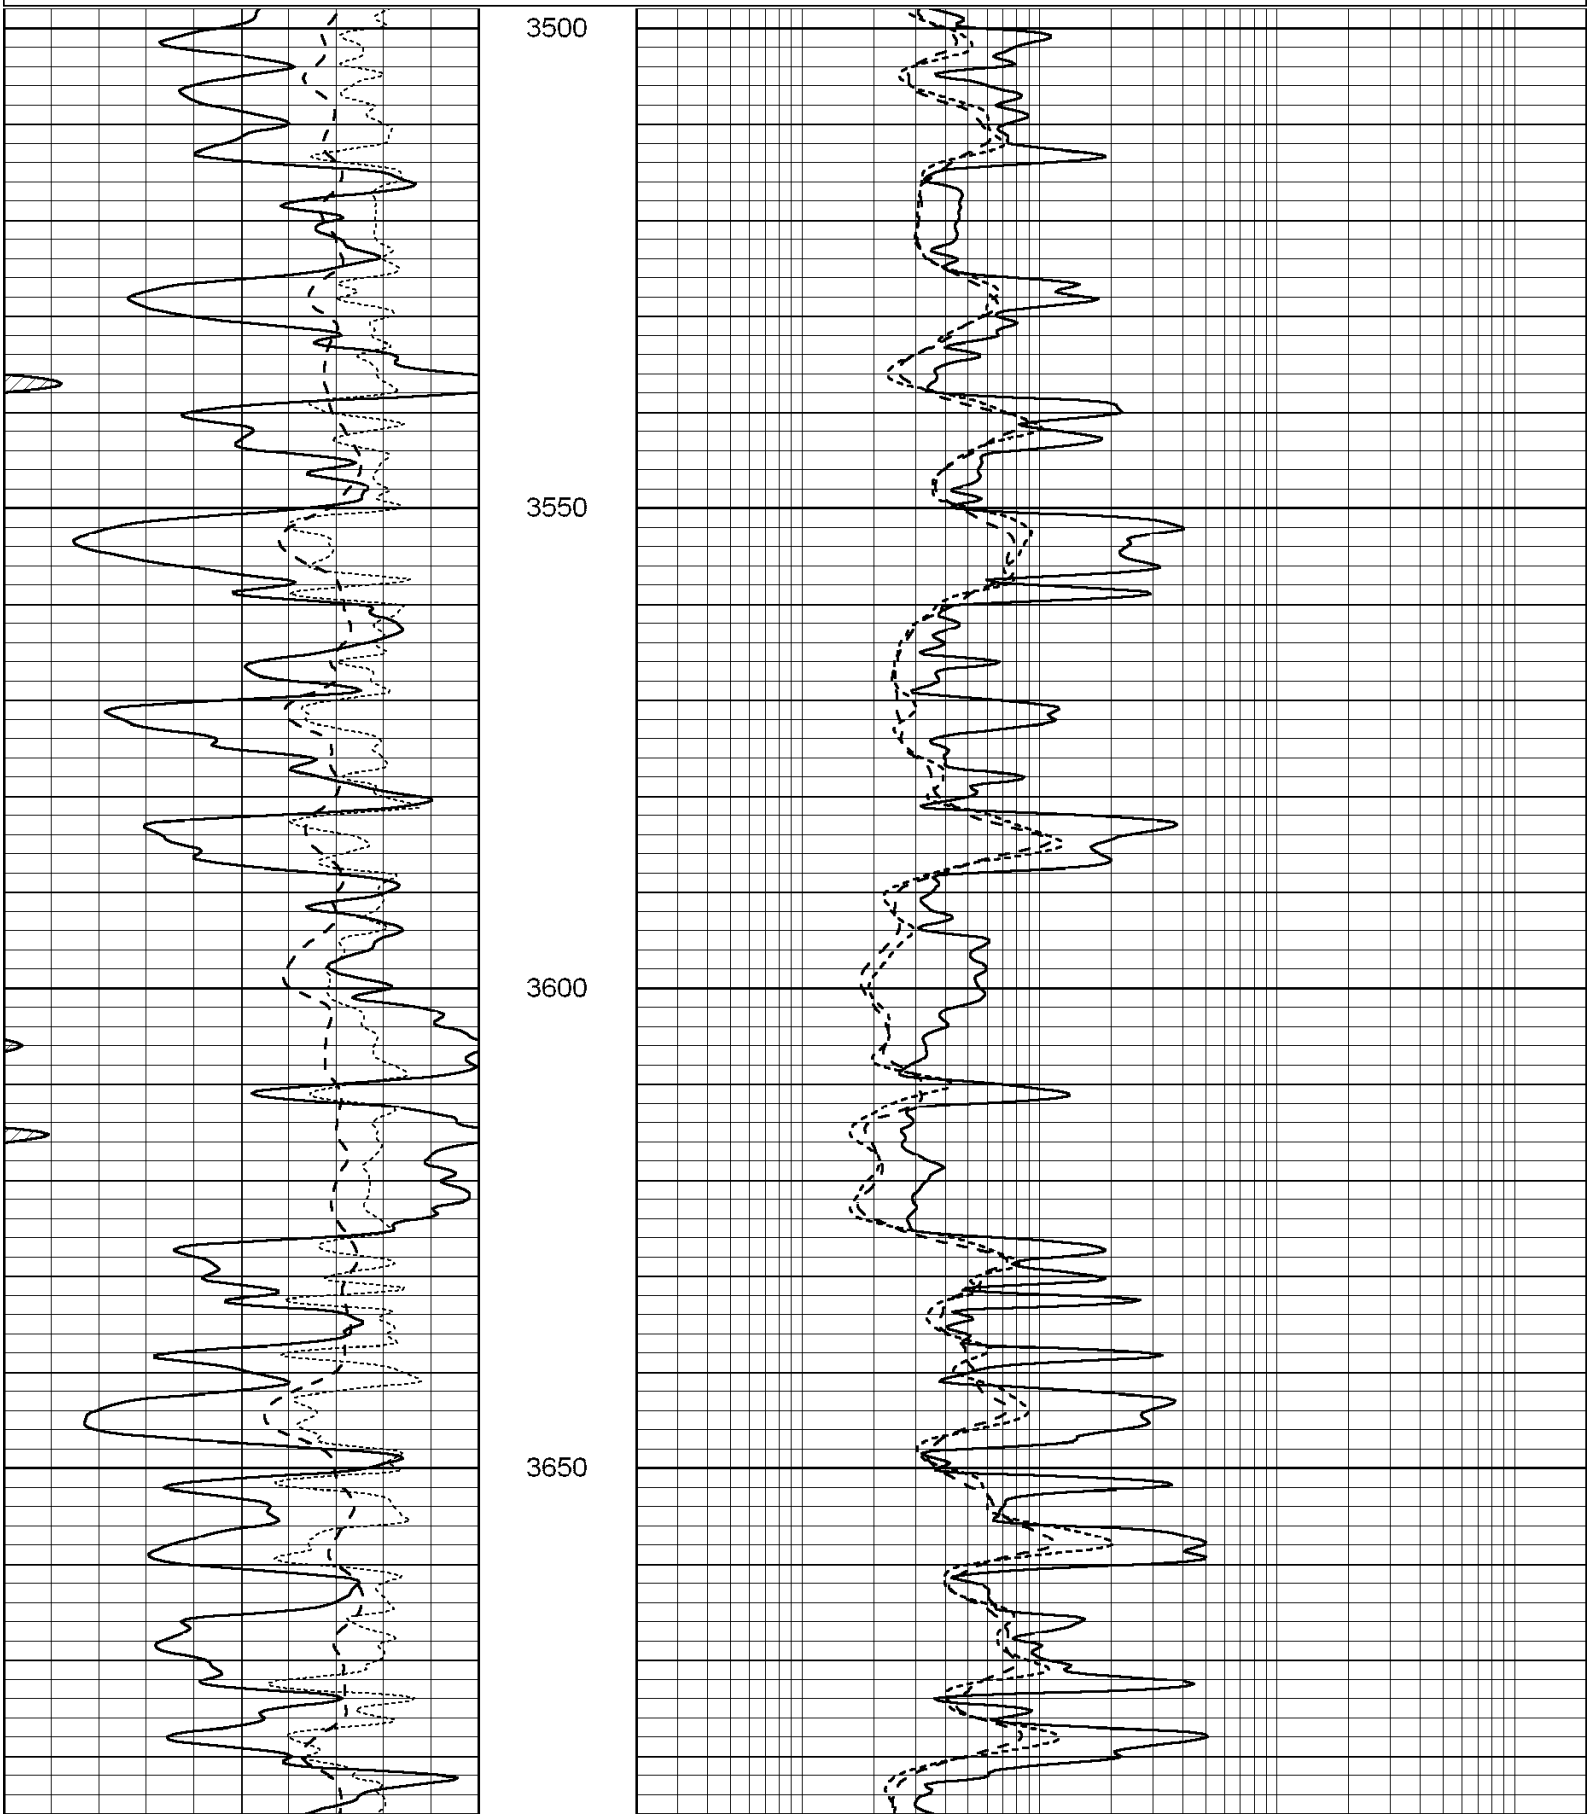
MAIN SECTION

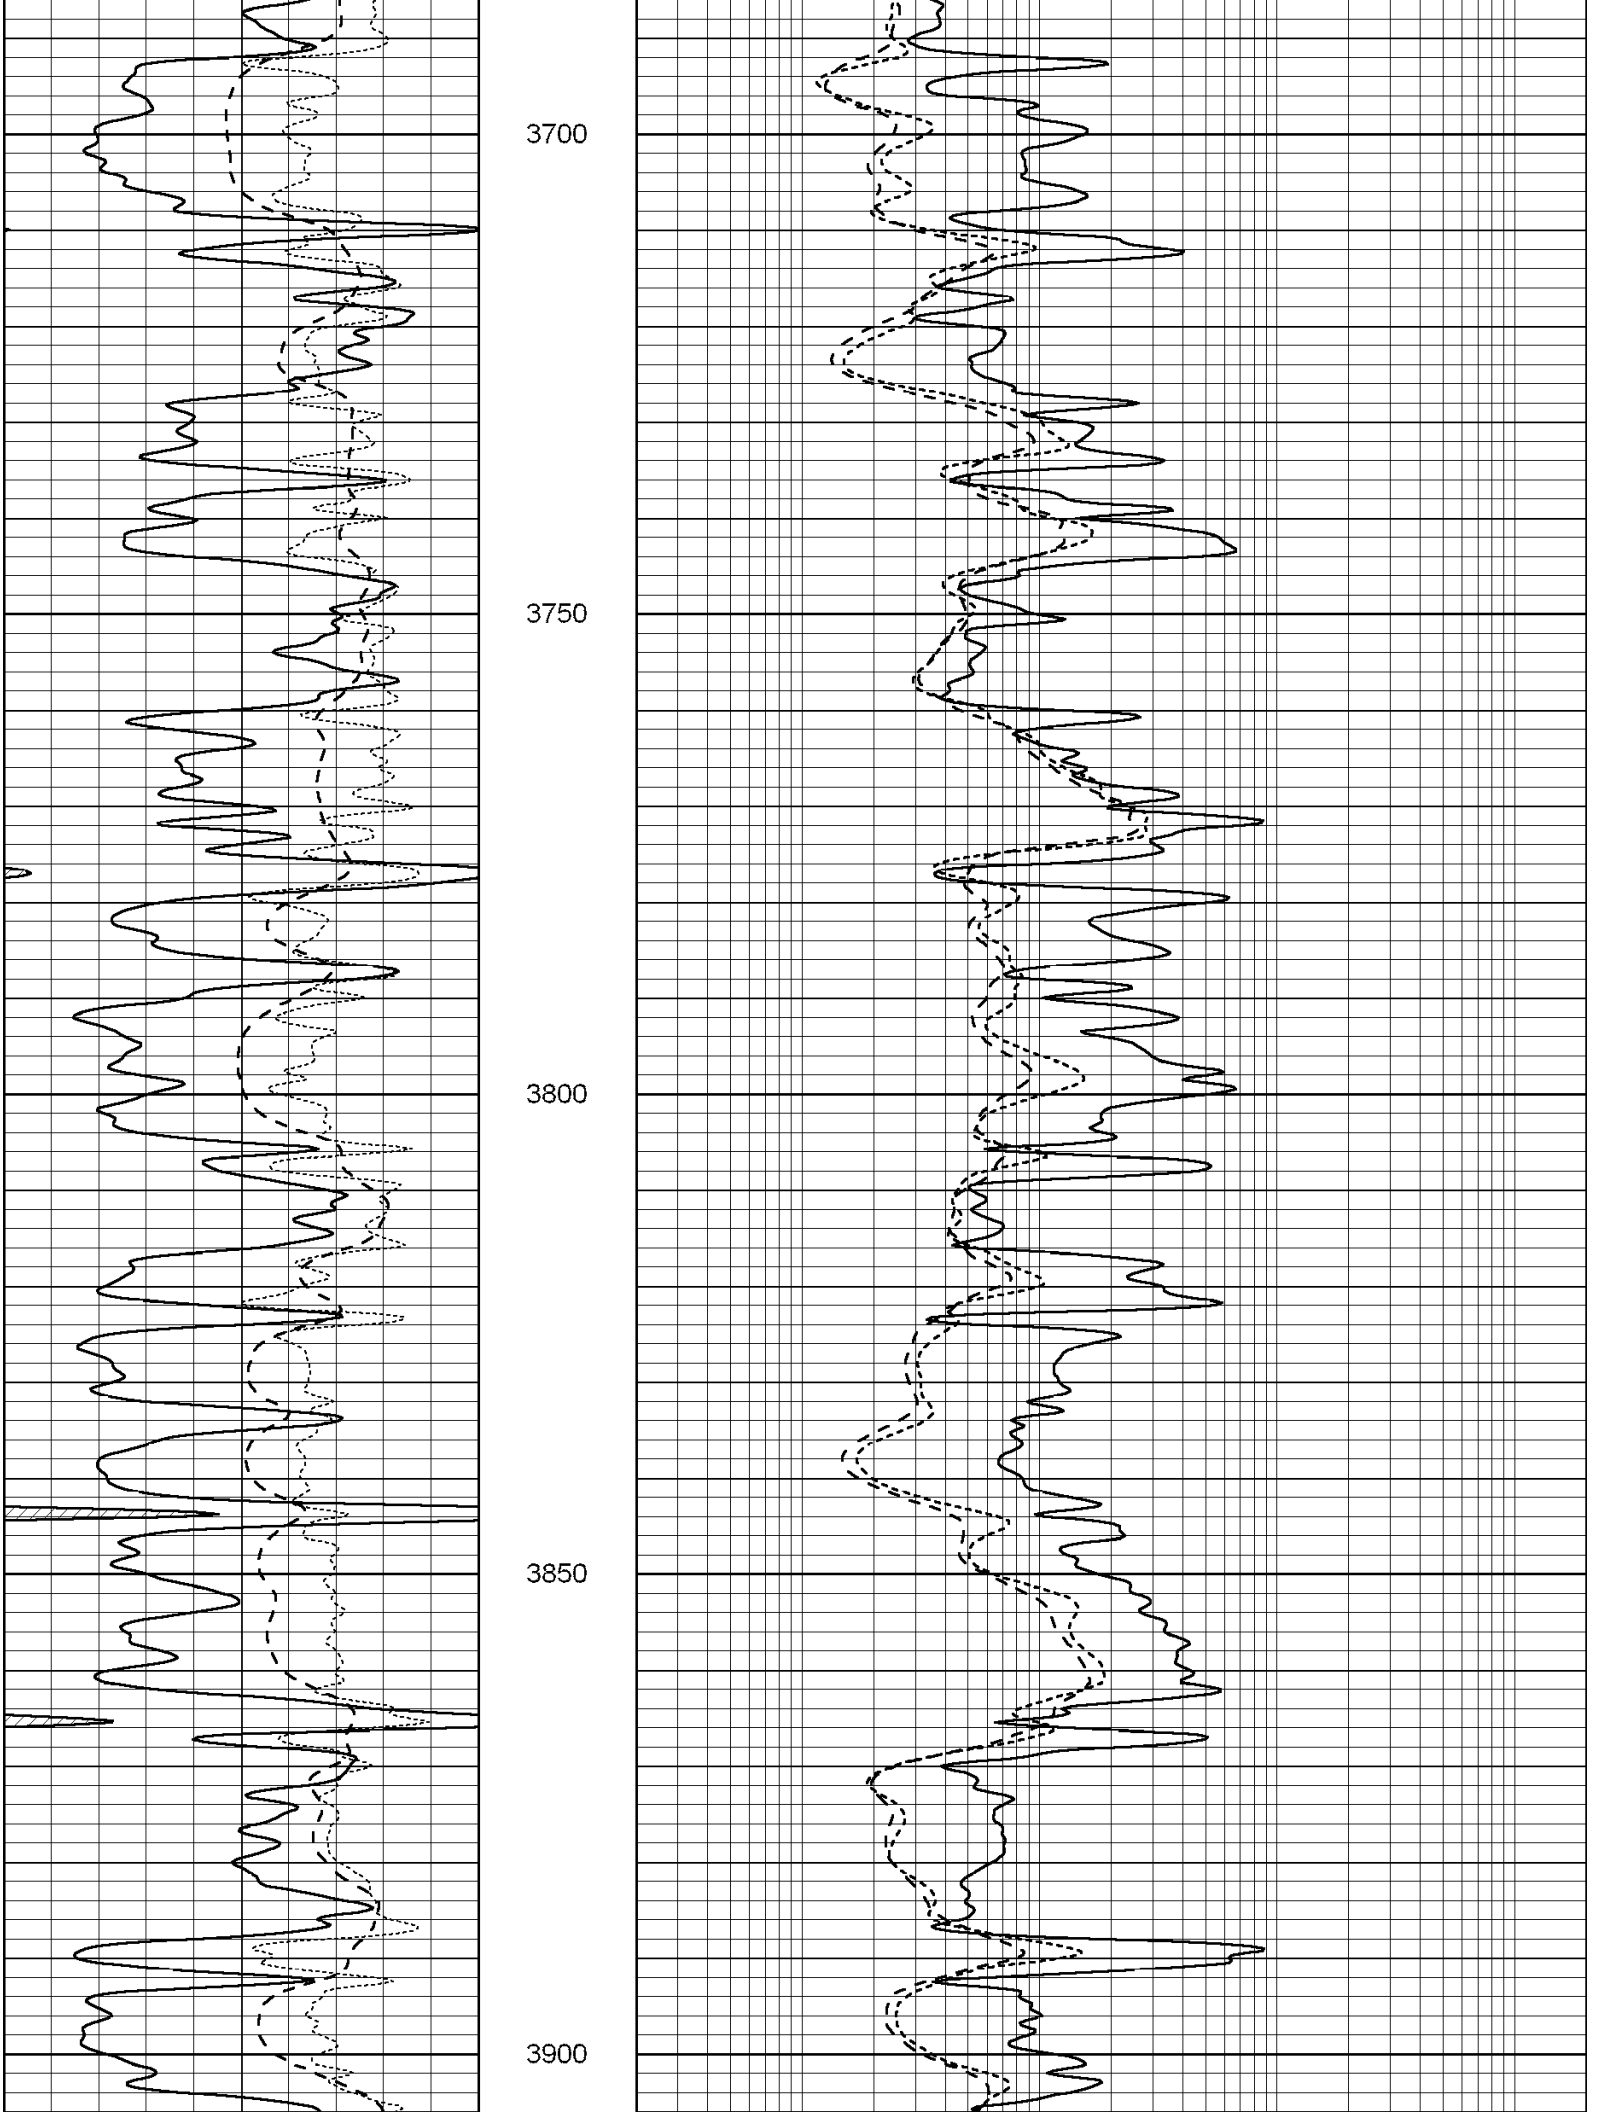
Database File: 002759pe.db
Dataset Pathname: pass3.6

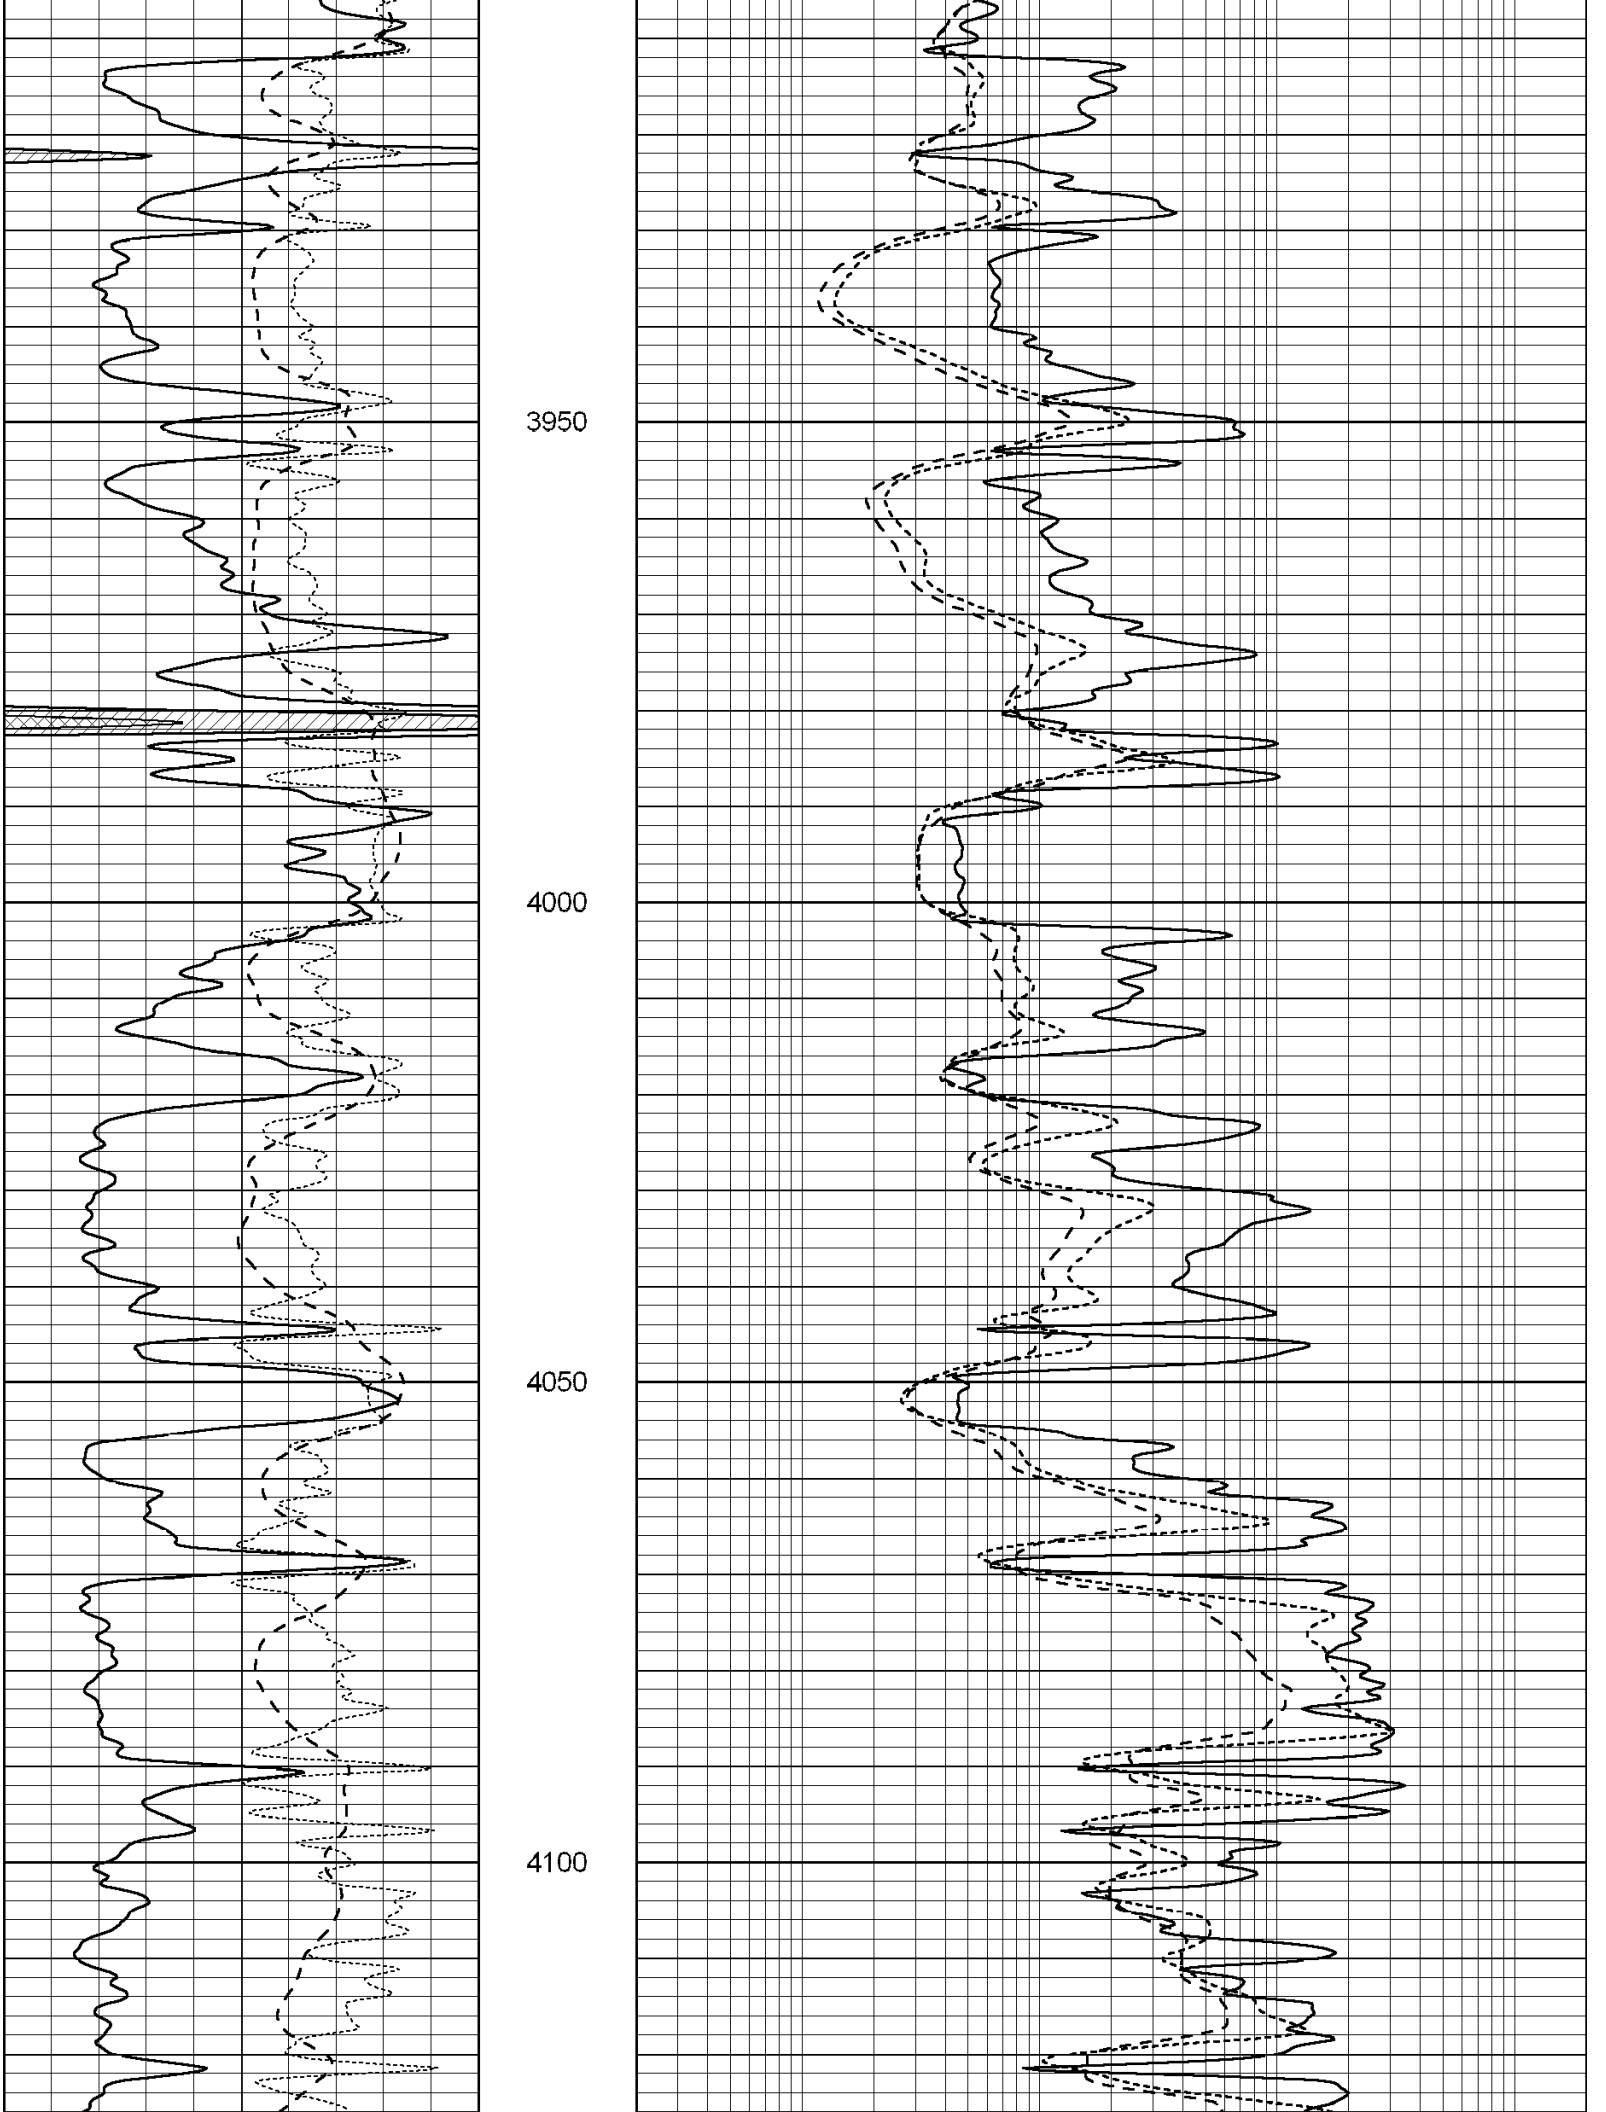
Presentation Format: dil
Dataset Creation: Wed Nov 05 23:19:02 2008 by Calc Open-Cased 060407
Charted by: Depth in Feet scaled 1:240

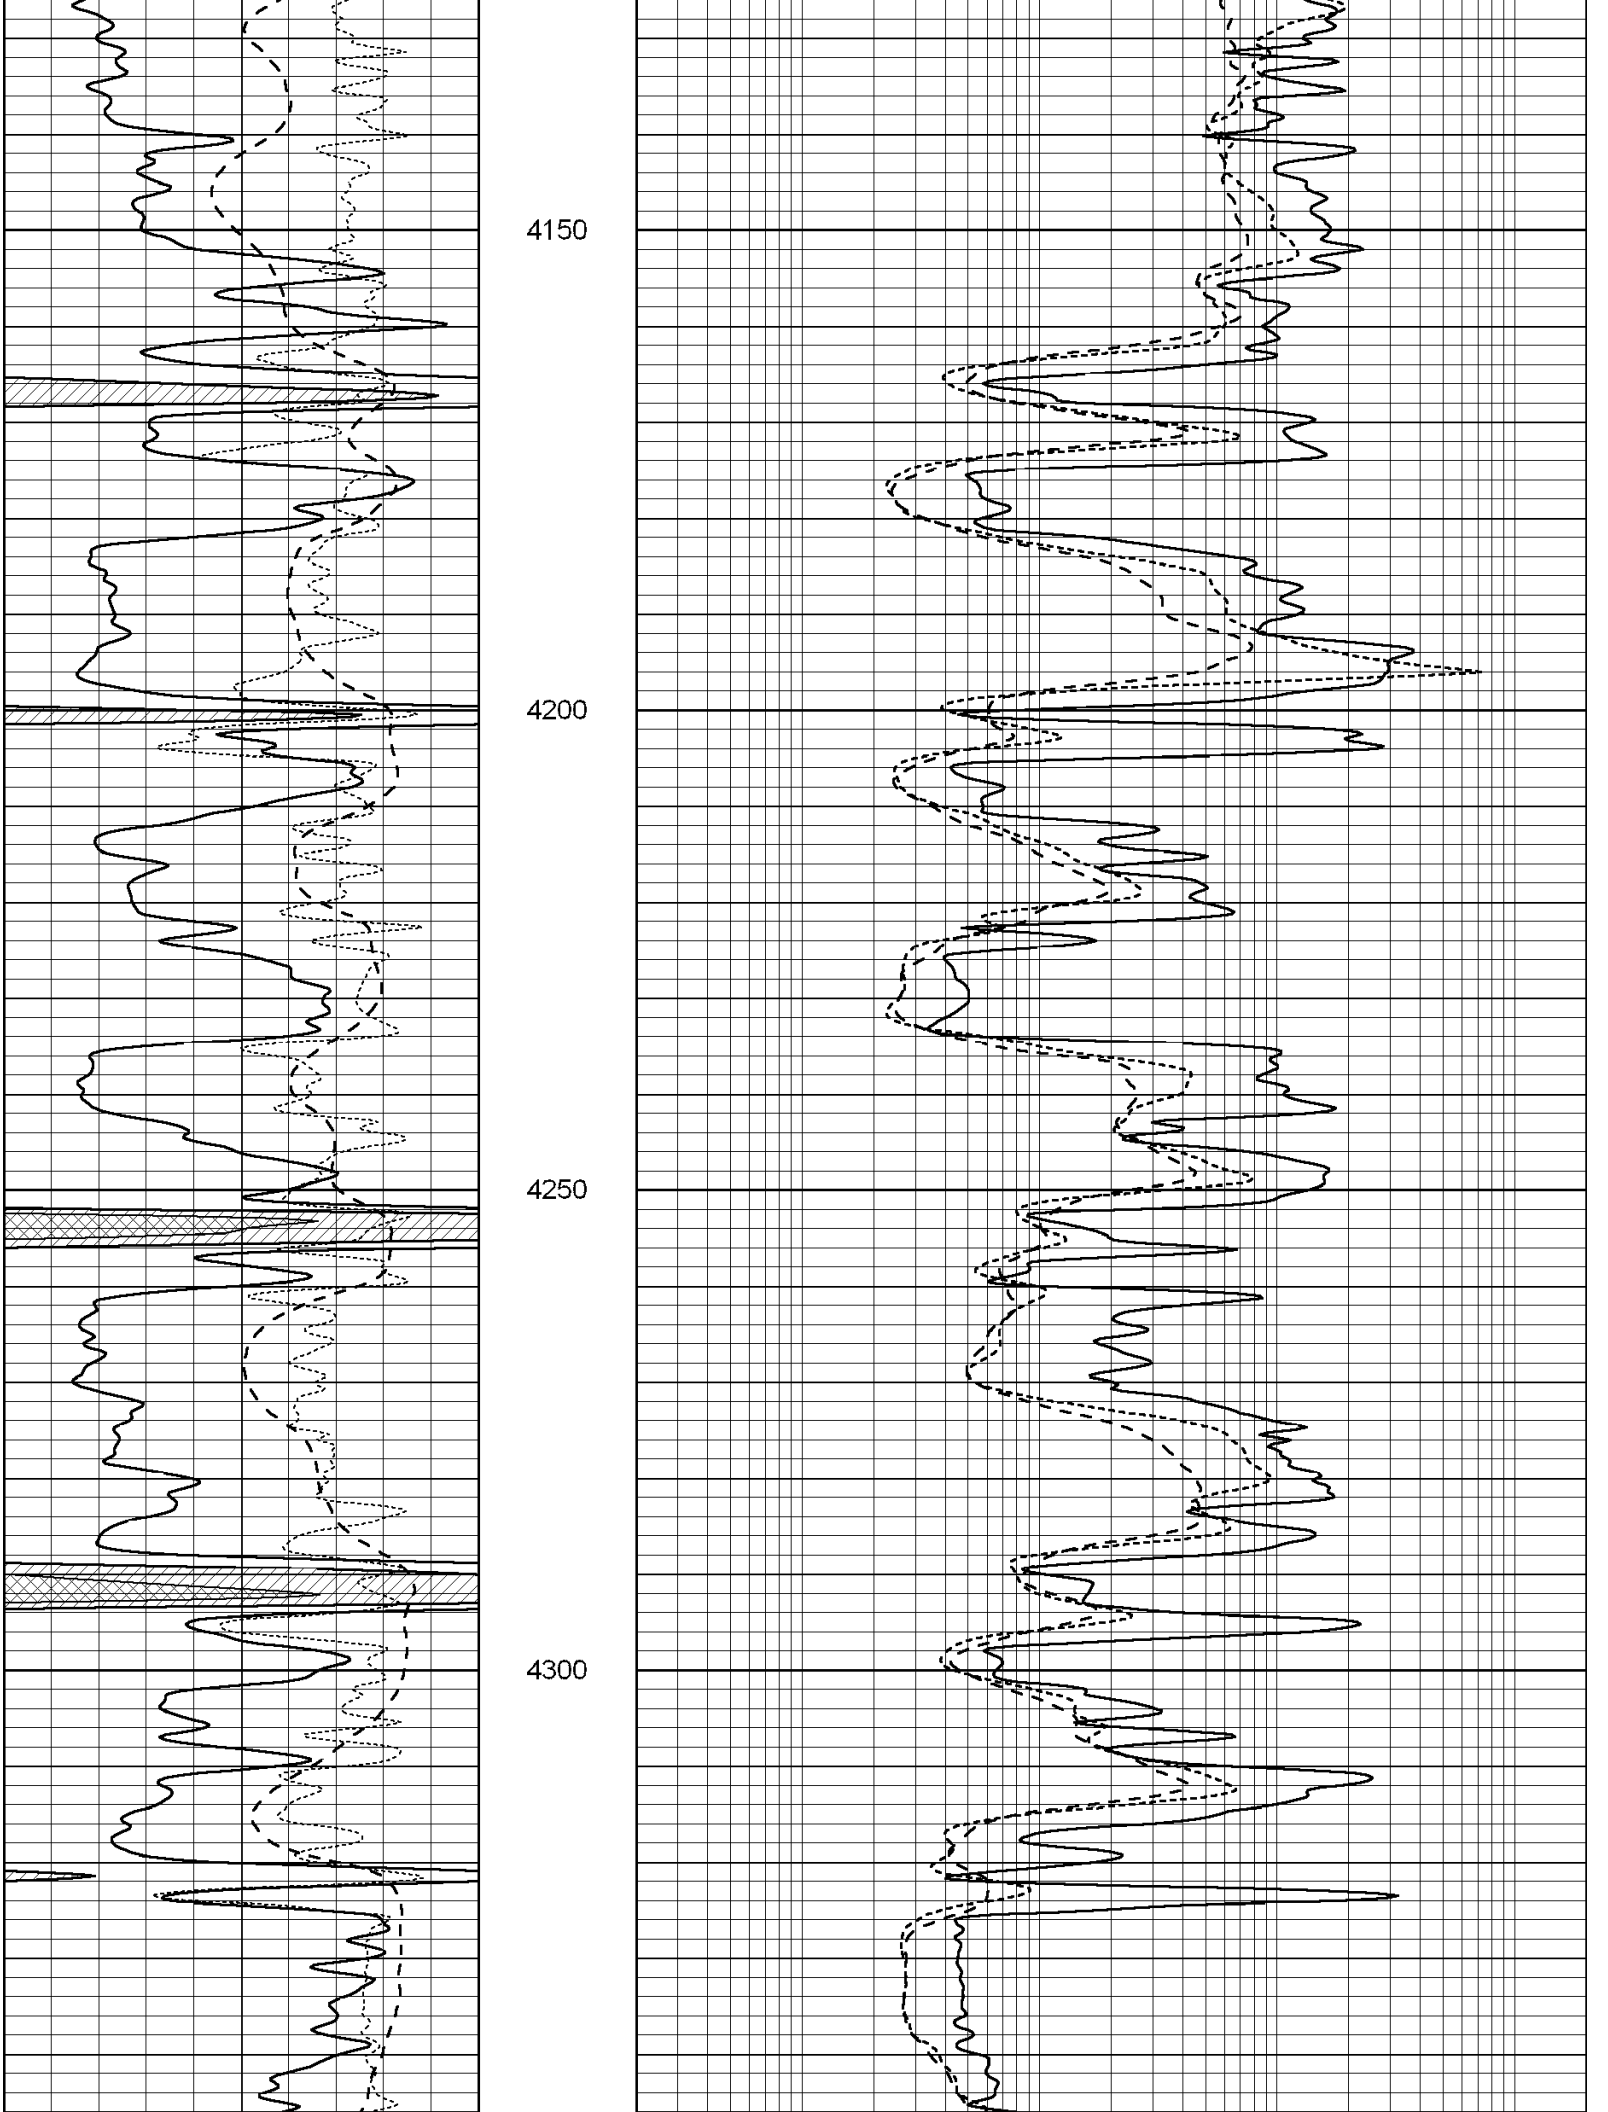
0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

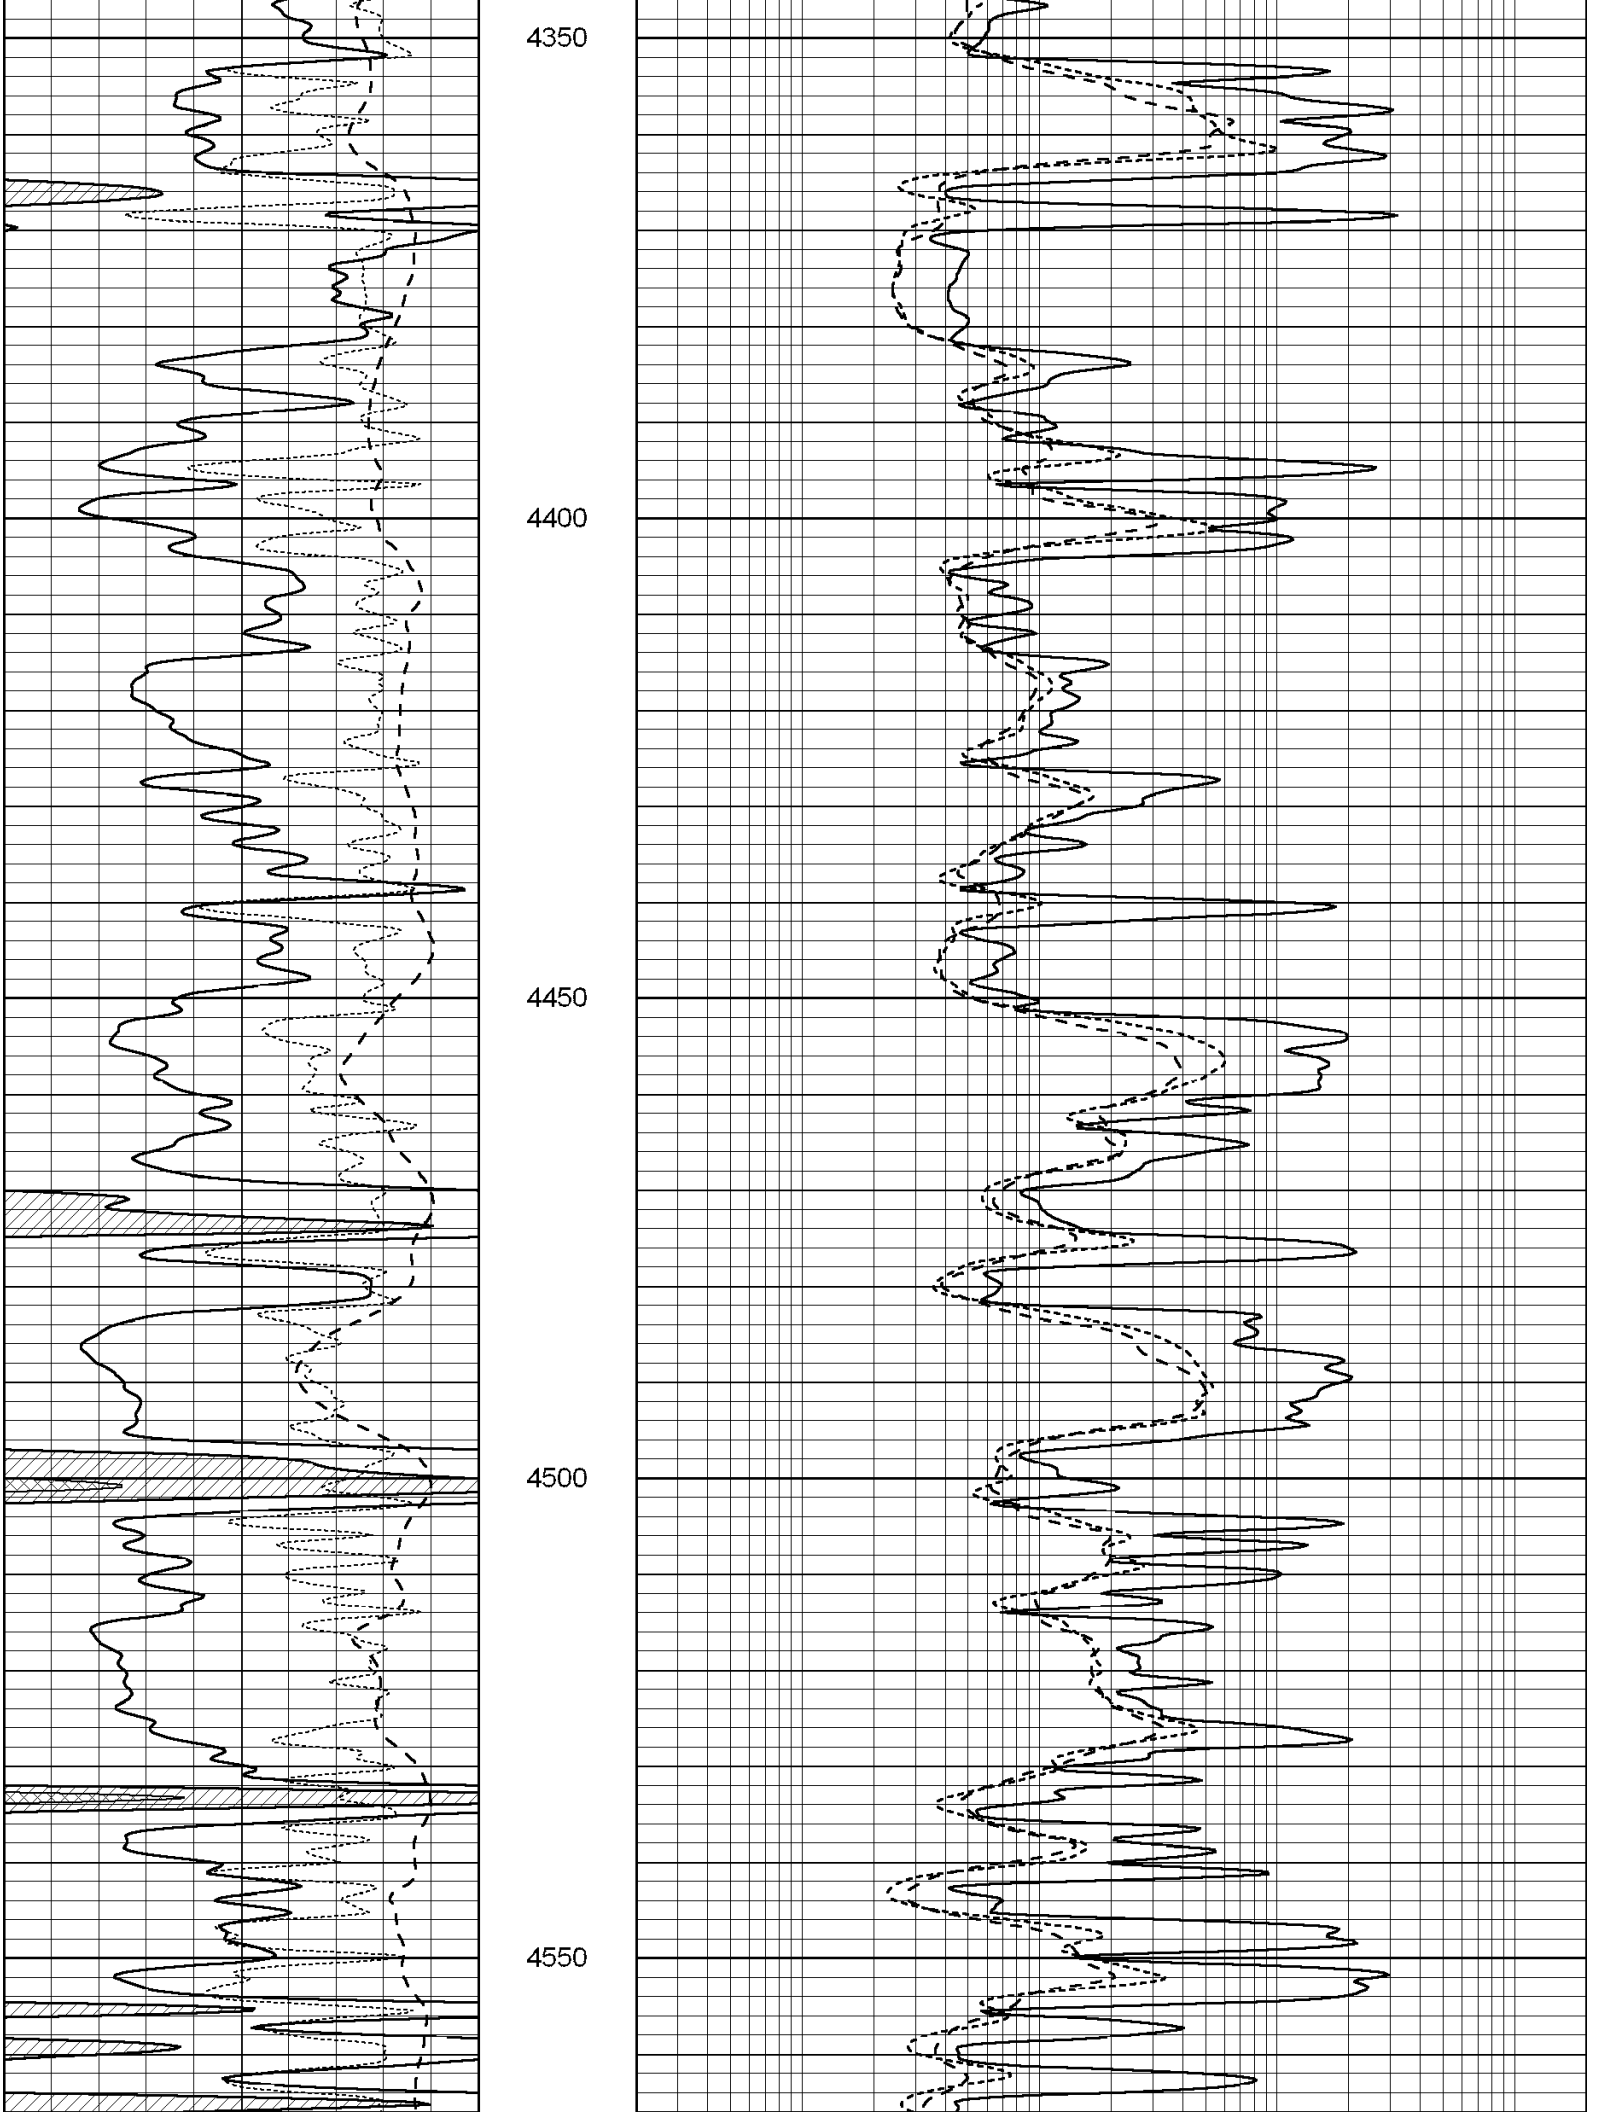
0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

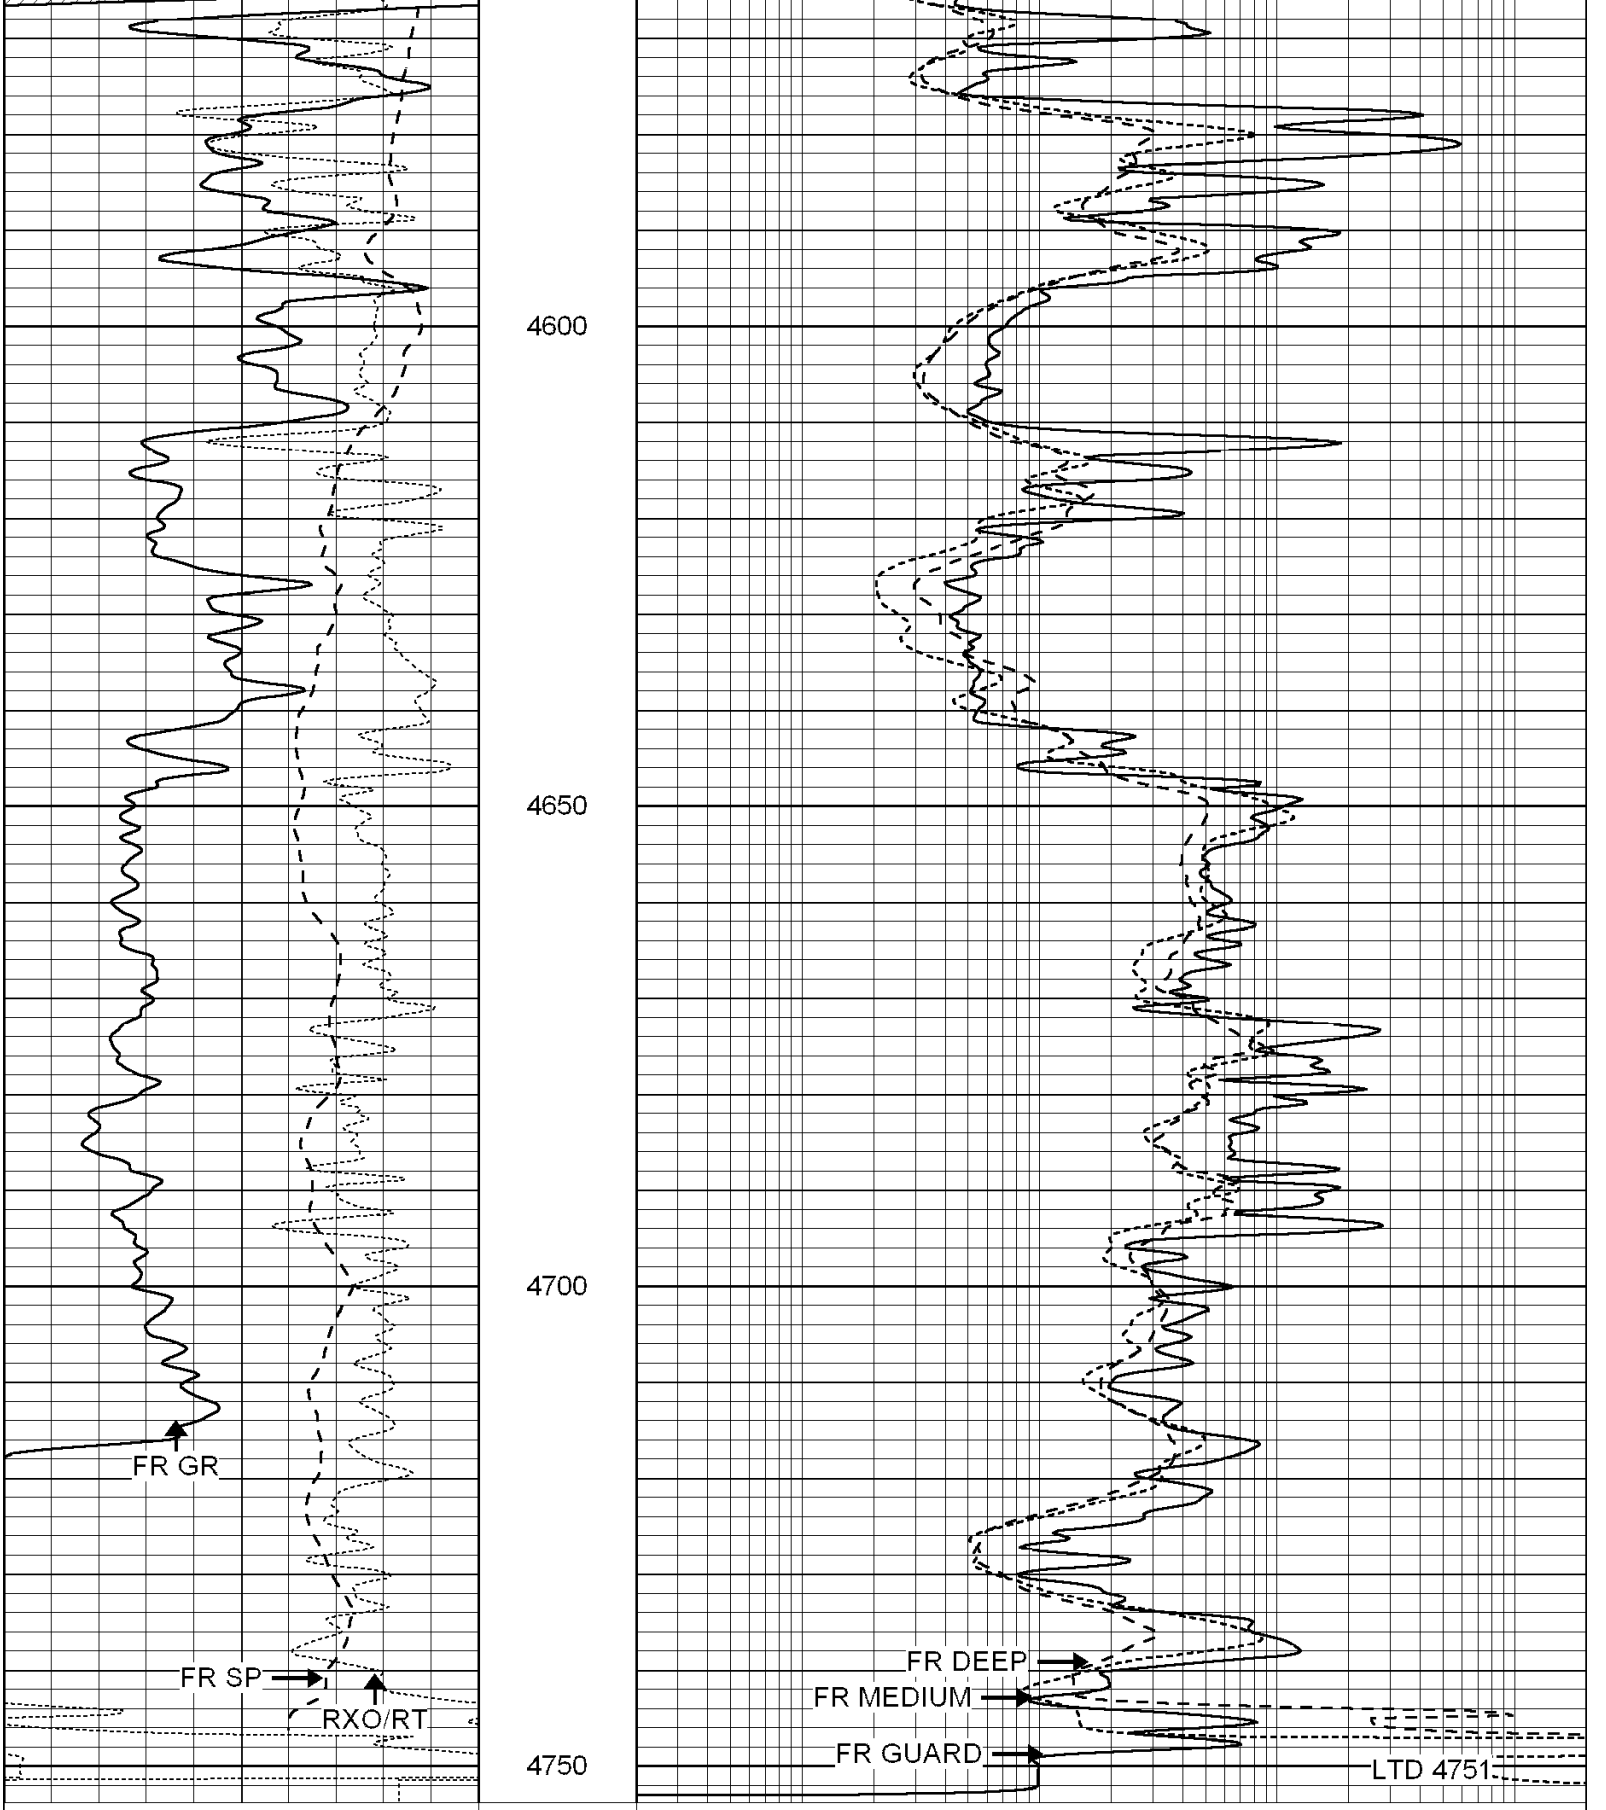



3700
3750
3800
3850
3900


3950
4000
4050
4100


4150
4200
4250
4300


4350
4400
4450
4500
4550



0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

SUPERIOR

SUPERIOR WELL SERVICES

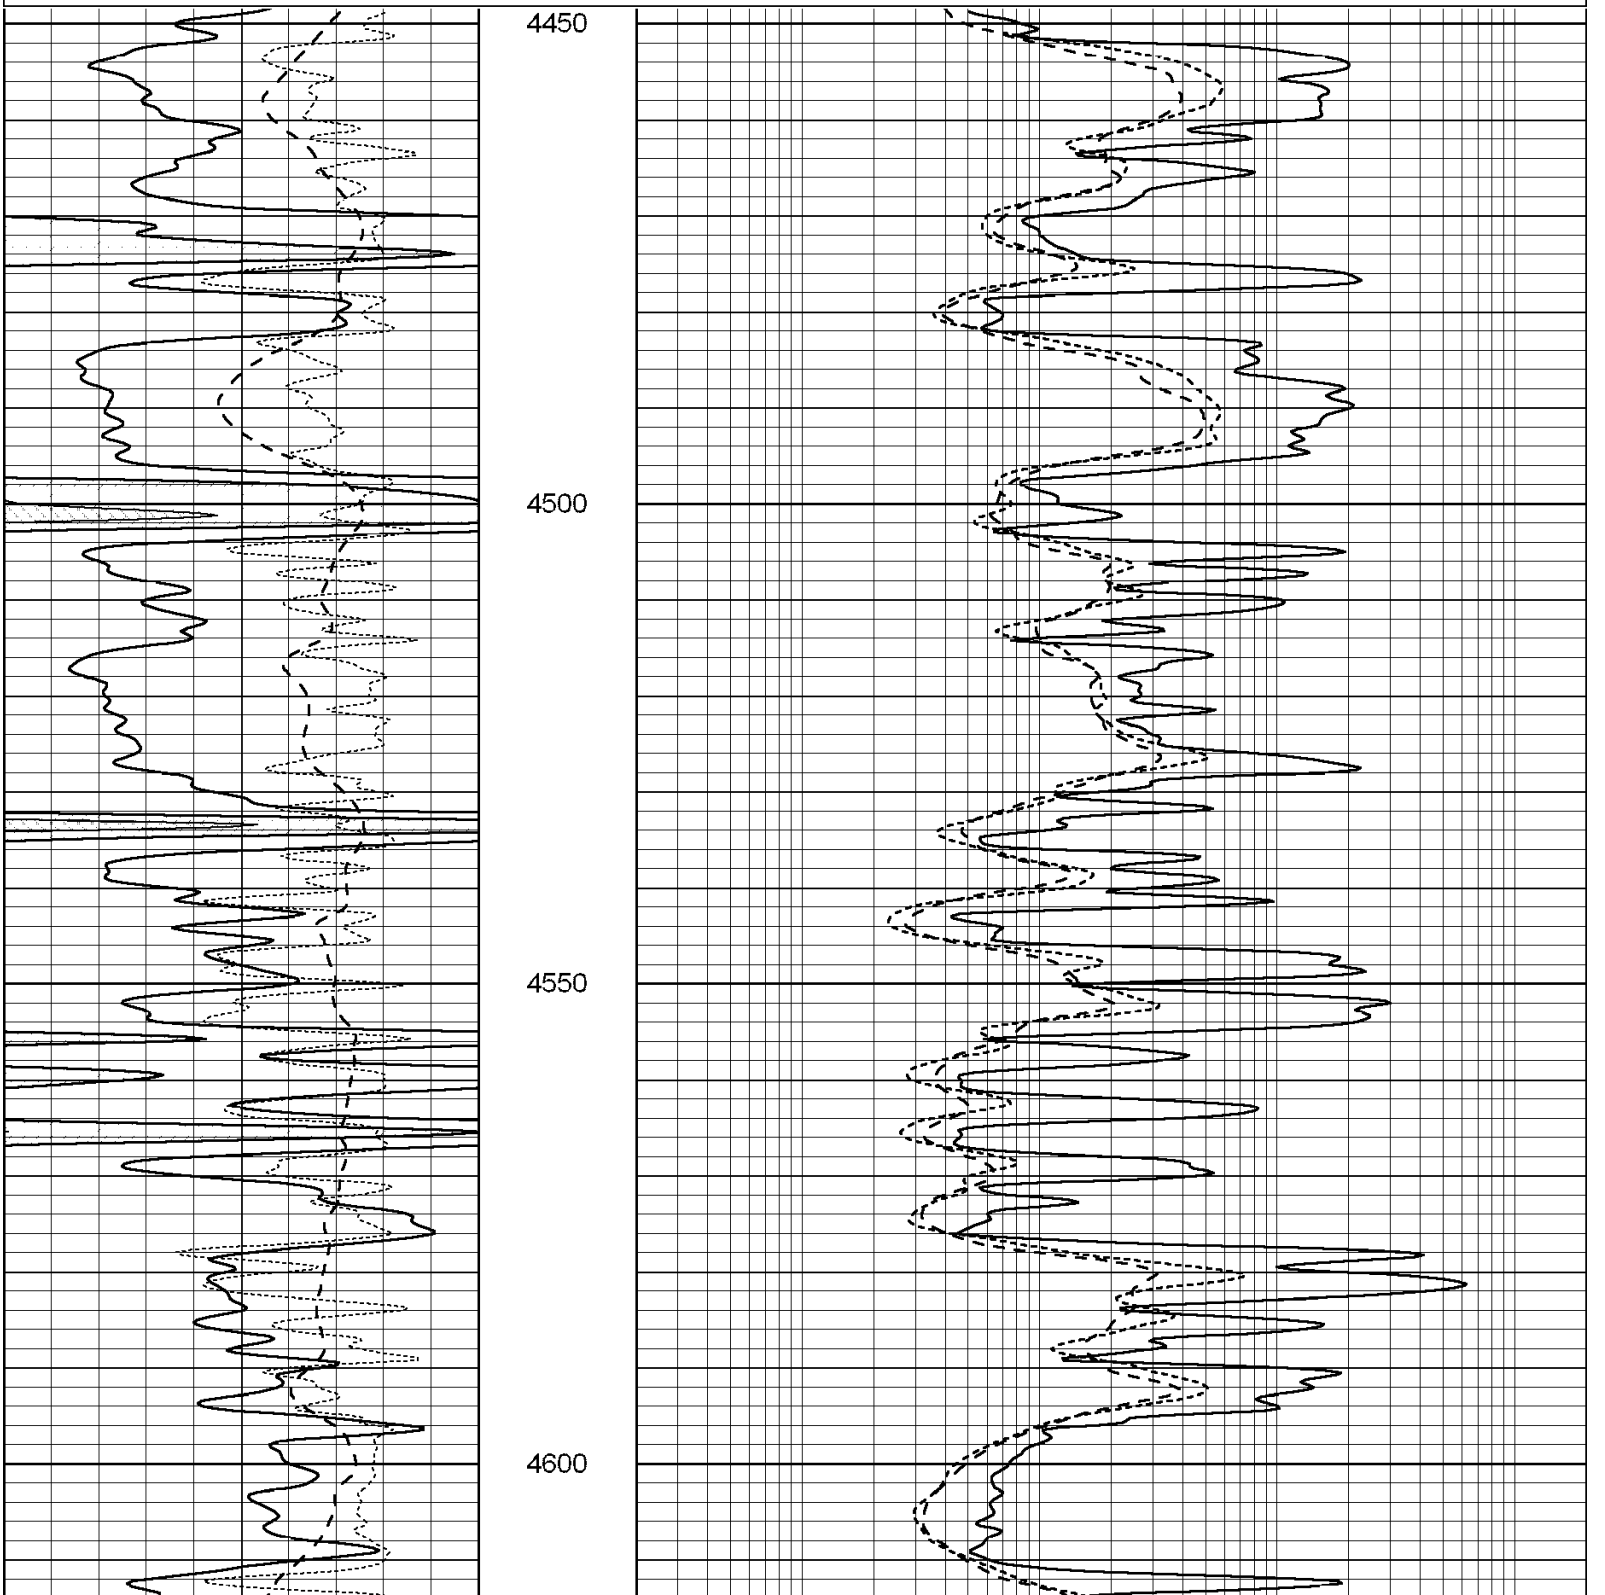
Hays, Kansas

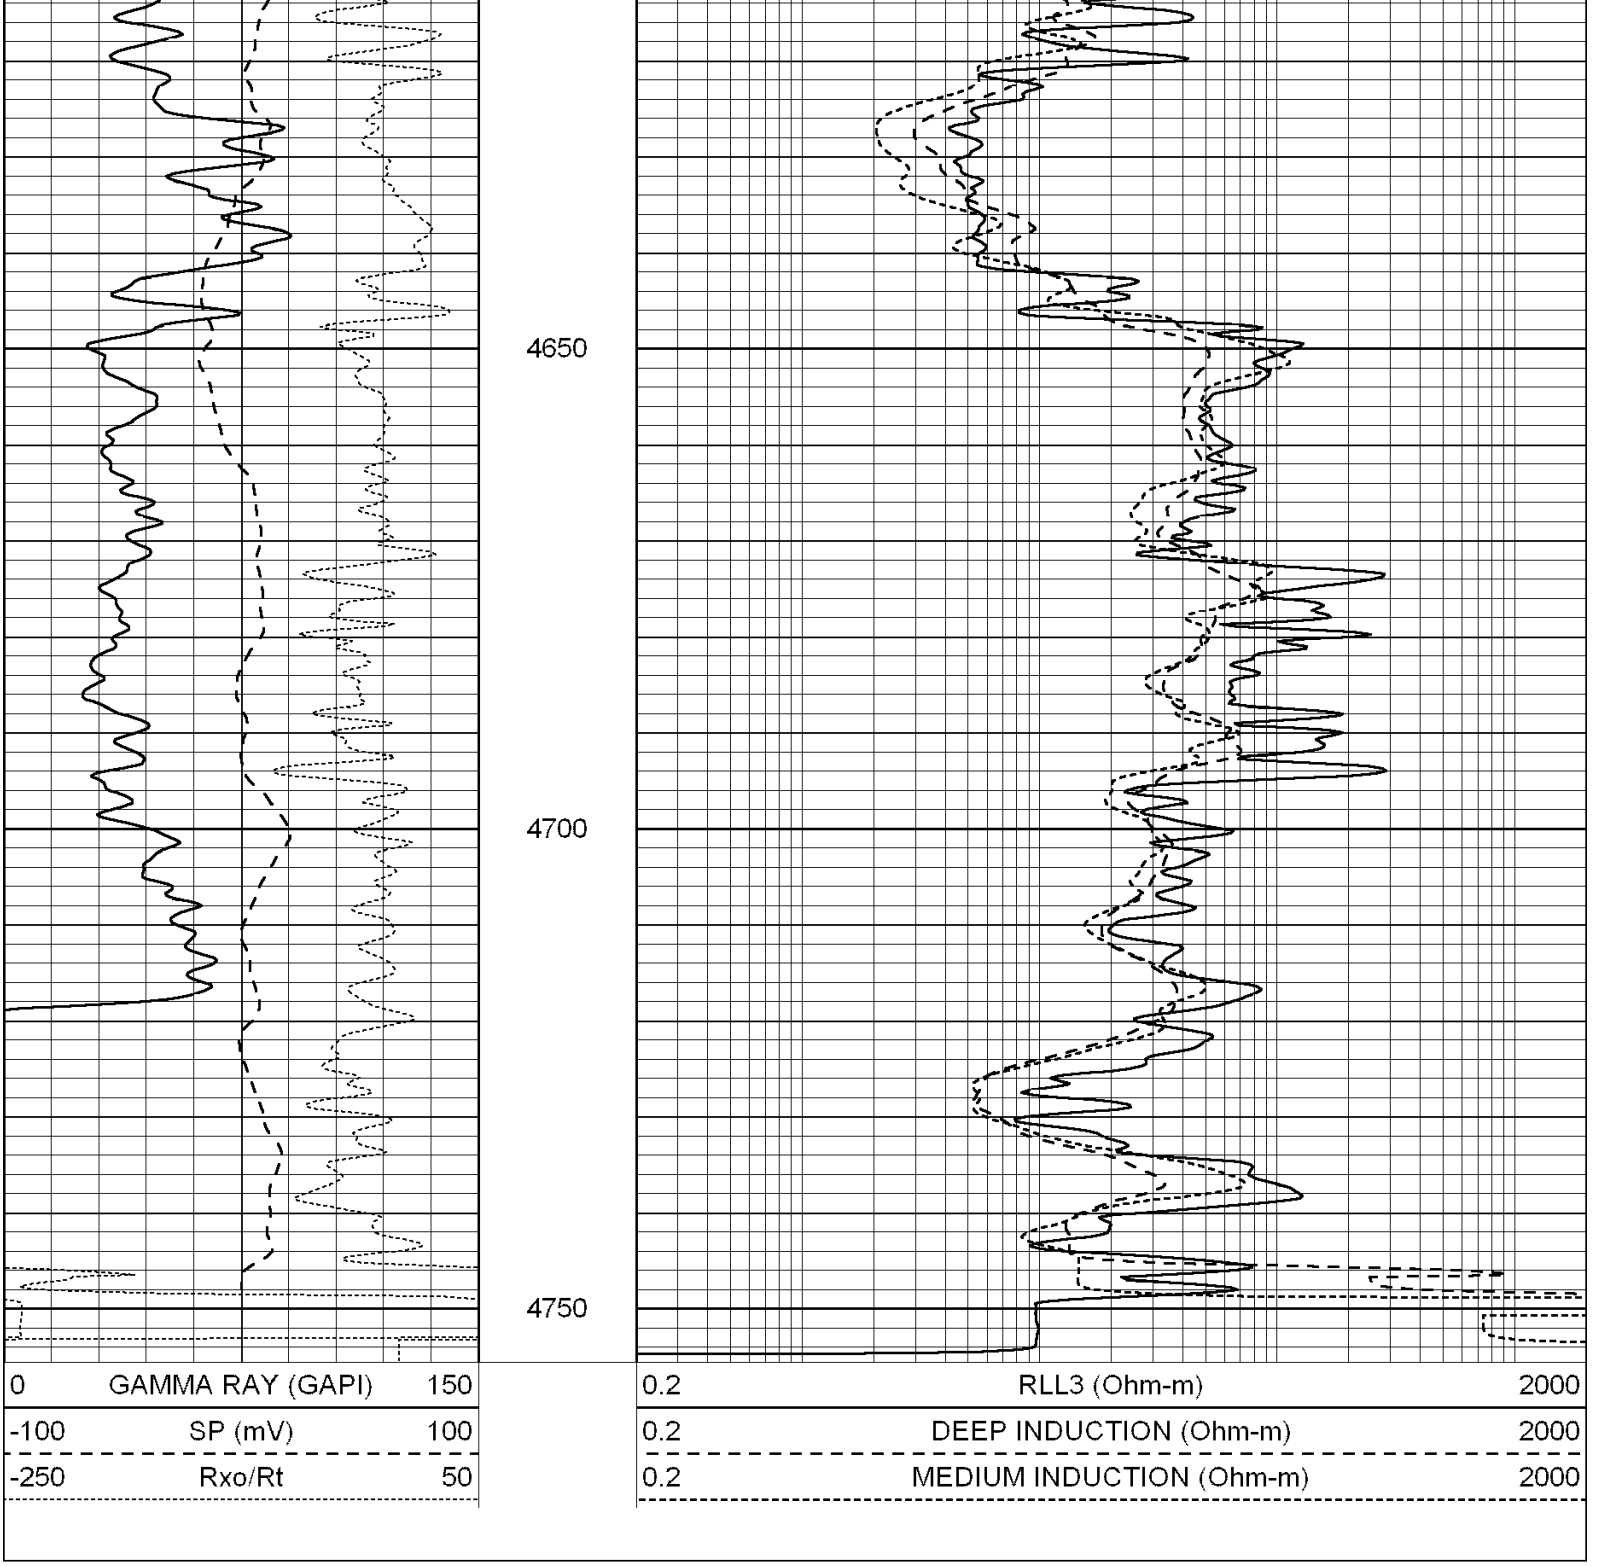
REPEAT SECTION

Database File:	002759pe.db
Dataset Pathname:	pass2.7
Presentation Format:	dil
Dataset Creation:	Wed Nov 05 22:45:18 2008 by Calc Open-Cased 060407
Charted by:	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000





Calibration Report

Database File: 002759pe.db
Dataset Pathname: pass3.6
Dataset Creation: Wed Nov 05 23:19:02 2008 by Calc Open-Cased 060407

Dual Induction Calibration Report

Serial-Model: DIL6-GEAR
Performed: Sun Nov 02 04:29:31 2008

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.001	0.644	V	0.000	400.000	mmho-m	640.000	-3.000
Medium	0.020	0.738	V	0.000	462.500	mmho-m	720.000	-27.000

Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.000	1.000	V	0.000	1.000	mmho-m	1.000	0.000
Medium	0.000	1.000	V	0.000	1.000	mmho-m	1.000	0.000

Litho Density Calibration Report

Serial: 004 Model: PRB
Performed Sun May 27 14:22:12 2007

Litho Density Calibration

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1637.8	12277.9	3987.9	13175.0	cps
Window 2	1491.6	10303.7	3430.3	10765.5	cps
Window 3	1139.1	4797.1	1913.1	4884.2	cps
Window 4	357.0	362.0	360.1	361.1	cps
Long Space	0.0	8812.1	1938.7	9273.9	cps
Short Space	1.4	1599.6	1036.7	1659.2	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe			2.5700	1.5500	

Rib Angle	: 44.0	Rib Slope	: 0.966	Density/Spine Ratio	: 0.559
Spine Angle	: 74.0	Spine Slope	: 3.491	Spine Intercept	: -16.7

Caliper

	Readings	Reference
Low Ref	2.2	6.0
High Ref	4.4	15.0
	Gain: 4.2	Offset: -3.3

Compensated Neutron Calibration Report

Serial Number: NEU_4I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	996.00	cps	1000.00	cps	1.0000
Long Space	977.00	cps	1000.00	cps	1.0000

Gamma Ray Calibration Report

Serial Number: GR4
Tool Model: OPEN
Performed: Wed Nov 05 21:55:59 2008

Calibrator Value: 200.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 189.0 cps

Sensitivity: 1.0500 GAPI/cps