



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-007-23,392-00-00

Company Val Energy, Inc.

Well Leysa No. 2-22

Field Wildcat

County Barber State

Kansas

Location

495' FSL & 495' FWL

Sec: 22 Twp: 34S Rge: 11W

Permanent Datum Ground Level Elevation 1326
Log Measured From Kelly Bushing 11 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Elevation

K.B. 1337
D.F. 1326
G.L. 1326

Date 11 / 02 / 2008

Run Number Two

Depth Driller 4890

Depth Logger 4891

Bottom Logged Interval 4890

Top Log Interval 3300

Casing Driller 8.625 @ 625

Casing Logger 614

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 4.500

Density / Viscosity 9.4 80

pH / Fluid Loss 9.5 9.6

Source of Sample Flowline

Rm @ Meas. Temp .28 @ 78

Rmf @ Meas. Temp .21 @ 78

Rmc @ Meas. Temp .38 @ 78

Source of Rmf / Rmc Charts

Rm @ BHT .17 @ 125

Operating Rig Time 5 Hours

Max Rec. Temp. F 125

Equipment Number 4

Location Hays

Recorded By J. Loffredi

Witnessed By Steve Van Buskirk

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


South of Medice Lodge on Highway 281 to Gerlane Rd,
4 East to Bethal Rd, 3 South, 2 East, East into

Database File: c:\warrior\data\val_leya no. 2-22\valhd.db
Dataset Pathname: dil\valstack
Presentation Format: micro
Dataset Creation: Sun Nov 02 23:31:49 2008
Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

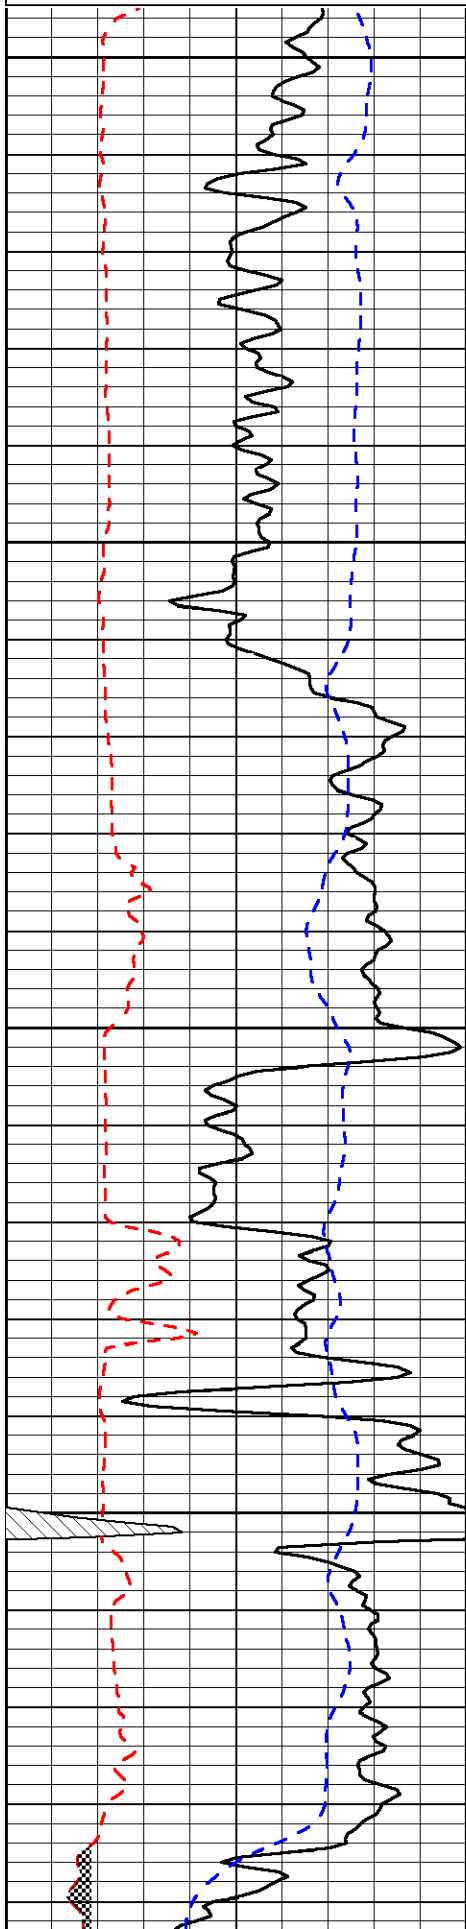

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

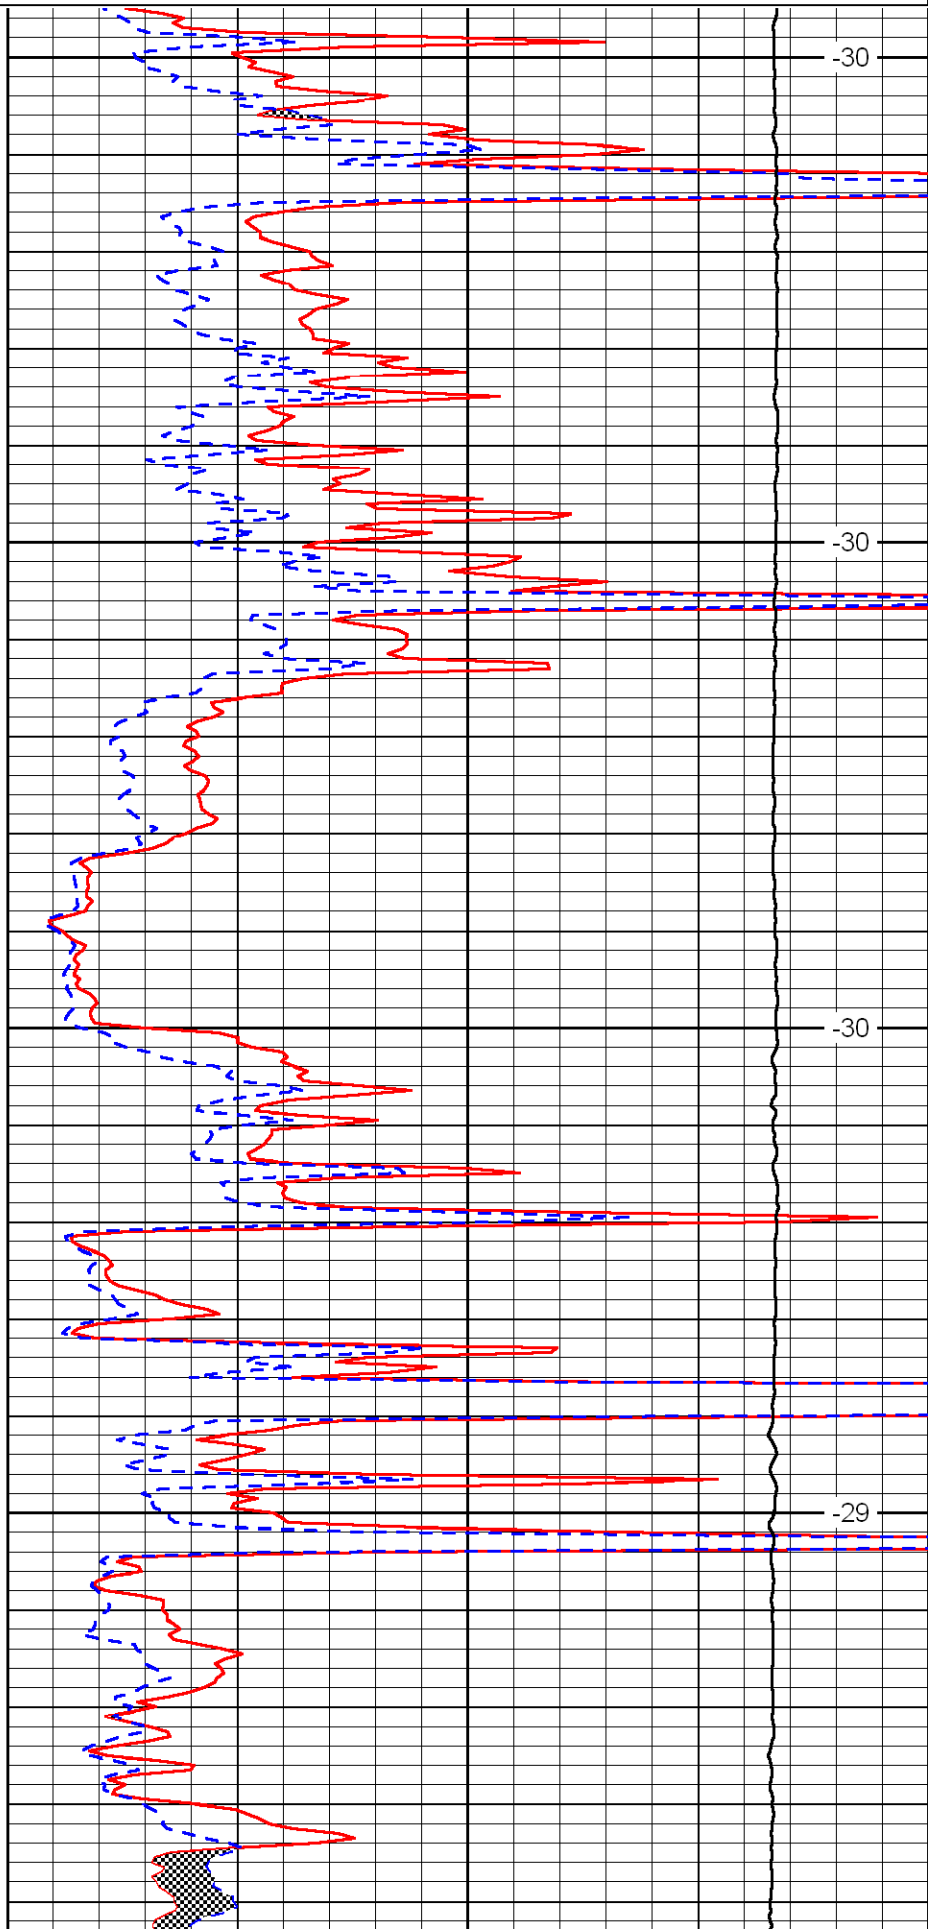

LSPD

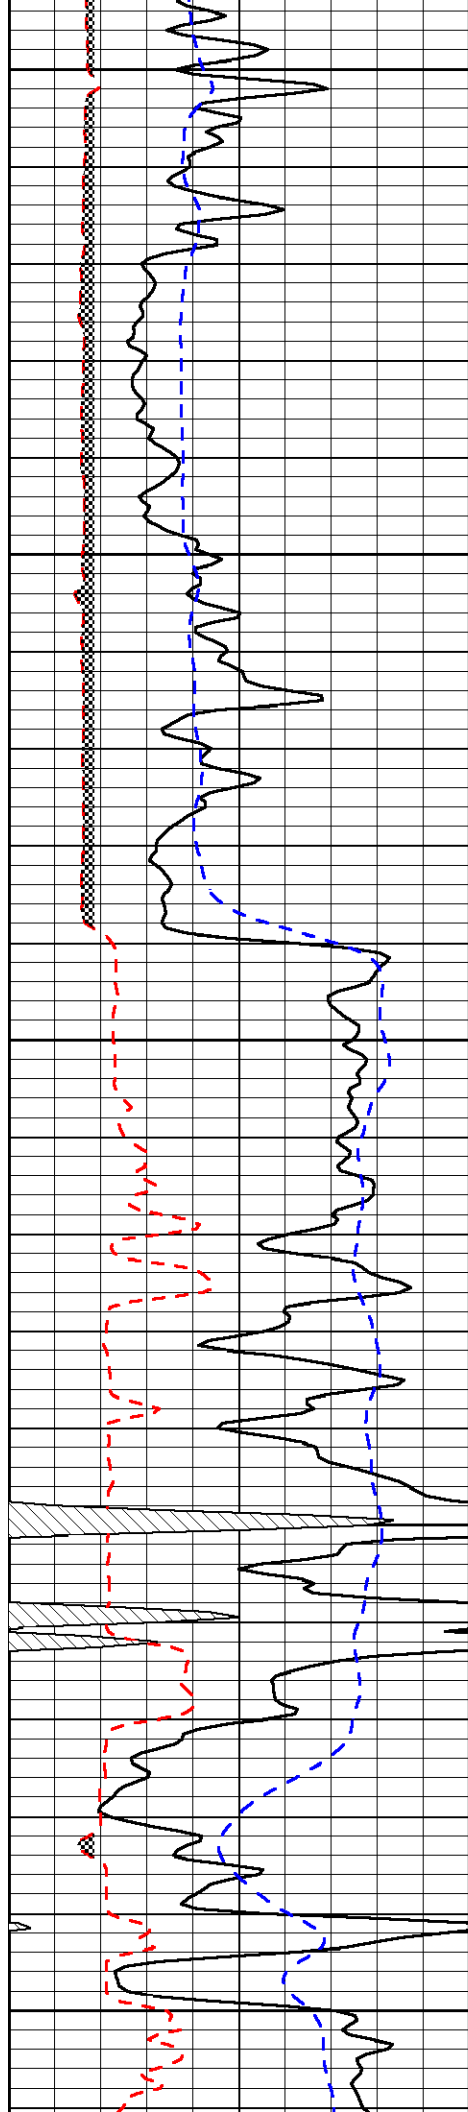


3500

3550

3600

3650

3700

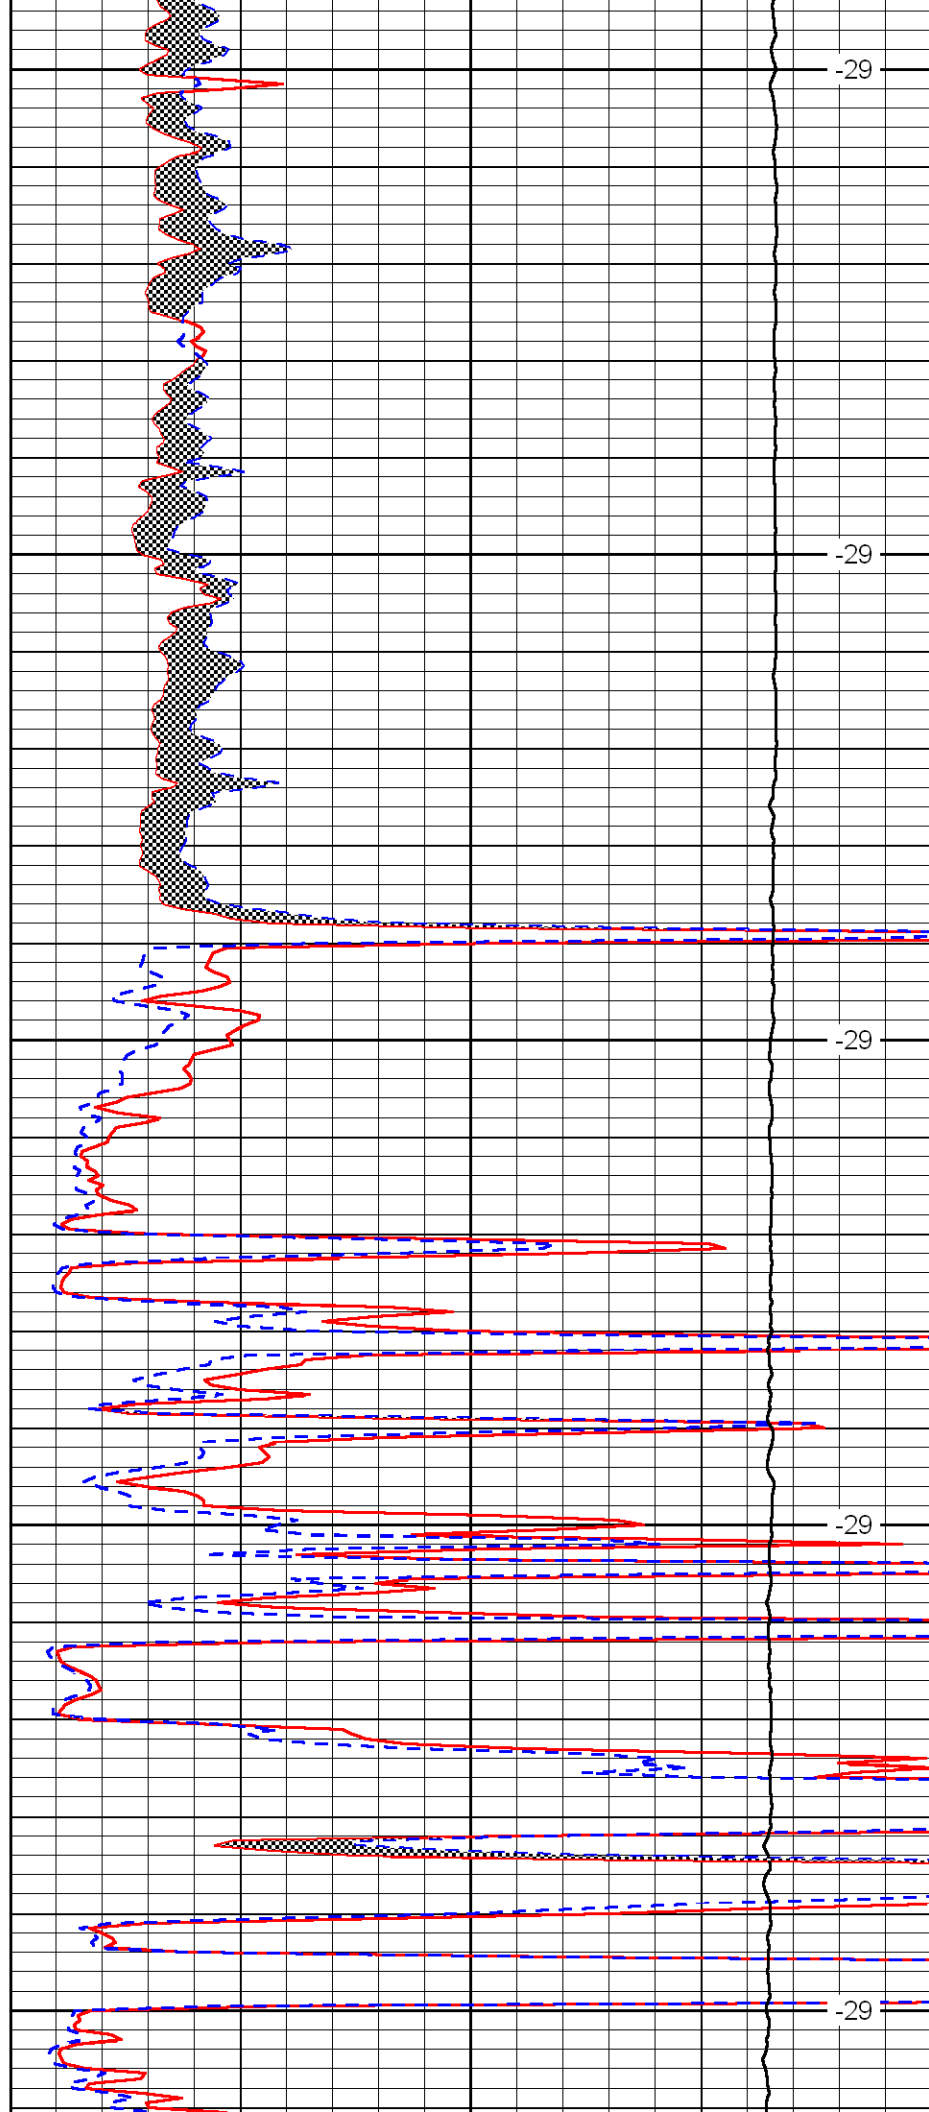


-29

-29

-29

-29

-29

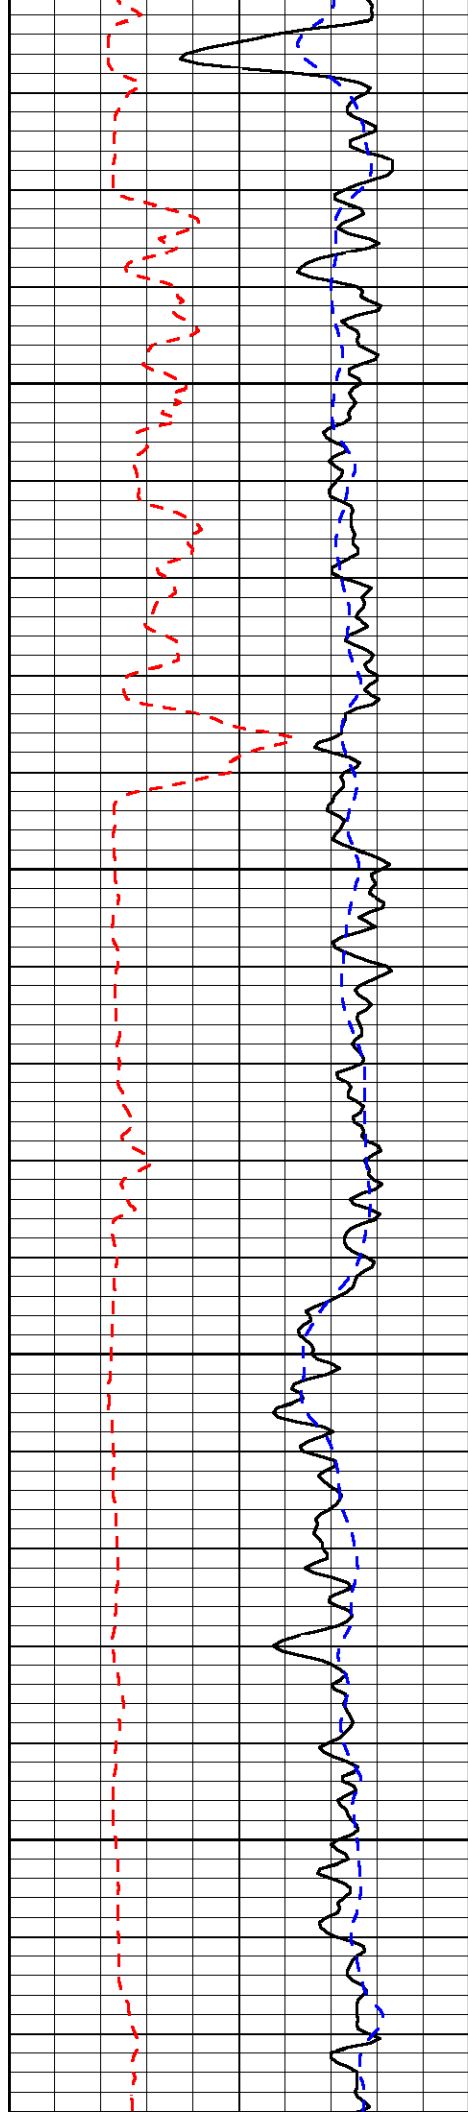


3750

3800

3850

3900


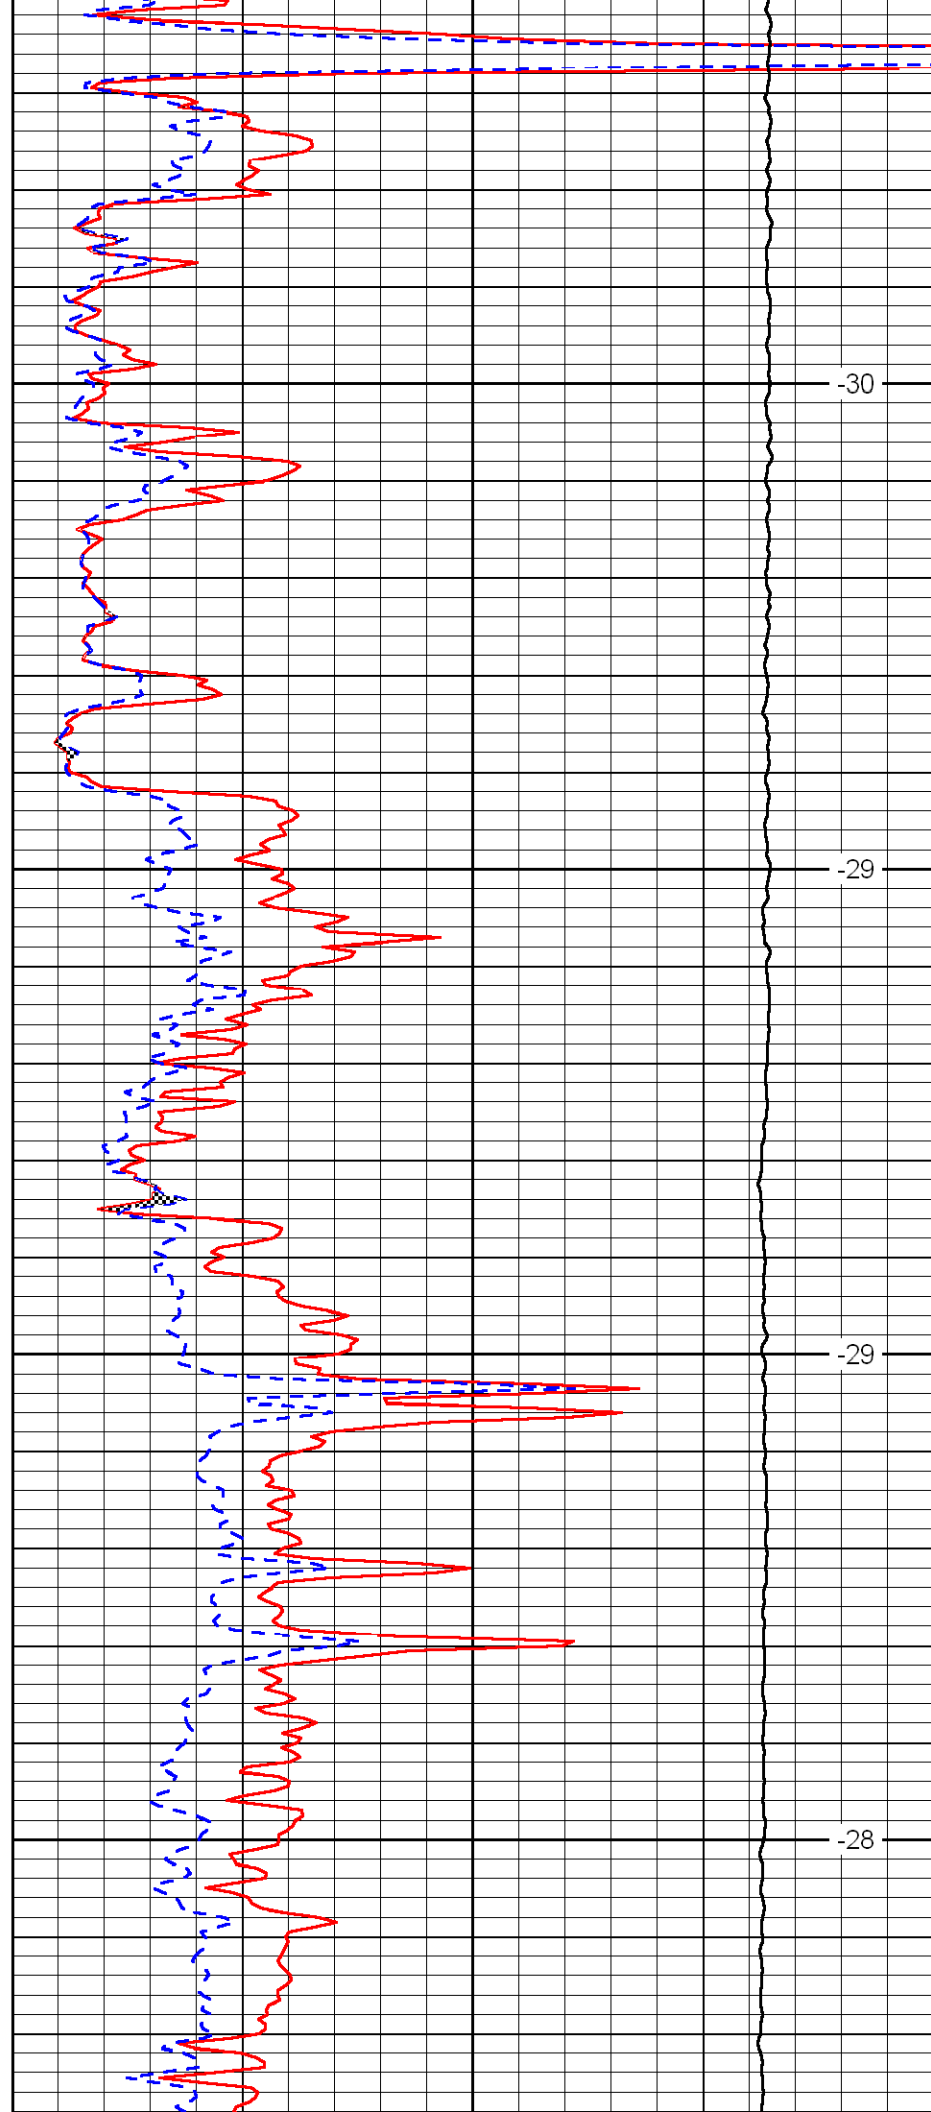



-30

-29

-29

-28

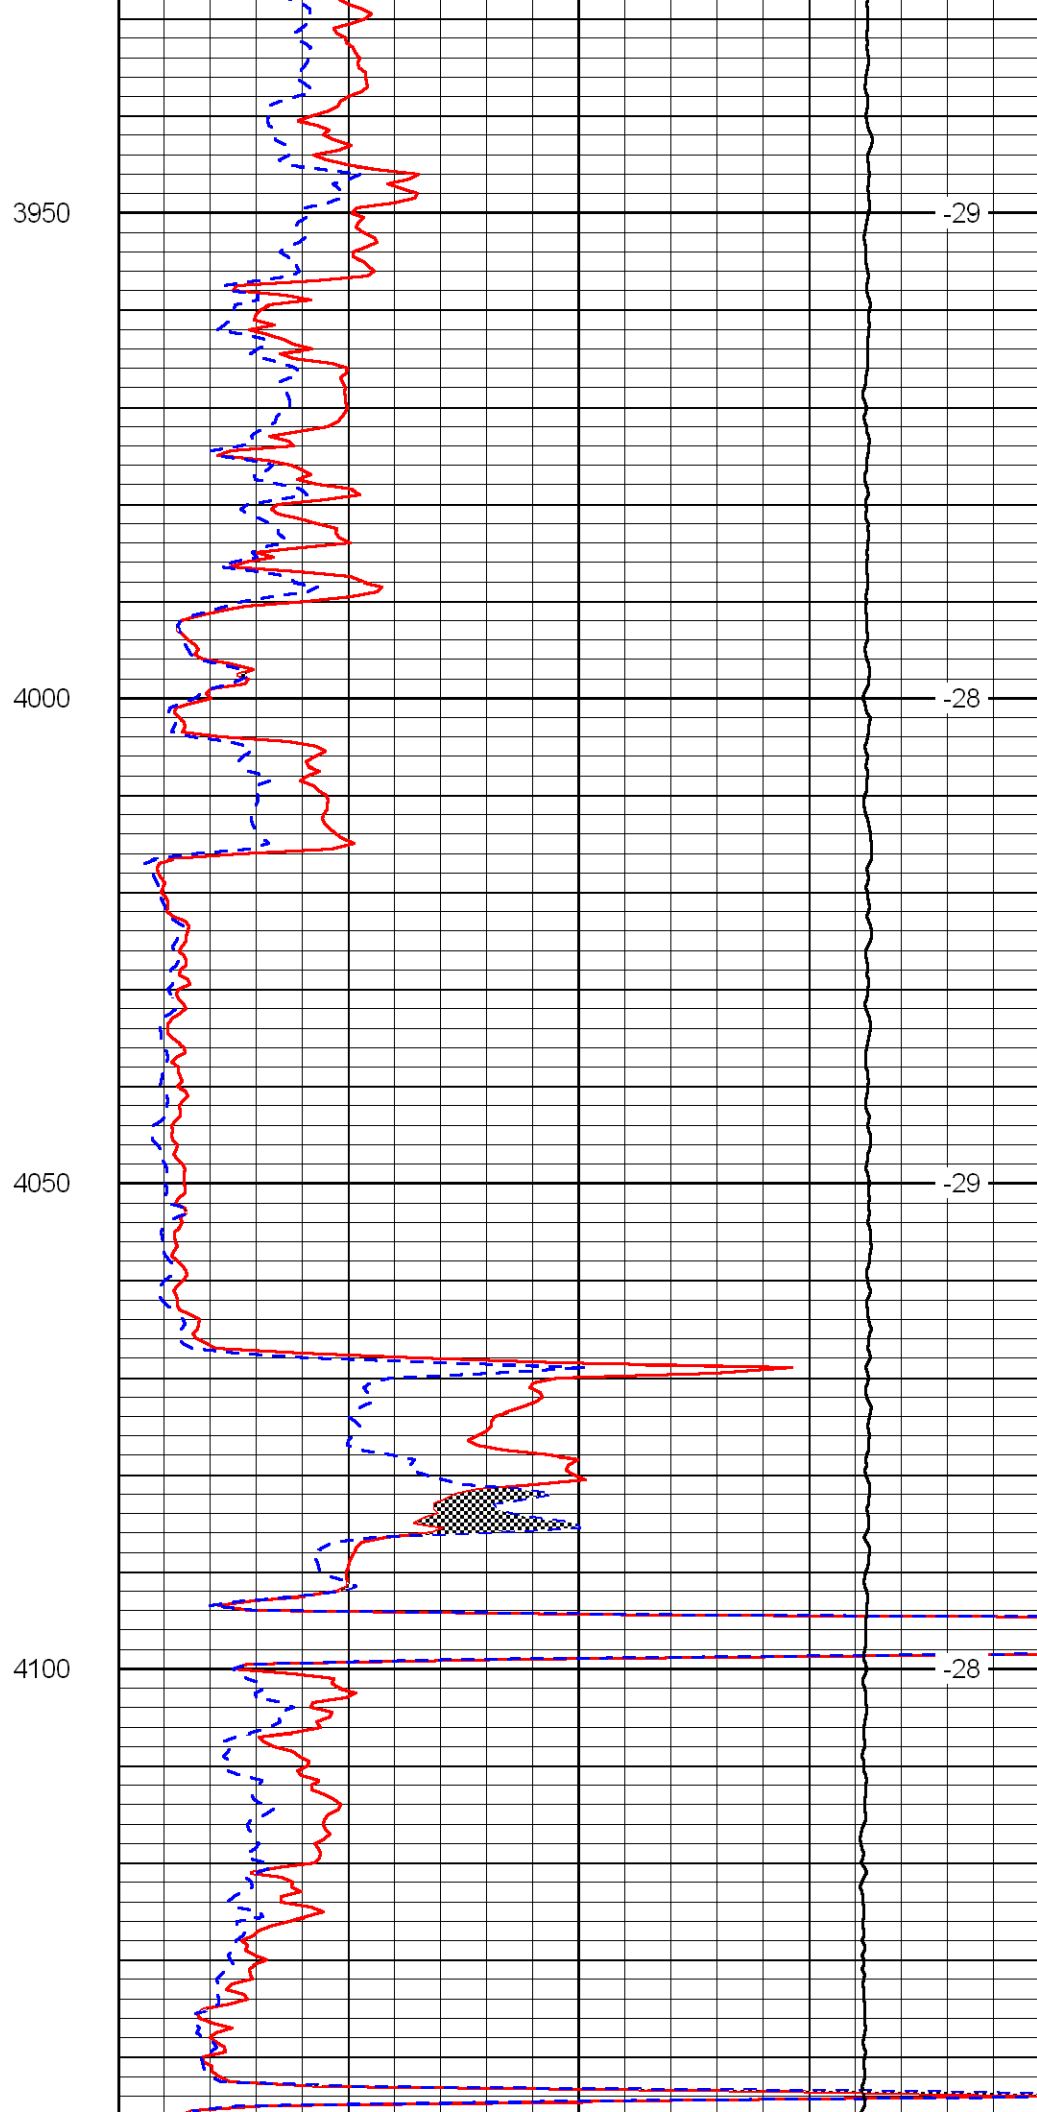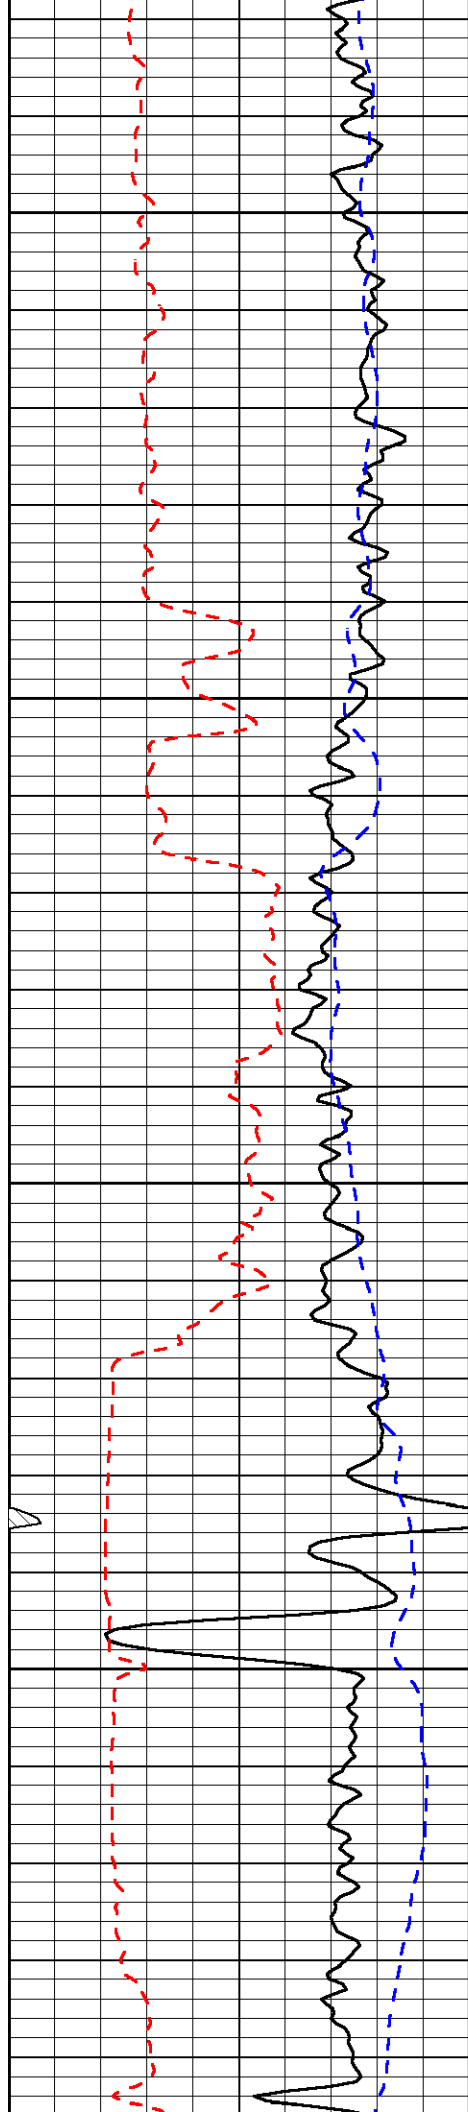

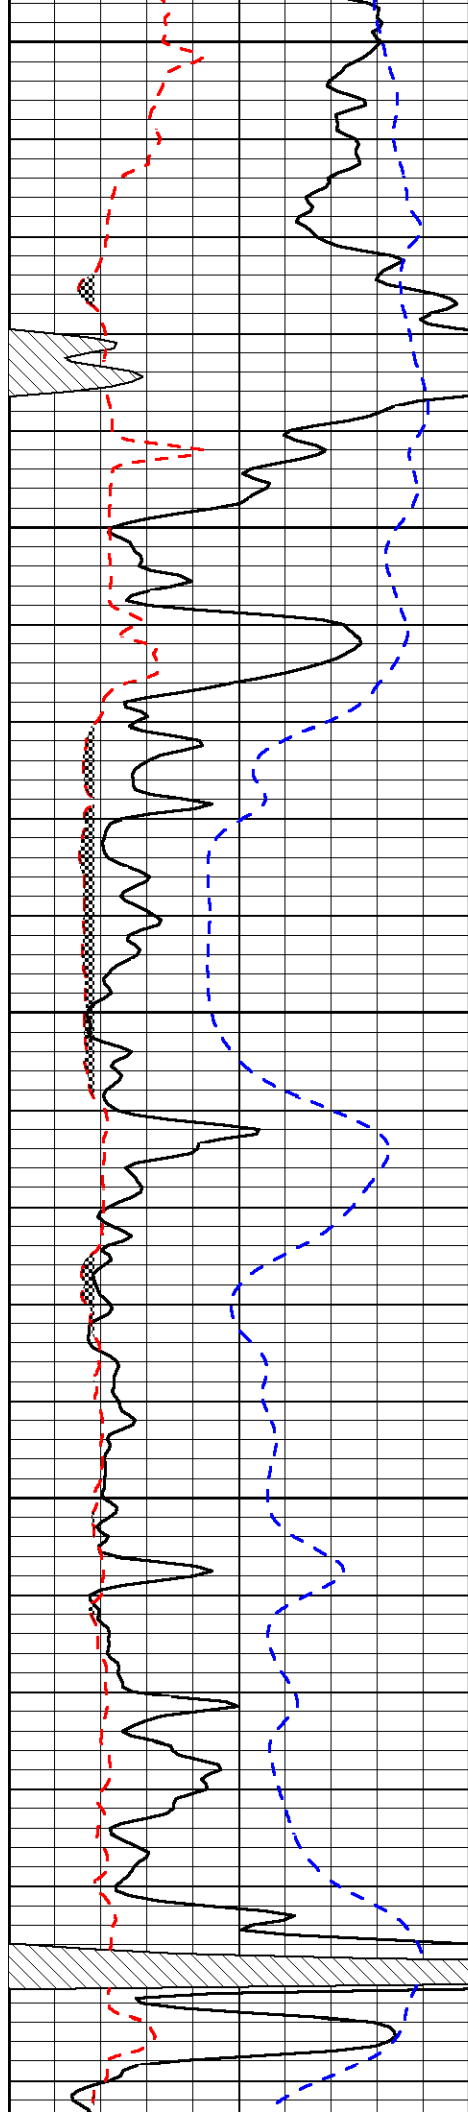


4150

4200

4250

4300

4350

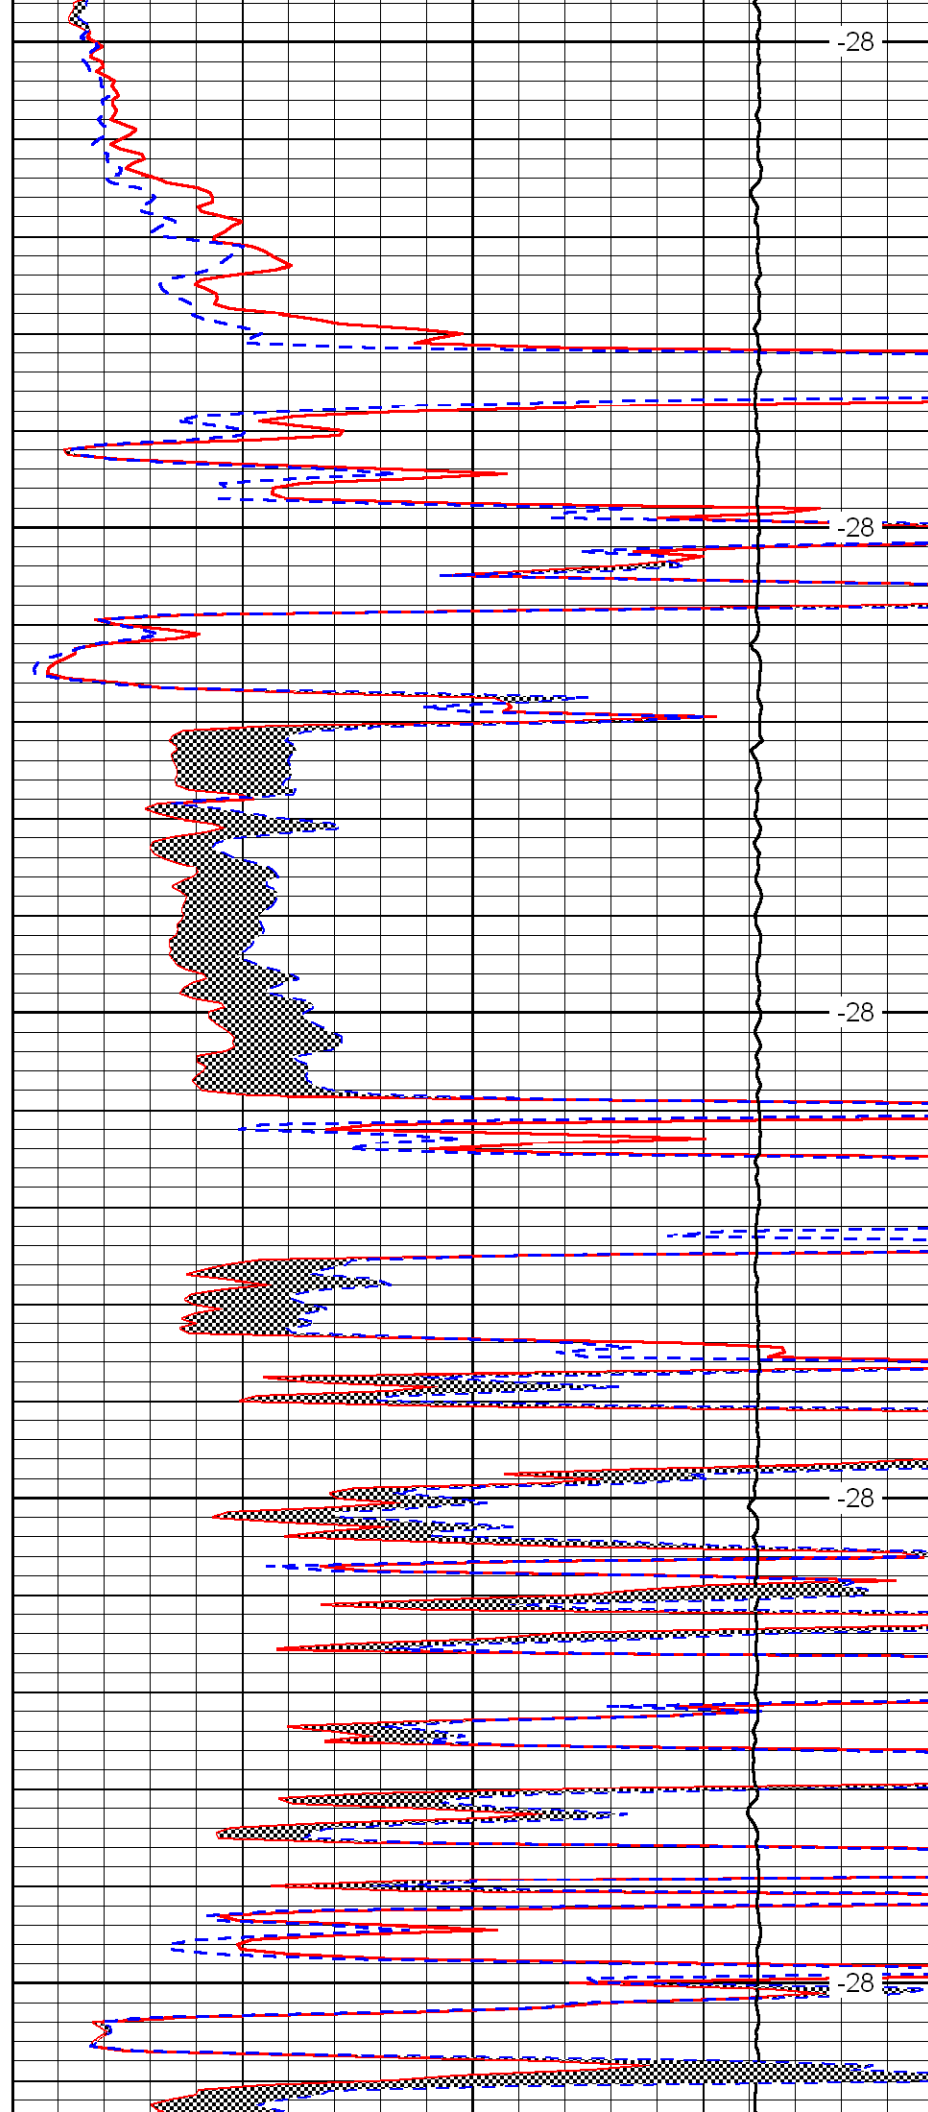


-28

-28

-28

-28

-28

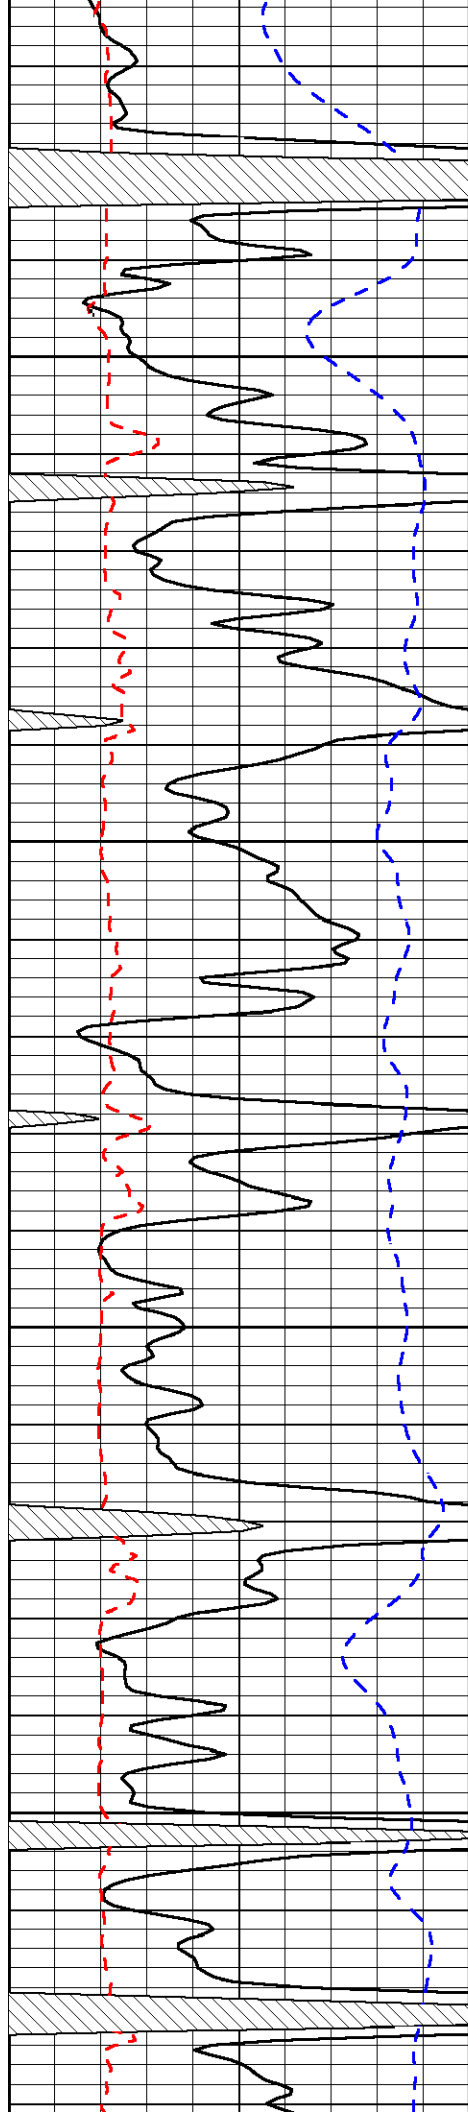



4400

4450

4500

4550

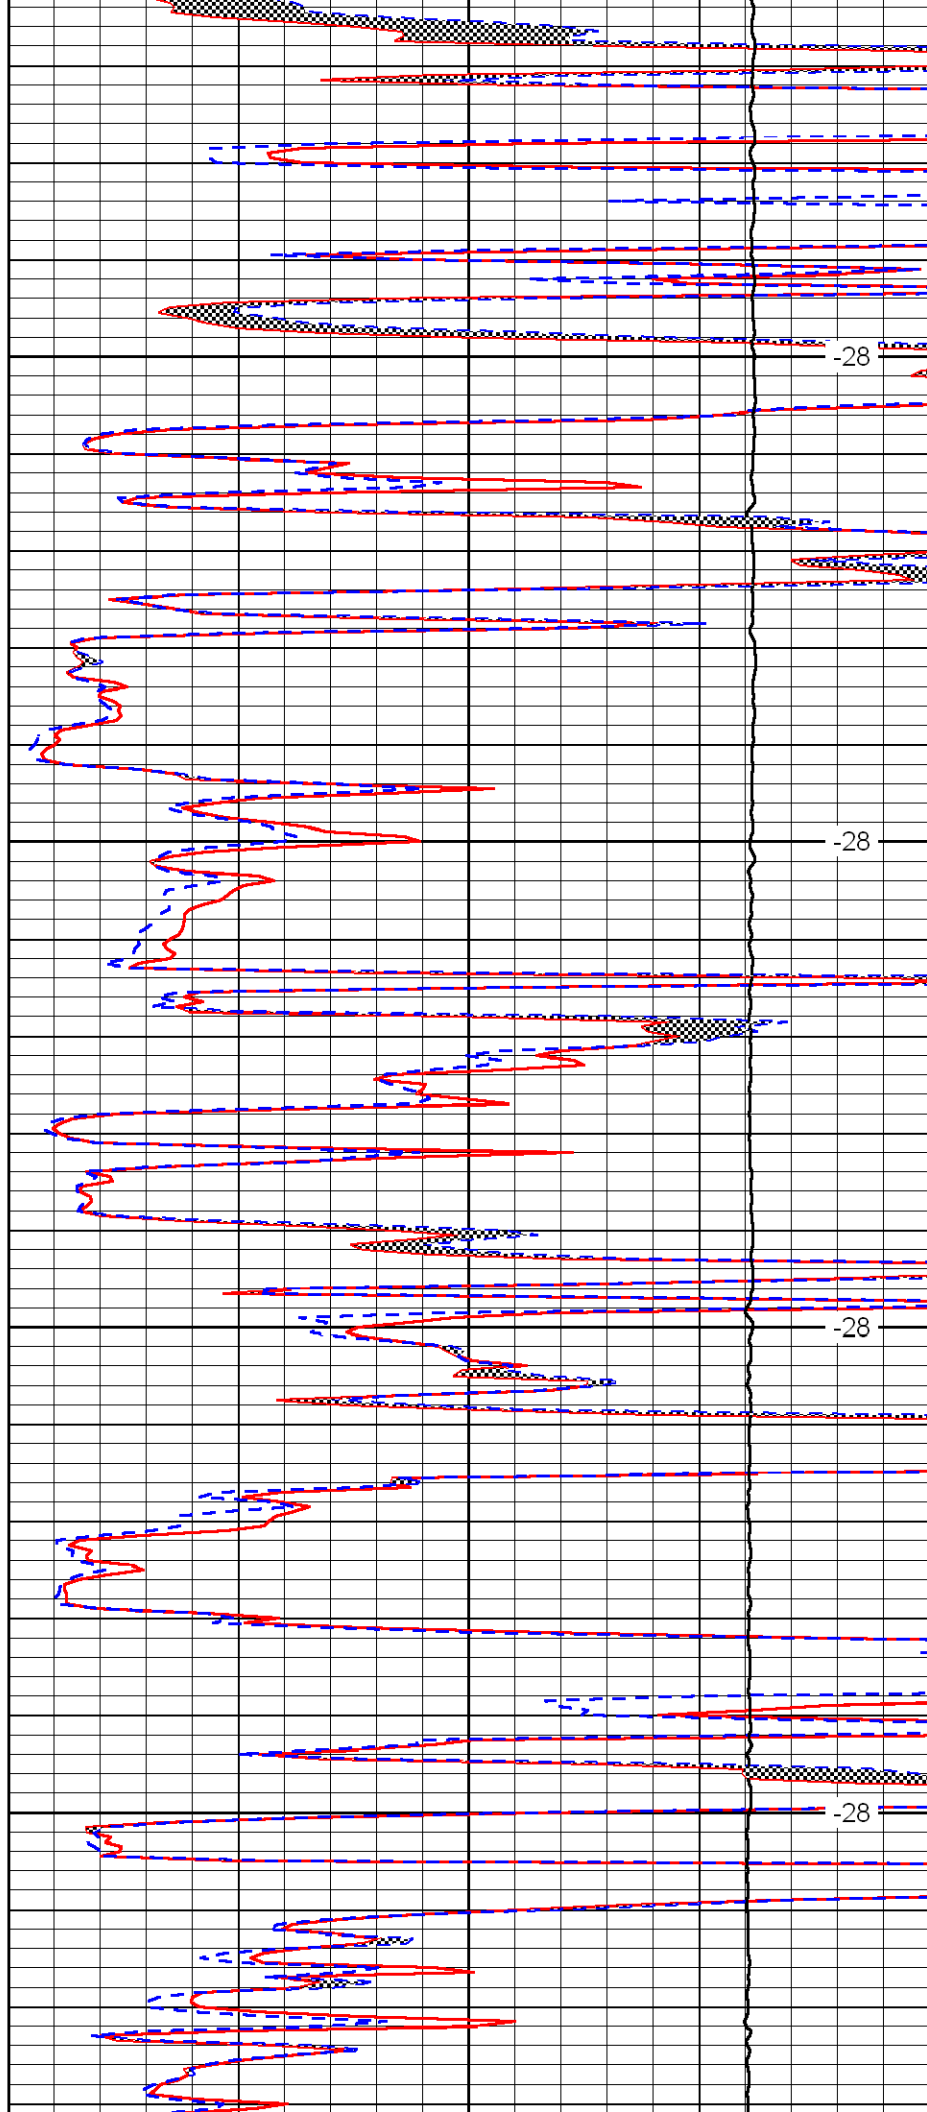

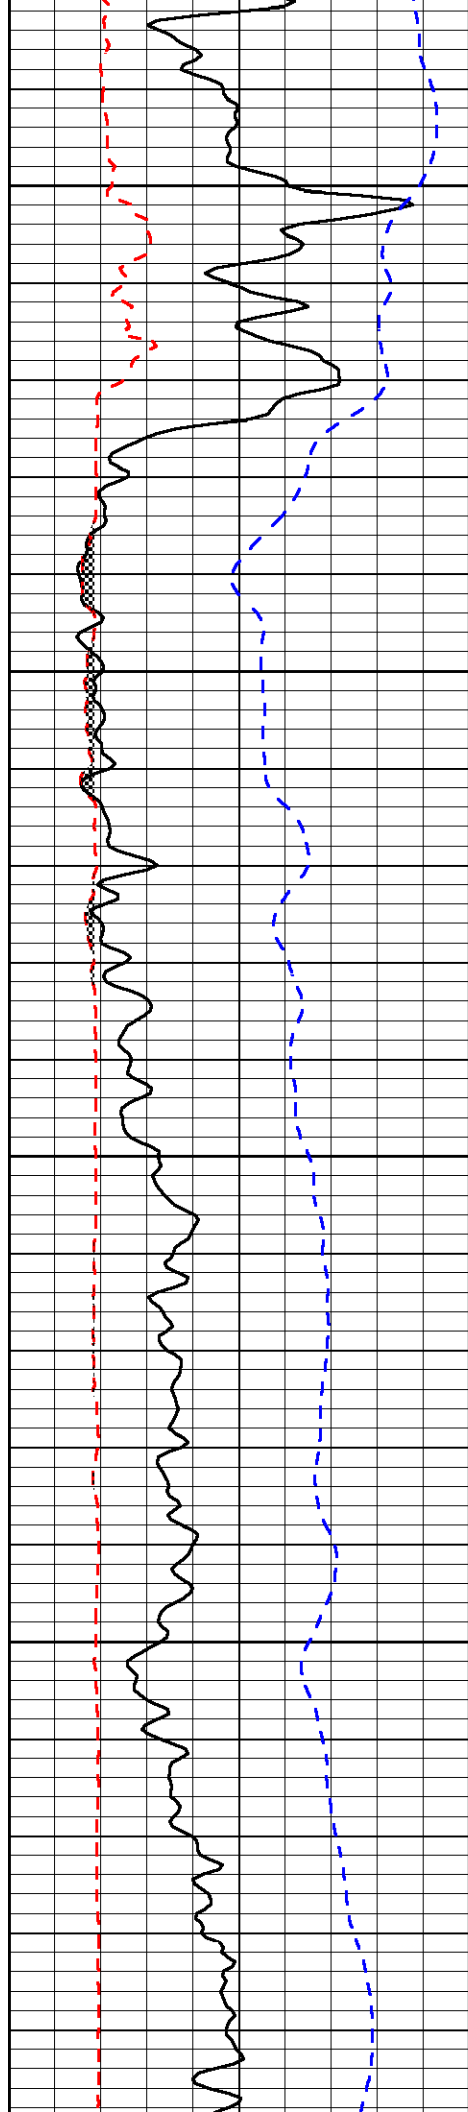


4600

4650

4700

4750


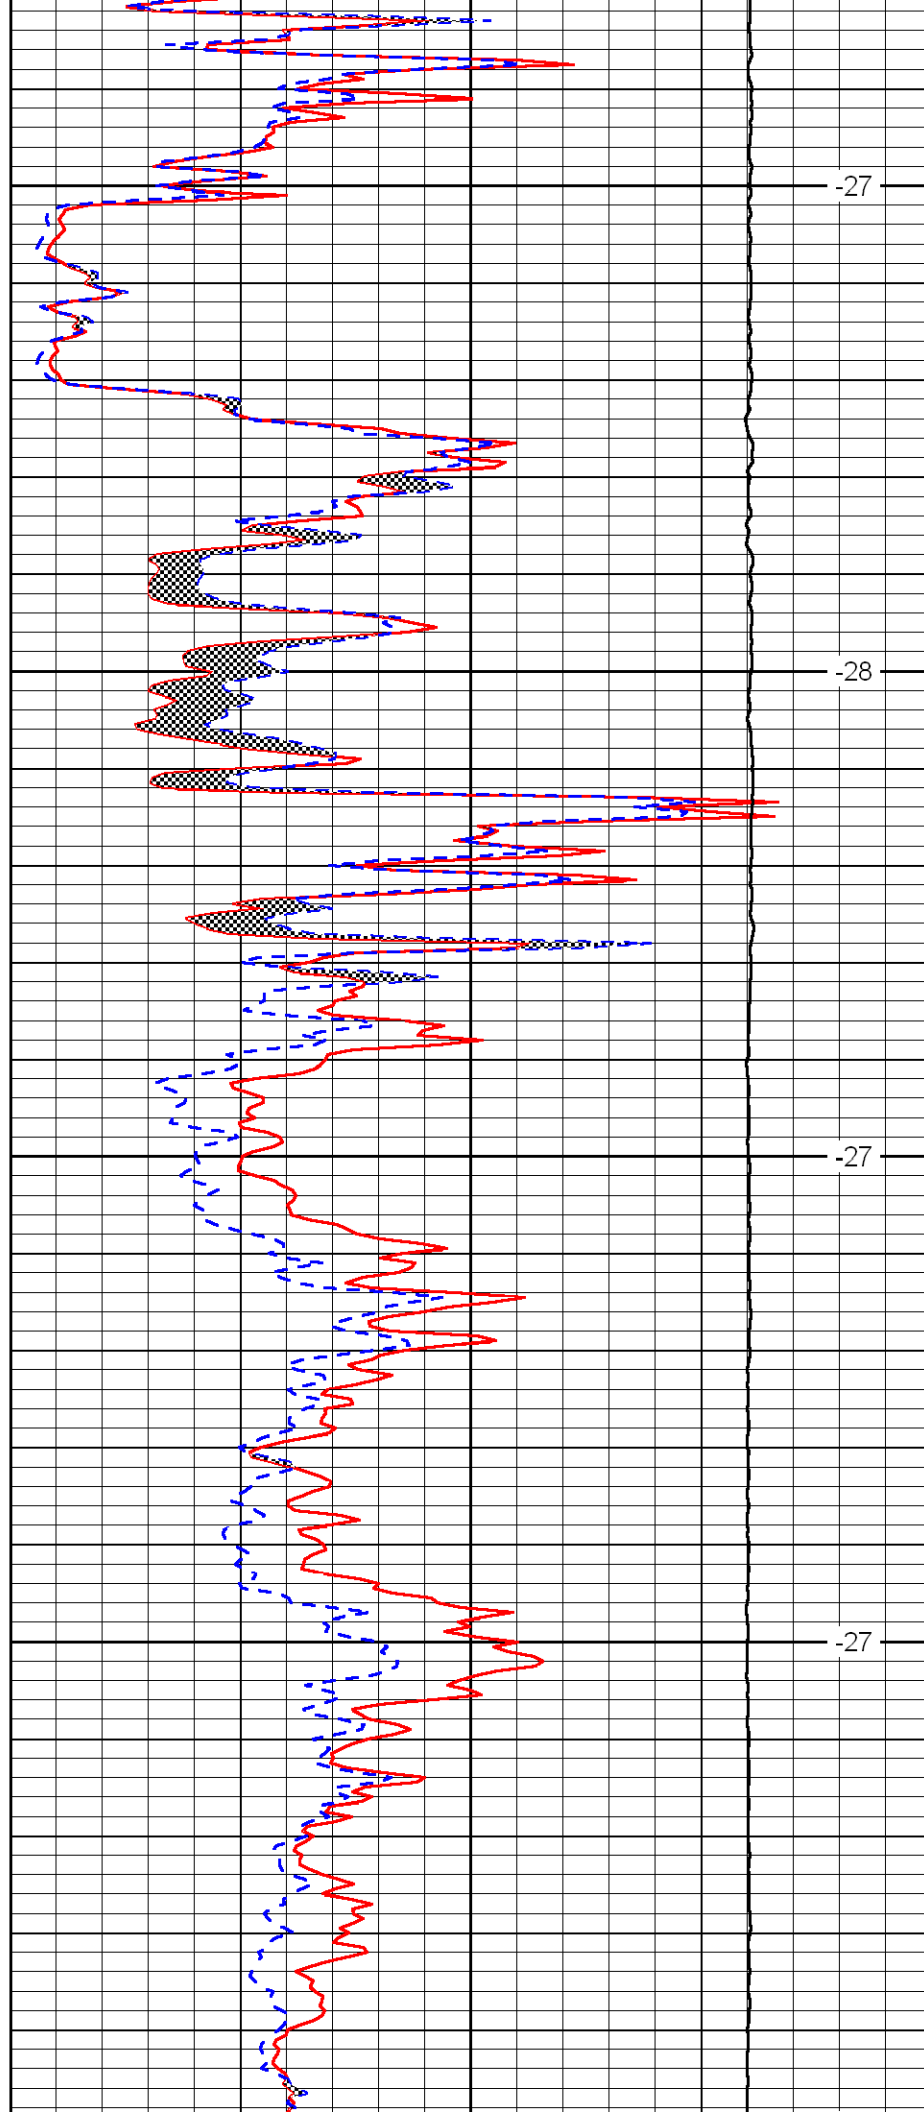


-27

-28

-27

-27

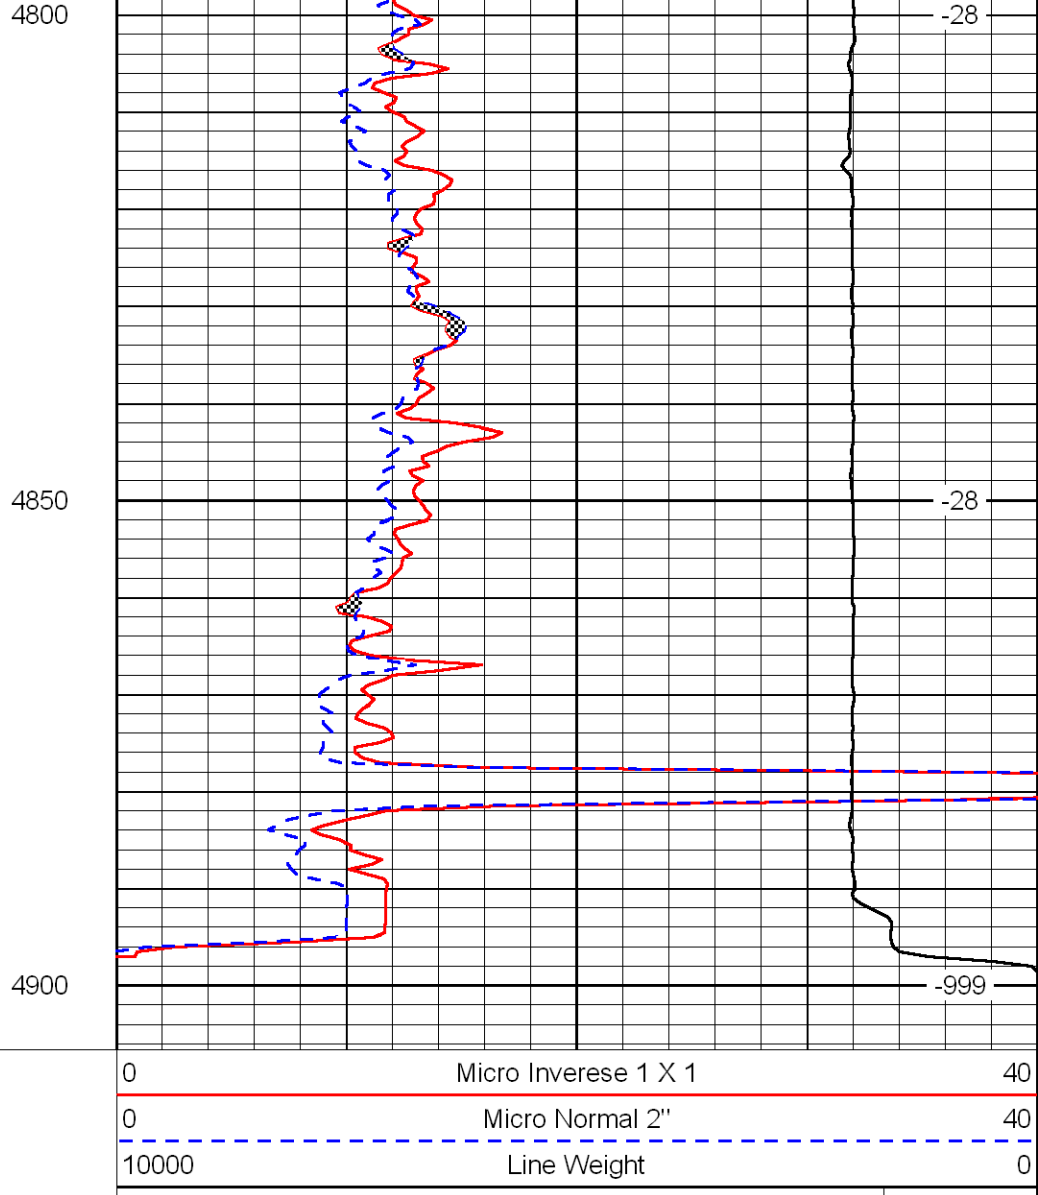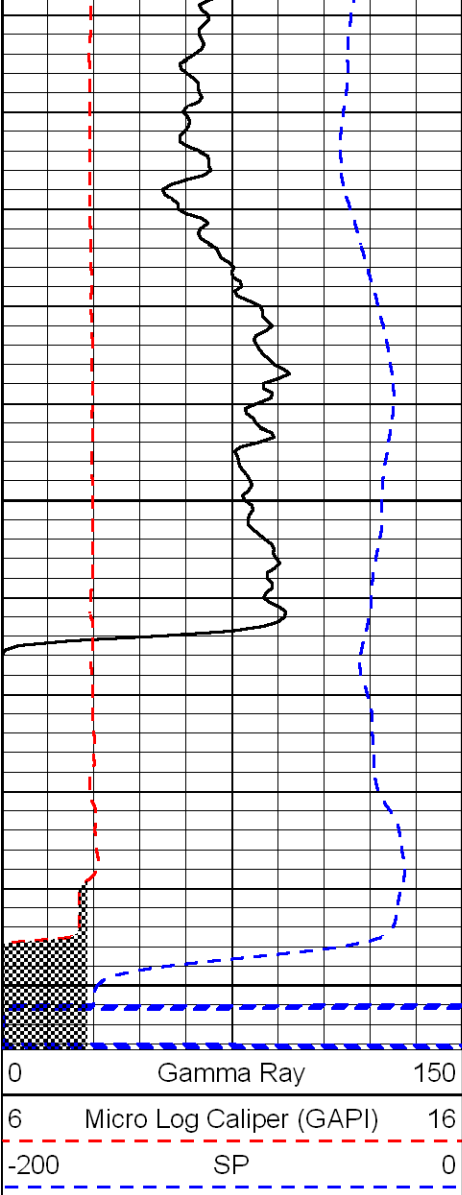

LSPD