



Radiation Guard Log

DIGITAL LOG (785) 625-3858

API No.	15-135-24,900-00-00		
Company	Abercrombie Energy, LLC.		
Well	Wyrill Farms No. 3-19		
Field	WCV		
County	Ness	State	Kansas
Location	330' FNL & 1880' FWL		Other Services NONE
Sec: 19	Twp: 19 S	Rge: 25 W	

Permanent Datum	Ground Level	Elevation 2578	
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	K.B. 2583
Driiling Measured From	Kelly Bushing		D.F. 2578
Date	5/11/2009		
Run Number	One		
Depth Driller	4558		
Depth Logger	4558		
Bottom Logged Interval	4557		
Top Log Interval	0		
Casing Driller	8.625 @ 301		
Casing Logger	301		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	3.500		
Density / Viscosity	9.3	52	
pH / Fluid Loss	10.5	9.2	
Source of Sample	Flowline		
Rm @ Meas. Temp	.68 @ 70		
Rmf @ Meas. Temp	.51 @ 70		
Rmc @ Meas. Temp	.92 @ 70		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.39 @ 124		
Operating Rig Time	2 1/2 Hours		
Max Rec. Temp. F	124		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Monica Turner		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Beeler, 5 S on C rd, 1 1/2 E. 1/2 N, E to dead end, through cattle guard, N and E into (stay right at y)


0 Gamma Ray 150


0.2 Igrd (Ohm-m) 2000

LSPD
(ft/min)

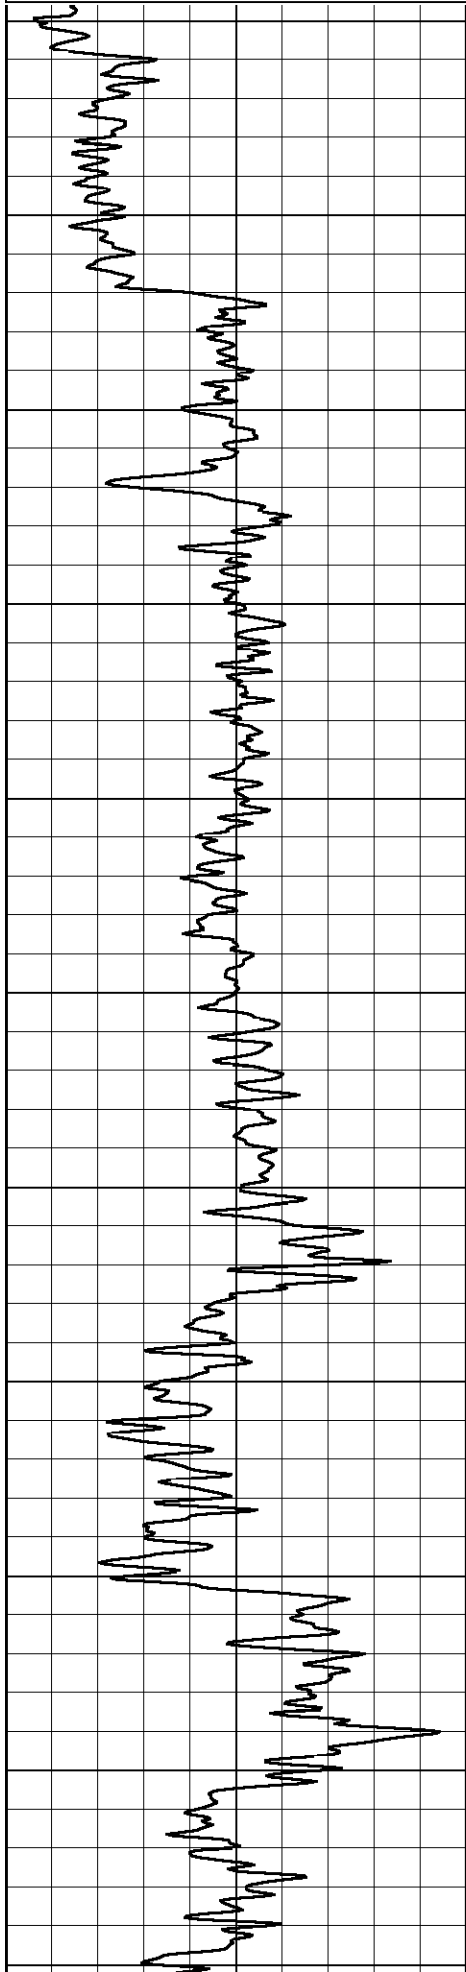


0
50
100
150
200
250
300
350
400
450
500


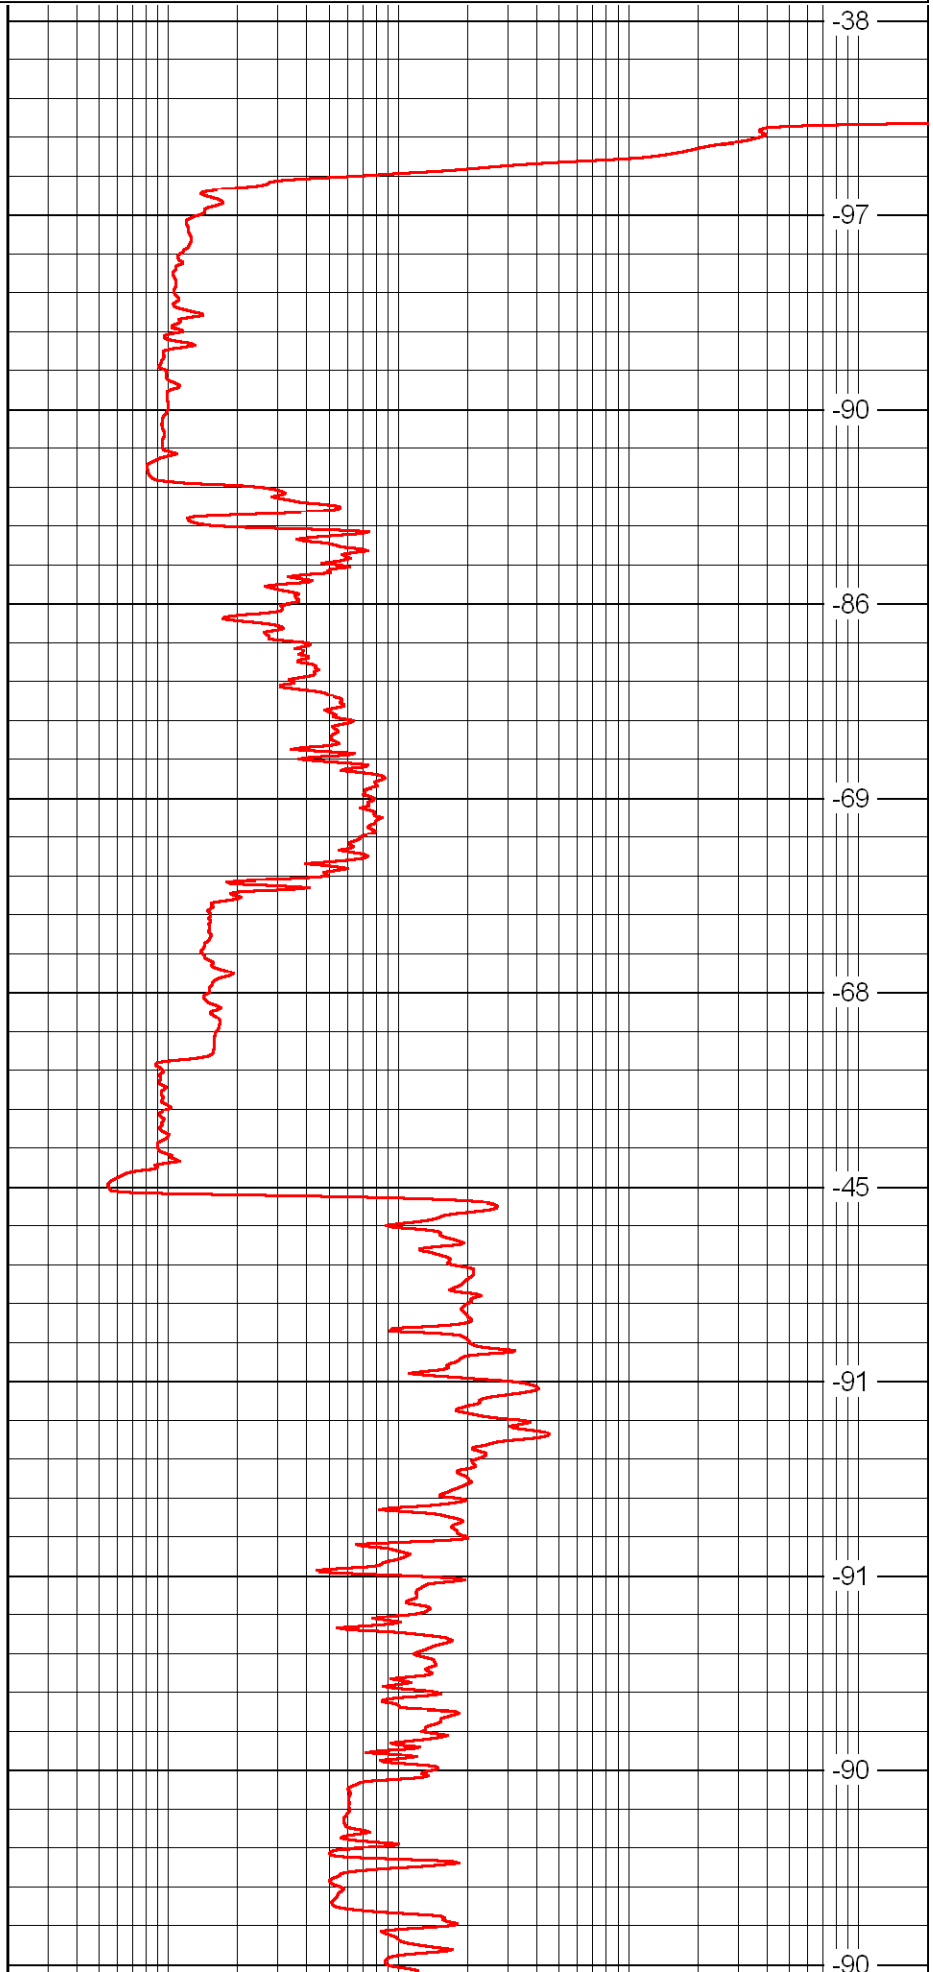


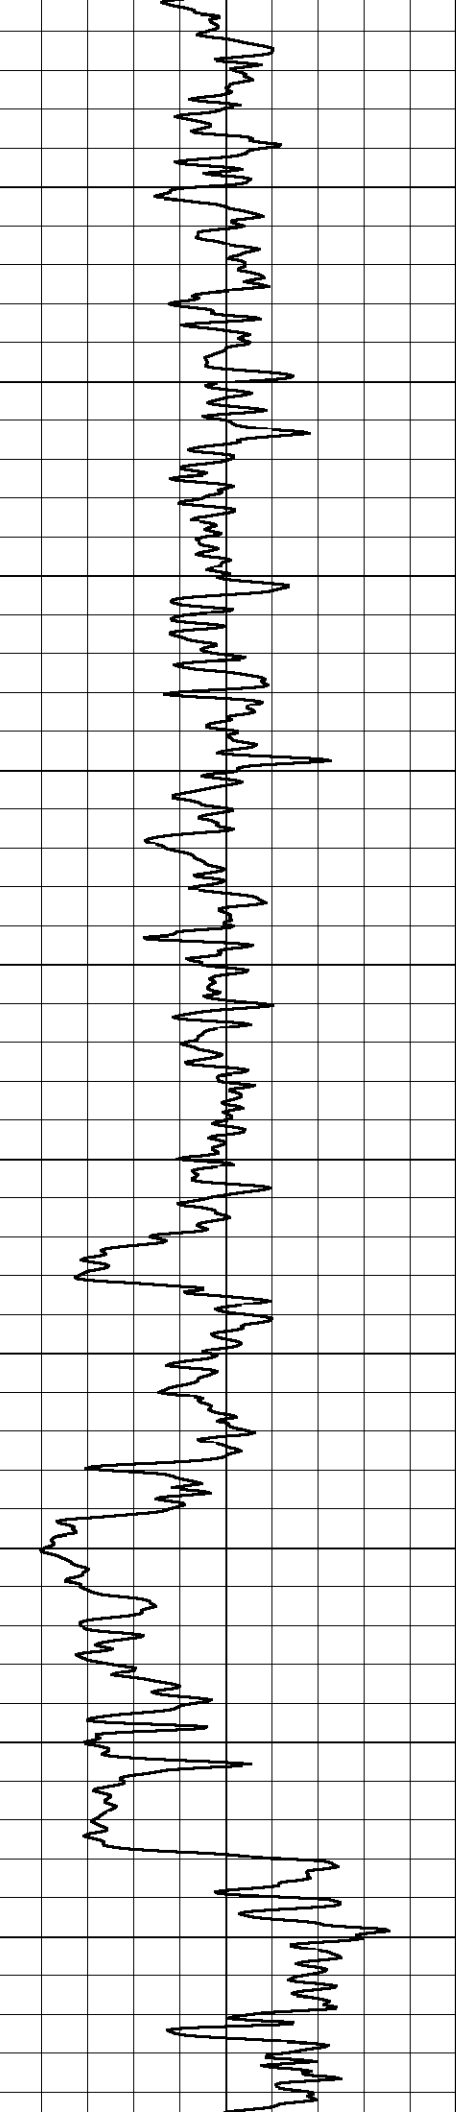


500
550
600
650
700
750
800
850
900
950
1000

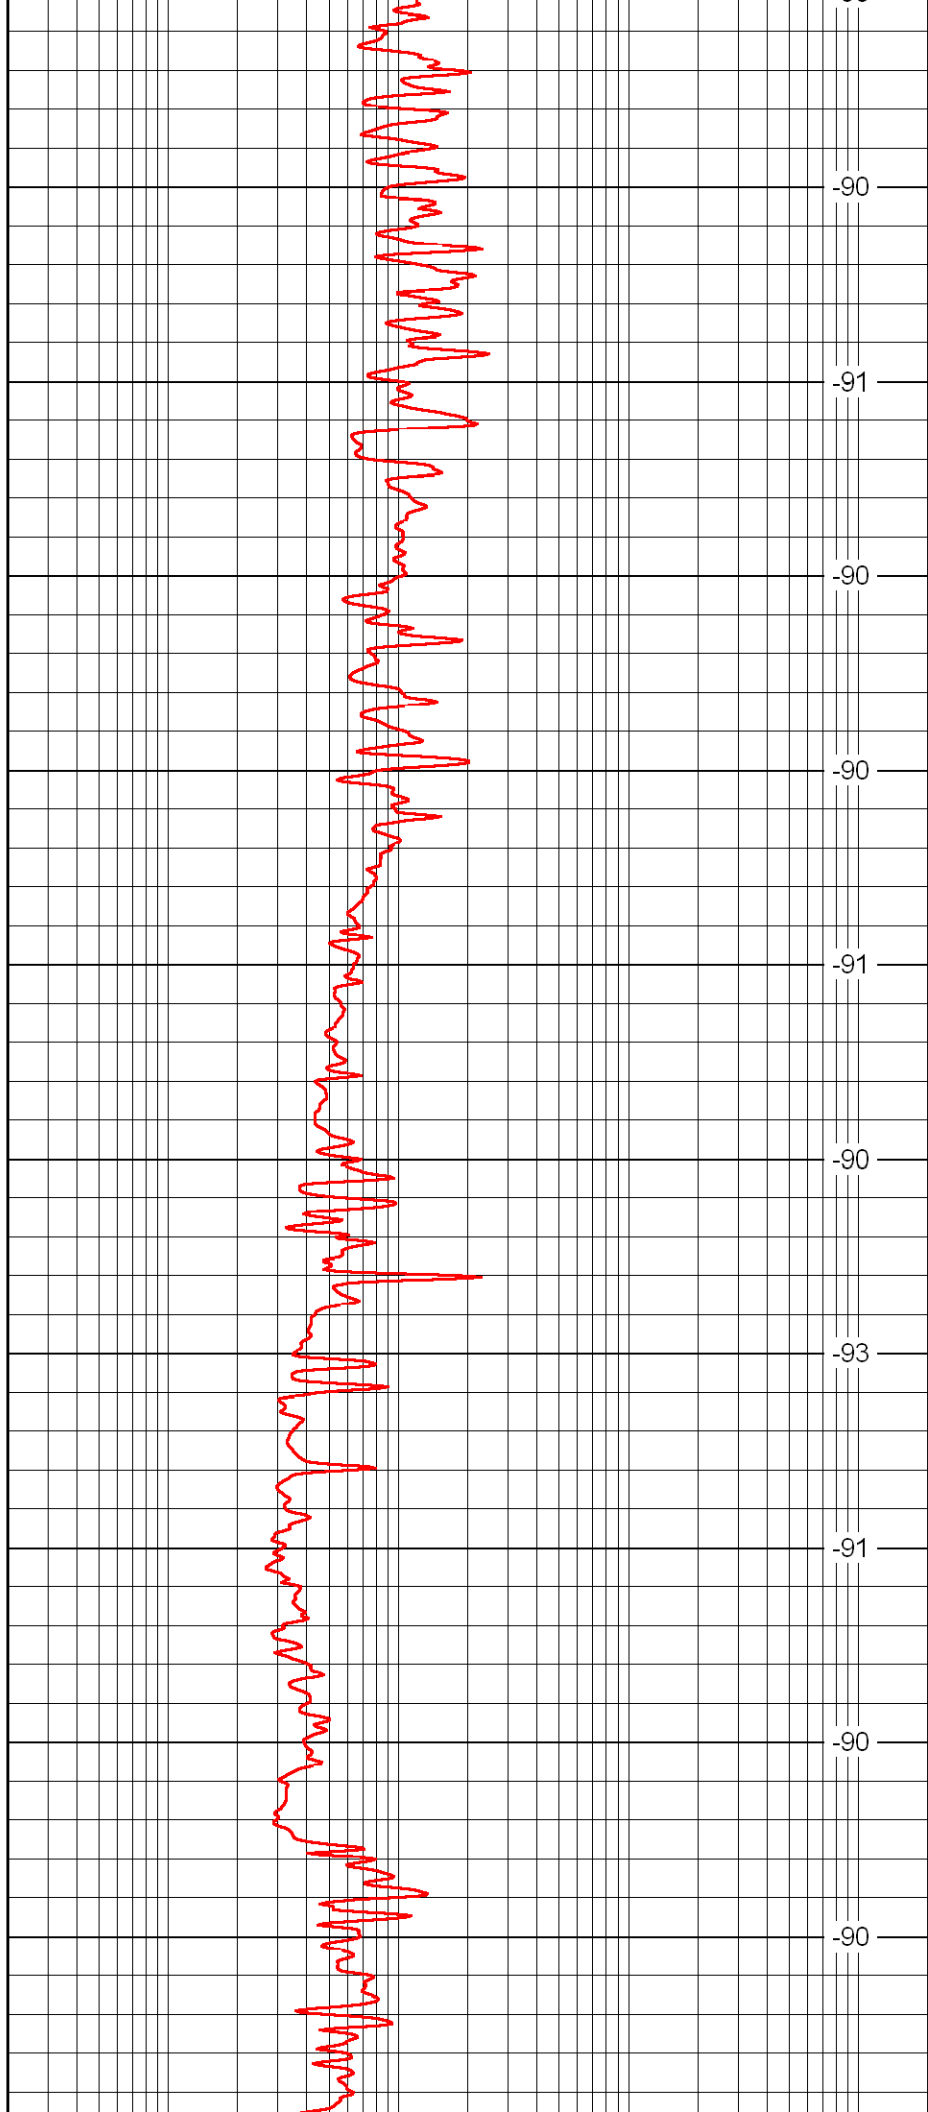

-90
-91
-90
-90
-91
-90
-93
-91
-90
-90

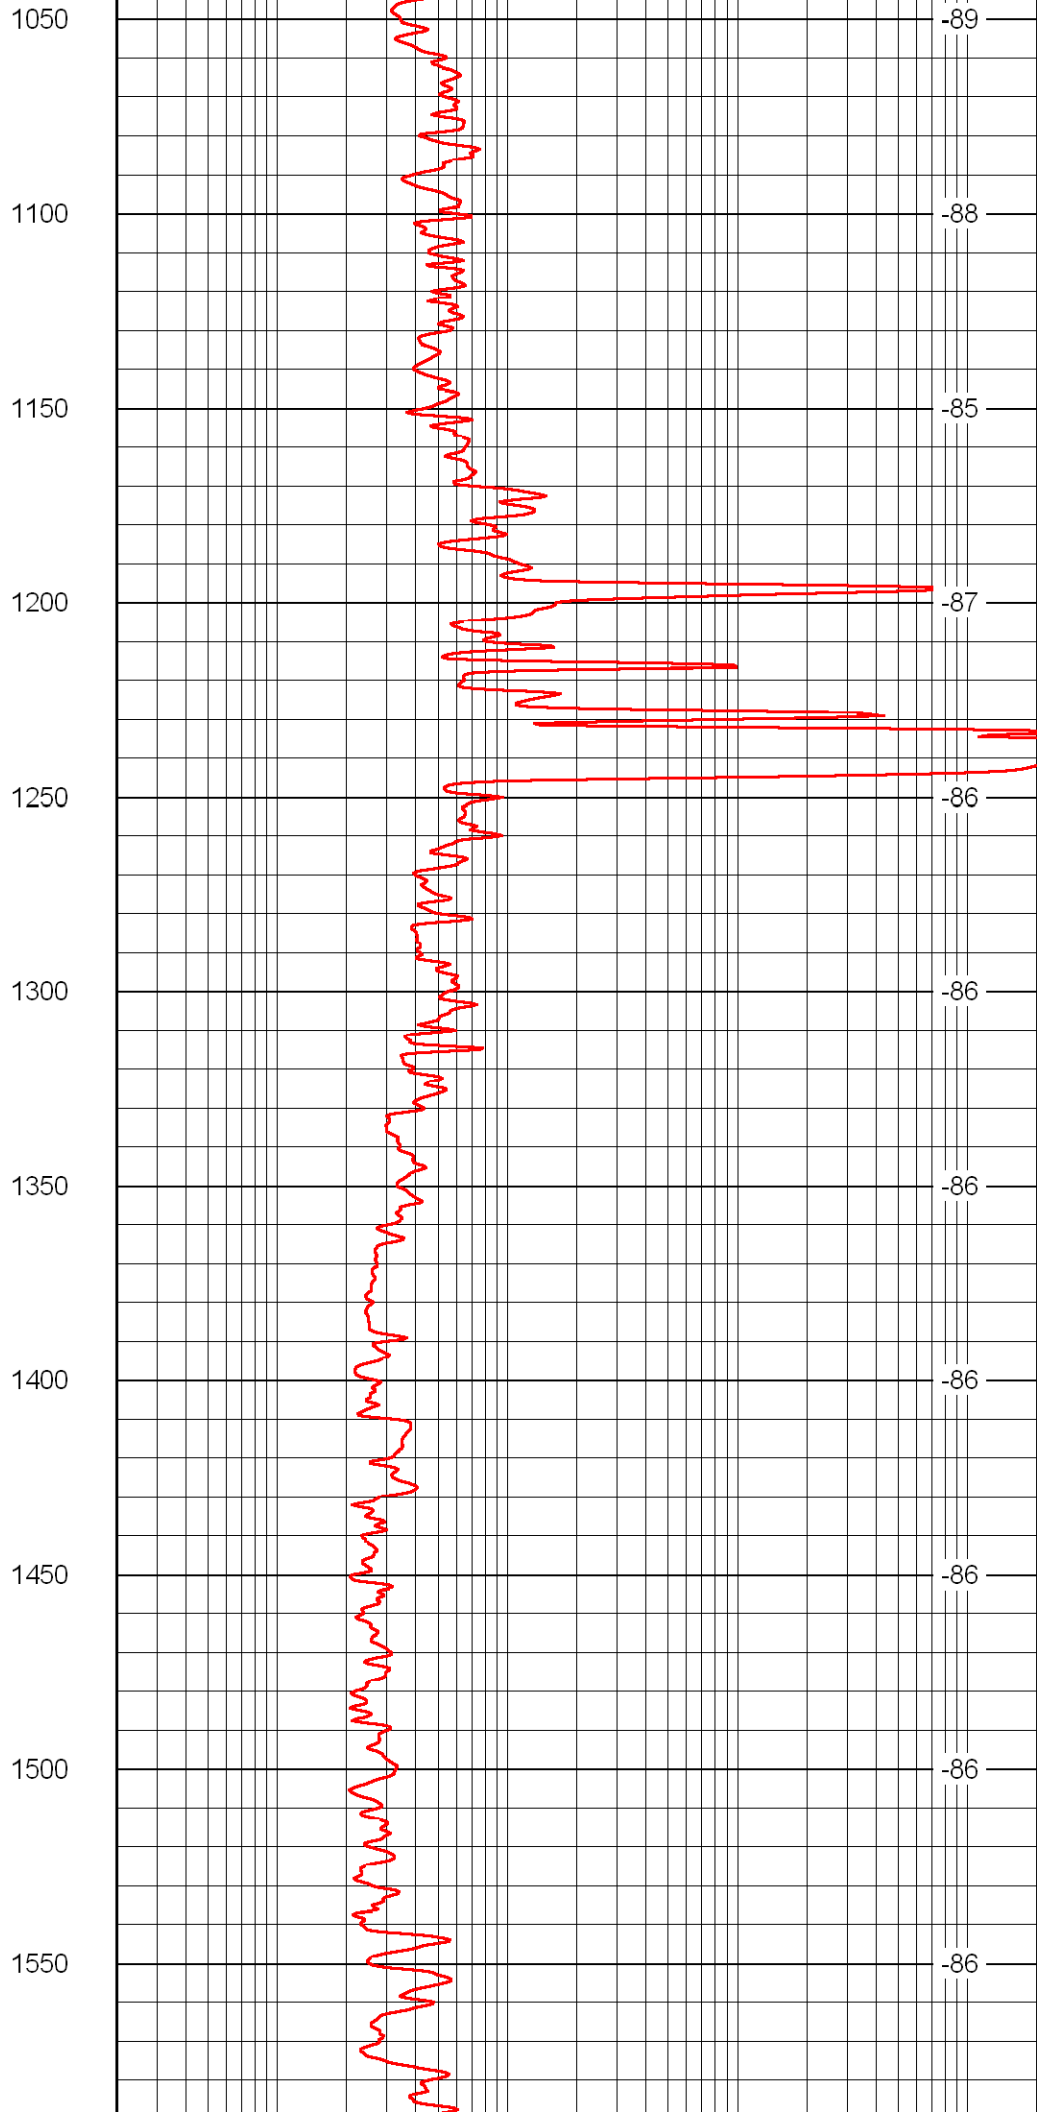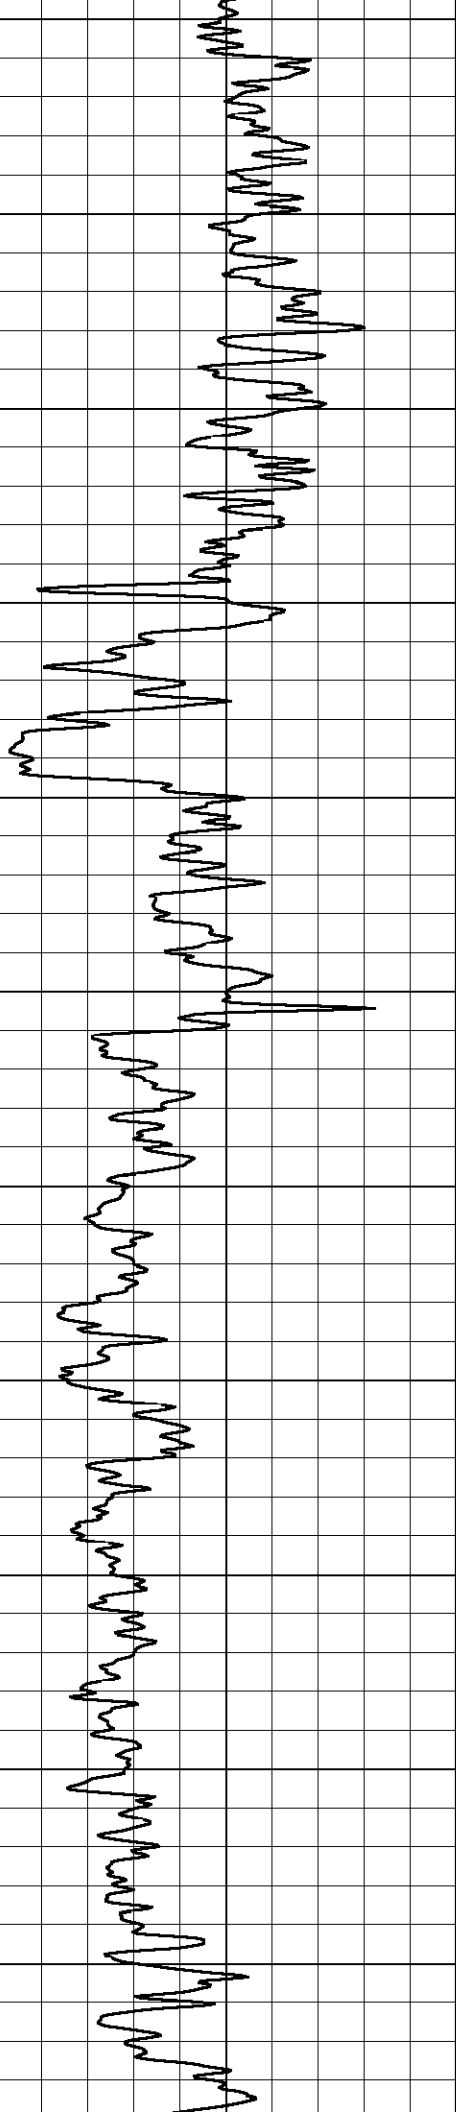

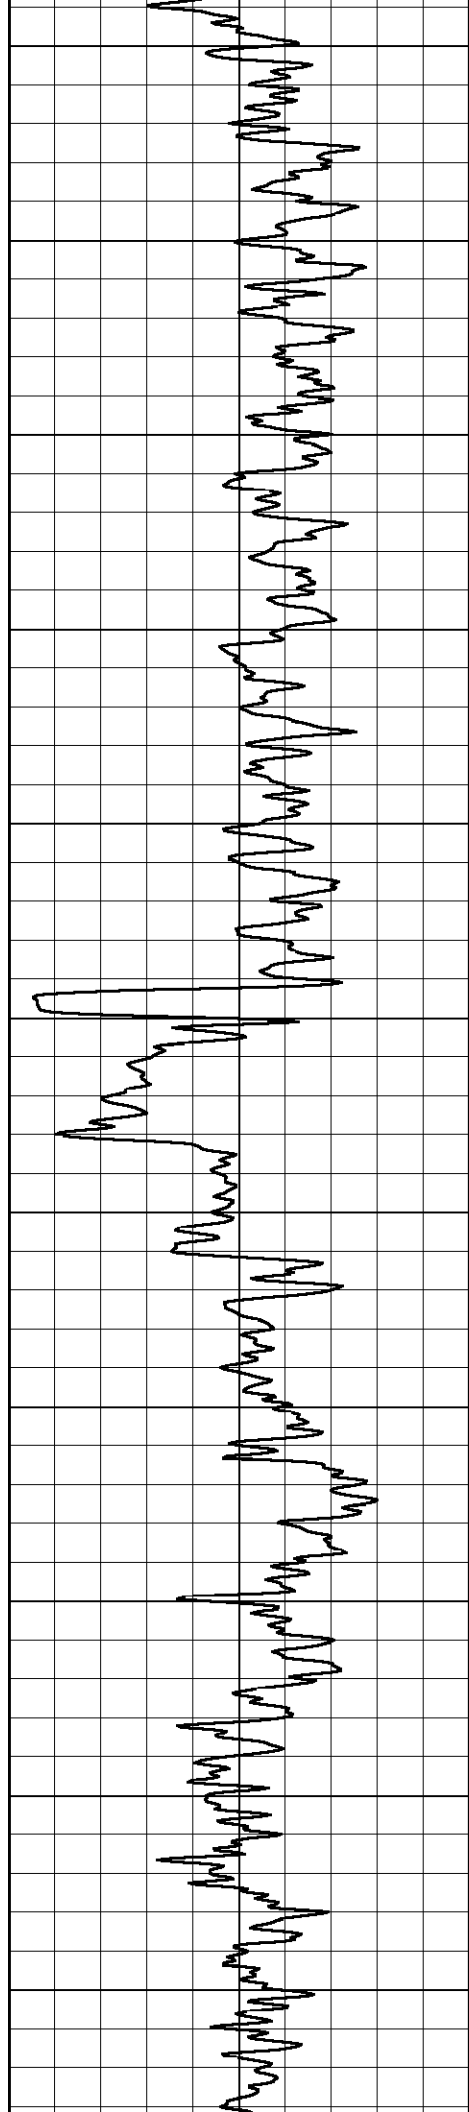

1600

1650

1700

1750

1800

1850


1900

1950

2000

2050

2100

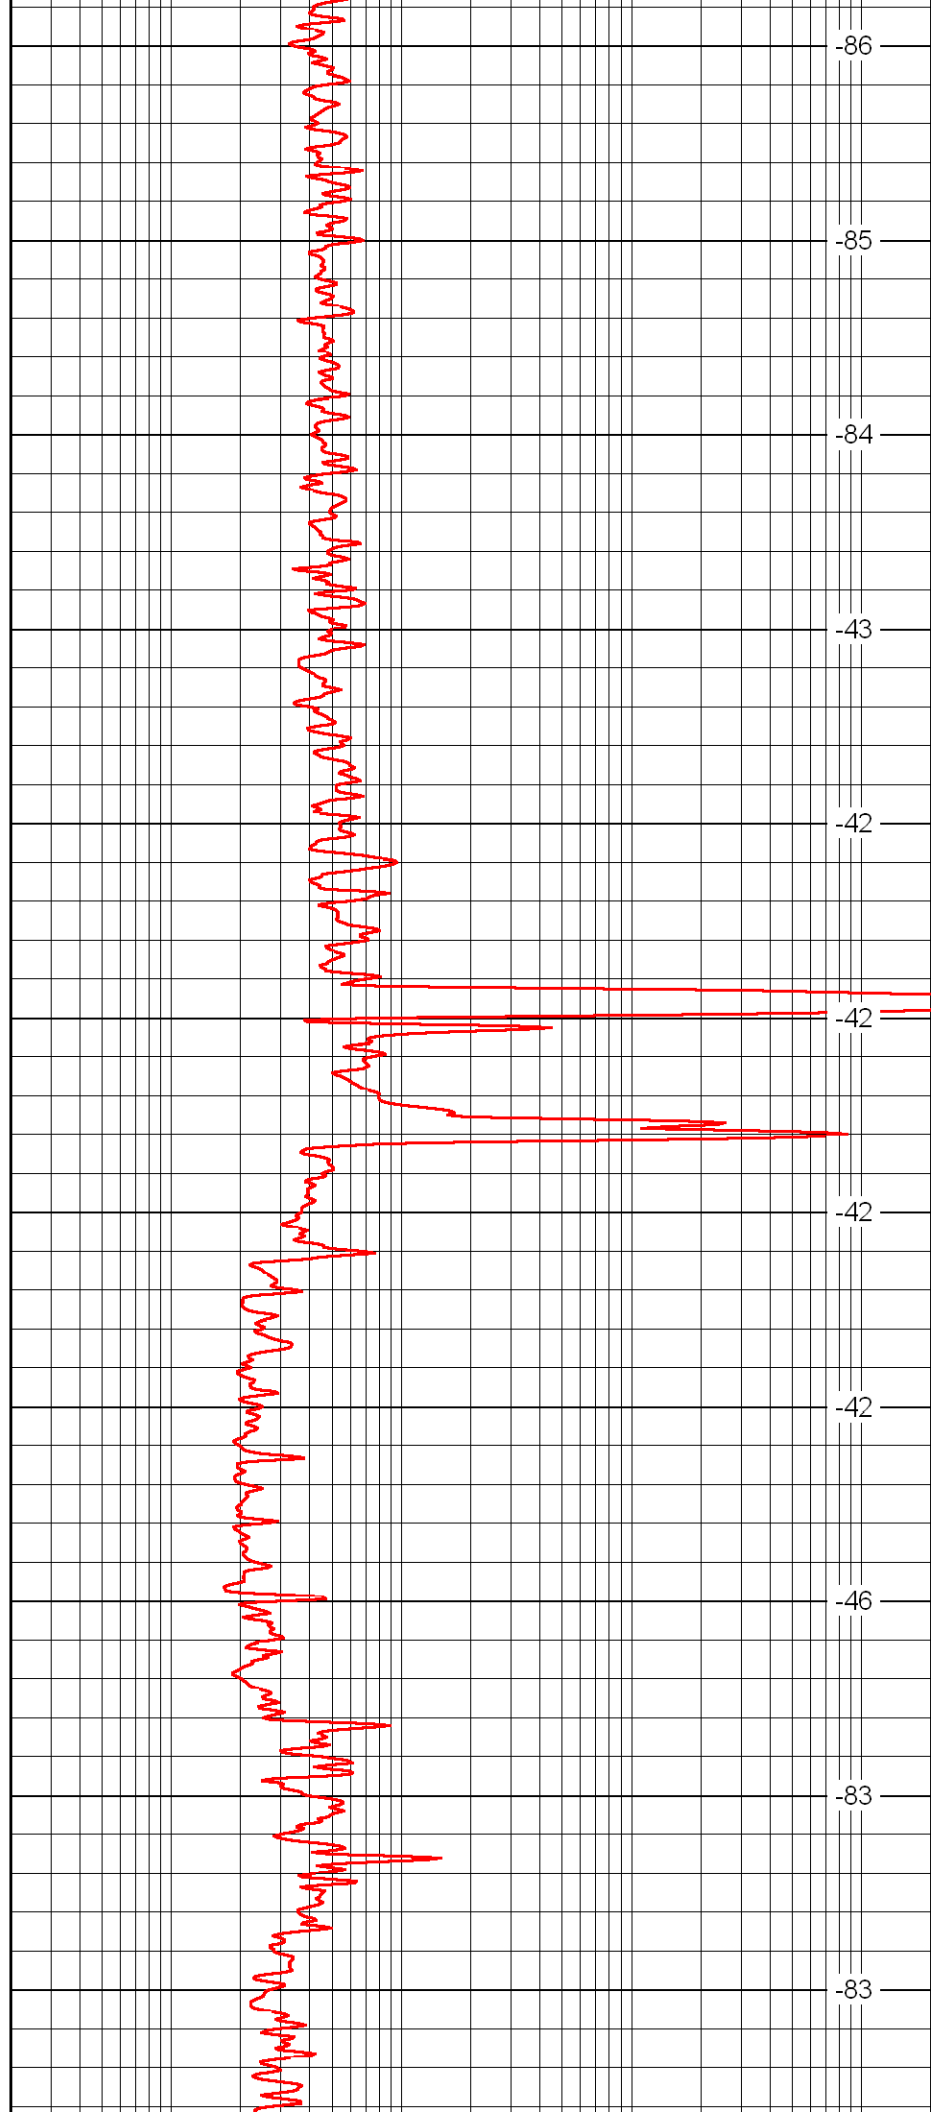

-86

-85

-84

-43

-42

-42


-42

-42

-46

-83

-83

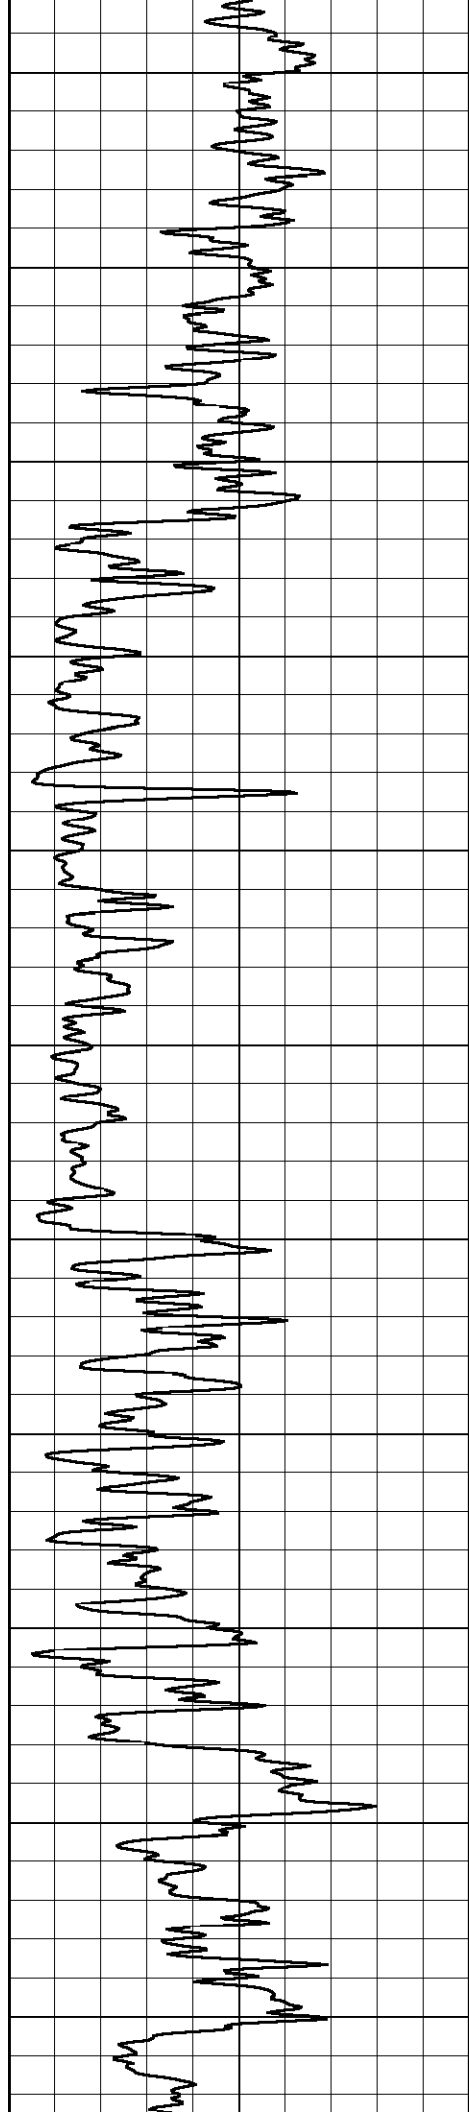

2150

2200

2250

2300

2350

2400


2450

2500

2550

2600

2650

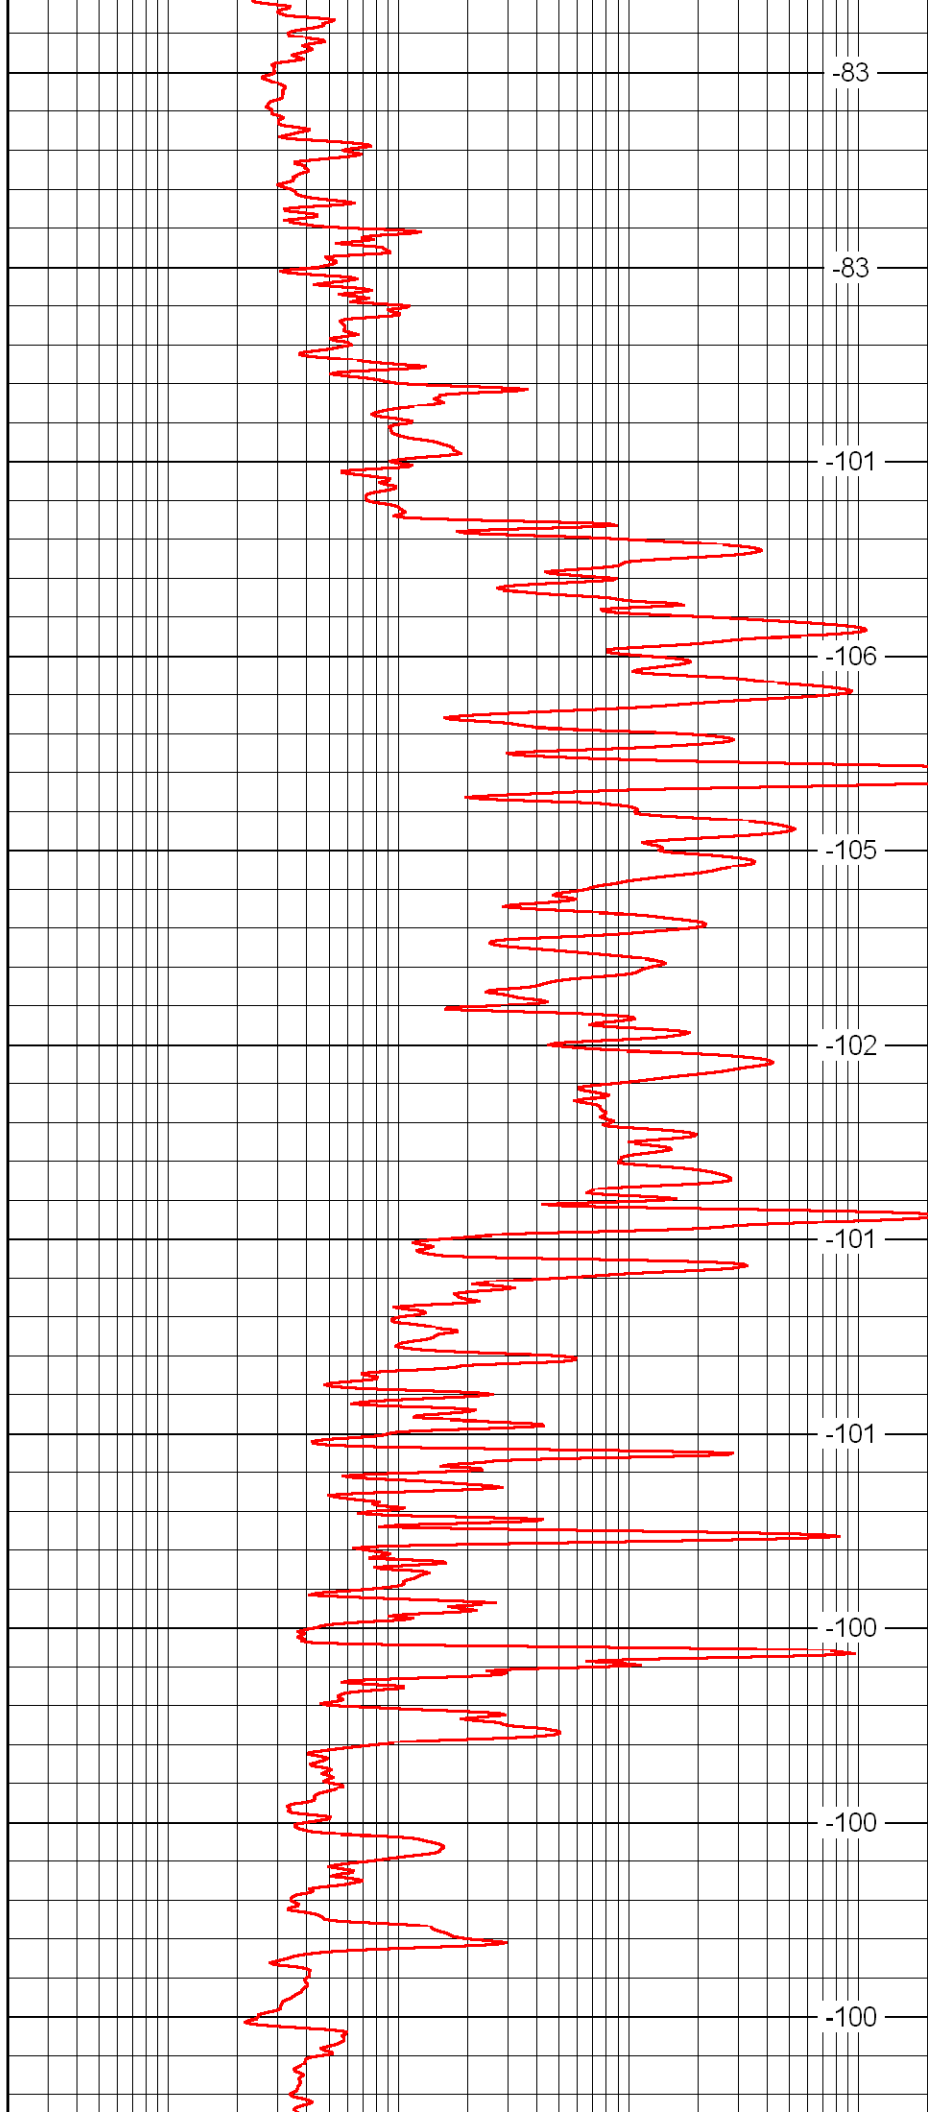

-83

-83

-101

-106

-105

-102


-101

-101

-100

-100

-100

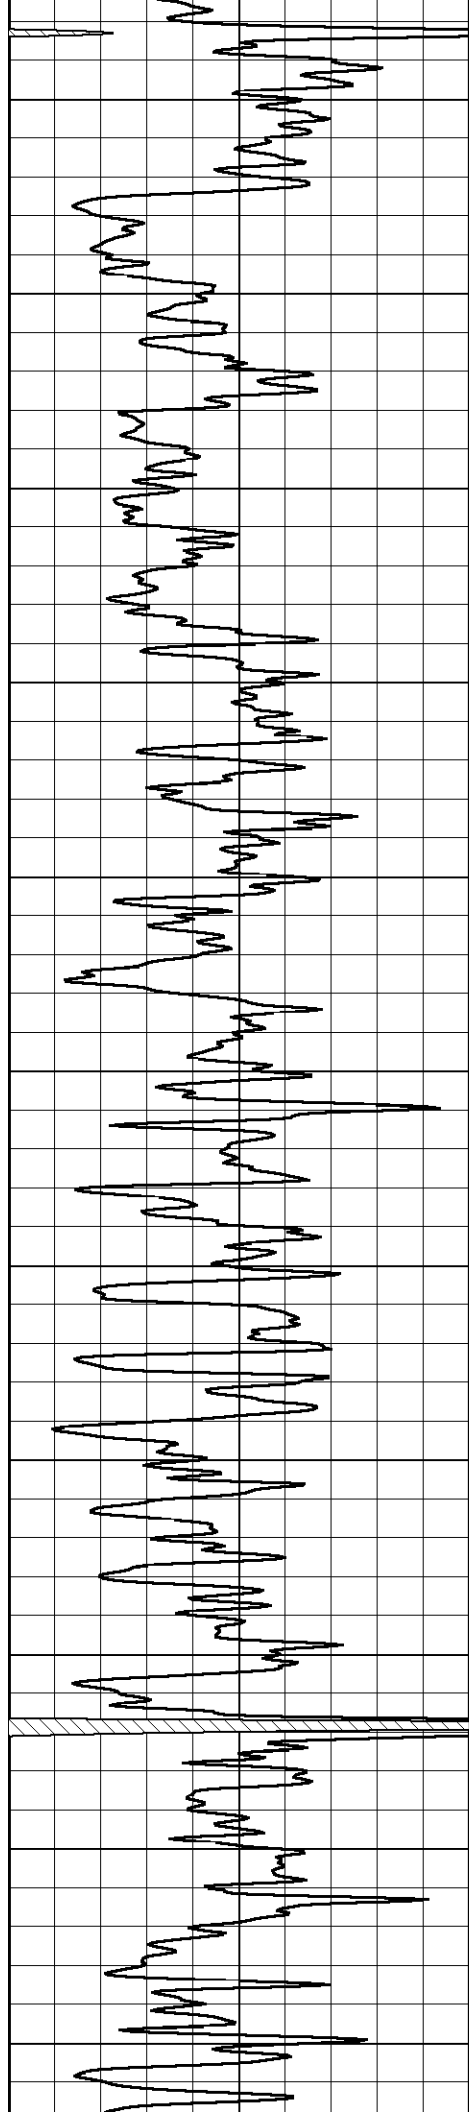

2700

2750

2800

2850

2900

2950


3000

3050

3100

3150

3200

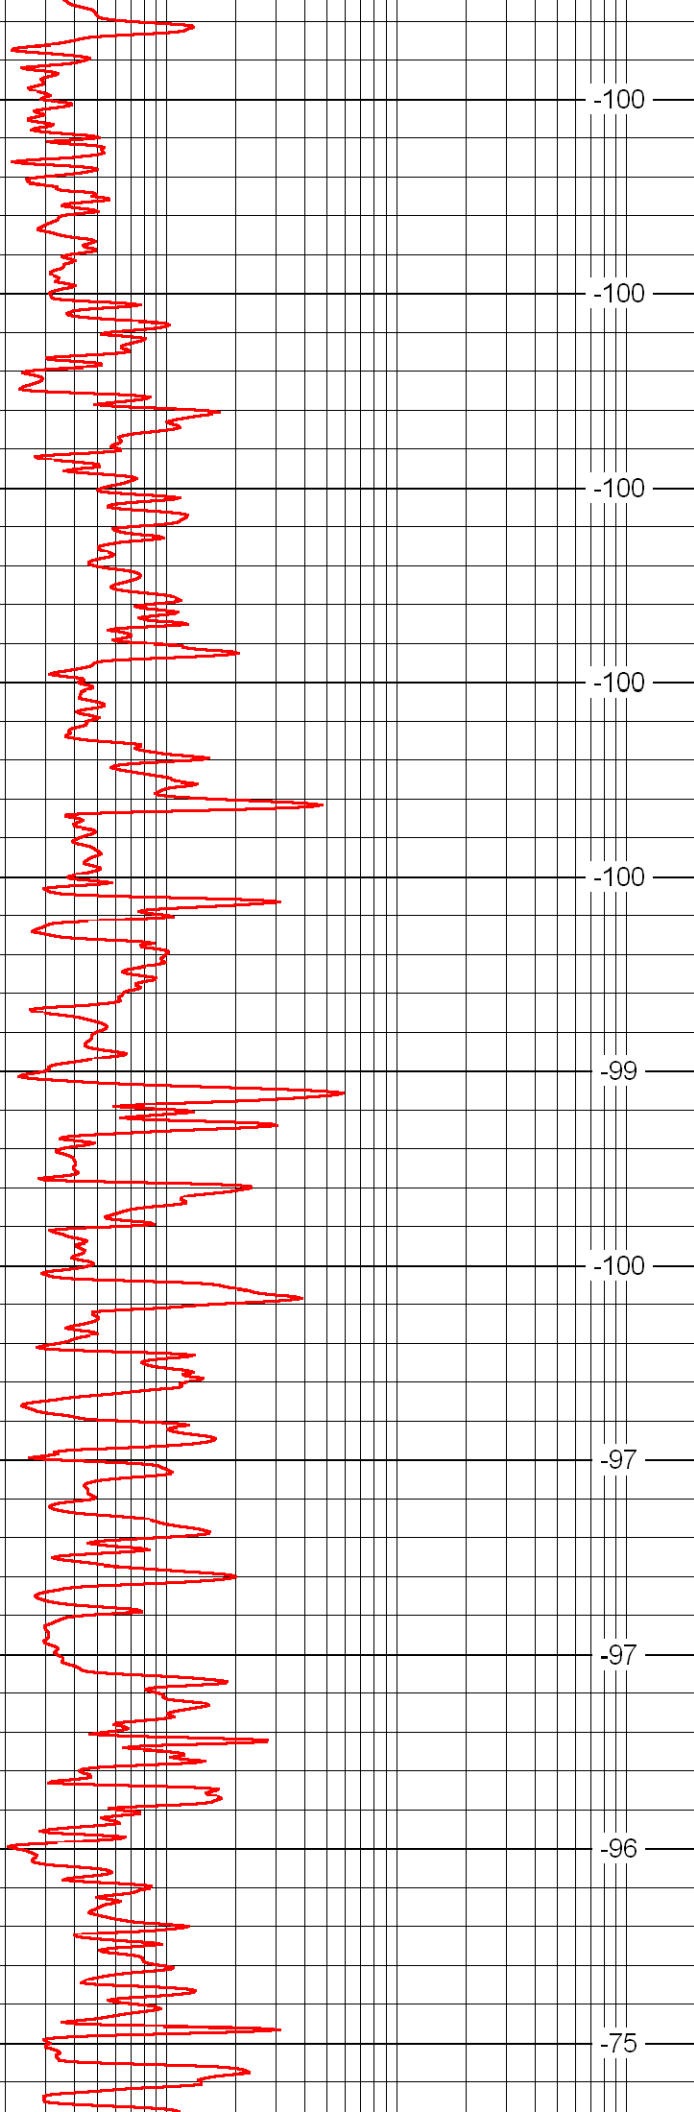

-100

-100

-100

-100

-100

-99


-100

-97

-97

-96

-75

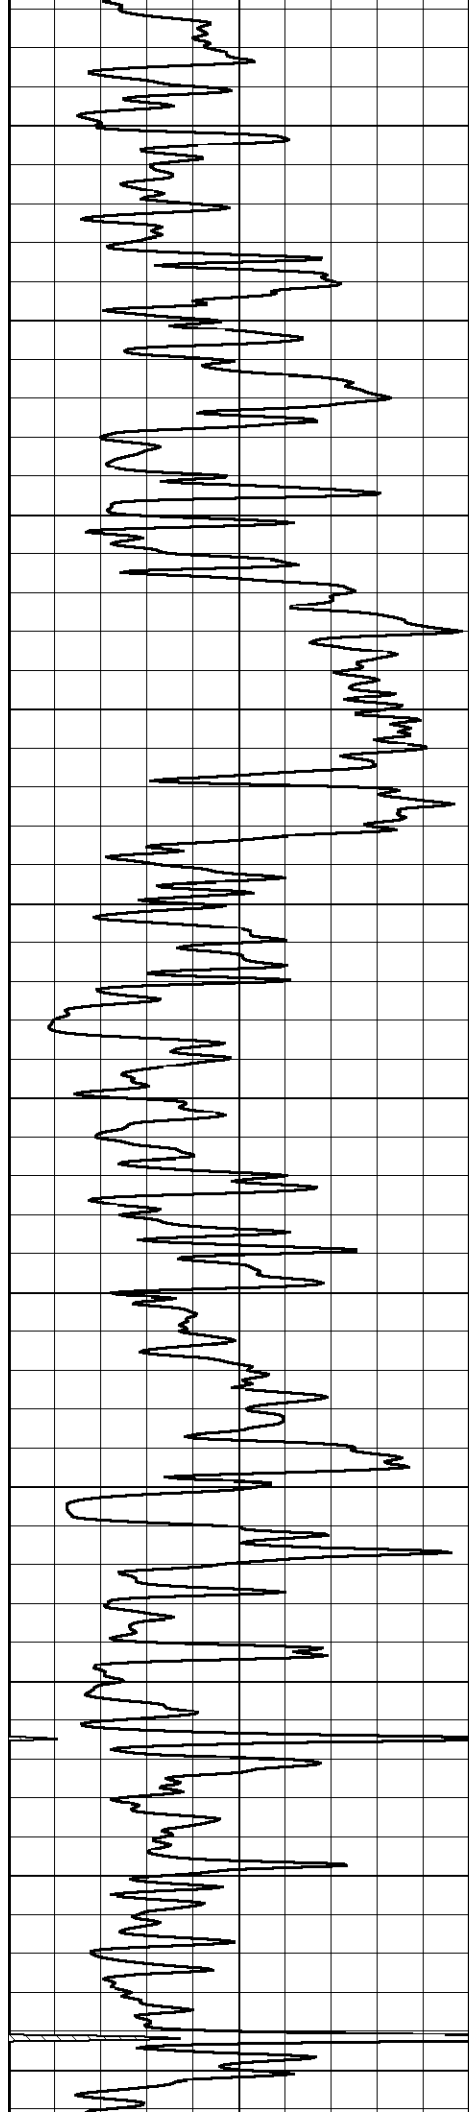

3250

3300

3350

3400

3450

3500


3550

3600

3650

3700

3750

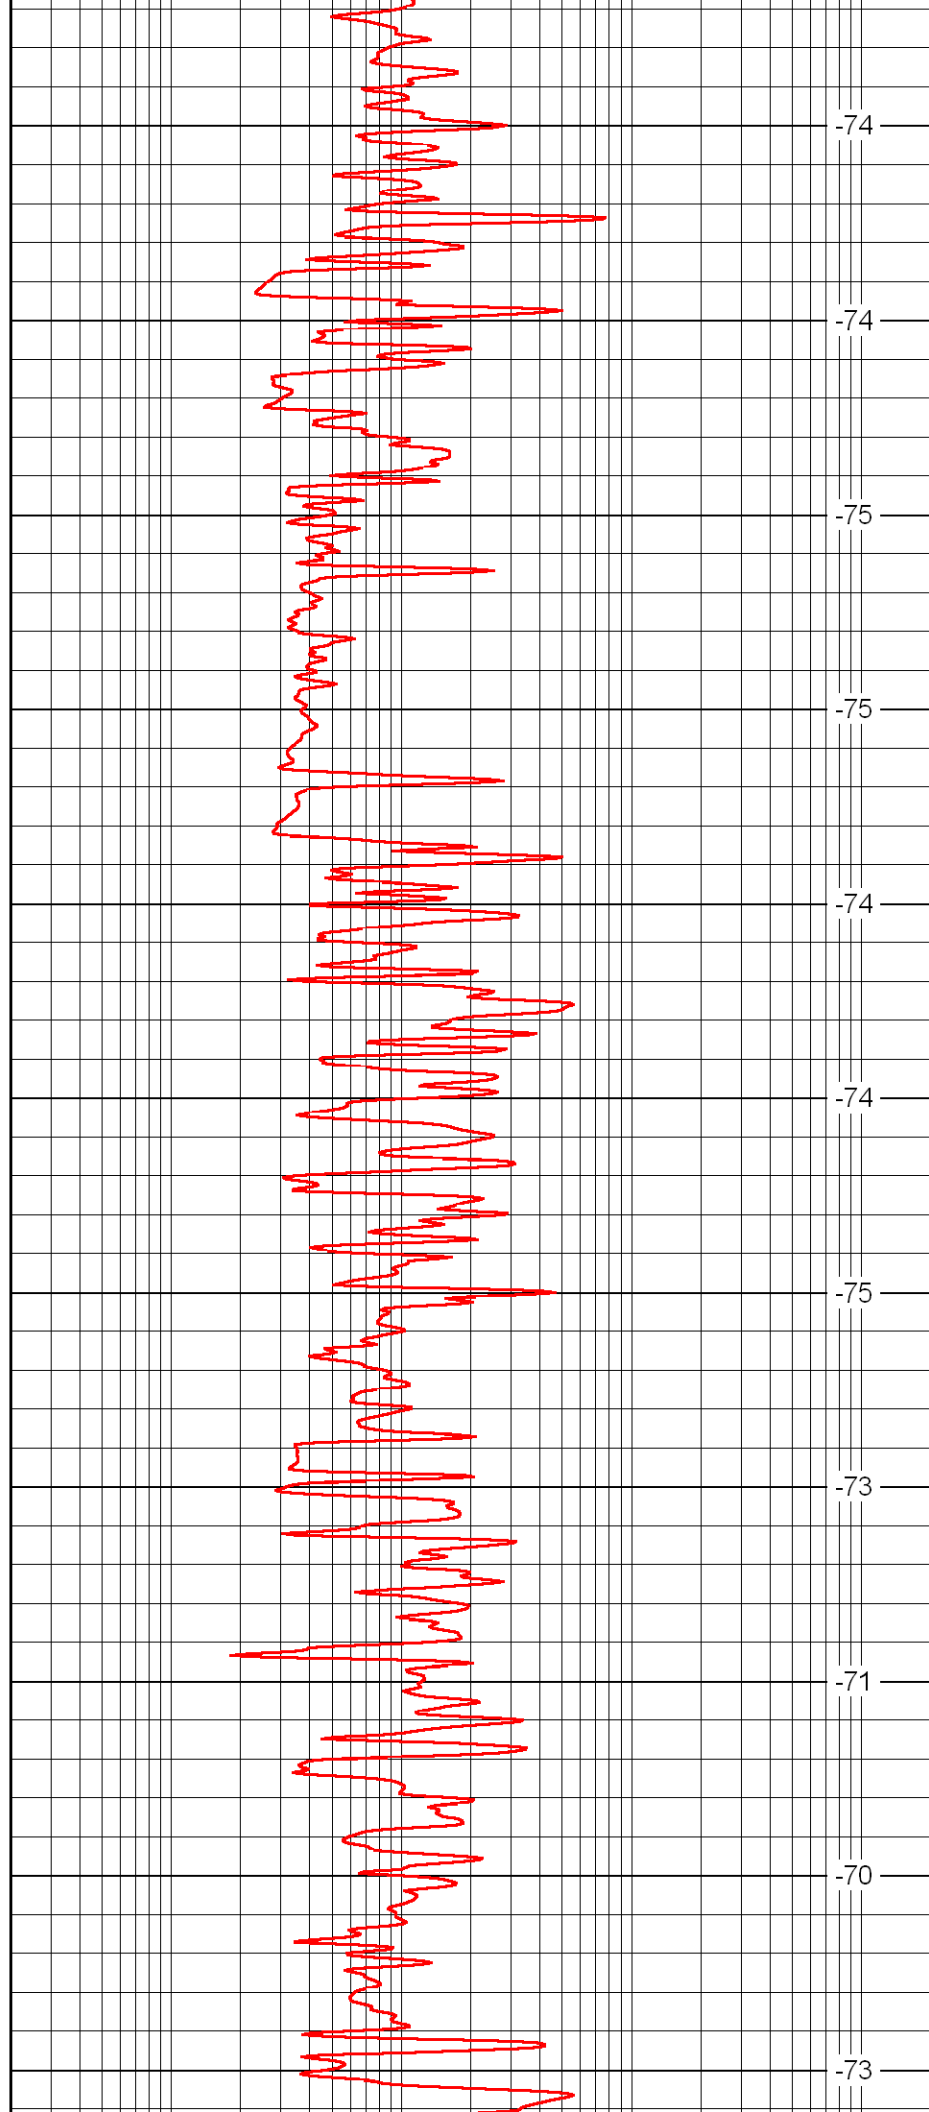

-74

-74

-75

-75

-74

-74


-75

-73

-71

-70

-73

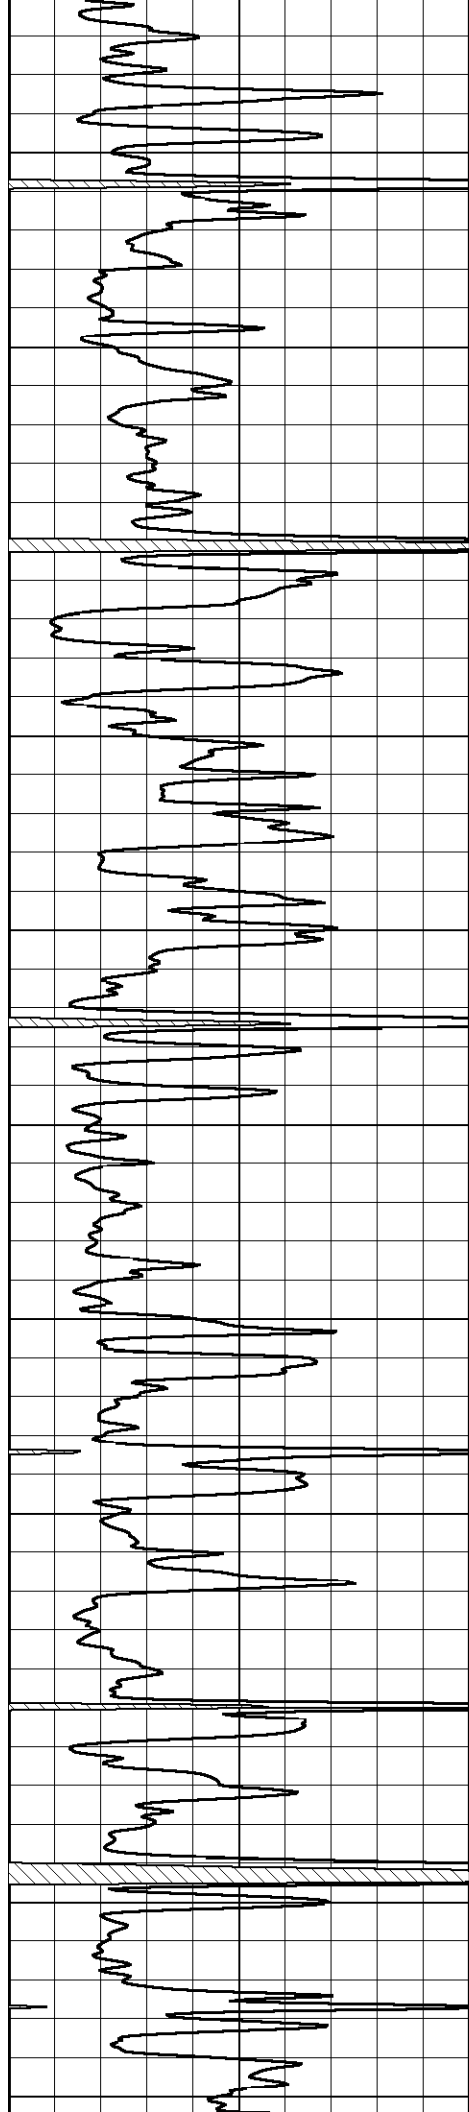

3800

3850

3900

3950

4000

4050


4100

4150

4200

4250

4300

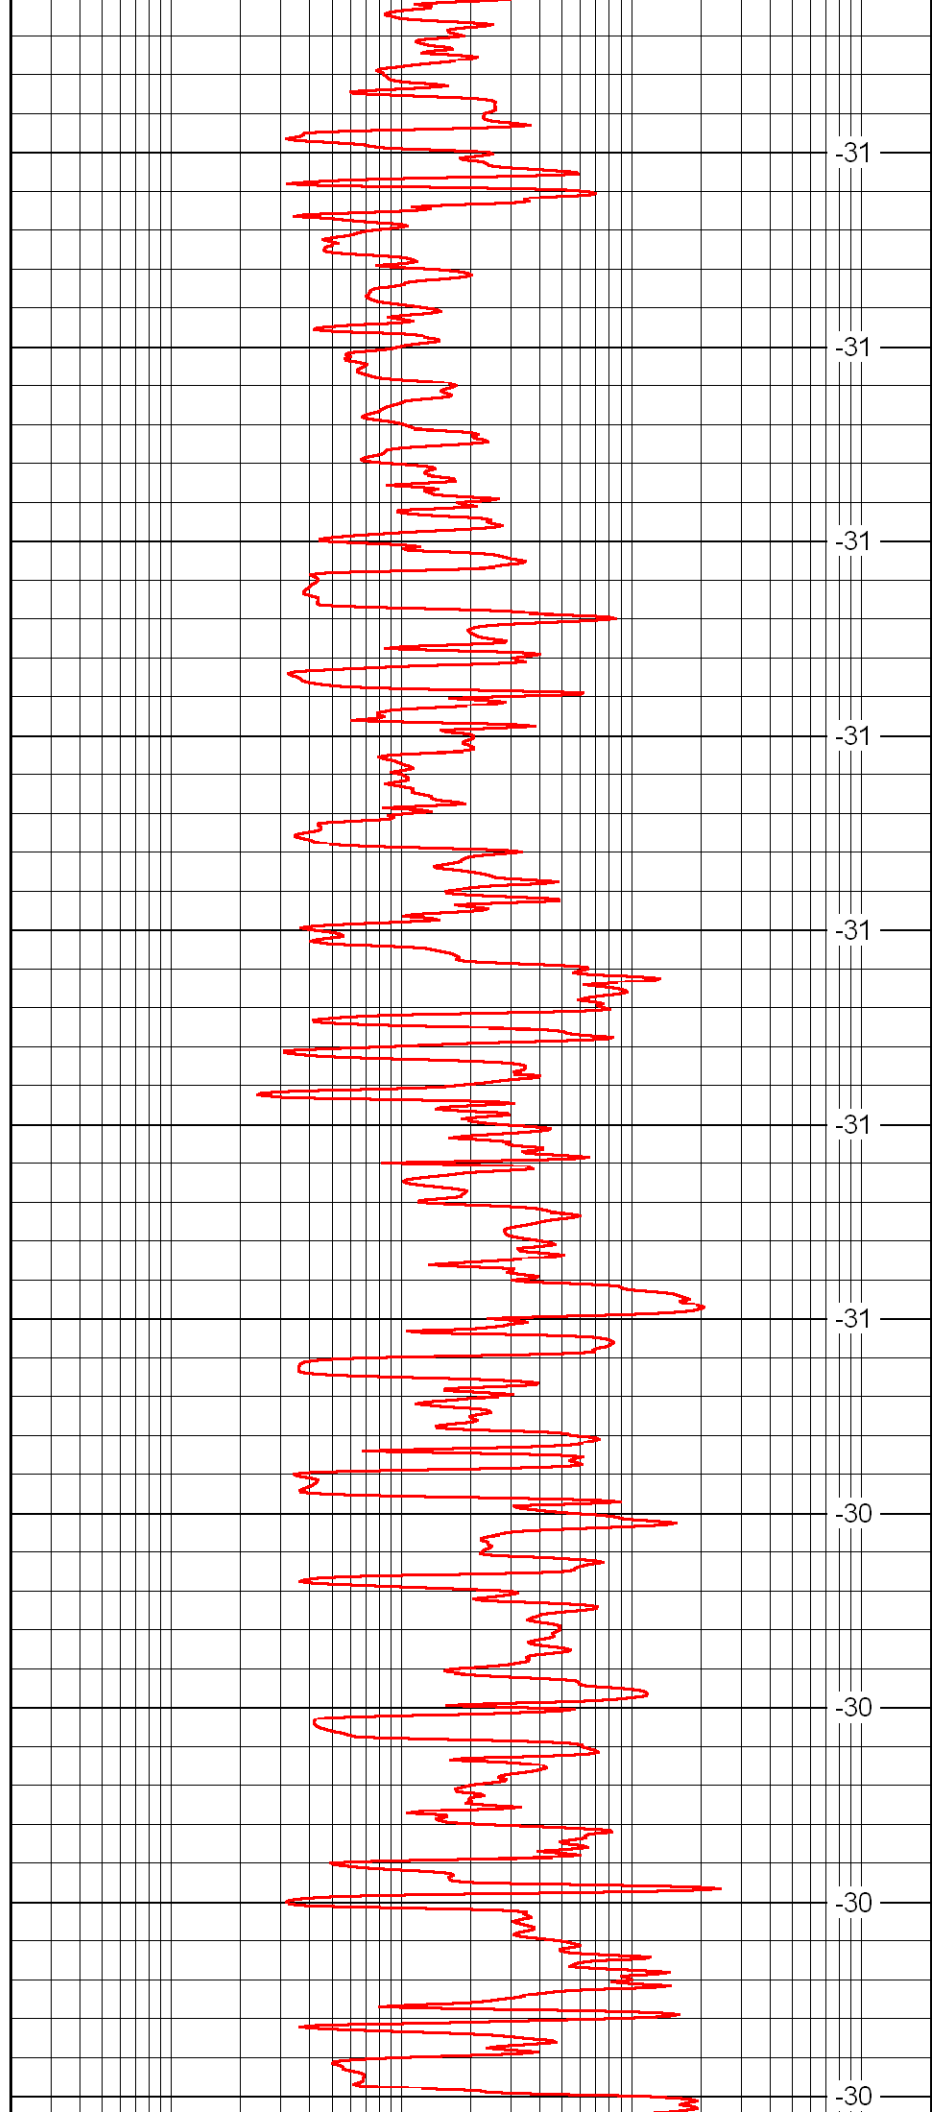

-31

-31

-31

-31

-31

-31




-31


-30

-30

-30

-30

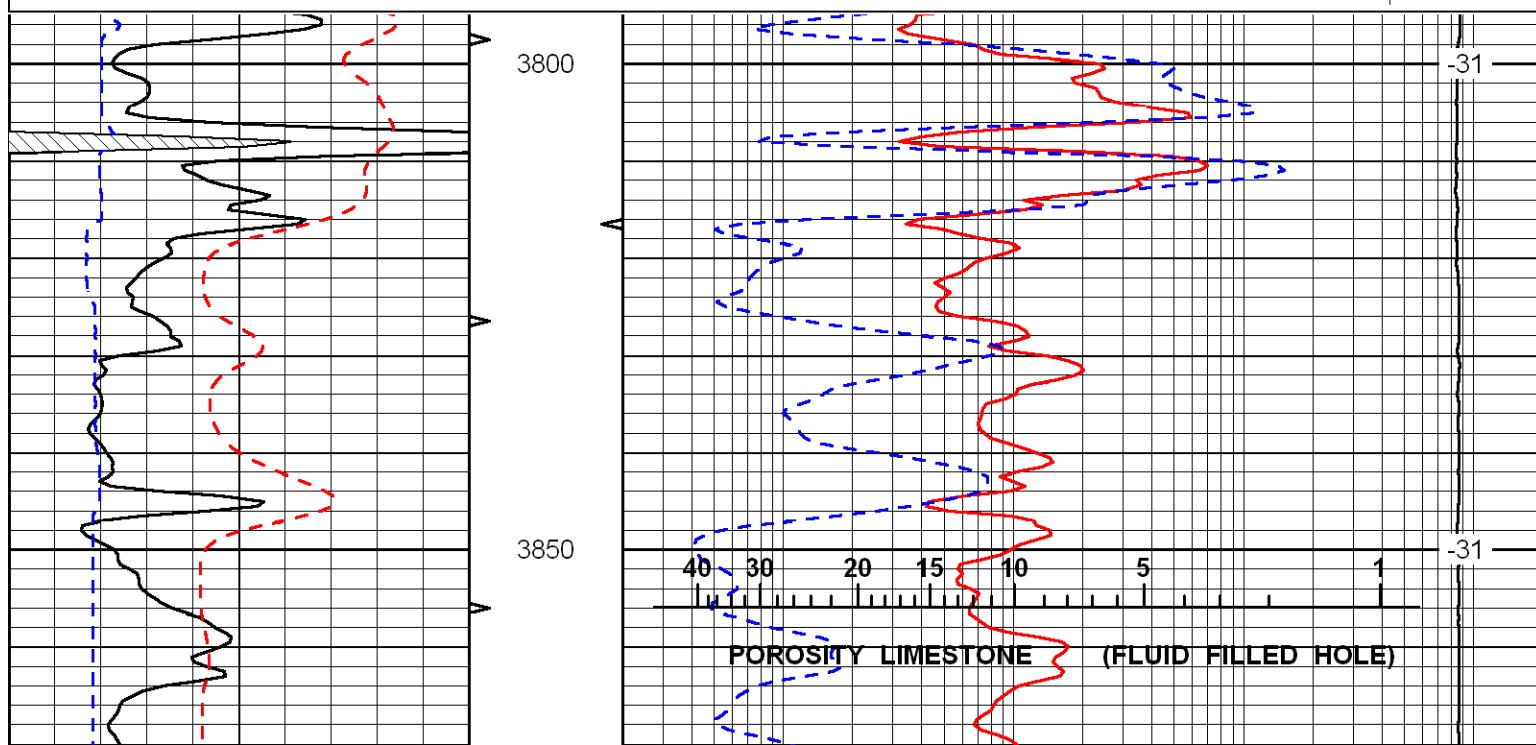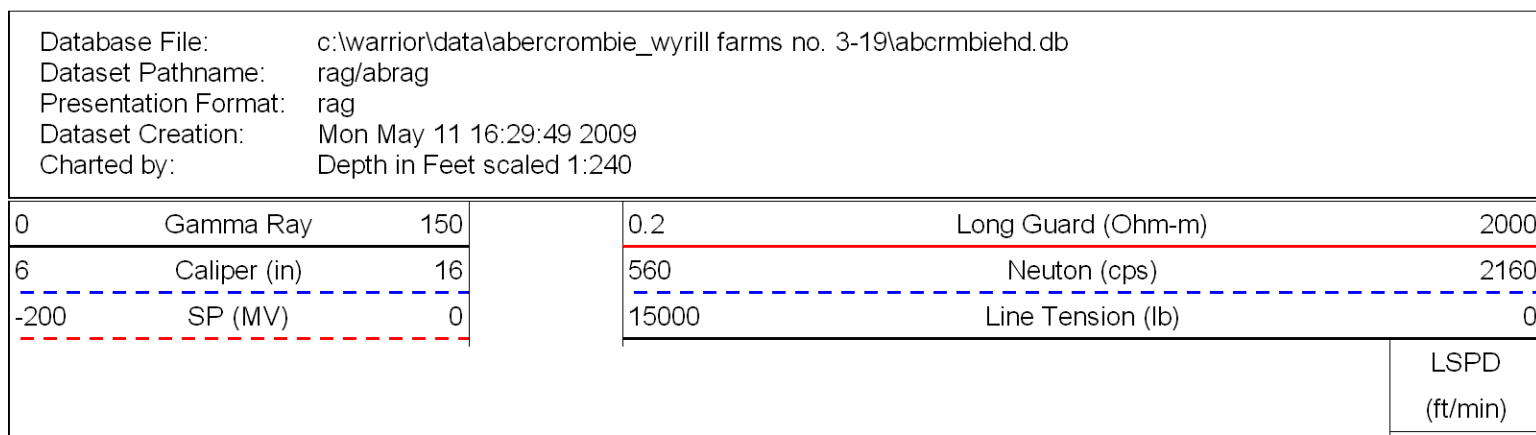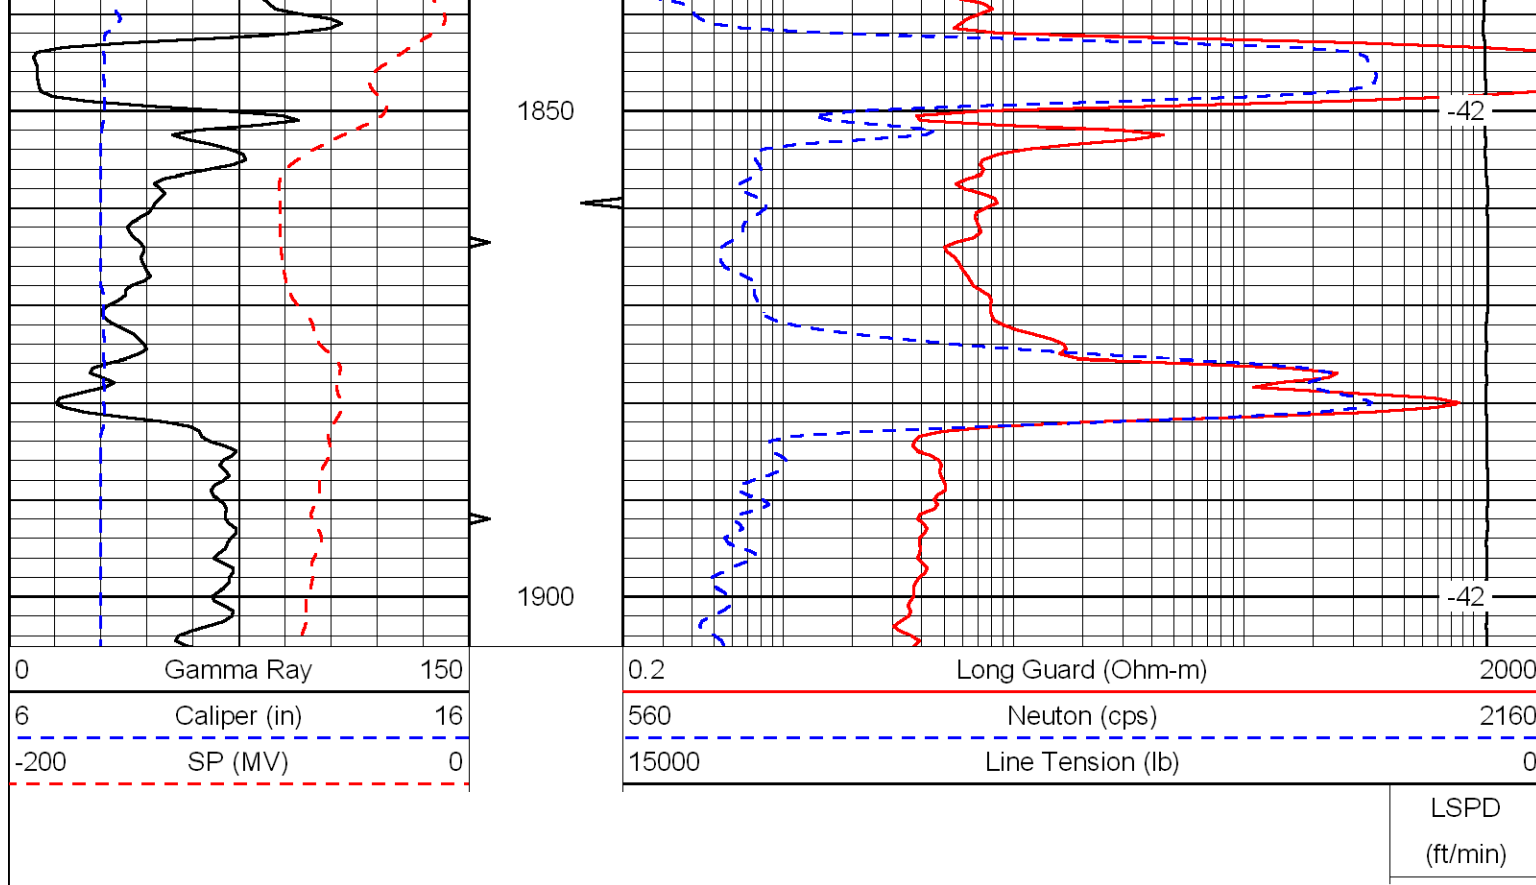

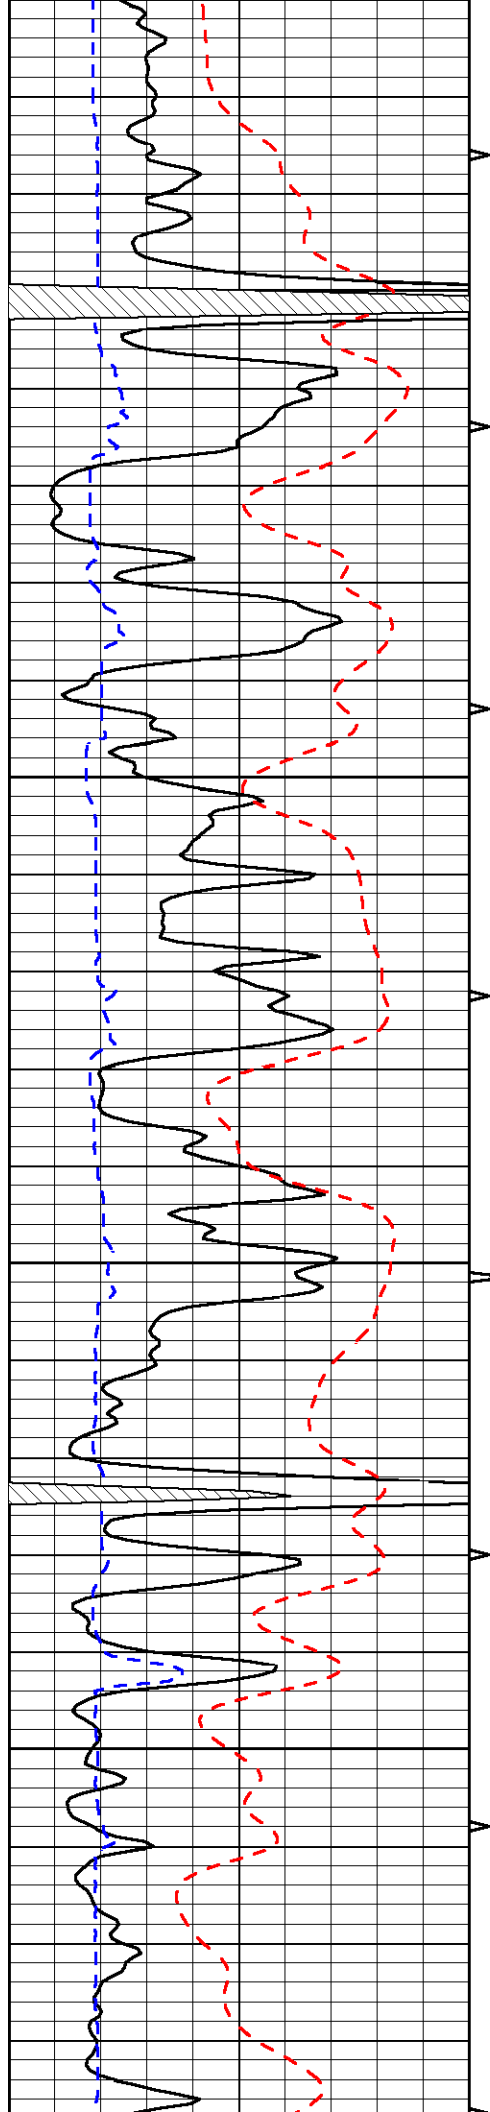


3900

3950

4000

4050

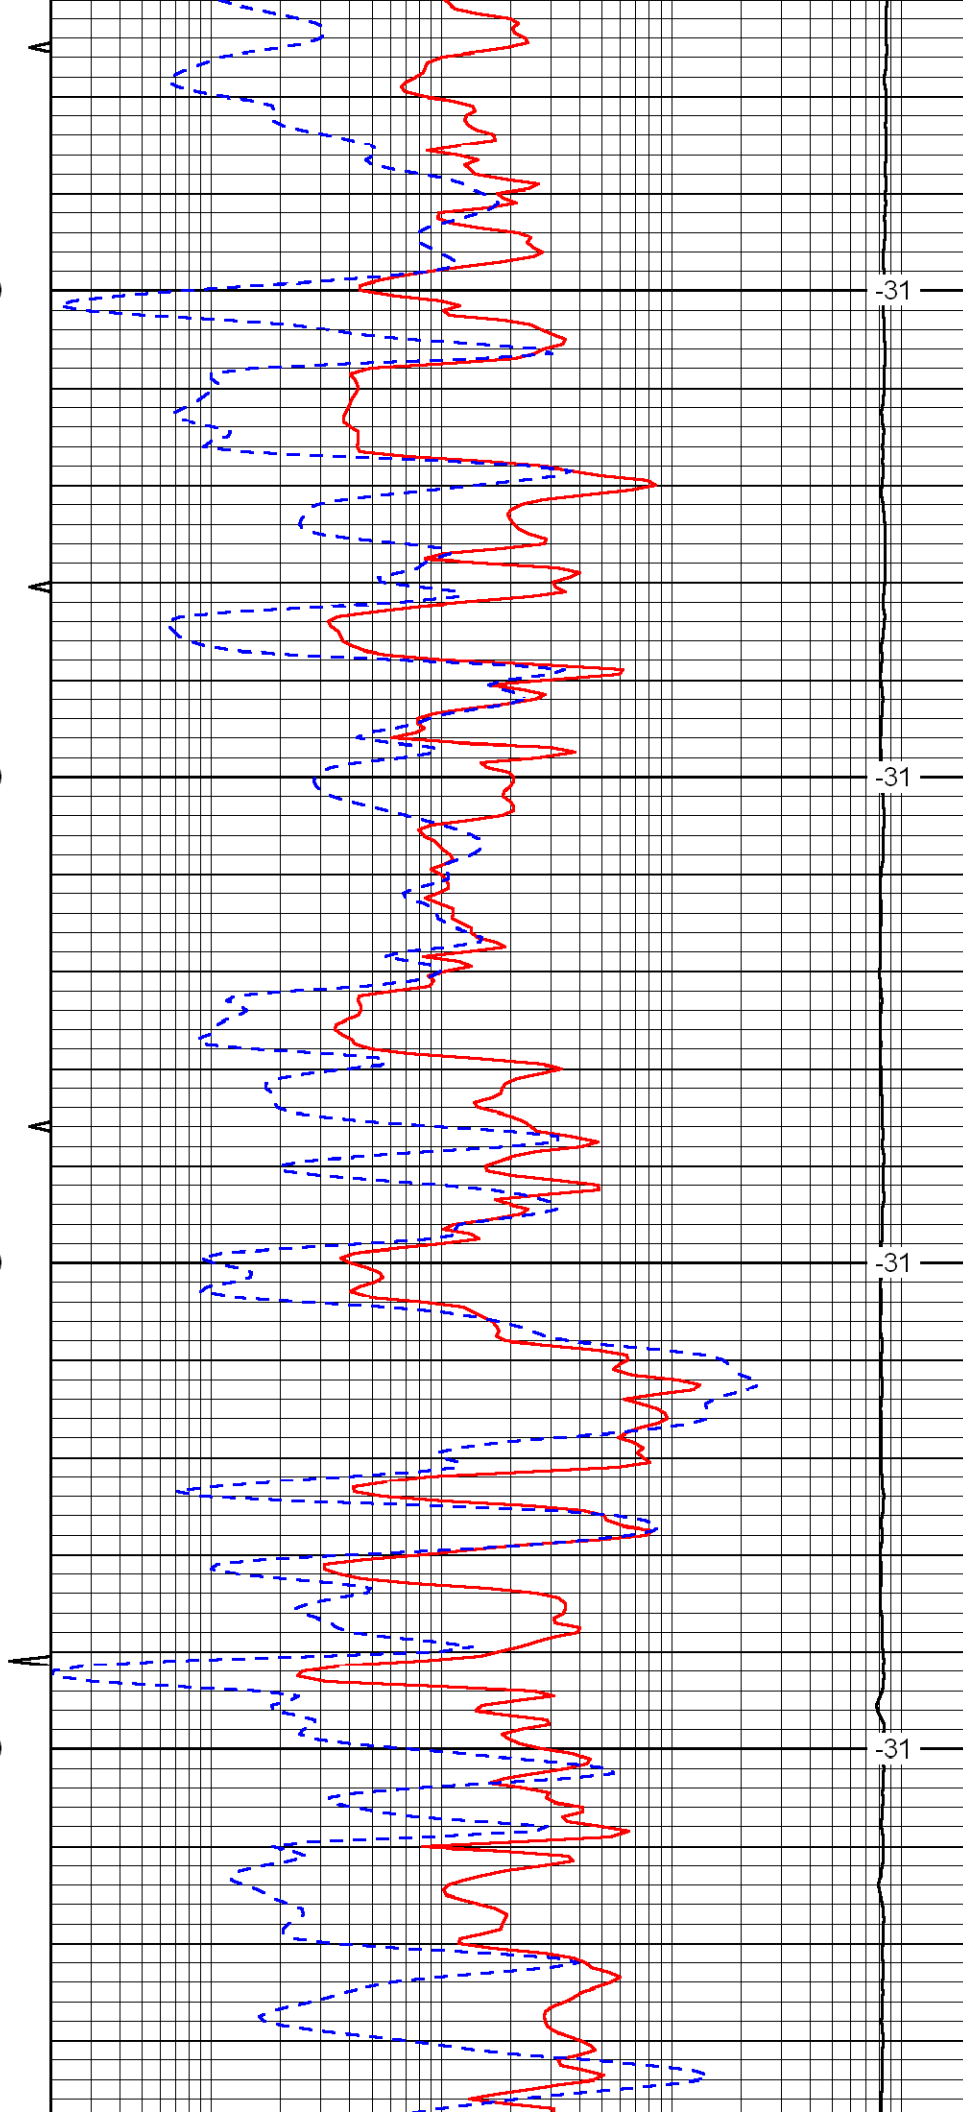



-31

-31

-31

-31

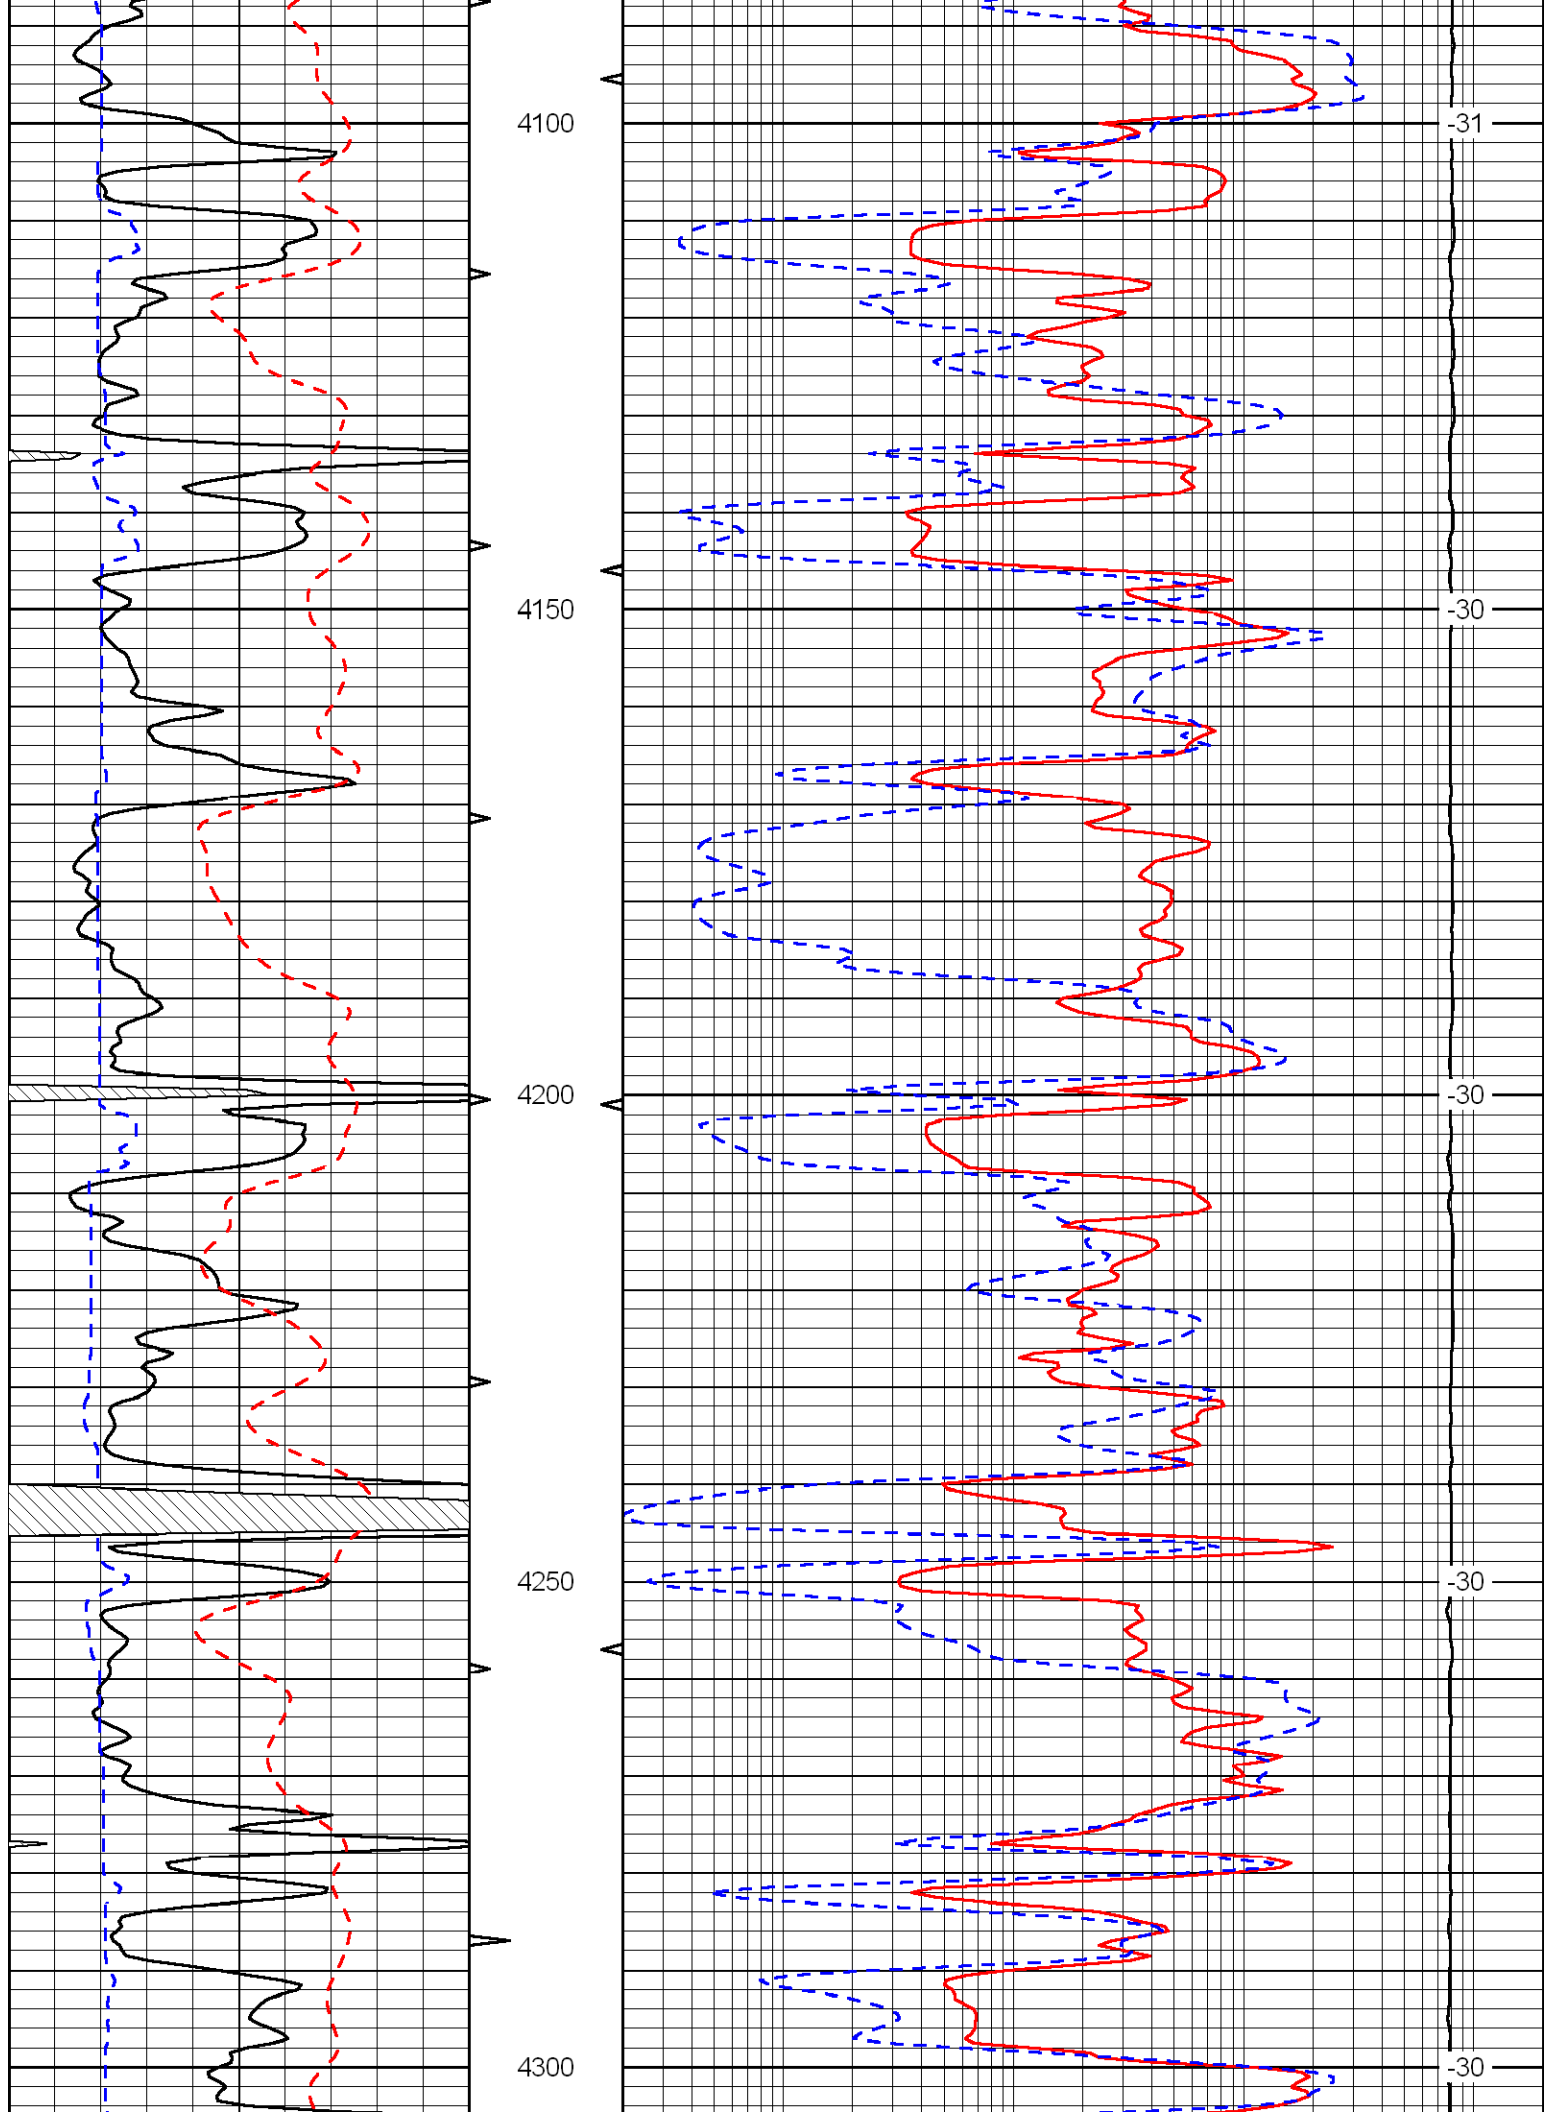

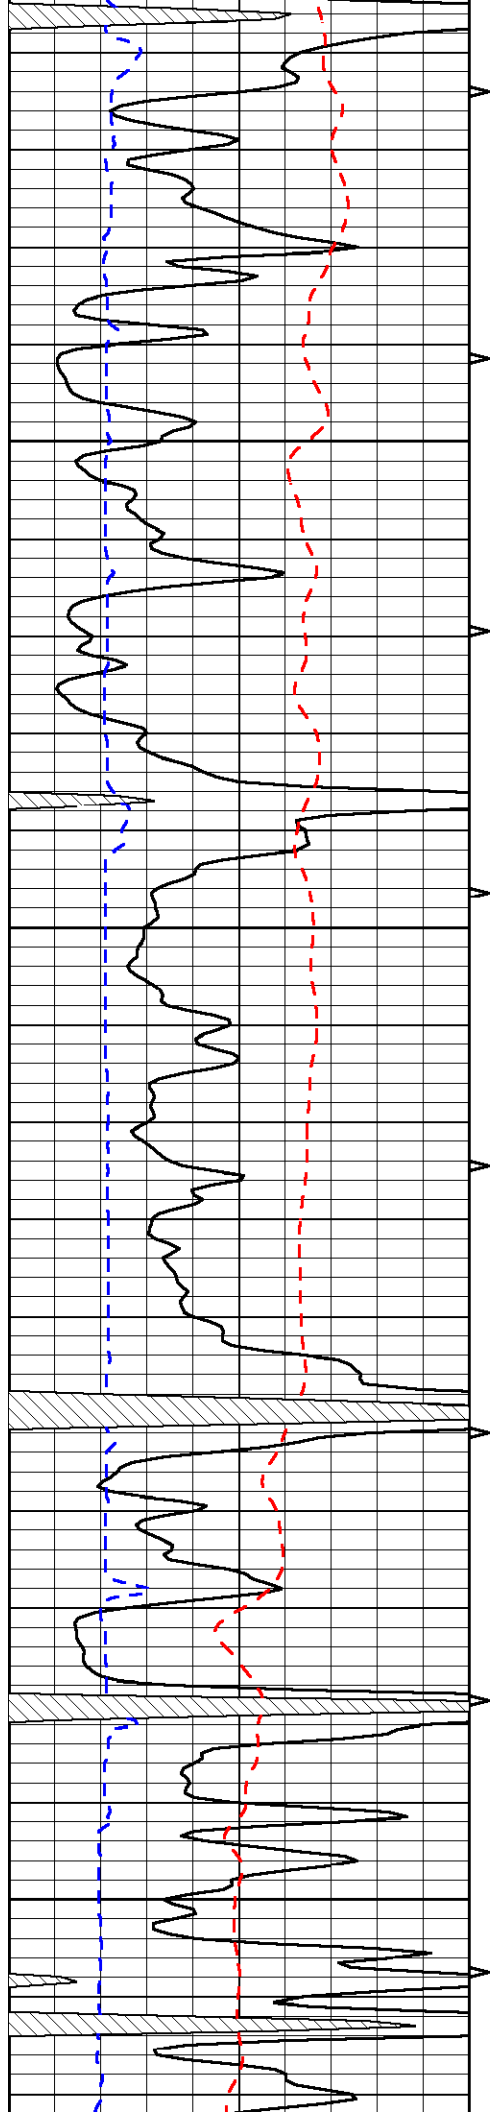


4350


4400

4450

4500

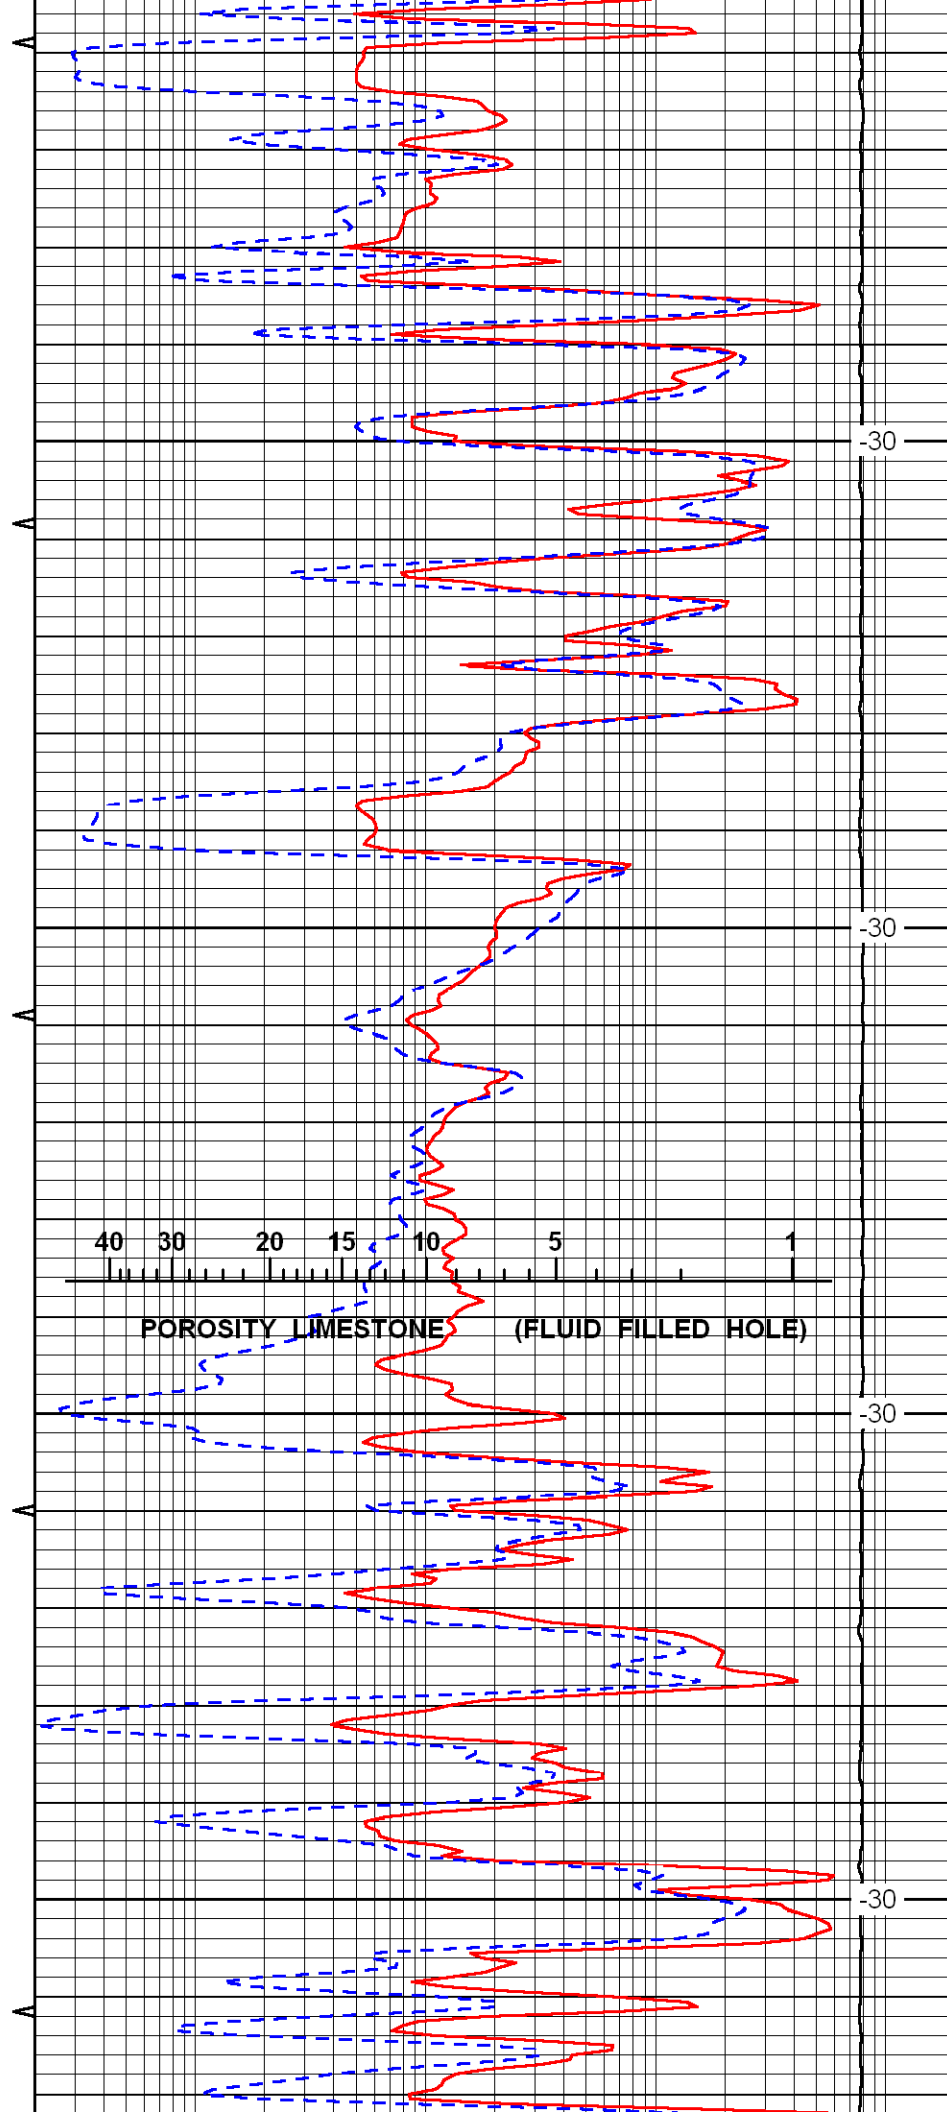


POROSITY LIMESTONE (FLUID FILLED HOLE)

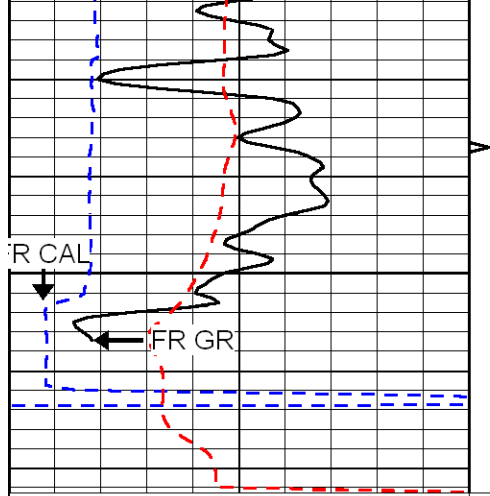

4550

0	Gamma Ray	150
6	Caliper (in)	16
-200	SP (MV)	0

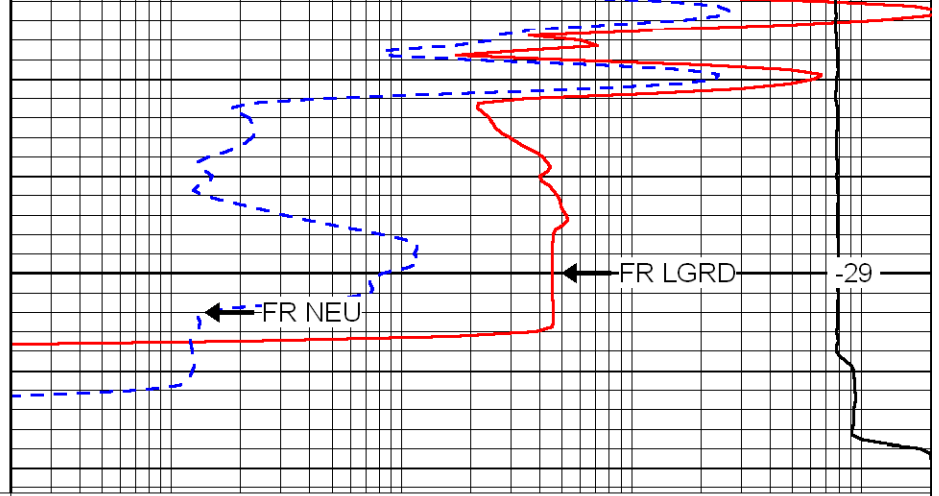

-29

0.2	Long Guard (Ohm-m)	2000
560	Neutron (cps)	2160
15000	Line Tension (lb)	0

LSPD
(ft/min)