



Dual Compensated Porosity Log

DIGITAL LOG (785) 625-3858

API No.

15-101-22,166-00-00

Company Carmen Schmitt, Inc.

Well Marlene 'A' No. 2

Field Wildcat

County Lane State Kansas

Location 330' FNL & 1650' FWL

Sec: 6 Twp: 19 S Rge: 29 W

Permanent Datum Ground Level Elevation 2844

Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum

Other Services
DIL
Elevation
K.B. 2849
D.F. 2844
G.L. 2844

Date 5/2/2009

Run Number One

Type Log CNL / CDL

Depth Driller 4675

Depth Logger 4677

Bottom Logged Interval 4657

Top Logged Interval 3700

Type Fluid In Hole Chemical

Salinity, PPM CL 3,400

Density 9.4

Level Full

Max. Rec. Temp. F 126

Operating Rig Time 4 Hours

Equipment -- Location 4 Hays

Recorded By K. Bange

Witnessed By Tom Funk

Borehole Record Casing Record

Run No Bit From To Size Wgt. From To

One 12.25 0 219 8.625 23# 0 219

Two 7.875 219 TD 219

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton, 5 W to Gage rd, 3 S, .8 W, S into

Database File: carmenhd.db
Dataset Pathname: dil/car2in
Presentation Format: cdl
Dataset Creation: Sat May 02 07:03:12 2009
Charted by: Depth in Feet scaled 1:600

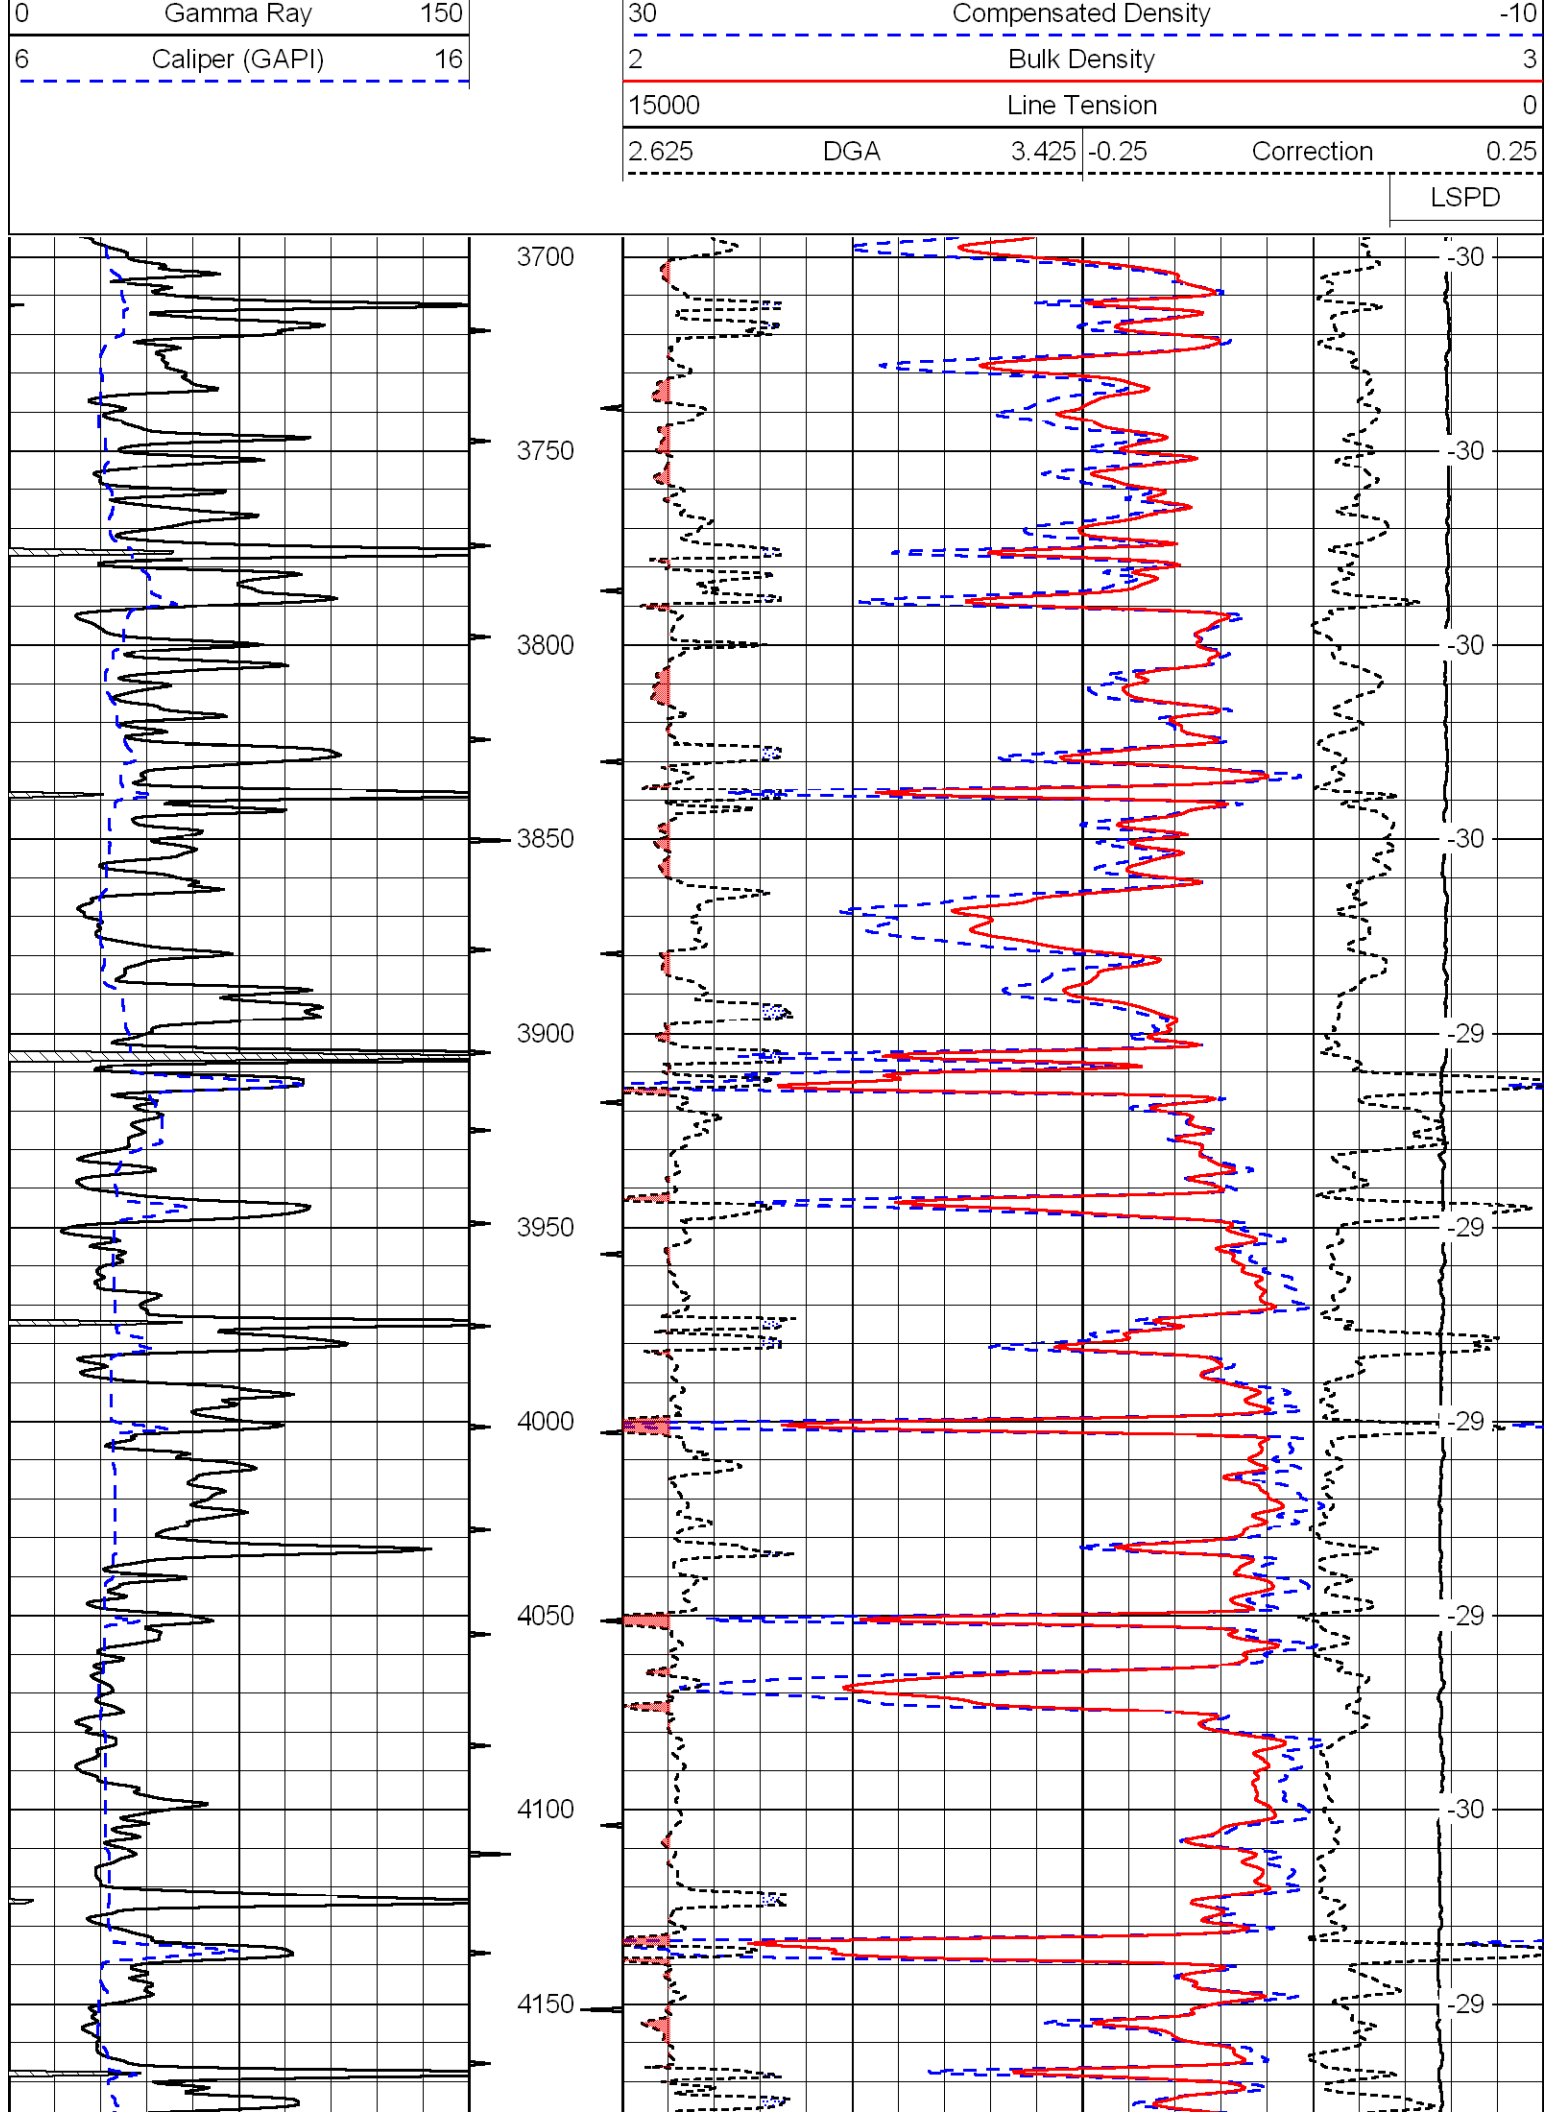

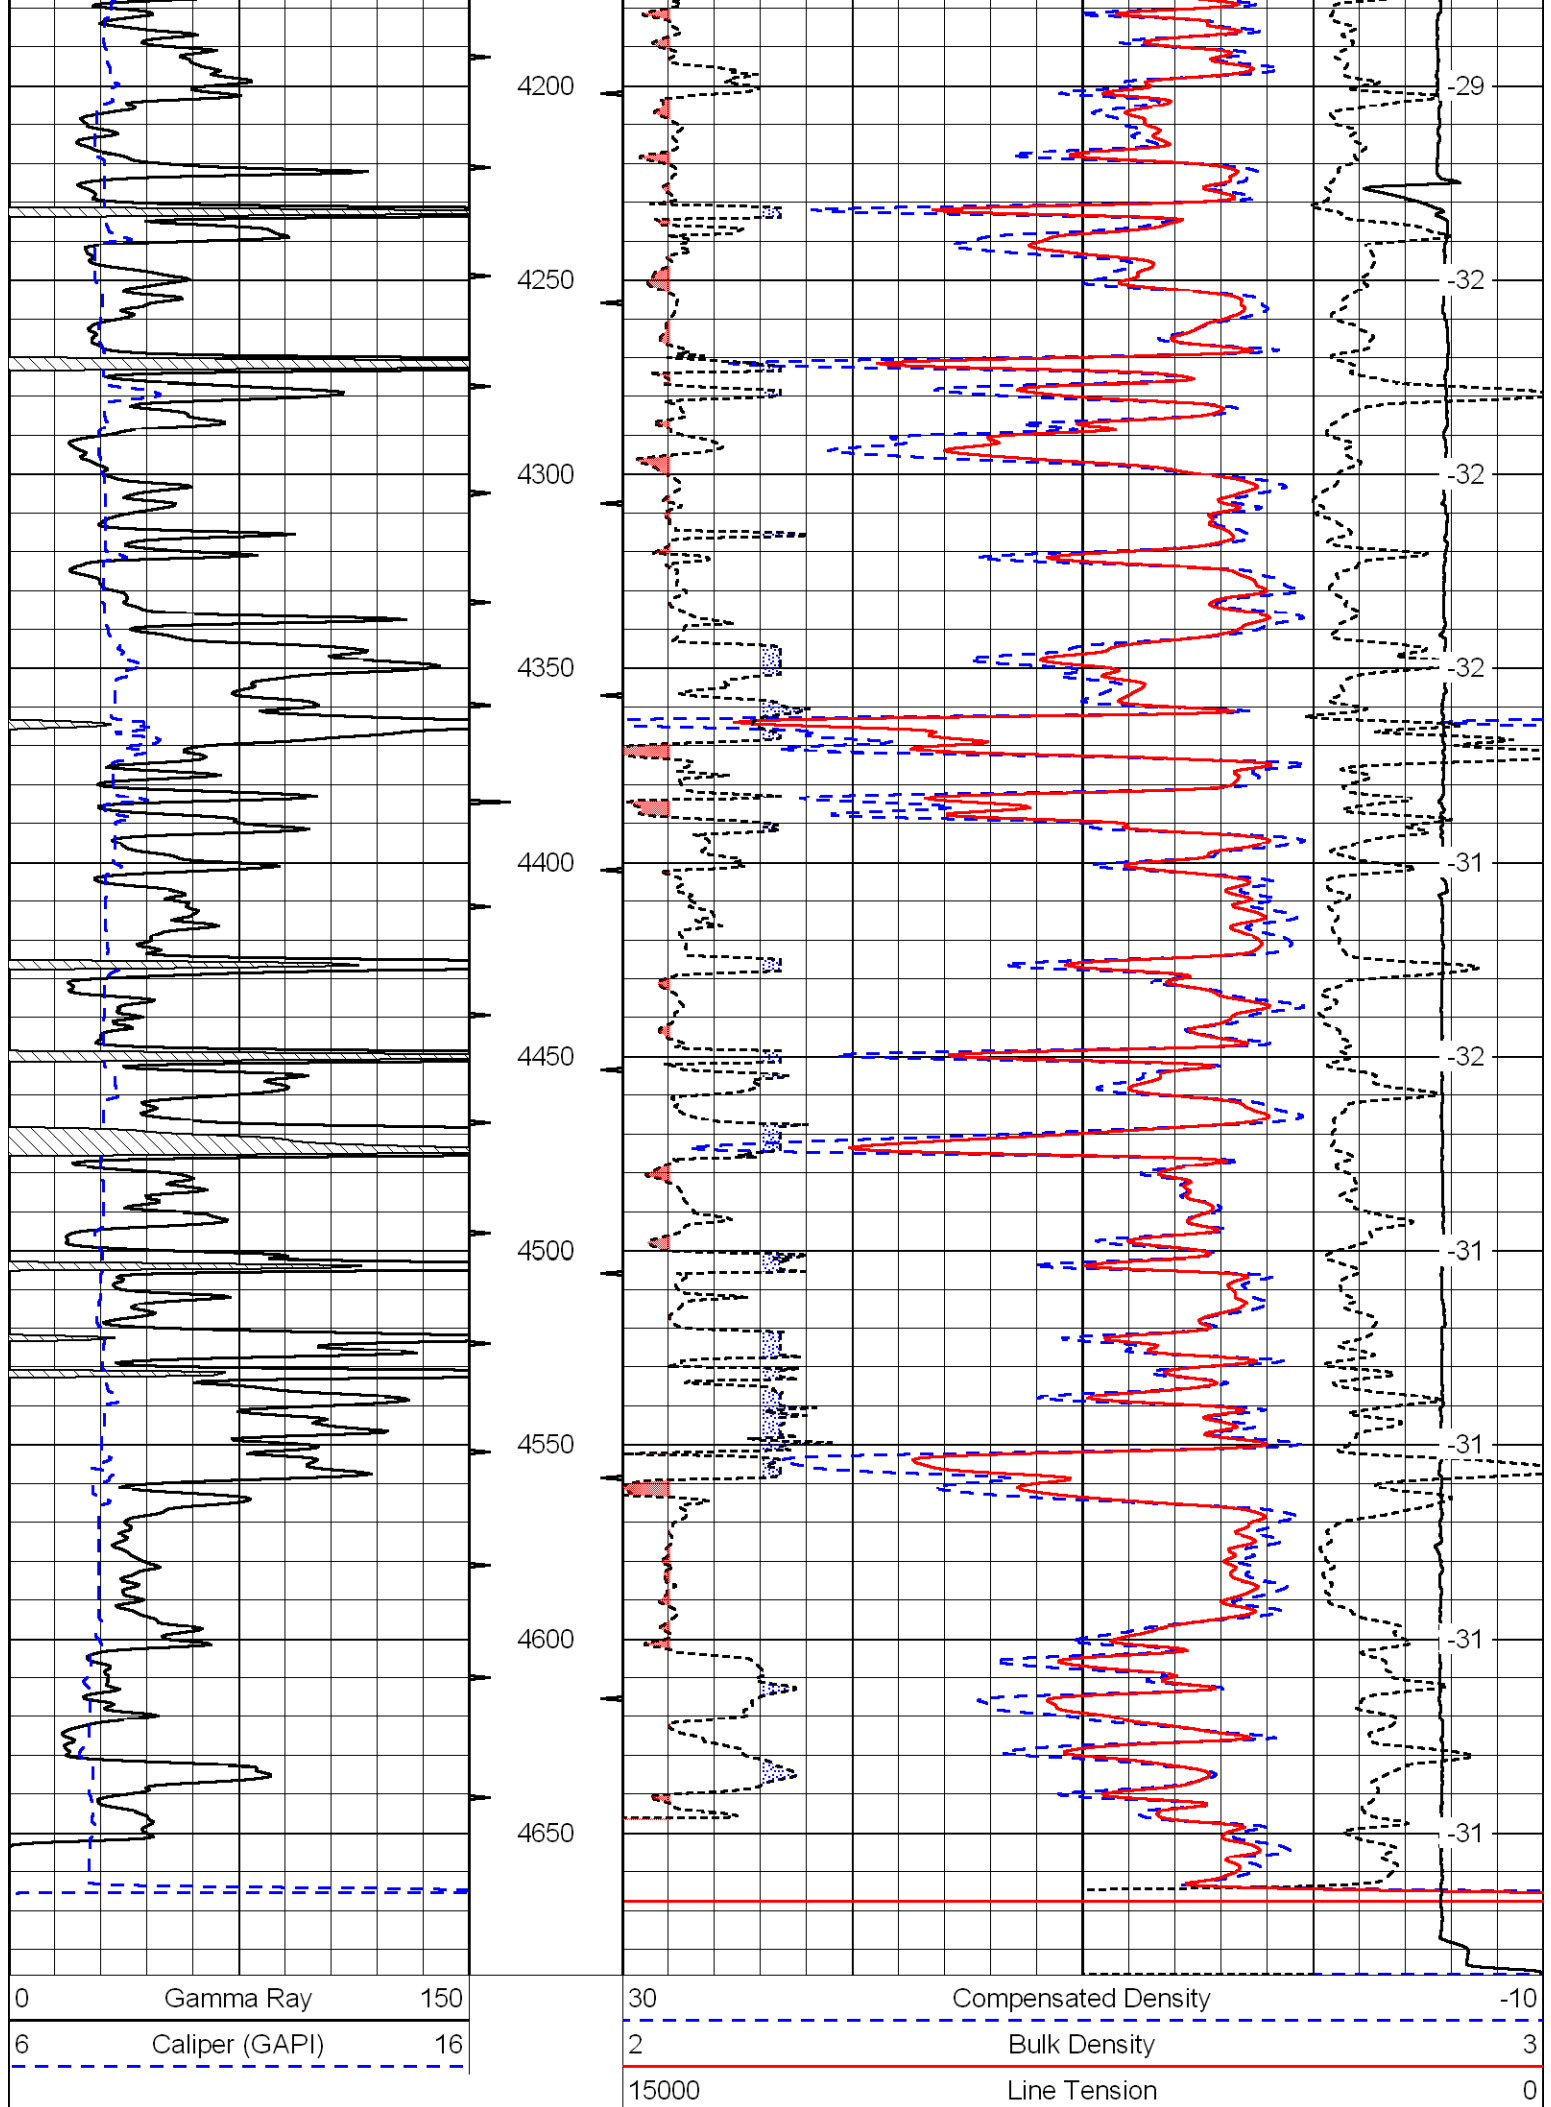

2.625	DGA	3.425	-0.25	Correction	0.25
					LSPD

Database File:

carmenhd.db

Dataset Pathname:

dil/car2in

Presentation Format:

cnrlspec

Dataset Creation:

Sat May 02 07:03:12 2009

Charted by:

Depth in Feet scaled 1:240

0	Gamma Ray	150
6	dcal (GAPI)	16

30	Compensated Neutron (Limestone)				-10
30	Compensated Density (2.71 ma)				-10
2.625	DGA	3.425	-0.25	Correction	0.25
15000	Line Tension				0

					LSPD
--	--	--	--	--	------

