



Dual Compensated Porosity Log

DIGITAL LOG (785) 625-3858

API No.

15-135-24,881-00-00

Company Berexco, Inc.

Well May Schneider No. 4

Field Schaben

County Ness

State Kansas

Location 2310' FNL & 2310' FEL

Sec: 12

Twp: 20S

Rge: 22W

Other Services
DIL
MEL/BHCS

Permanent Datum Ground Level Elevation 2232

Log Measured From Kelly Bushing 9 Ft. Above Perm. Datum

K.B. 2241
D.F.
G.L. 2232

Date 02/27/2009

Run Number One

Type Log CNL / CDL

Depth Driller 4516

Depth Logger 4520

Bottom Logged Interval 4499

Top Logged Interval 3500

Type Fluid In Hole Chemical

Salinity, PPM CL 8,000

Density 8.9

Level Full

Max. Rec. Temp. F 123

Operating Rig Time 5 Hours

Equipment -- Location 10 Hays

Recorded By Jason Wellbrock

Witnessed By Jim Hickman

G. Koralegedara

Casing Record

Borehole Record

Run No

Bit

From

To

Size

Wgt.

24#

From

To

From

To

From

To

From

To

From

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858


Bazine 7 S to 50rd, 1/2 W, S Into


Database File: c:\warrior\data\berexco_may schneider no. 4\berhd.db
Dataset Pathname: dil/ber2in
Presentation Format: cdl
Dataset Creation: Sat Feb 28 00:46:47 2009
Charted by: Depth in Feet scaled 1:600


0	Gamma Ray	150
6	Caliper (in)	16


30	Compensated Density (pu)				-10
2	Bulk Density (g/cc)				3
15000	Line Tension (lb)				0
2.625	DGA (g/cc)	3.425	-0.25	Correction (g/cc)	0.25
					LSPD (ft/min)

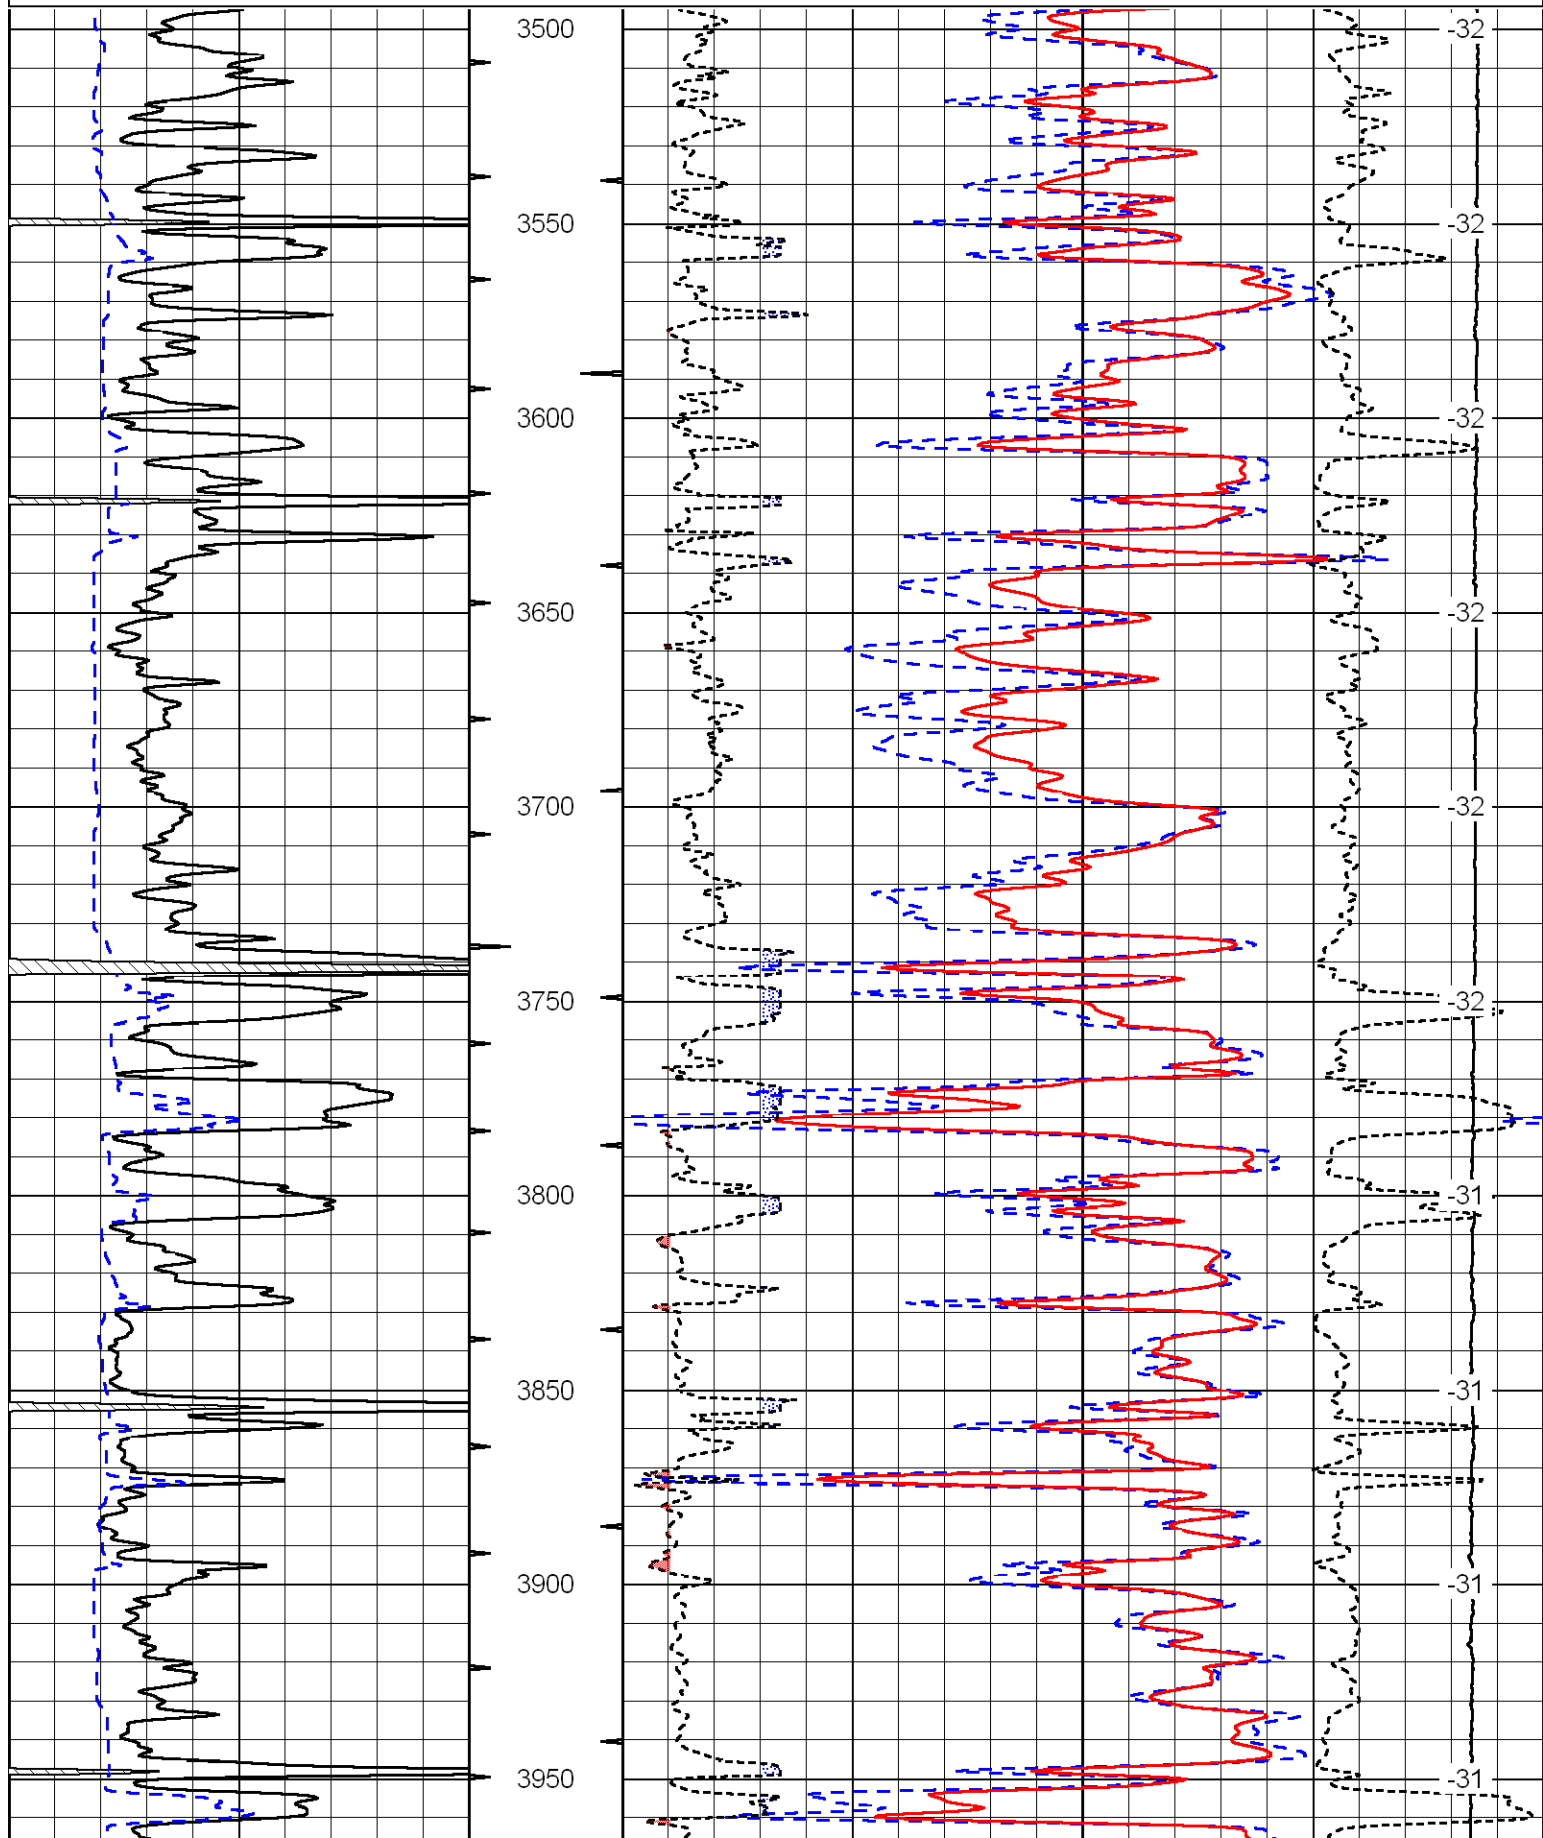


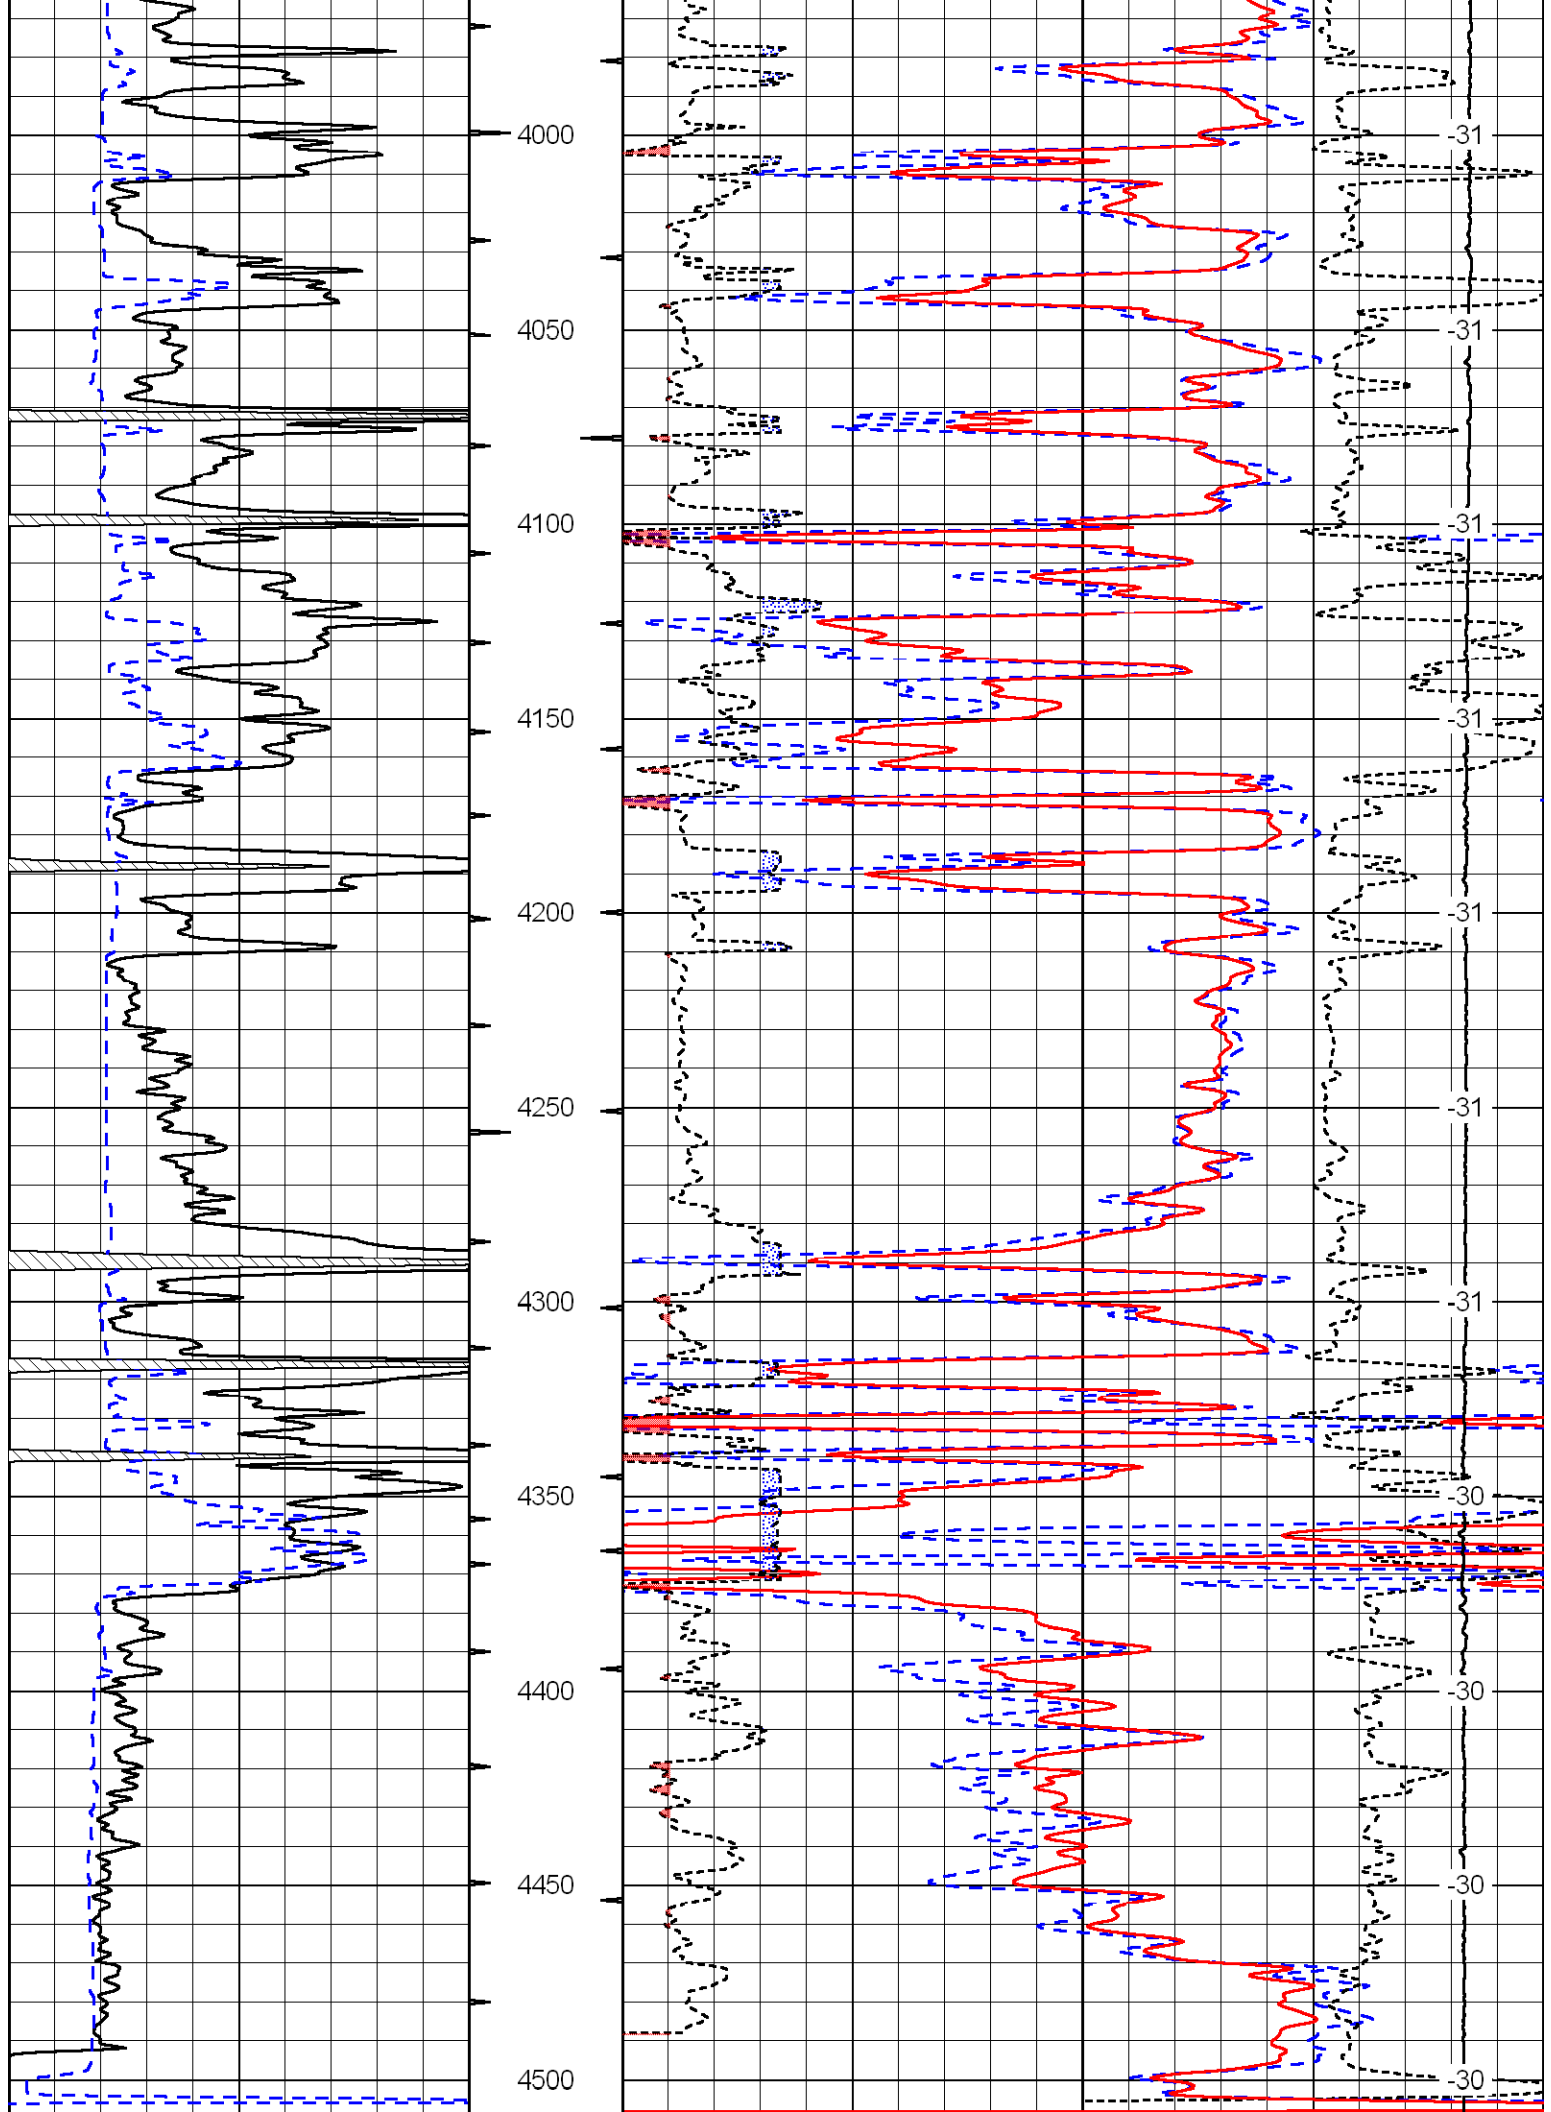


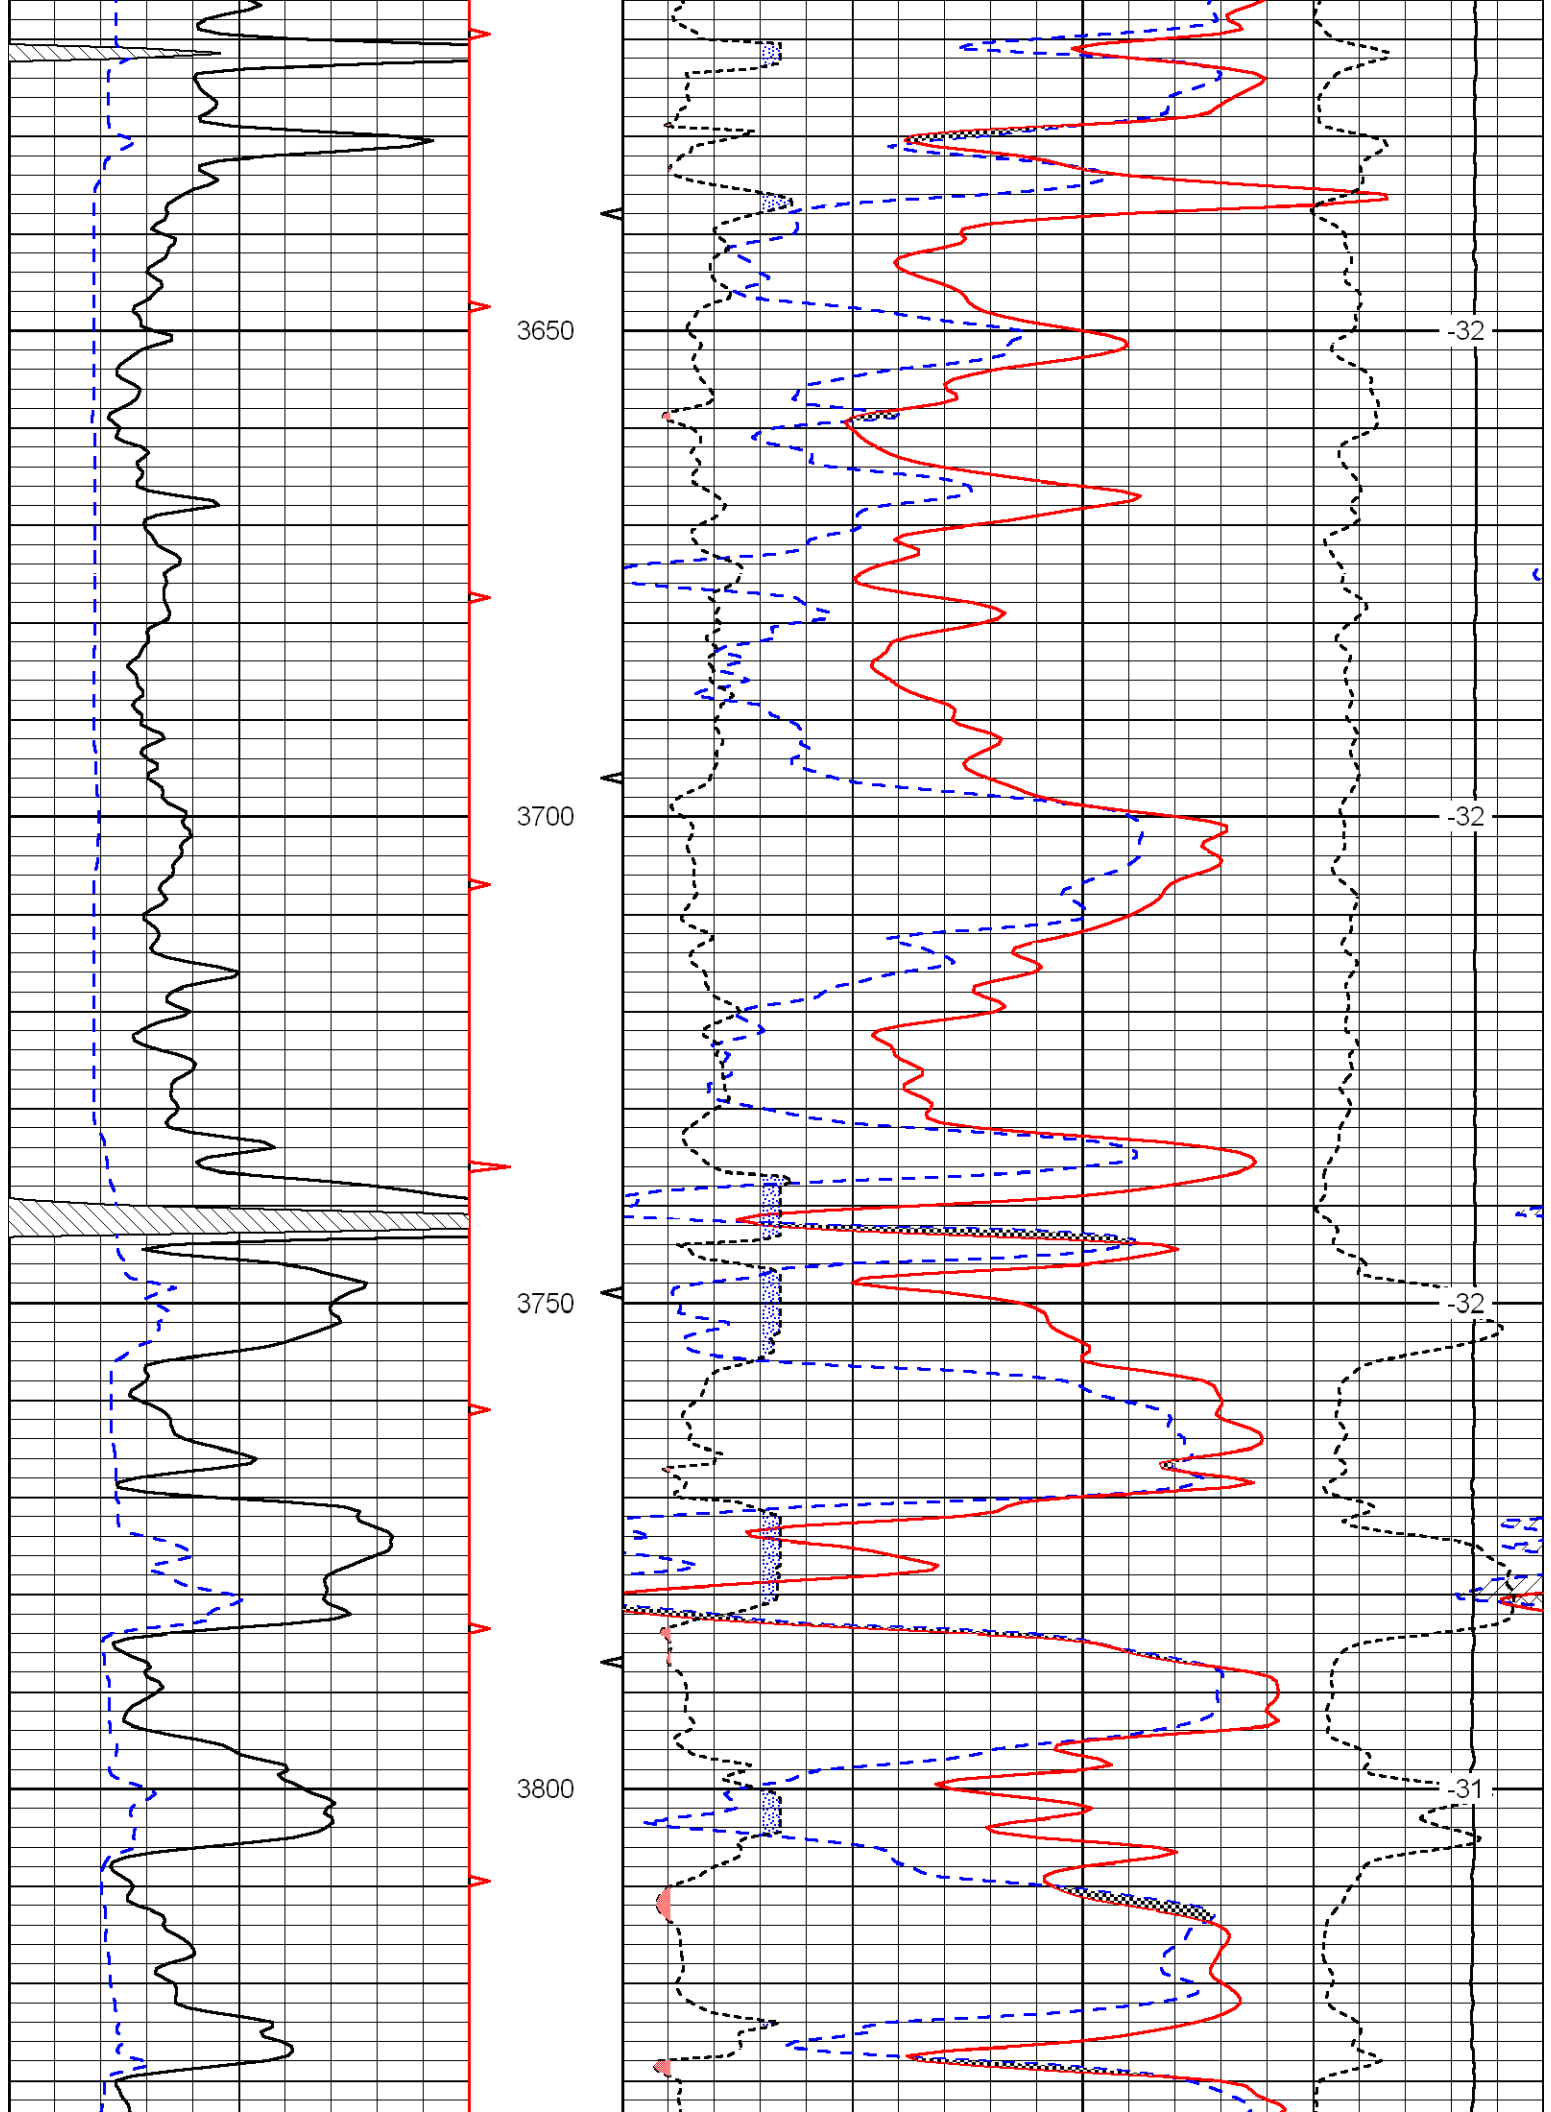

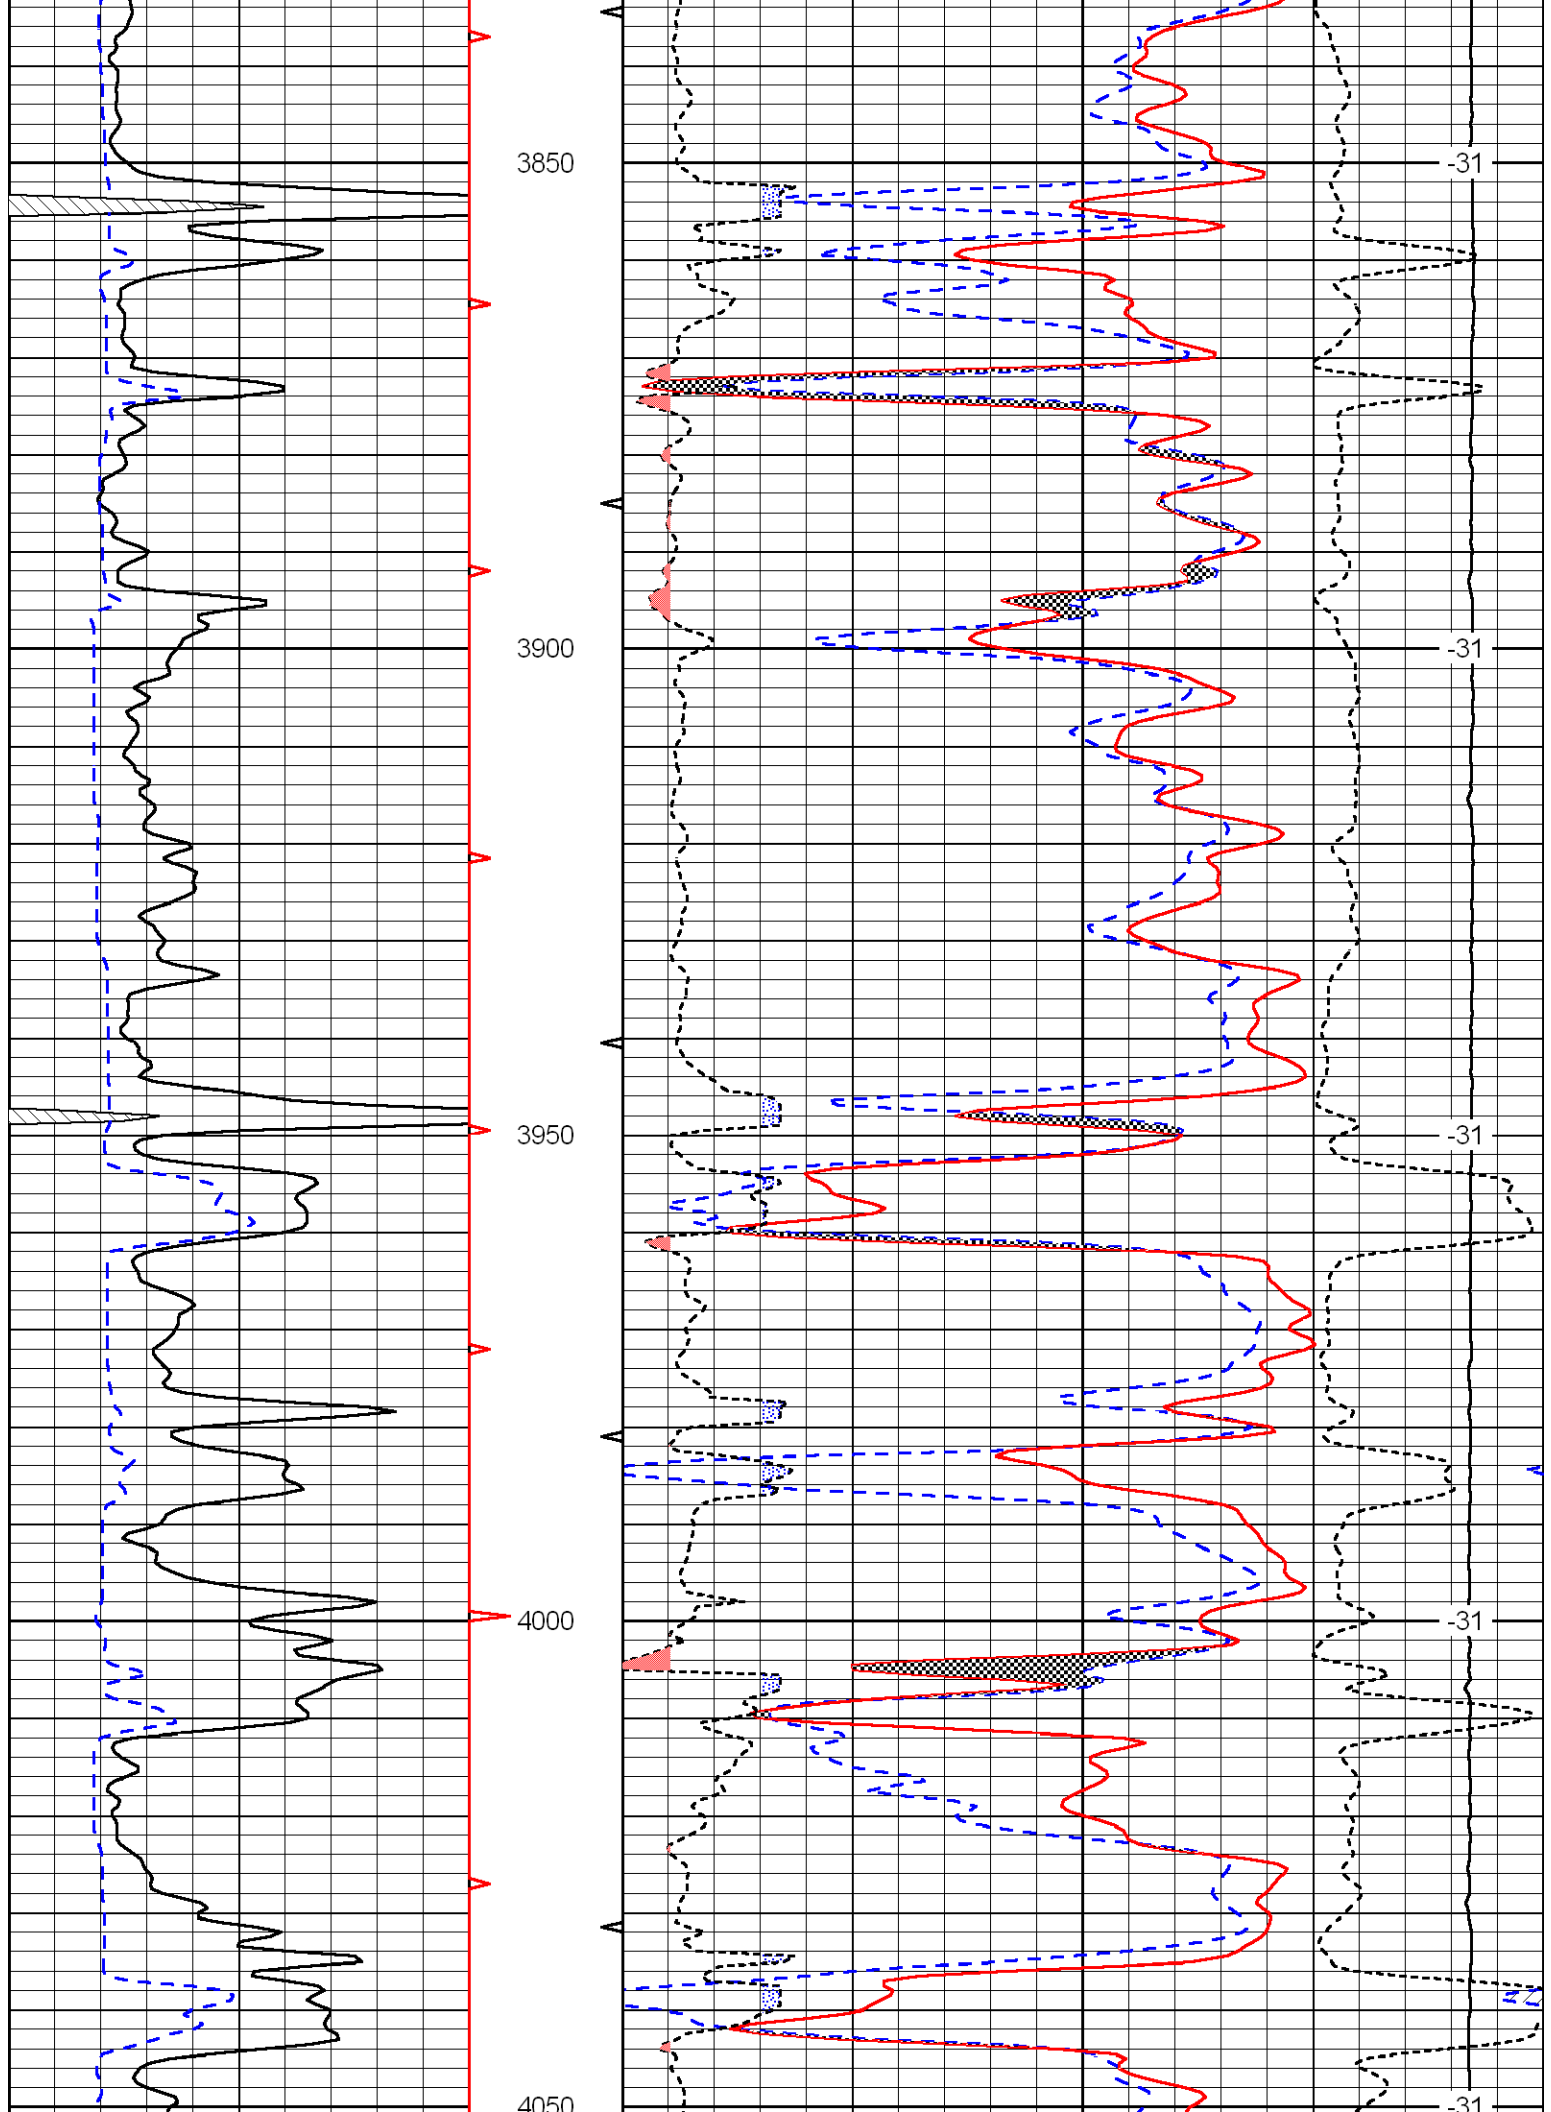

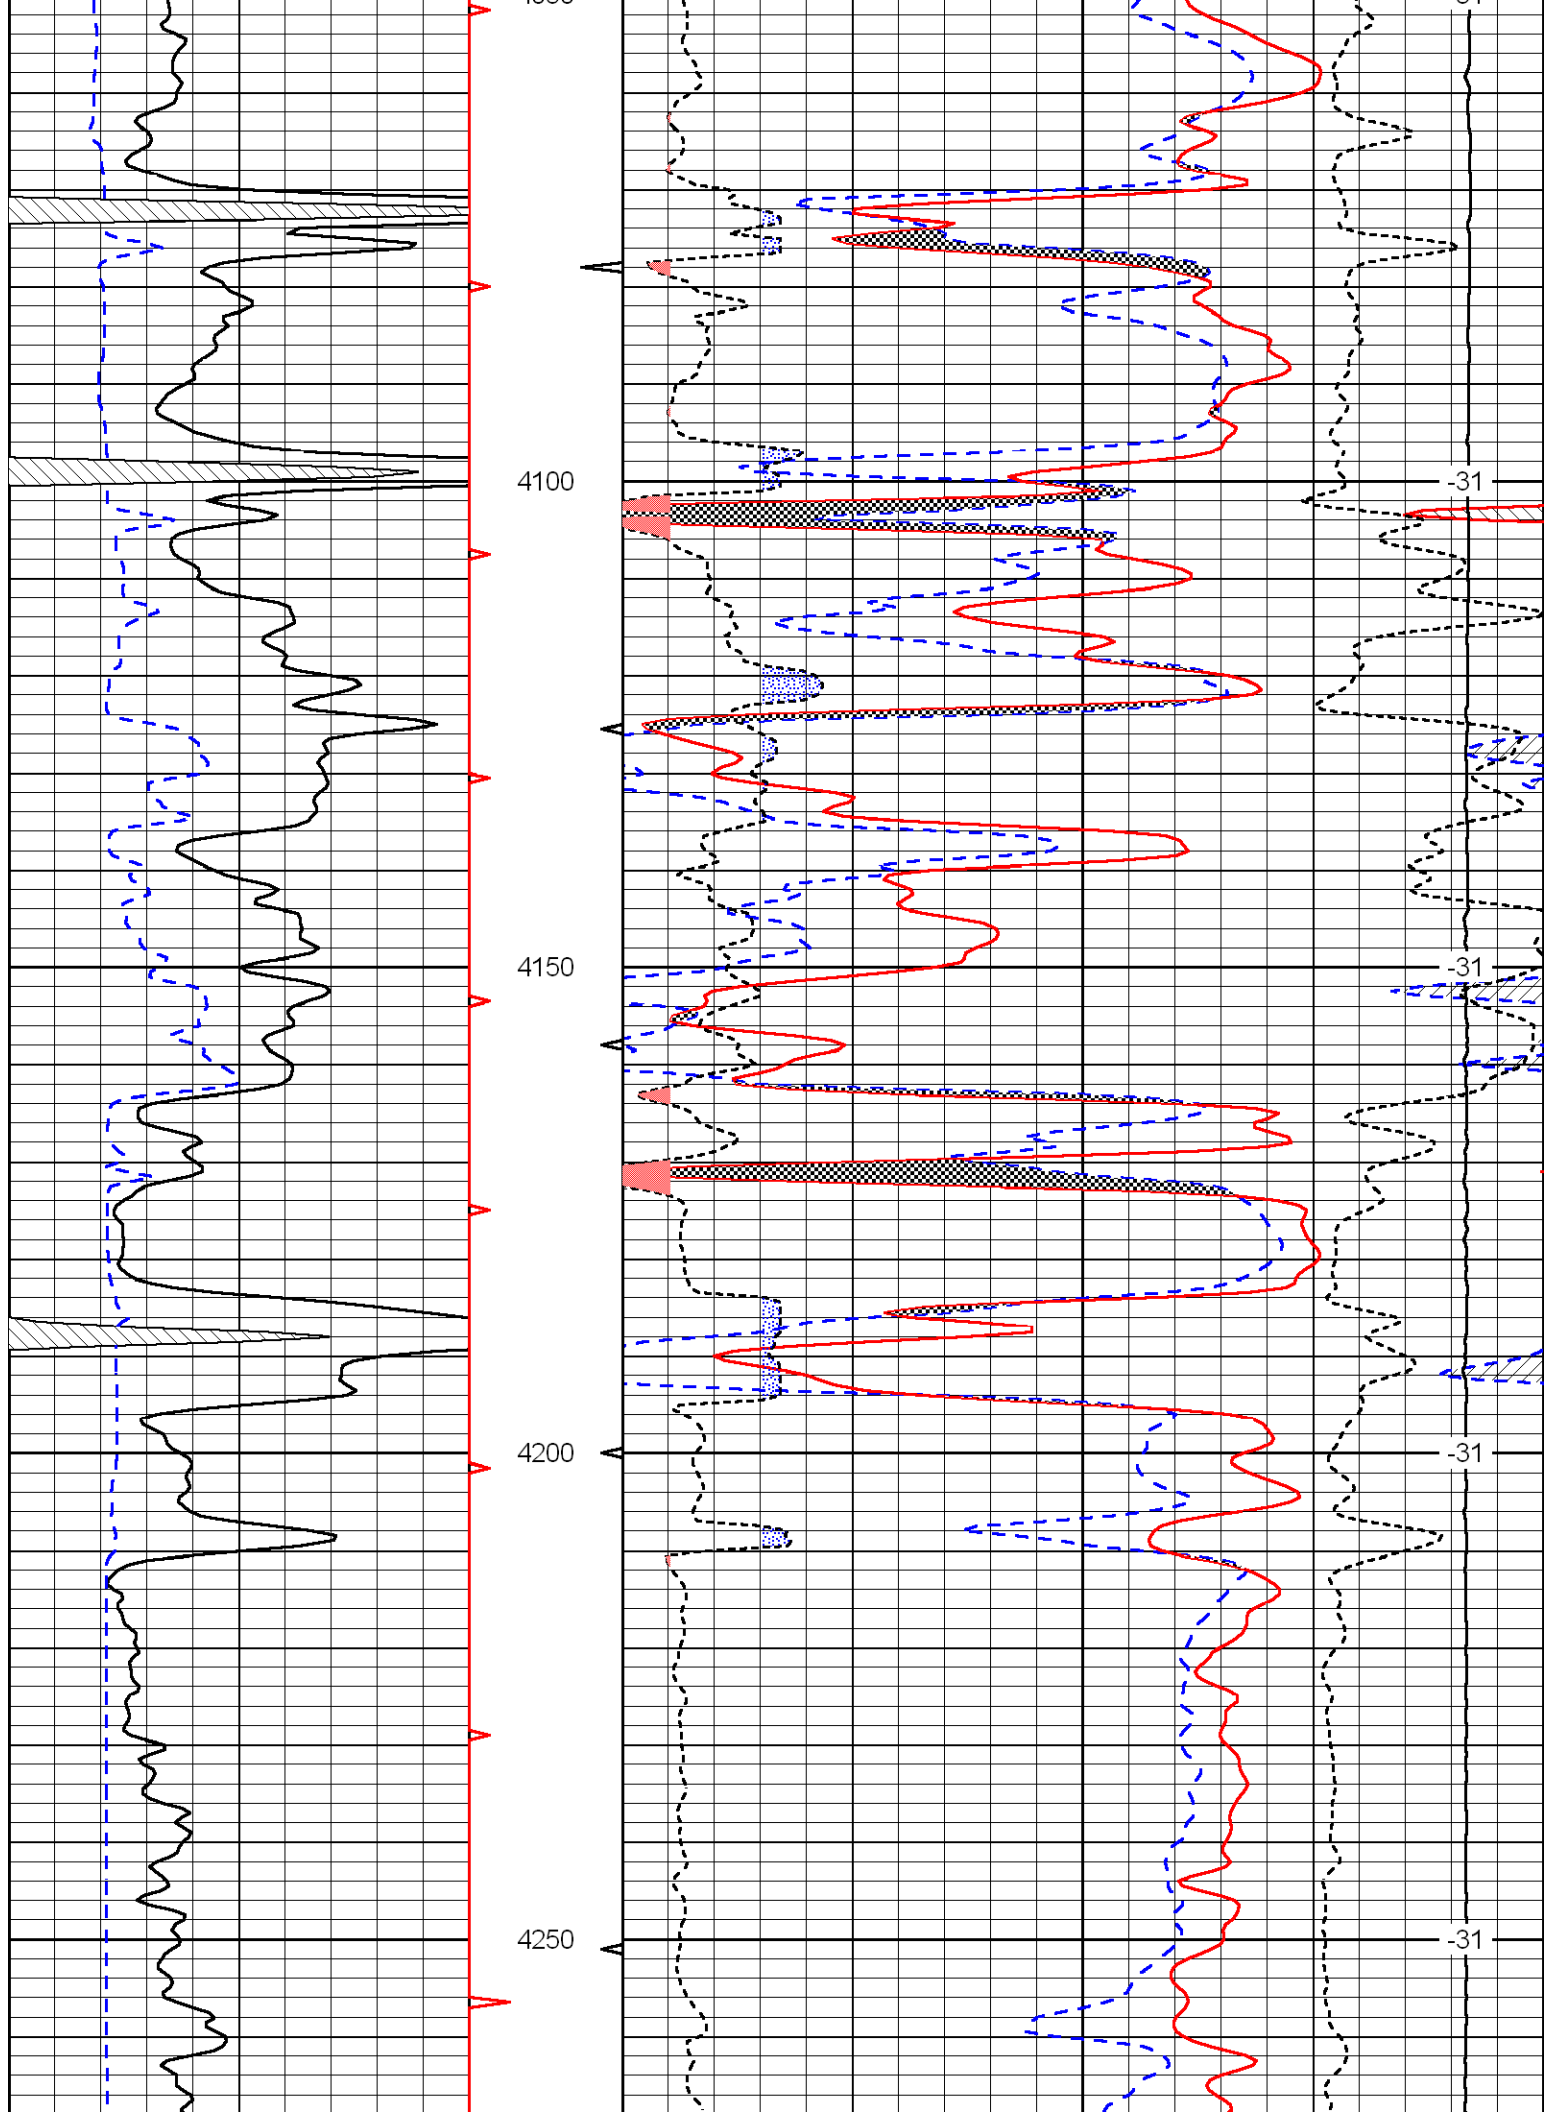


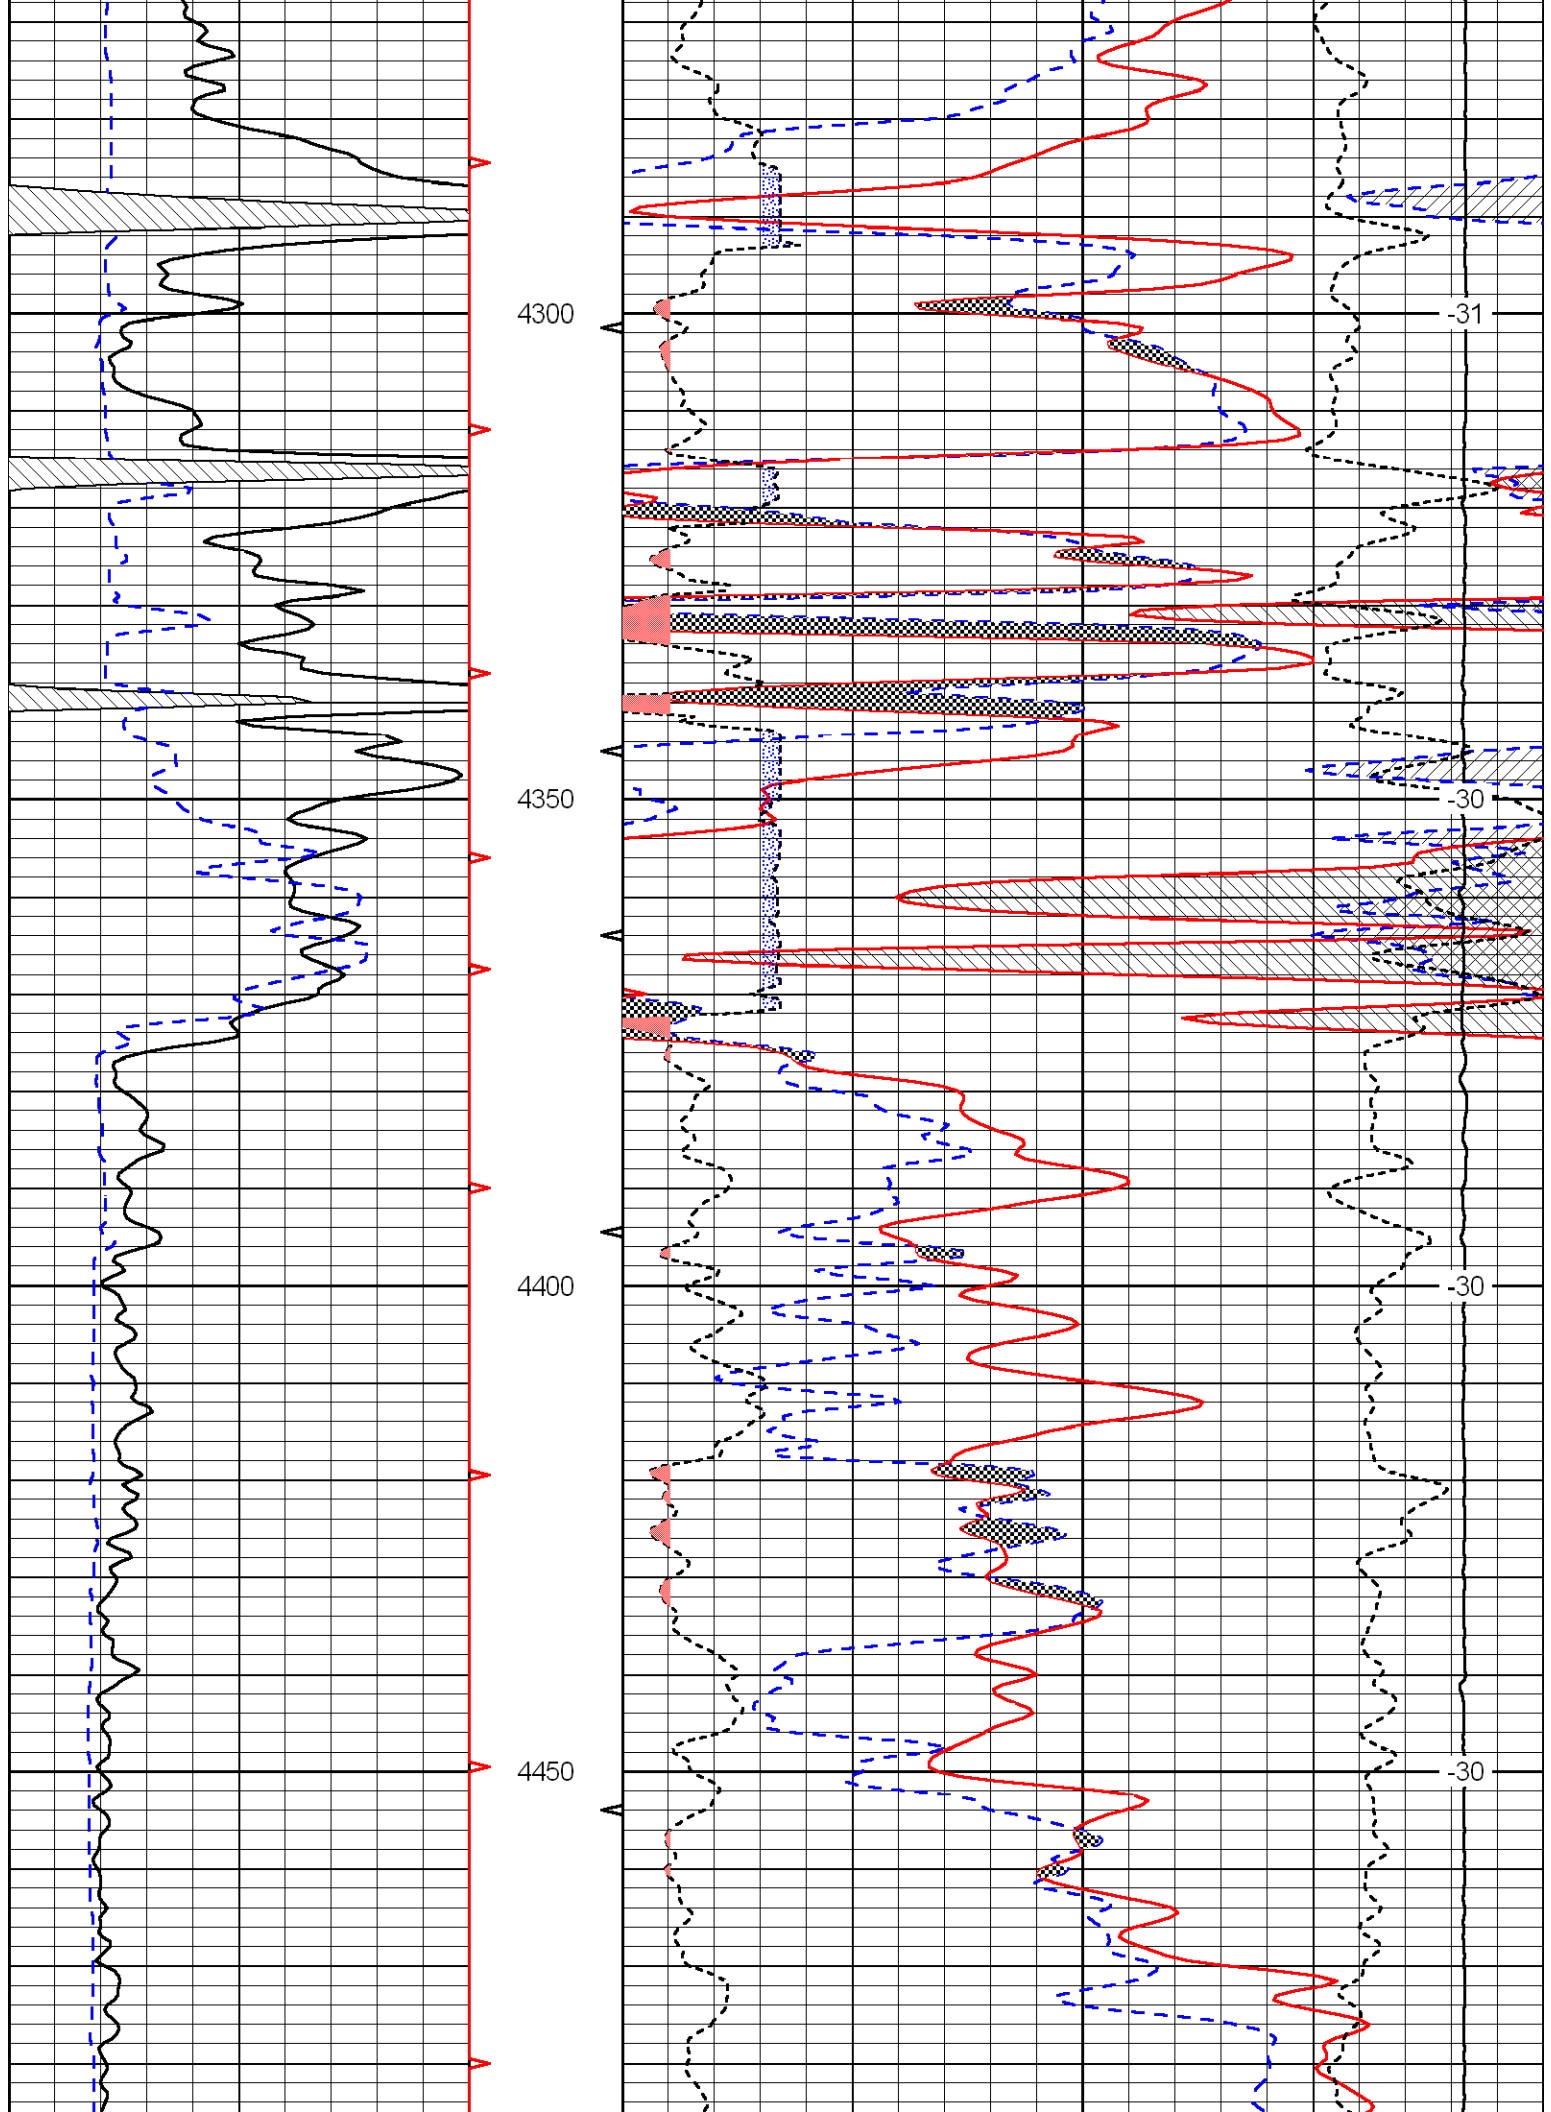

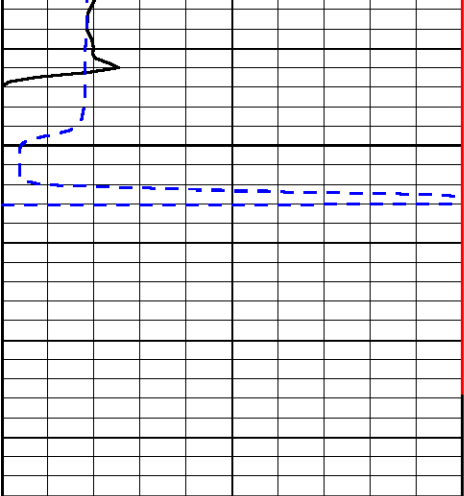

4500

0	Gamma Ray	150
6	Caliper (in)	16

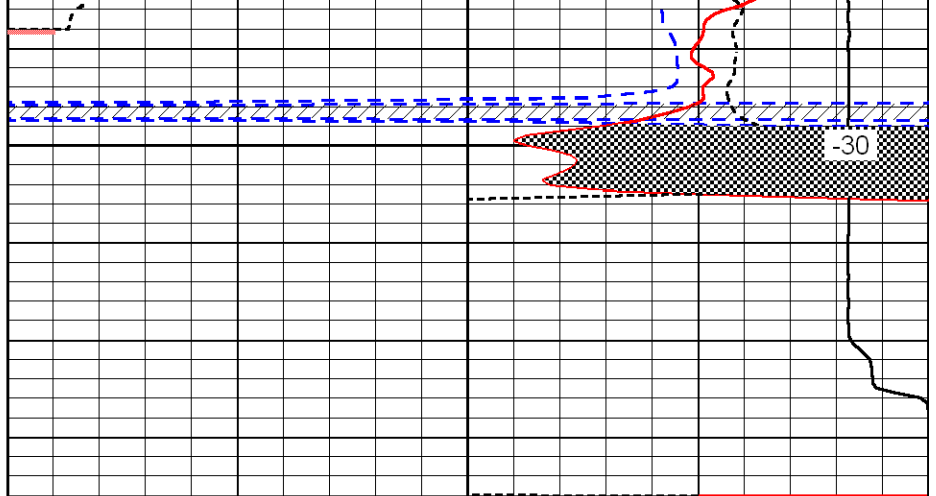

30	Compensated Neutron (Limestone) (pu)				-10
30	Compensated Density (2.71 ma) (pu)				-10
2.625	DGA (g/cc)	3.425	-0.25	Correction (g/cc)	0.25
15000	Line Tension (lb)				0

LSPD
(ft/min)