


STATE OF KANSAS
STATE CORPORATION COMMISSION

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Phillips County. Sec. 20 Twp. 5s. Rge. 20W. (W) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE SE SE
Lease Owner. D. G. Hansen
Lease Name. Perry V. States Well No. 4
Office Address. Logan, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed. 10/4/47 19
Application for plugging filed. 10/20/47 19
Application for plugging approved. 10/20/47 19
Plugging commenced. 10/20/47 19
Plugging completed. 10/30/47 19
Reason for abandonment of well or producing formation. dry hole
If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

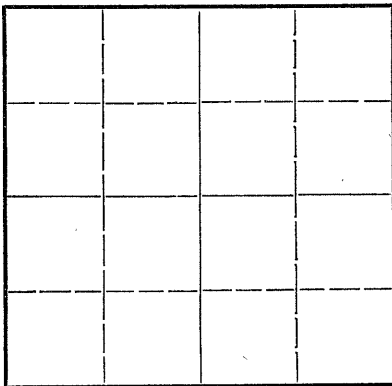

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well. C. D. Stough
Producing formation. Depth to top. Bottom. Total Depth of Well. 3651 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Top Of Lansing	XXX Void	3360		8 5/8	216	none
Base of Kansas City	"	3576		5 1/2	3629	2400
Top Arbuckle	trace of oil	3626				
top Reagan Sand	trace oil	3630				
Total Depth	Water	3651				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Lane Wells plug at 3573, filled with sand to 3350' then dumped 5 sacks cement, shot pipe off at 2400' filled with mud to 216' dumped 15 sacks cement, filled with mud to 30' then plugged with 10 sacks cement, filling hole to surface with cement.

11-06-1947 Rec'd

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. D. G. Hansen
Address. Logan, Kansas

STATE OF Kansas, COUNTY OF Phillips, ss.
Hugh M. King (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Hugh M. King*
Logan, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of November, 1947

My commission expires 12-11-47

Notary Public
Notary Public.

PLUGGING
FILE SEC 20 T 5 R 20W
BOOK PAGE 144 LINE 20