

LOG-TECH



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.

15-135-24,881-00-00

Company Berexco, Inc.

Well May Schneider No. 4

Field Schaben

County Ness State Kansas

Location 2310' FNL & 2310' FEL

Sec: 12 Twp: 20S Rge: 22W

Other Services
CNL/CDL
MEL/BHCS

Permanent Datum Ground Level Elevation 2232

Log Measured From Kelly Bushing 9 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing K.B. 2241
D.F. 2232
G.L. 2232

Date 02/27/2009

Run Number One

Depth Driller 4516

Depth Logger 4520

Bottom Logged Interval 4519

Top Log Interval 200

Casing Driller 8.625 @ 230

Casing Logger 226

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 8.000

Density / Viscosity 8.9 50

pH / Fluid Loss 9.0 12.0

Source of Sample Flowline

Rm @ Meas. Temp .85 @ 65

Rmf @ Meas. Temp .63 @ 65

Rmc @ Meas. Temp 1.14 @ 65

Source of Rmf / Rmc Charts

Rm @ BHT .45 @ 123

Operating Rig Time 5 Hours

Max Rec. Temp. F 123

Equipment Number 10

Location Hays

Recorded By Jason Wellbrock

Witnessed By Jim Hickman

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858




Bazine 7 S to 50rd, 1/2 W, S Into



Database File: c:\warrior\data\berexco_may schneider no. 4\berhd.db
Dataset Pathname: dil/ber2in
Presentation Format: dil2in
Dataset Creation: Sat Feb 28 00:46:47 2009
Charted by: Depth in Feet scaled 1:600



0	Gamma Ray	150
-200	SP (MV)	0




0	Shallow Resistivity (Ohm-m)	50
0	Deep Resistivity (Ohm-m)	50
1000	Conductivity (mmho/m)	0
15000	Line Tension (lb)	0
50	Shallow Resistivity (Ohm-m)	500
50	Deep Resistivity (Ohm-m)	500



LSPD
(ft/min)

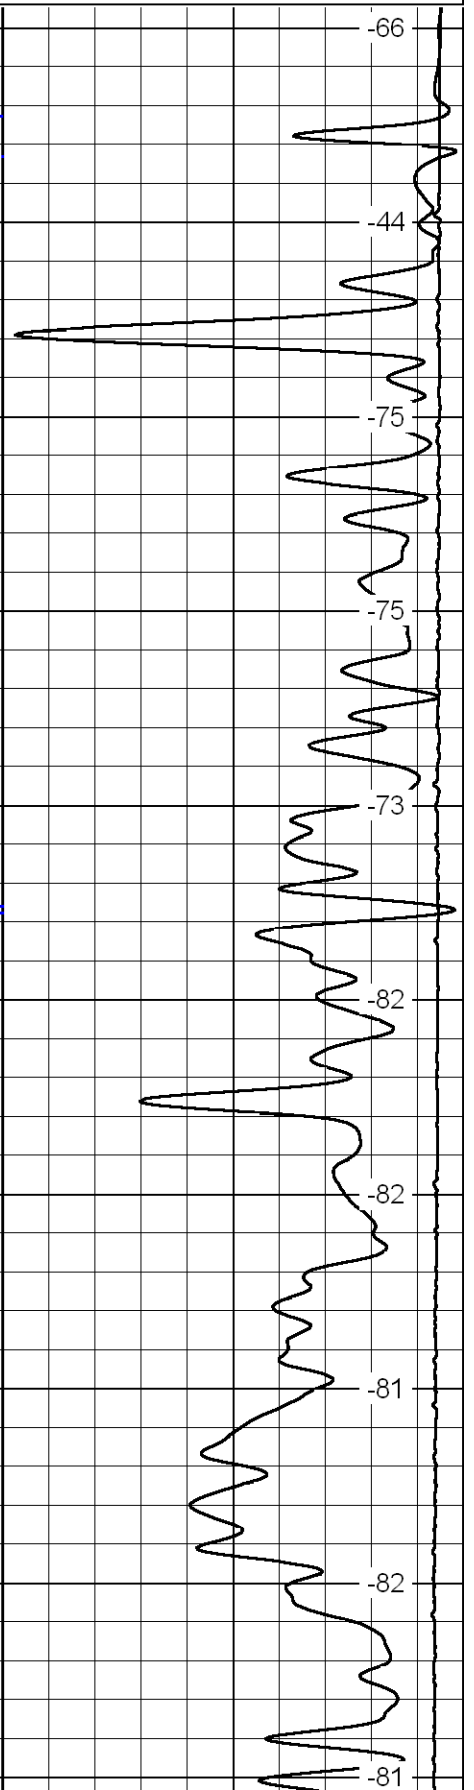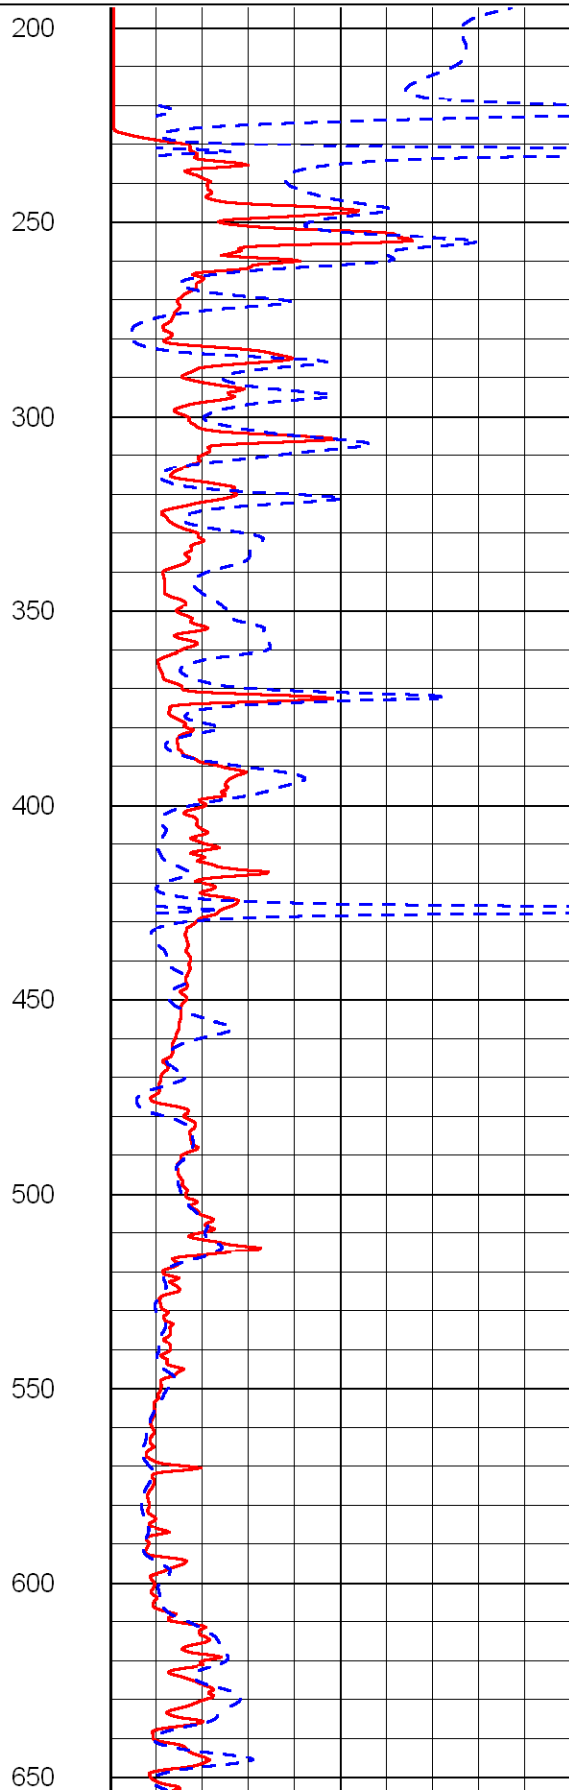
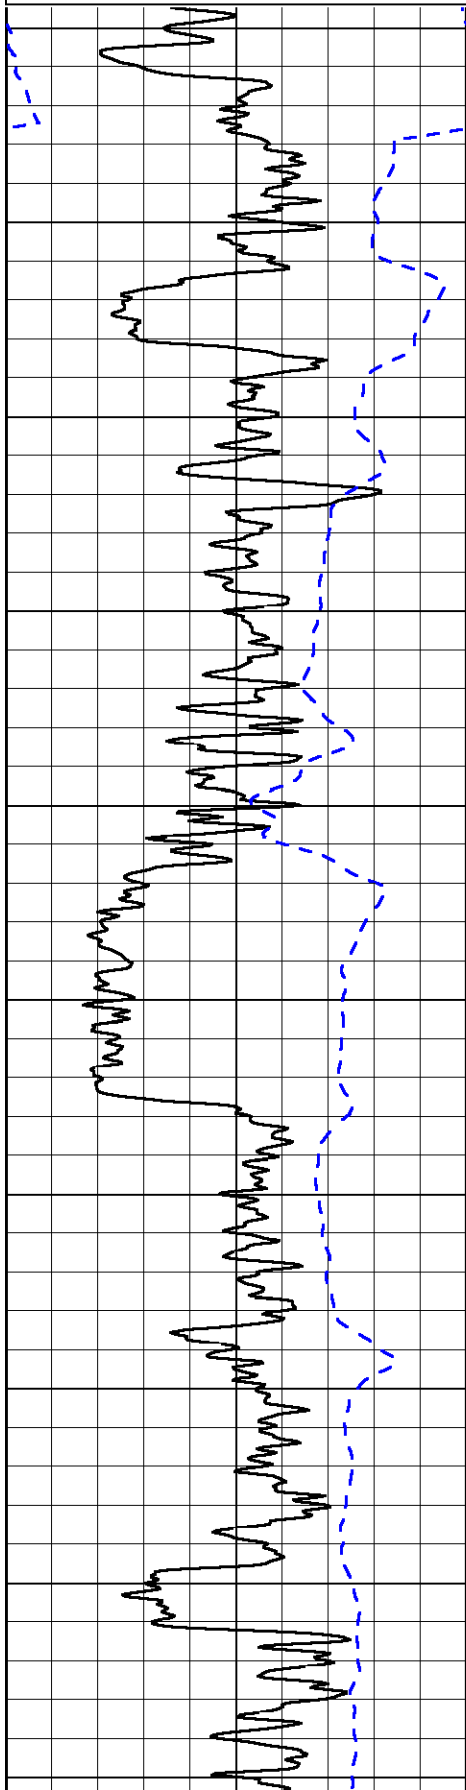


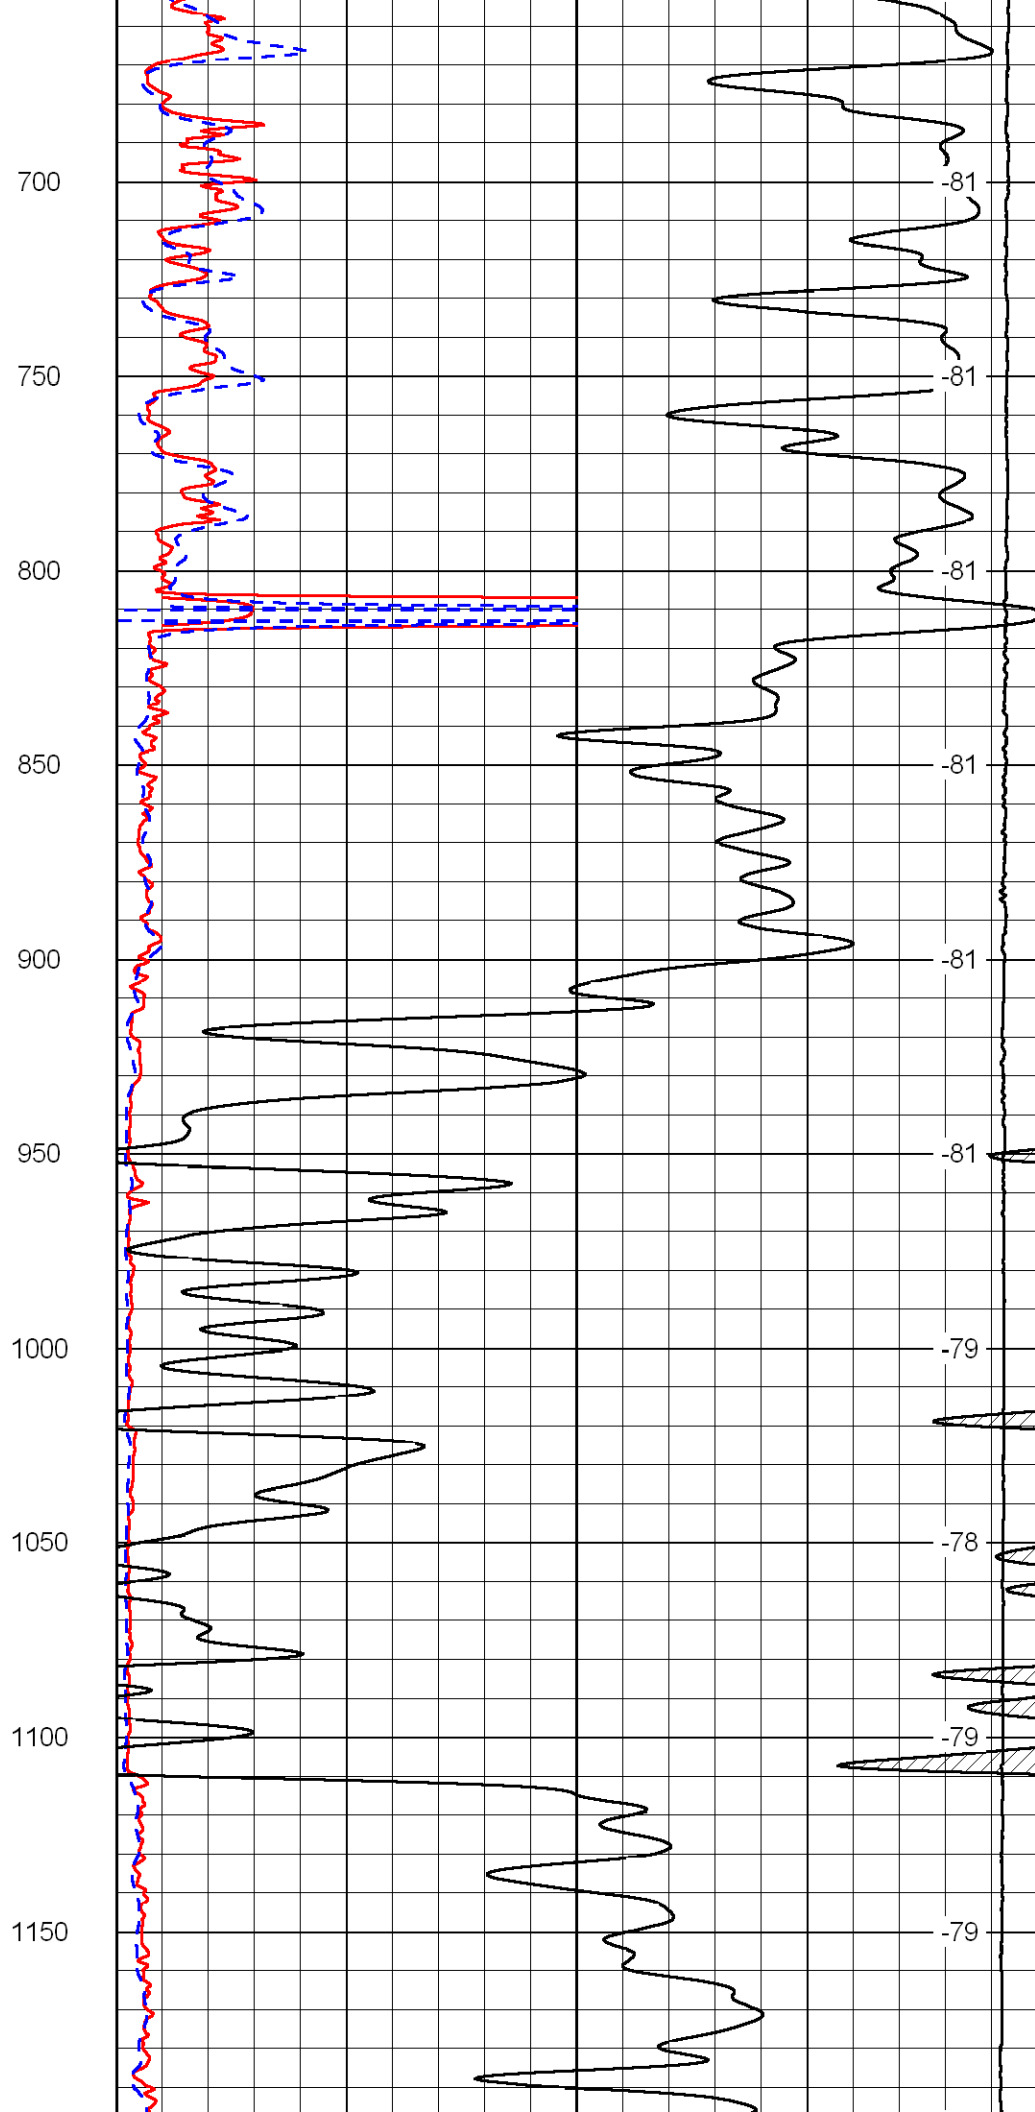
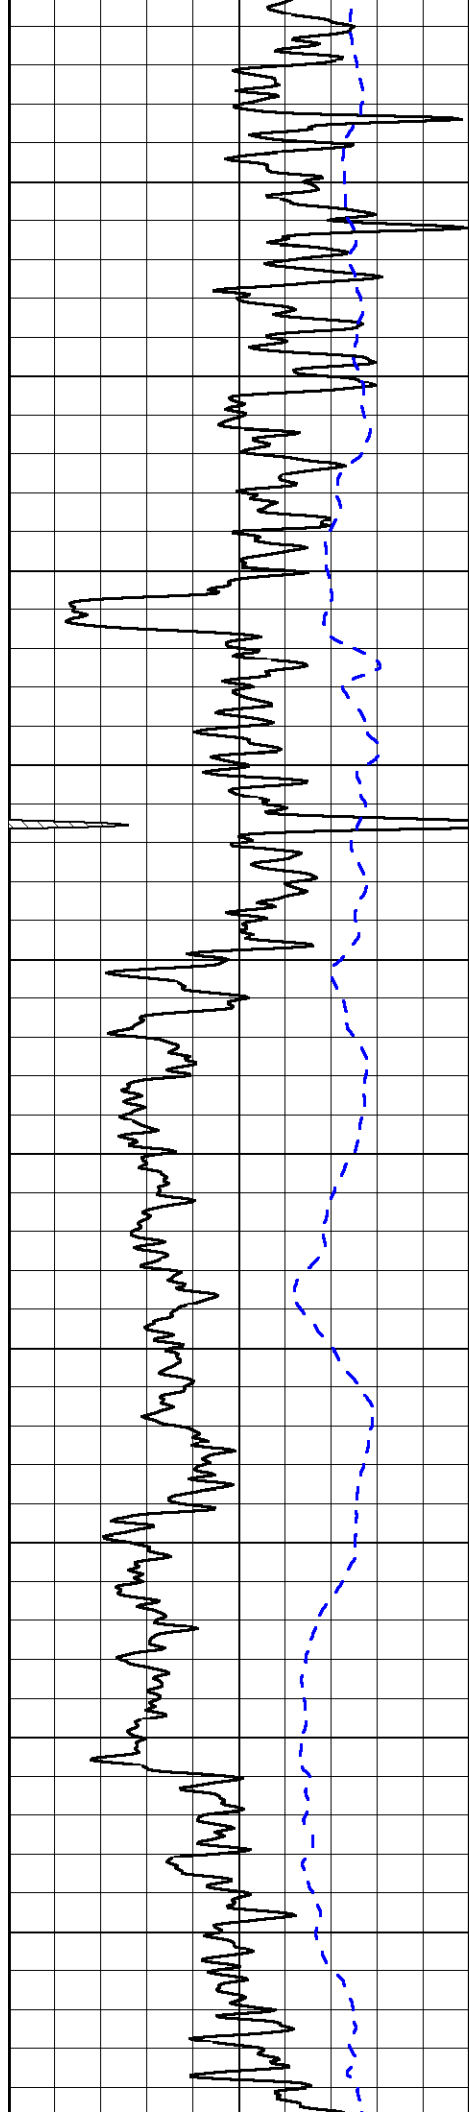


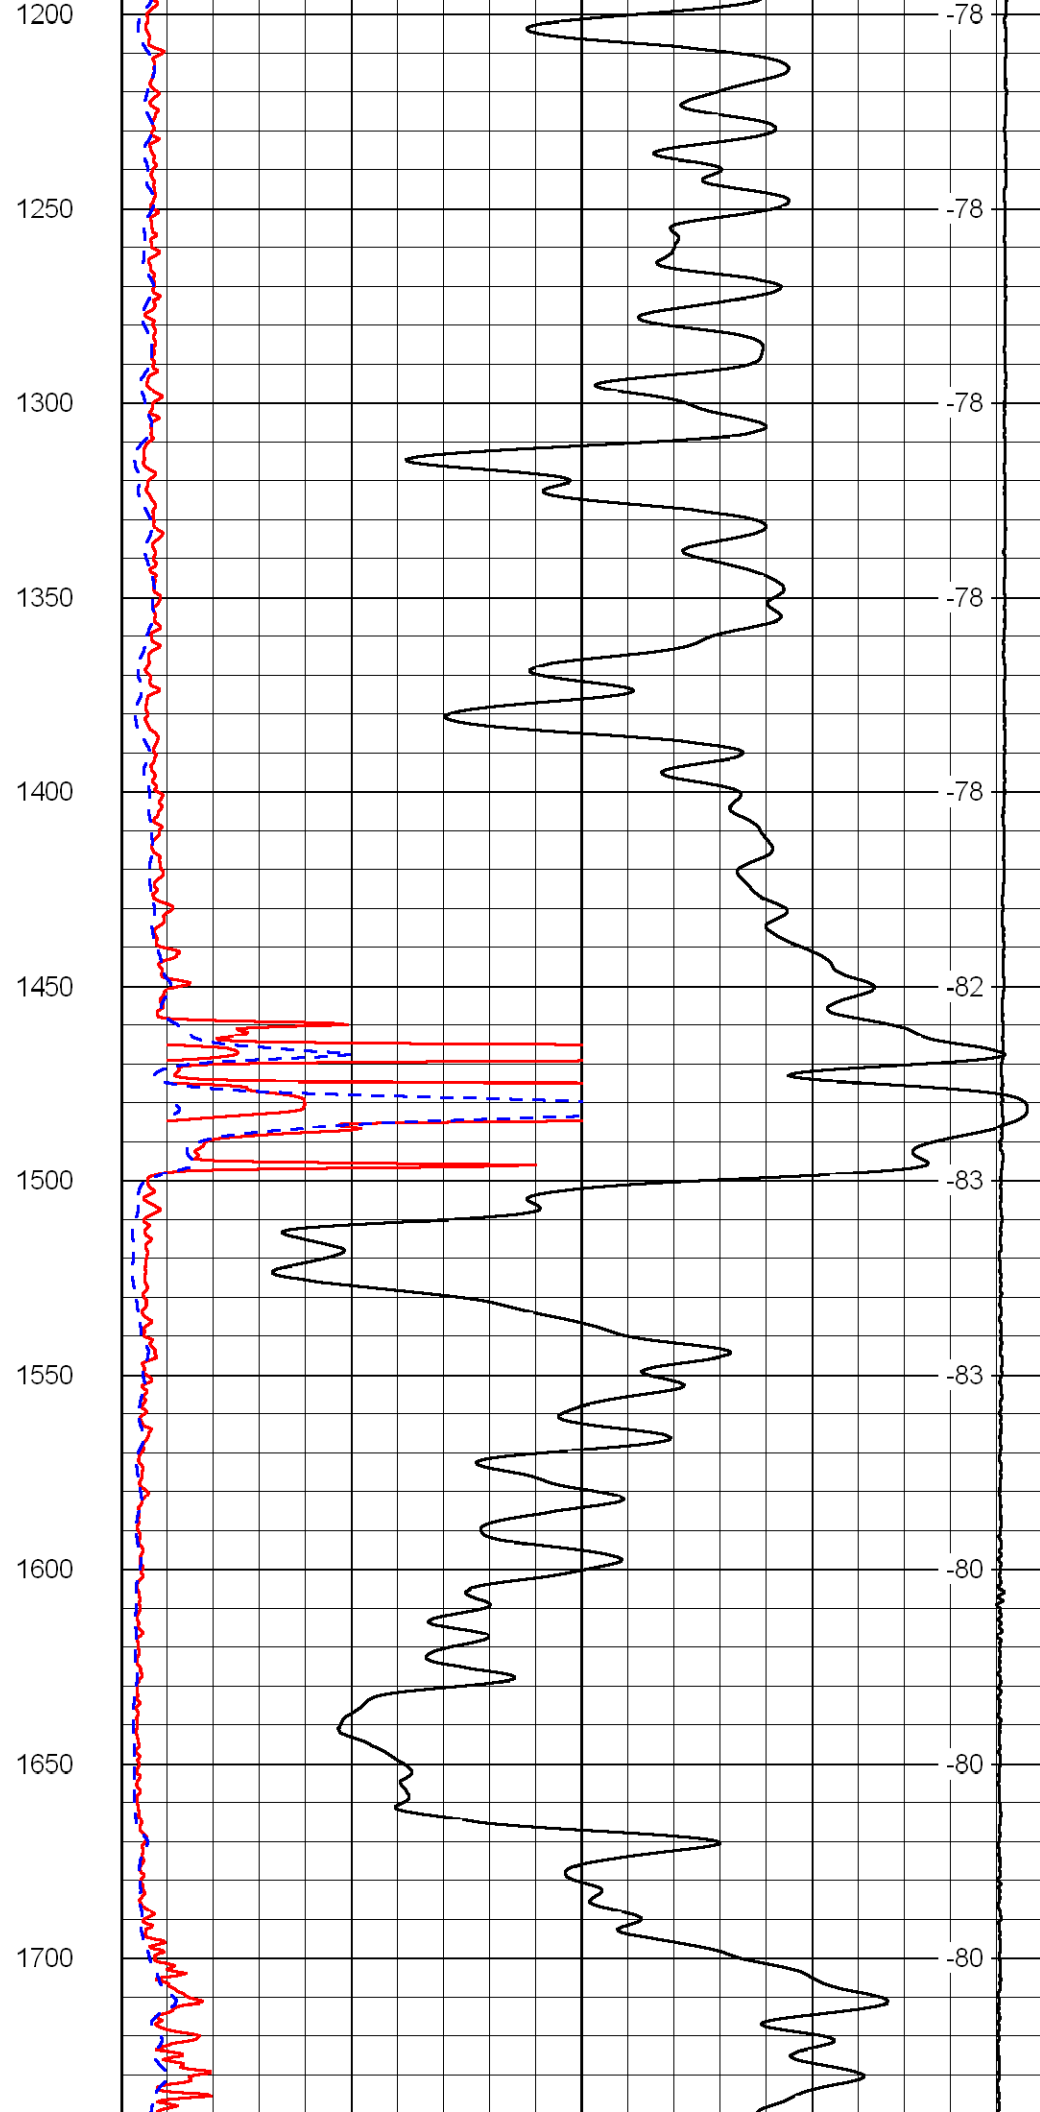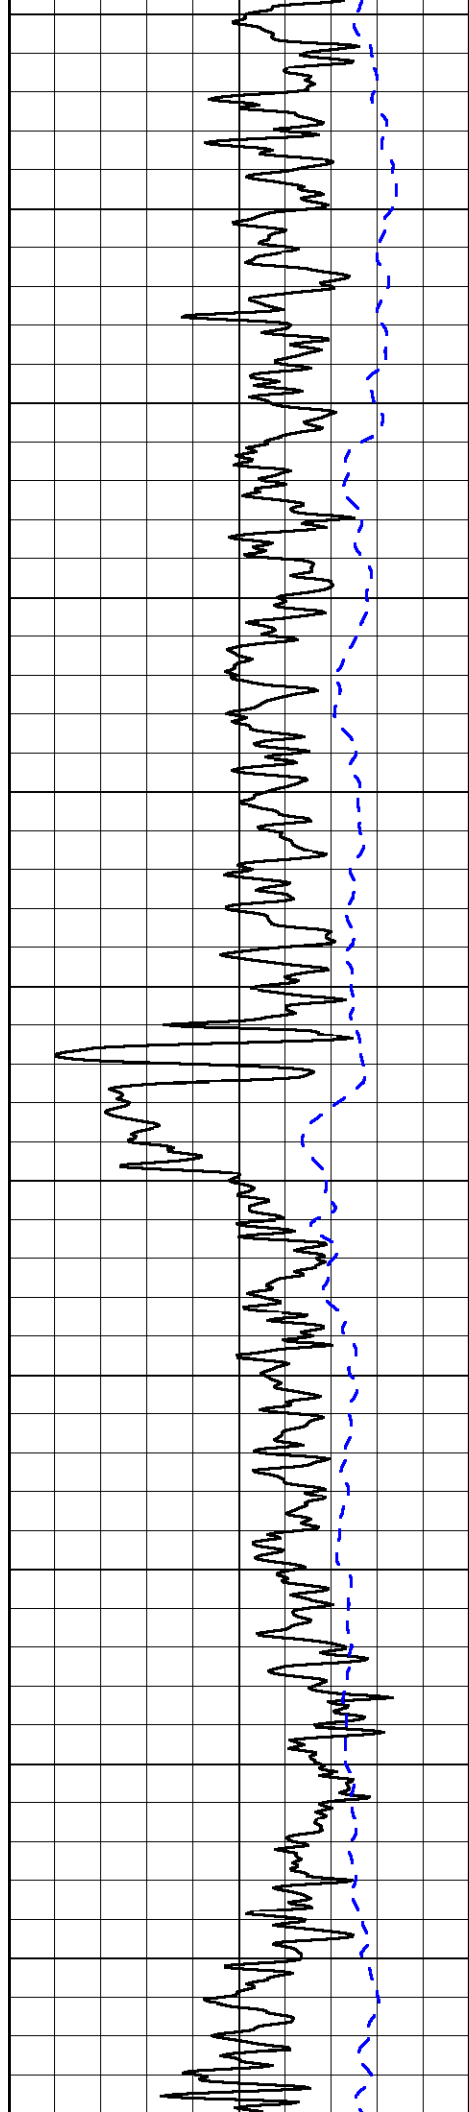


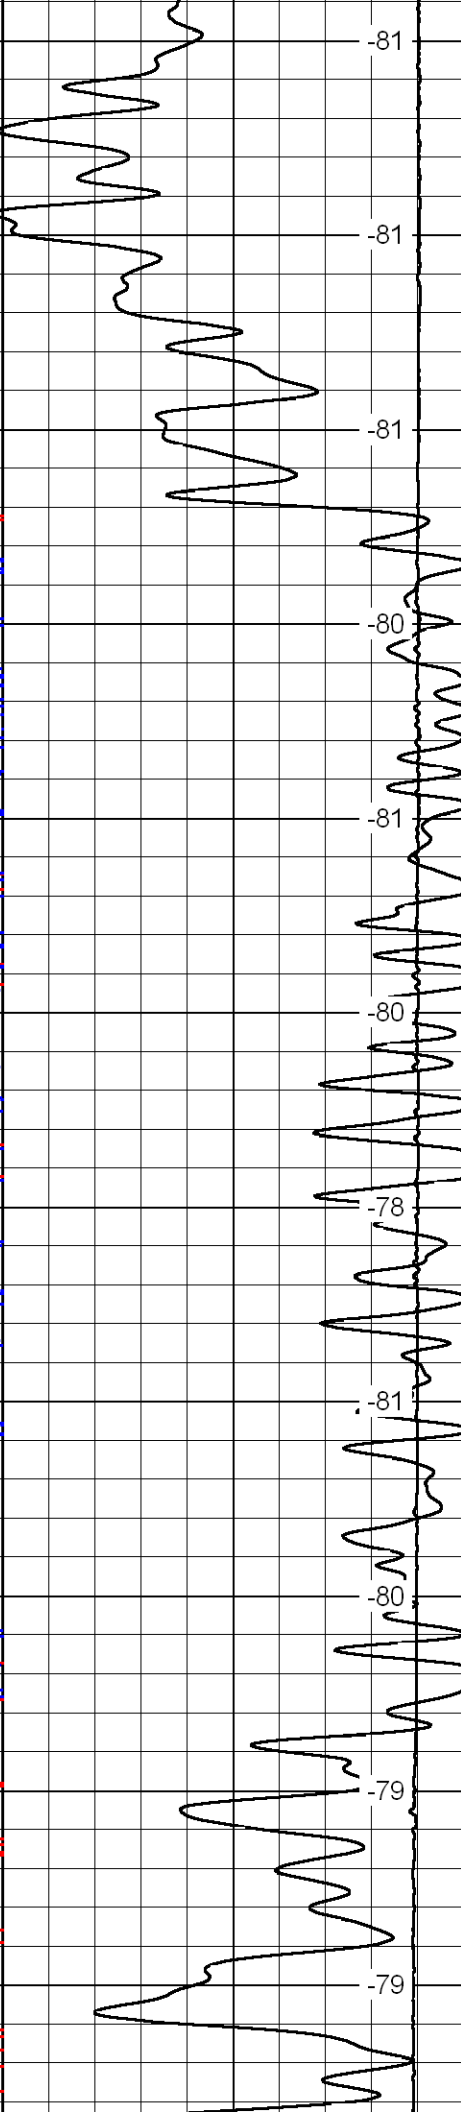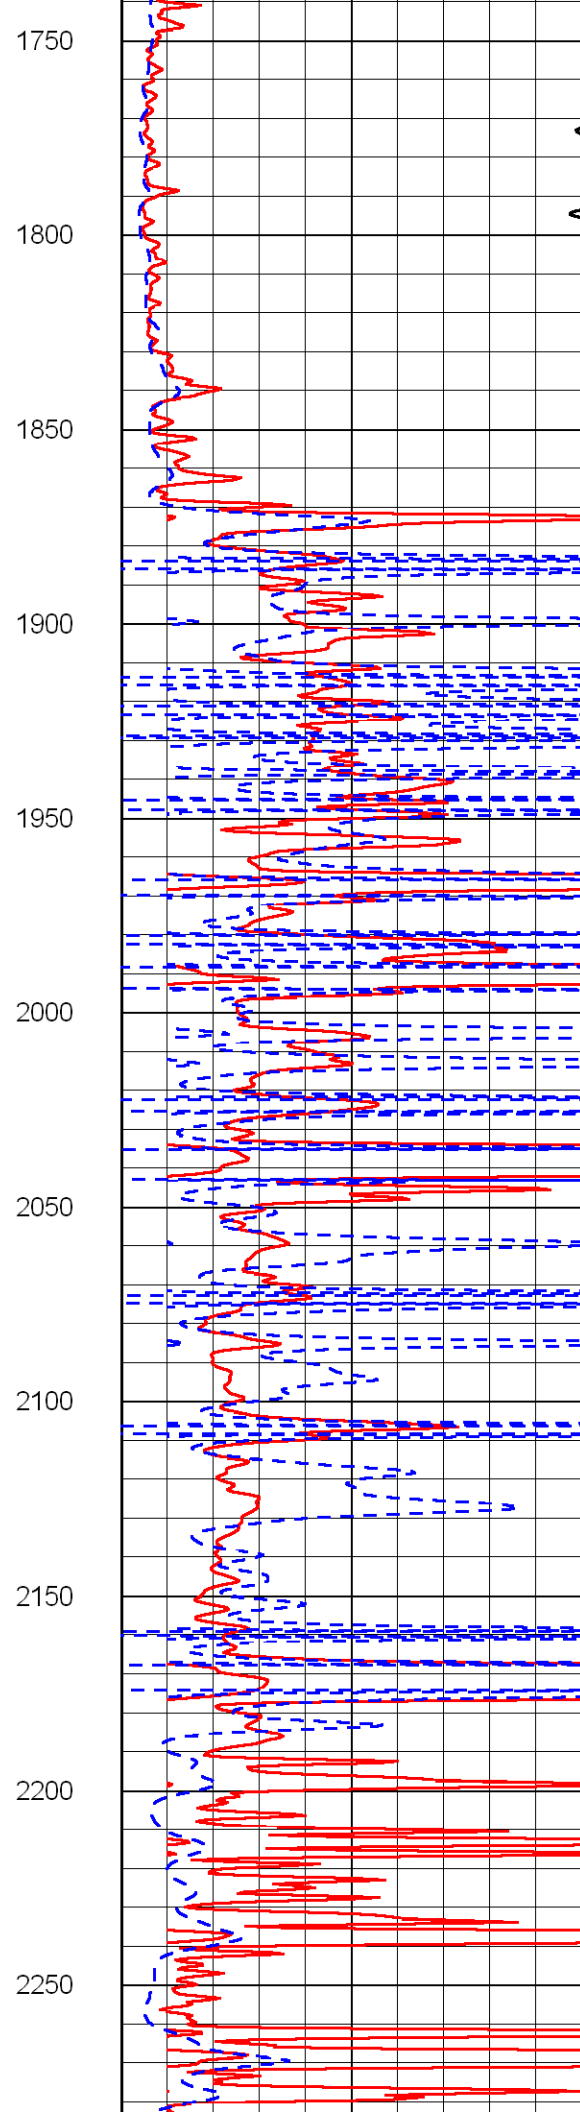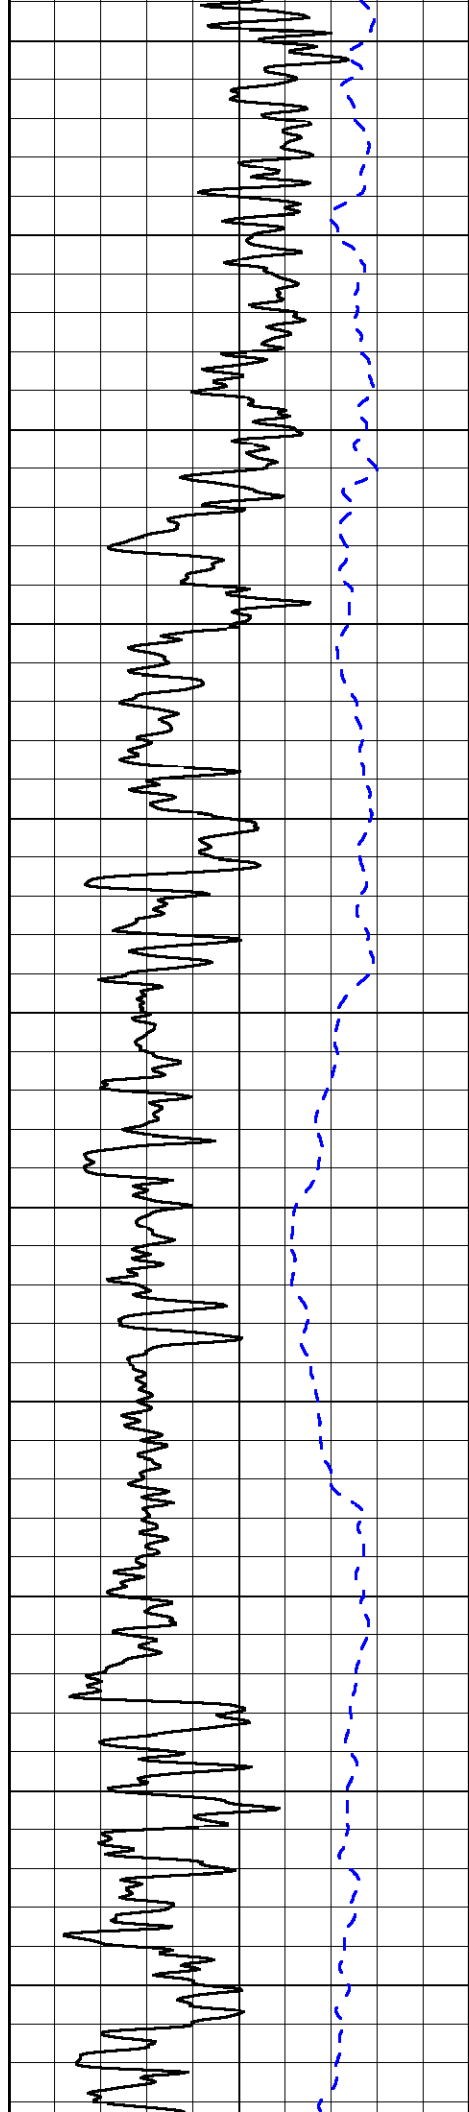

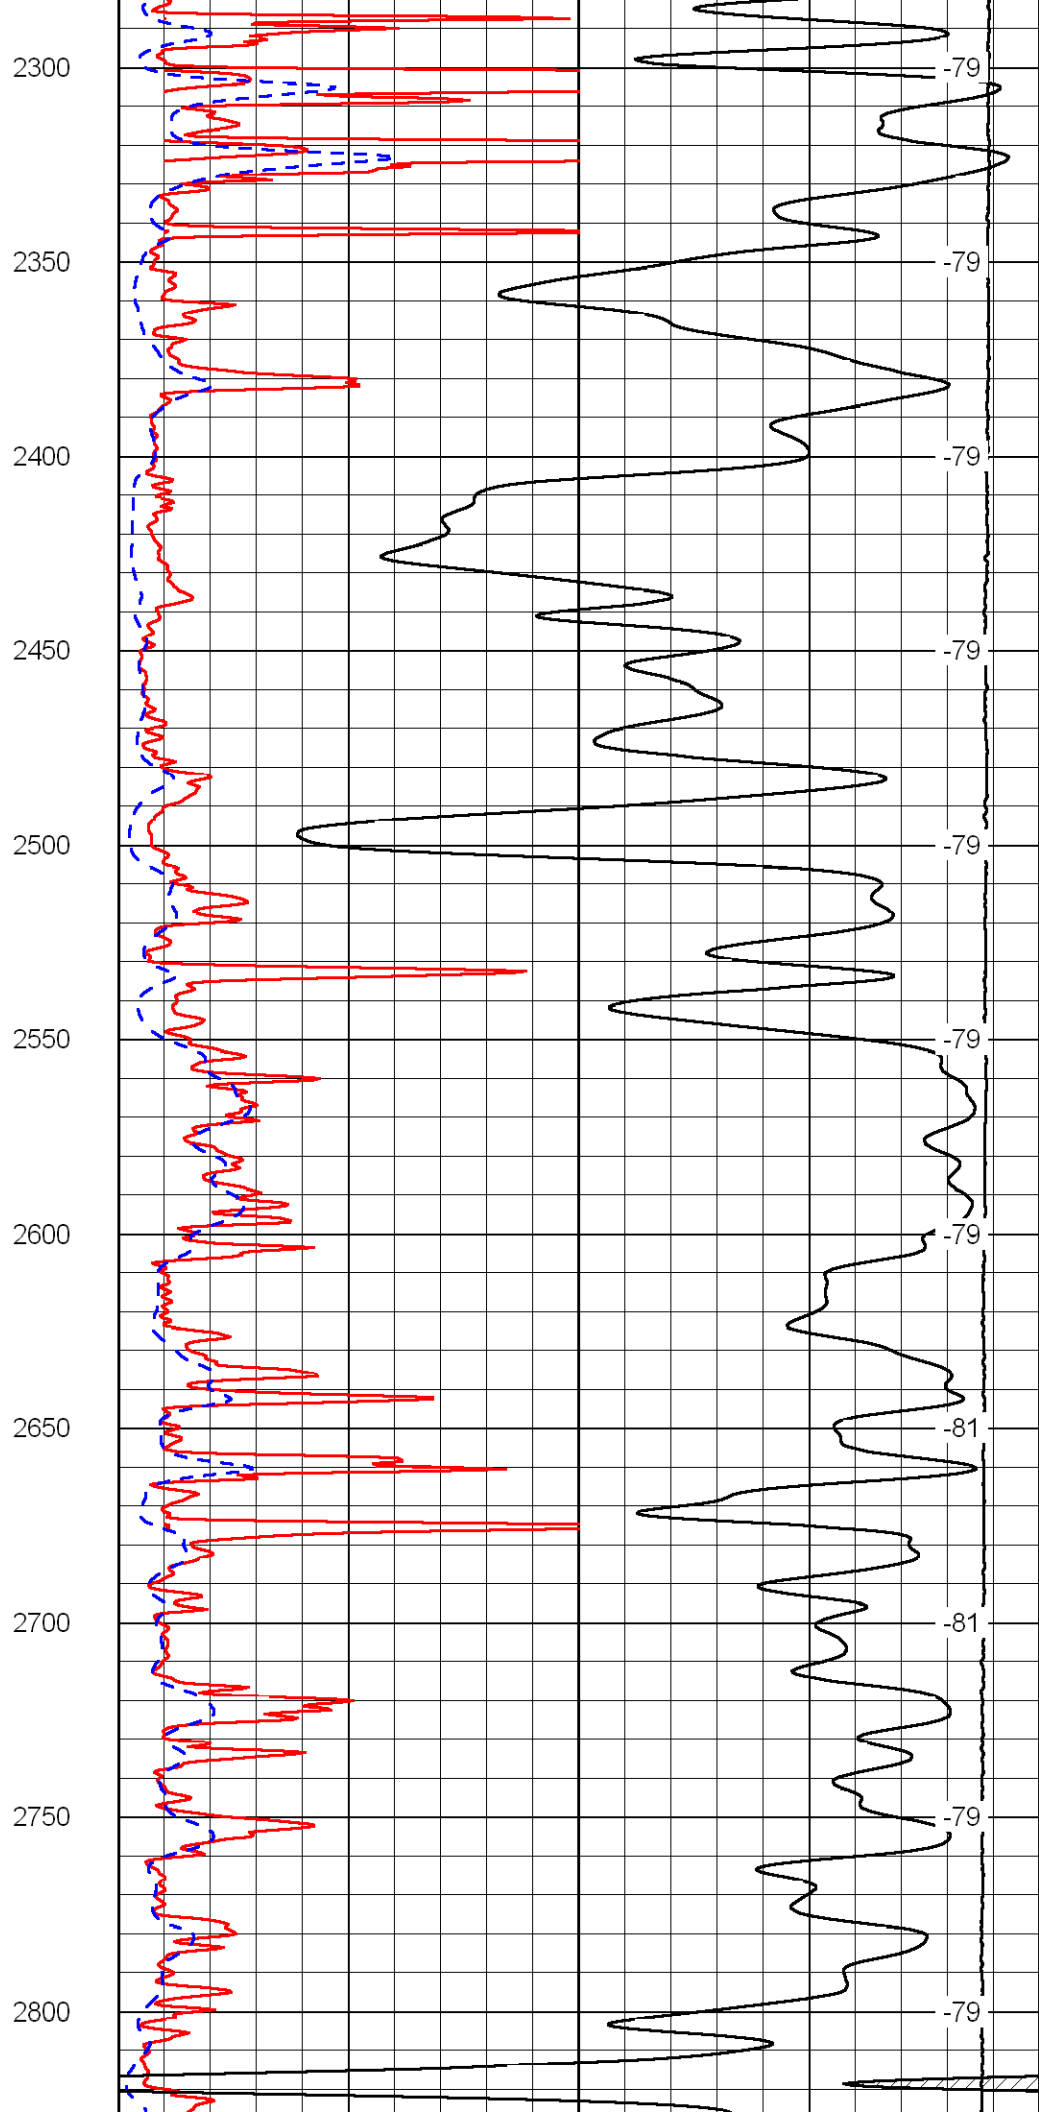
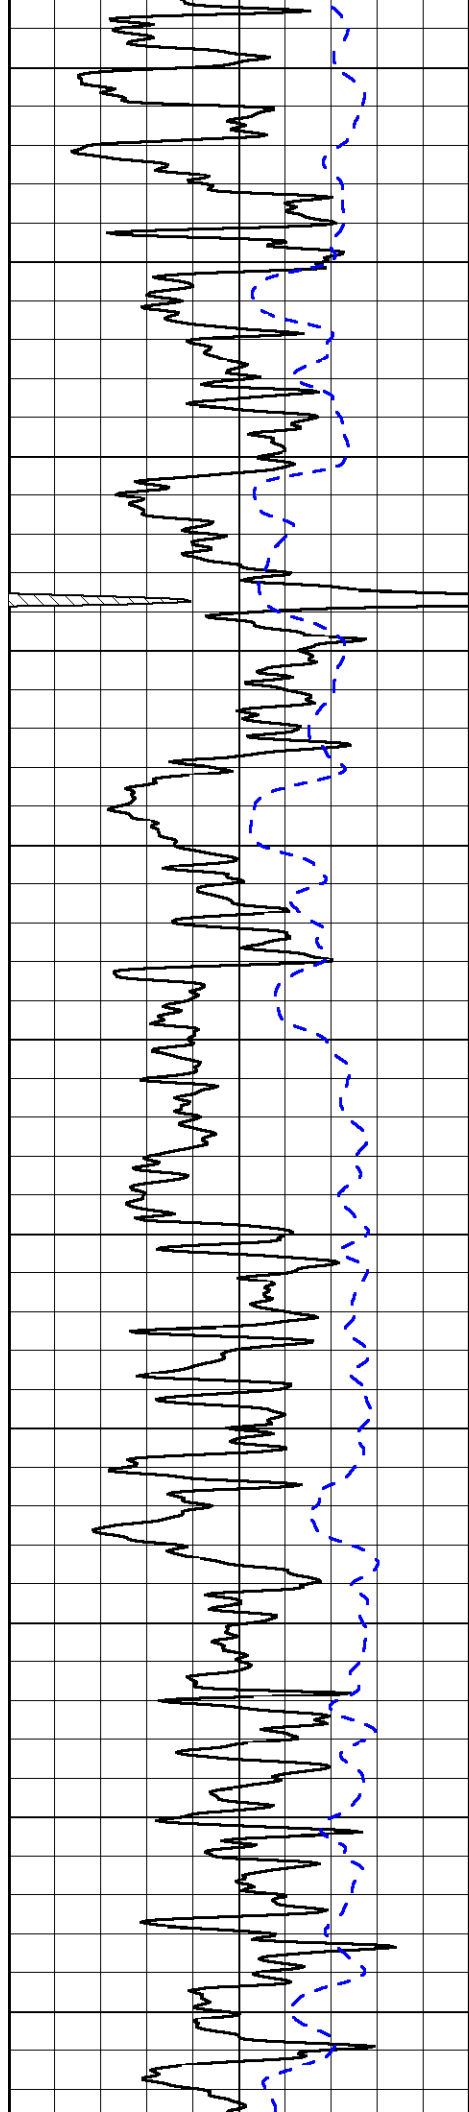


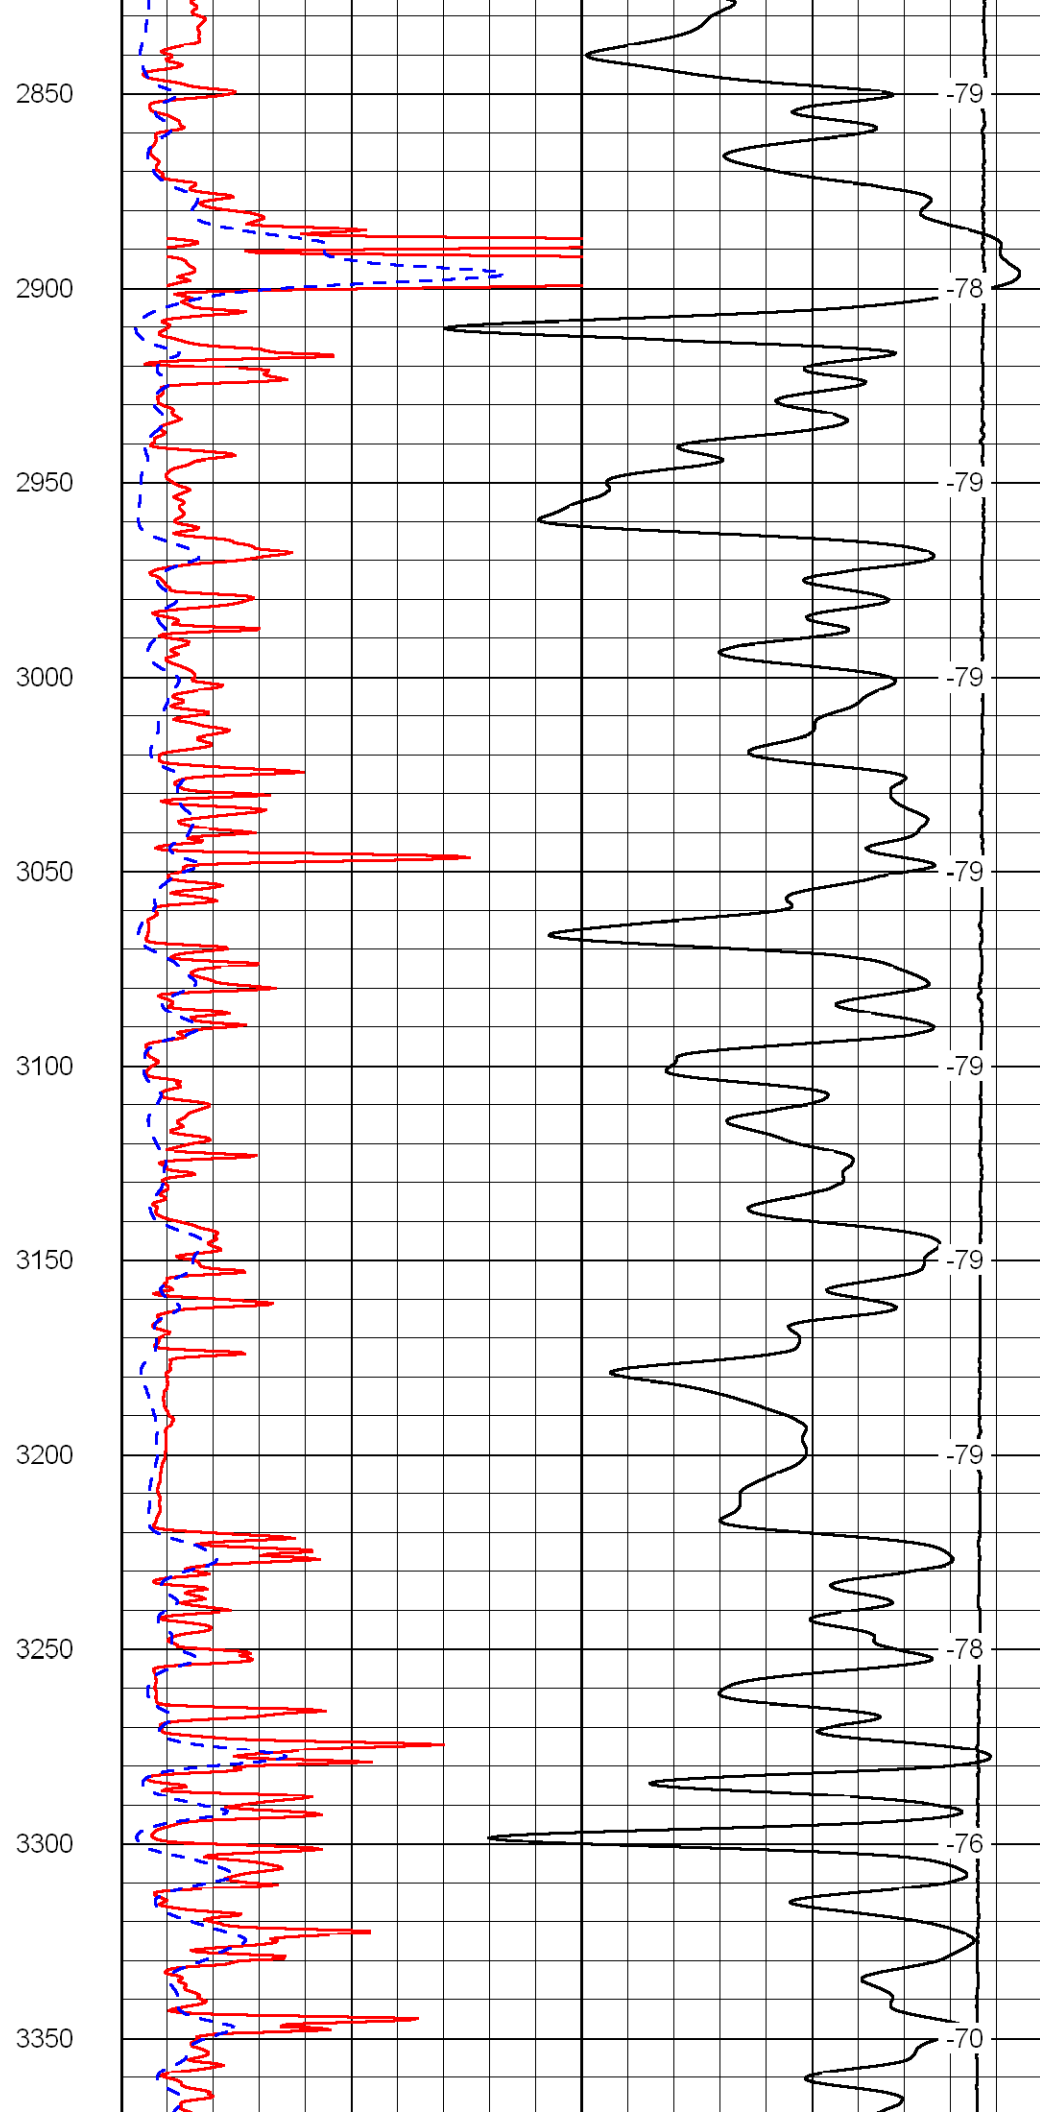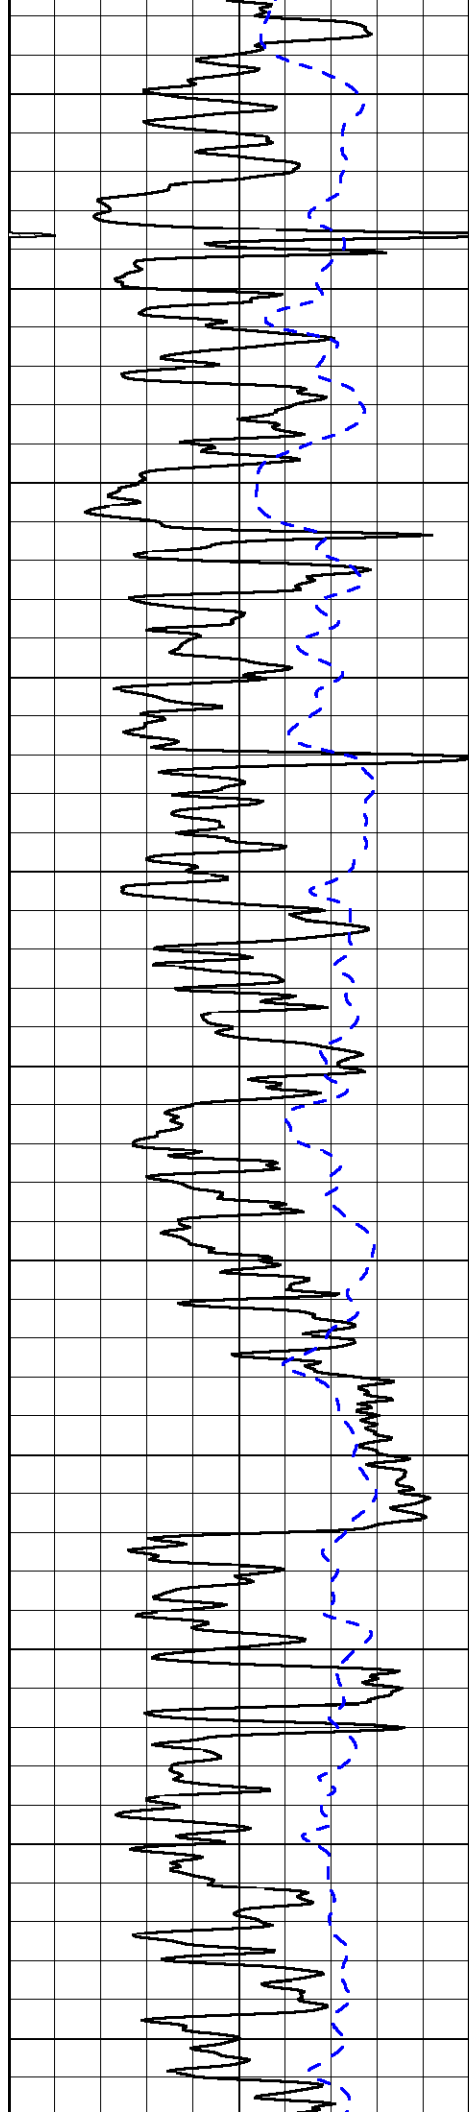


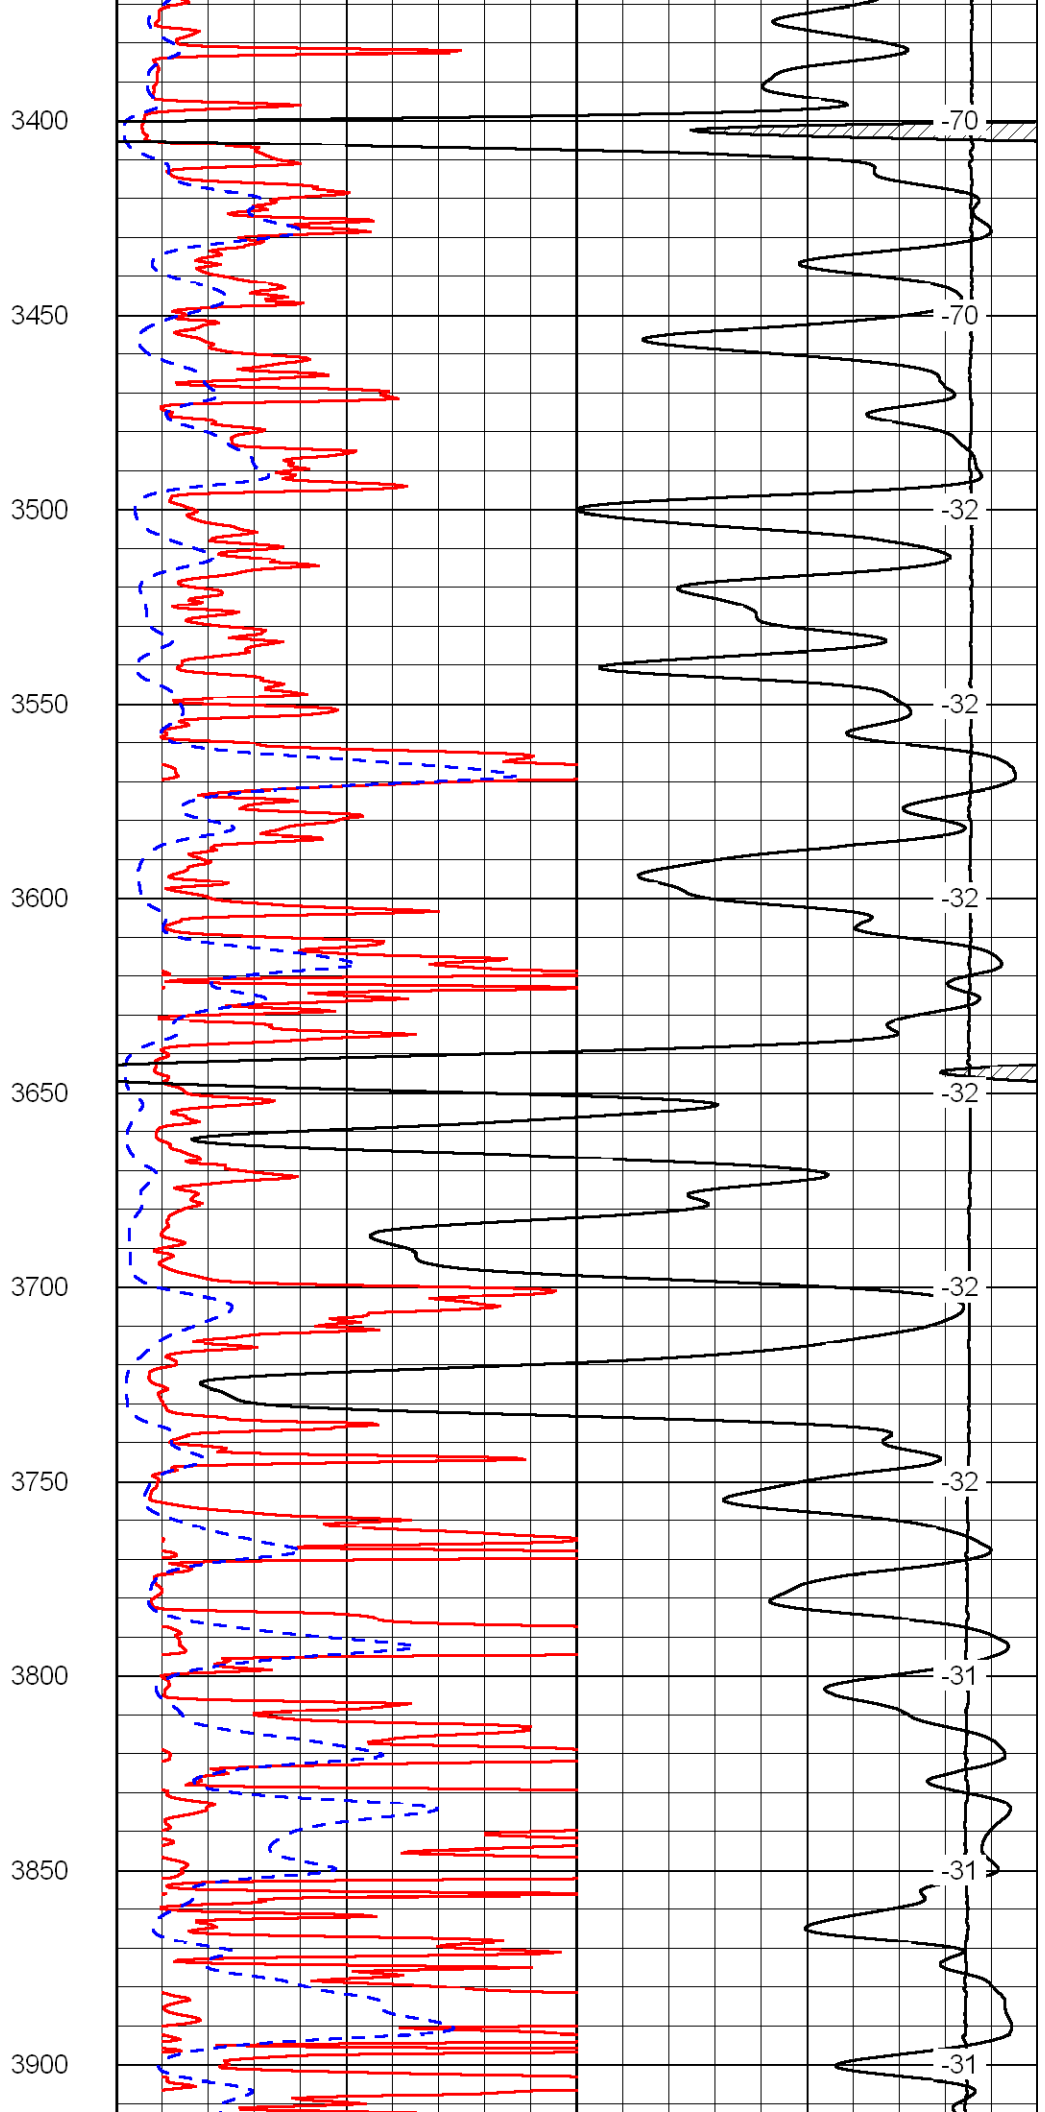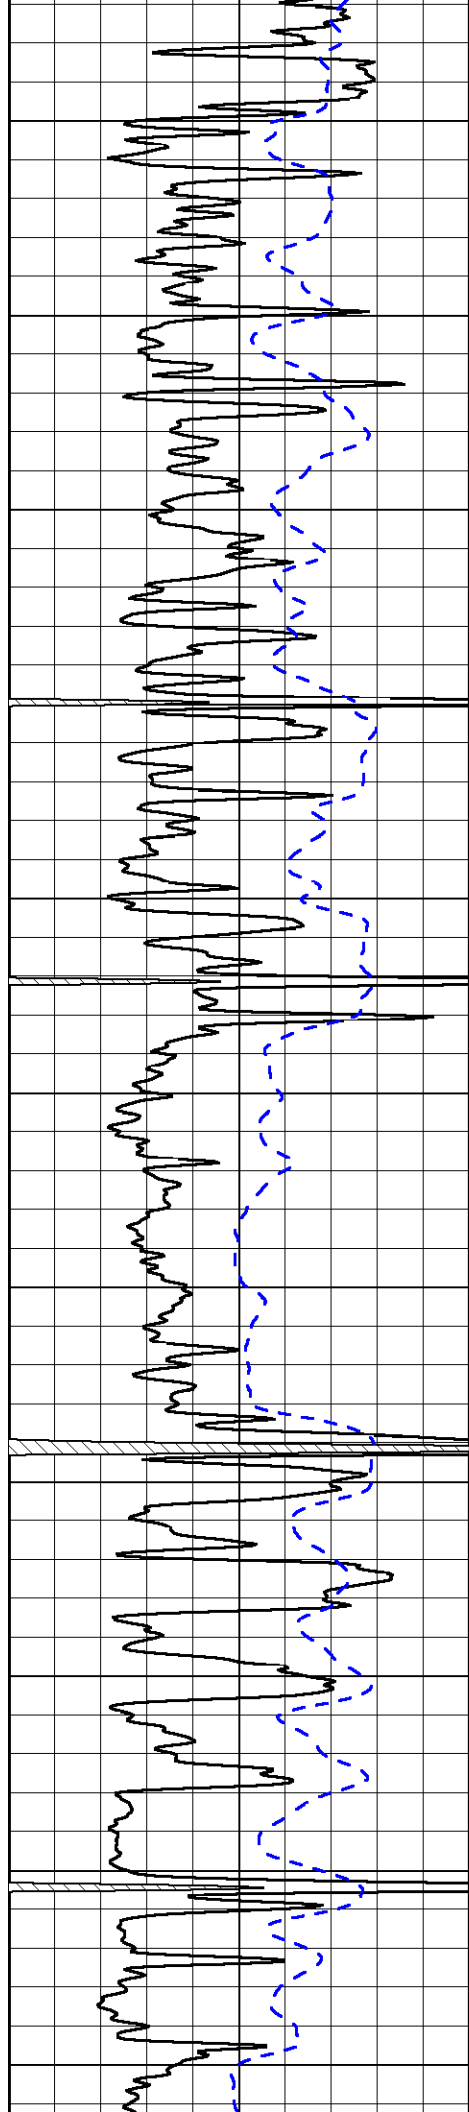


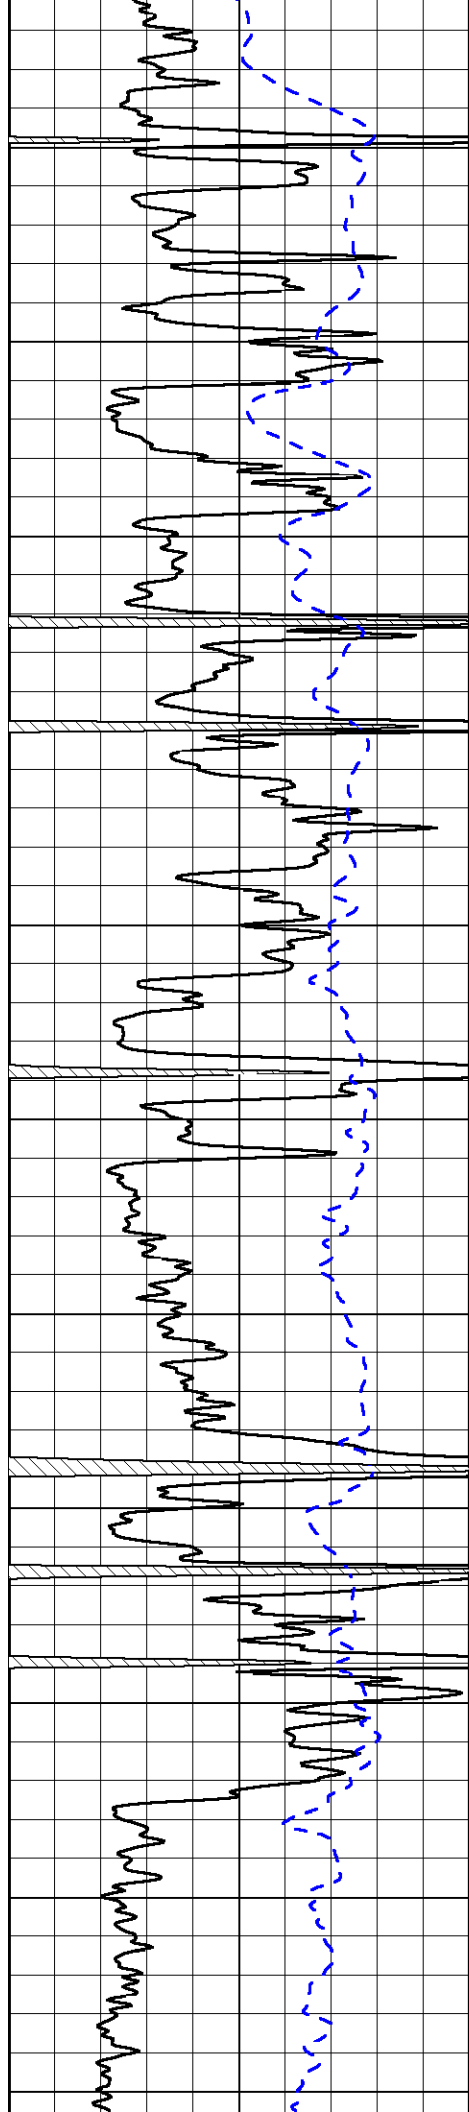


3950
4000
4050
4100
4150
4200
4250
4300
4350
4400
4450

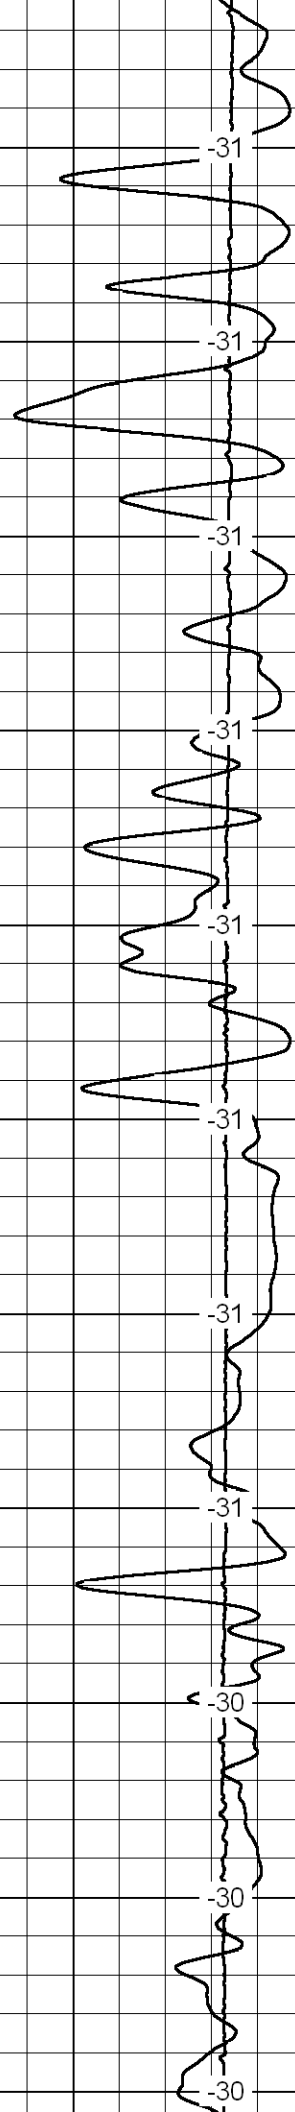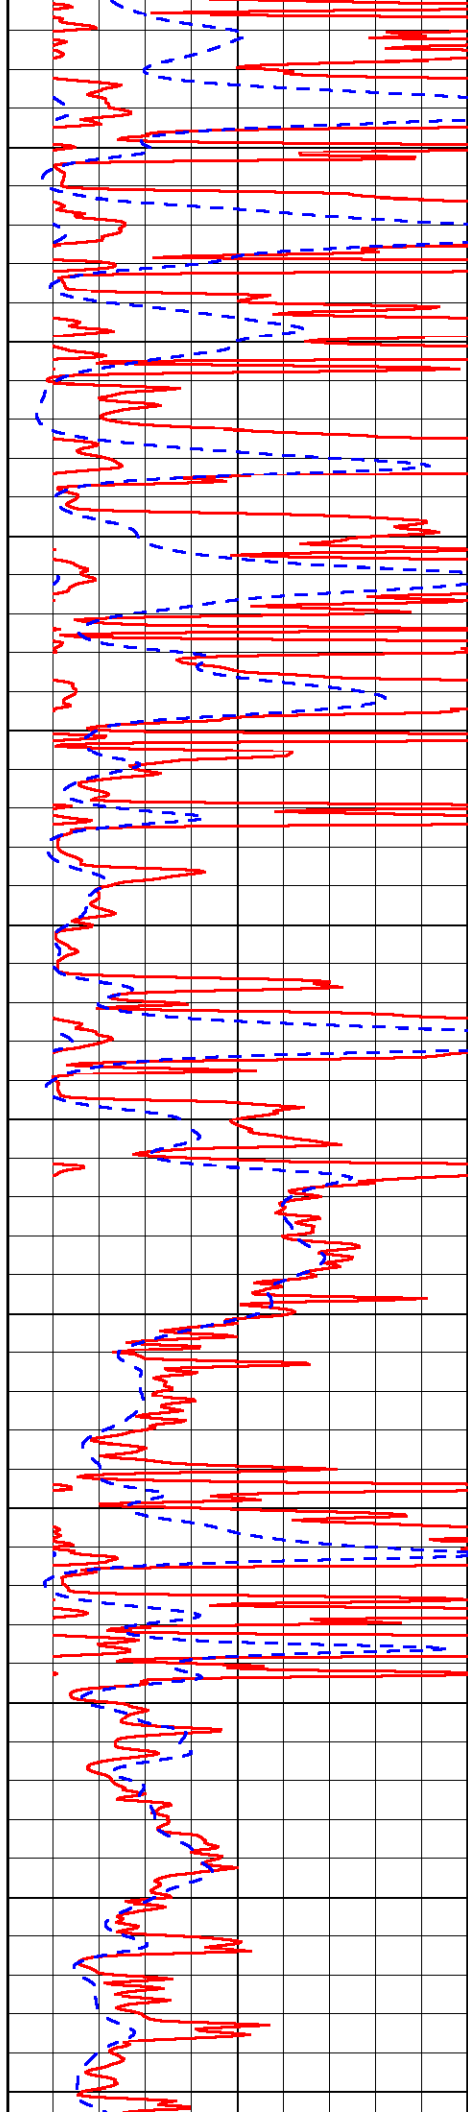

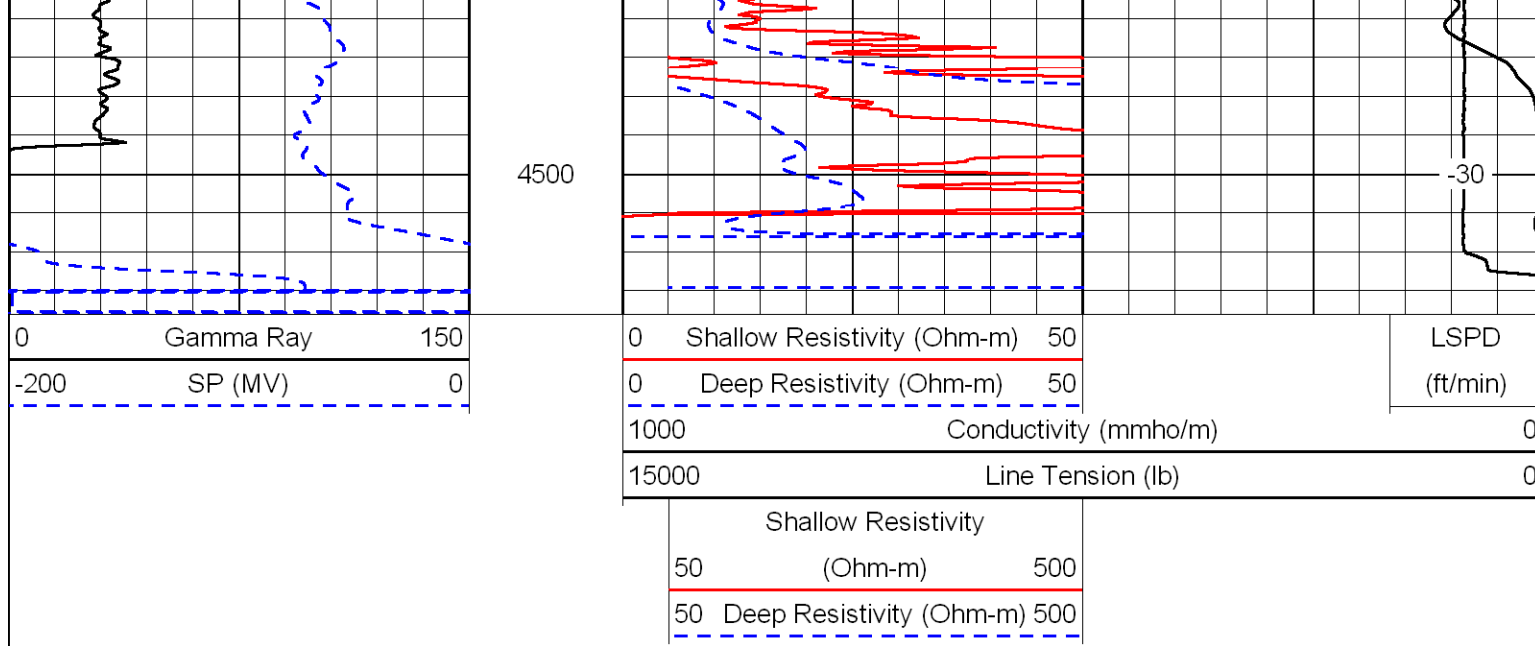

Database File: c:\warrior\data\berexco_may schneider no. 4\berhd.db
 Dataset Pathname: dil/ber2in
 Presentation Format: dil
 Dataset Creation: Sat Feb 28 00:46:47 2009
 Charted by: Depth in Feet scaled 1:240

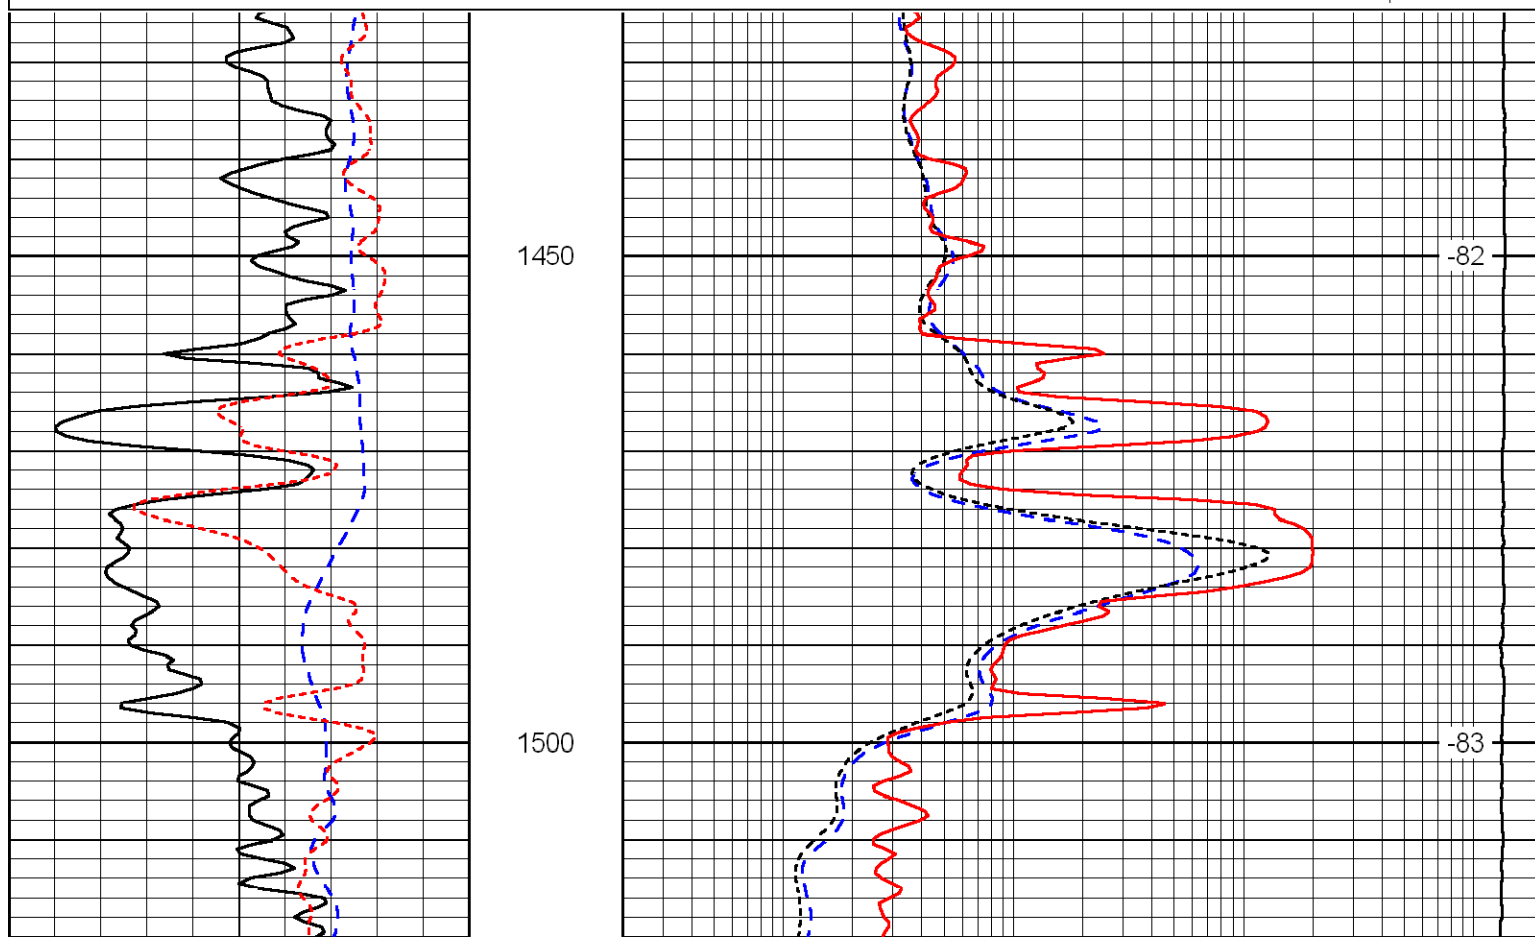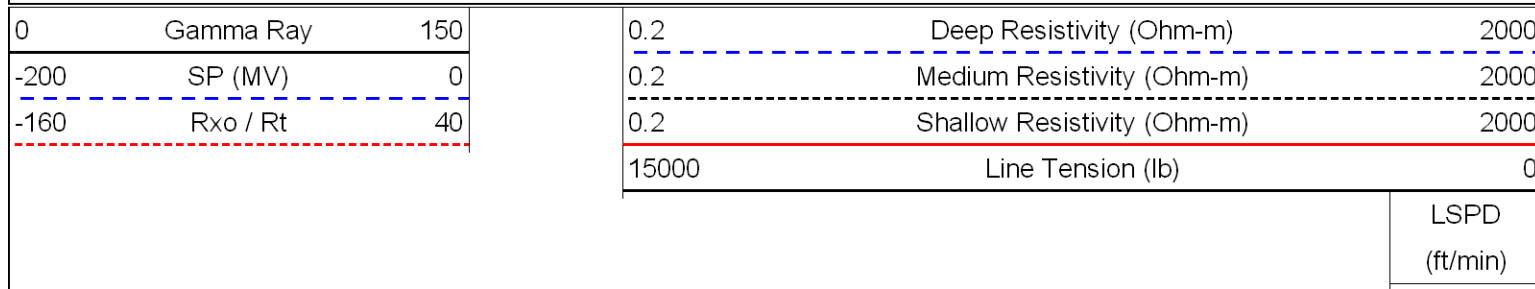

0	Gamma Ray	150
-200	SP (MV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity (Ohm-m)	2000
0.2	Medium Resistivity (Ohm-m)	2000
0.2	Shallow Resistivity (Ohm-m)	2000
15000	Line Tension (lb)	0


LSPD
(ft/min)

Database File: c:\warrior\data\berexco_ may schneider no. 4\berhd.db
Dataset Pathname: dil/ber2in
Presentation Format: dil
Dataset Creation: Sat Feb 28 00:46:47 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-200	SP (MV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity (Ohm-m)	2000
0.2	Medium Resistivity (Ohm-m)	2000
0.2	Shallow Resistivity (Ohm-m)	2000
15000	Line Tension (lb)	0


LSPD
(ft/min)

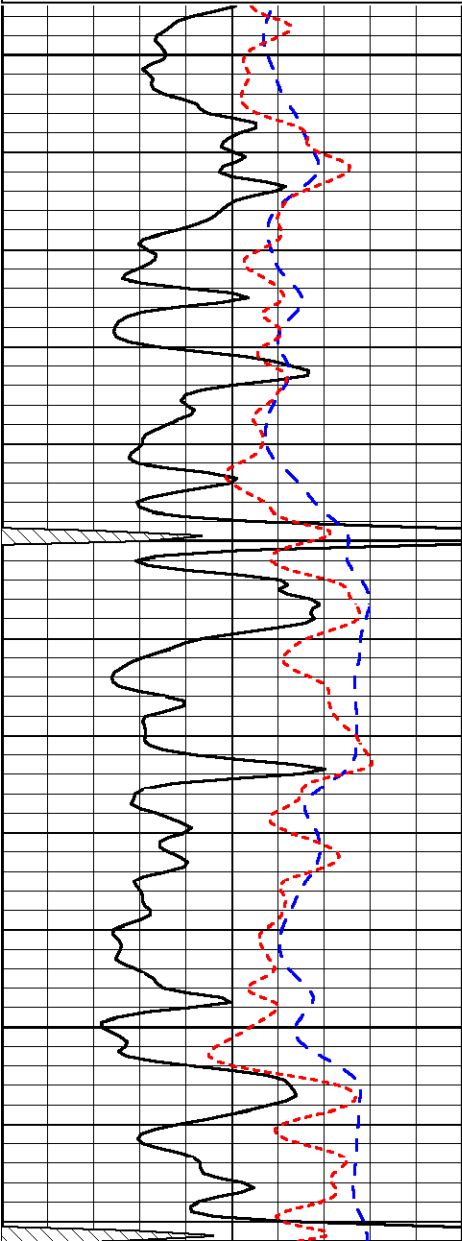

3500

3550


3600

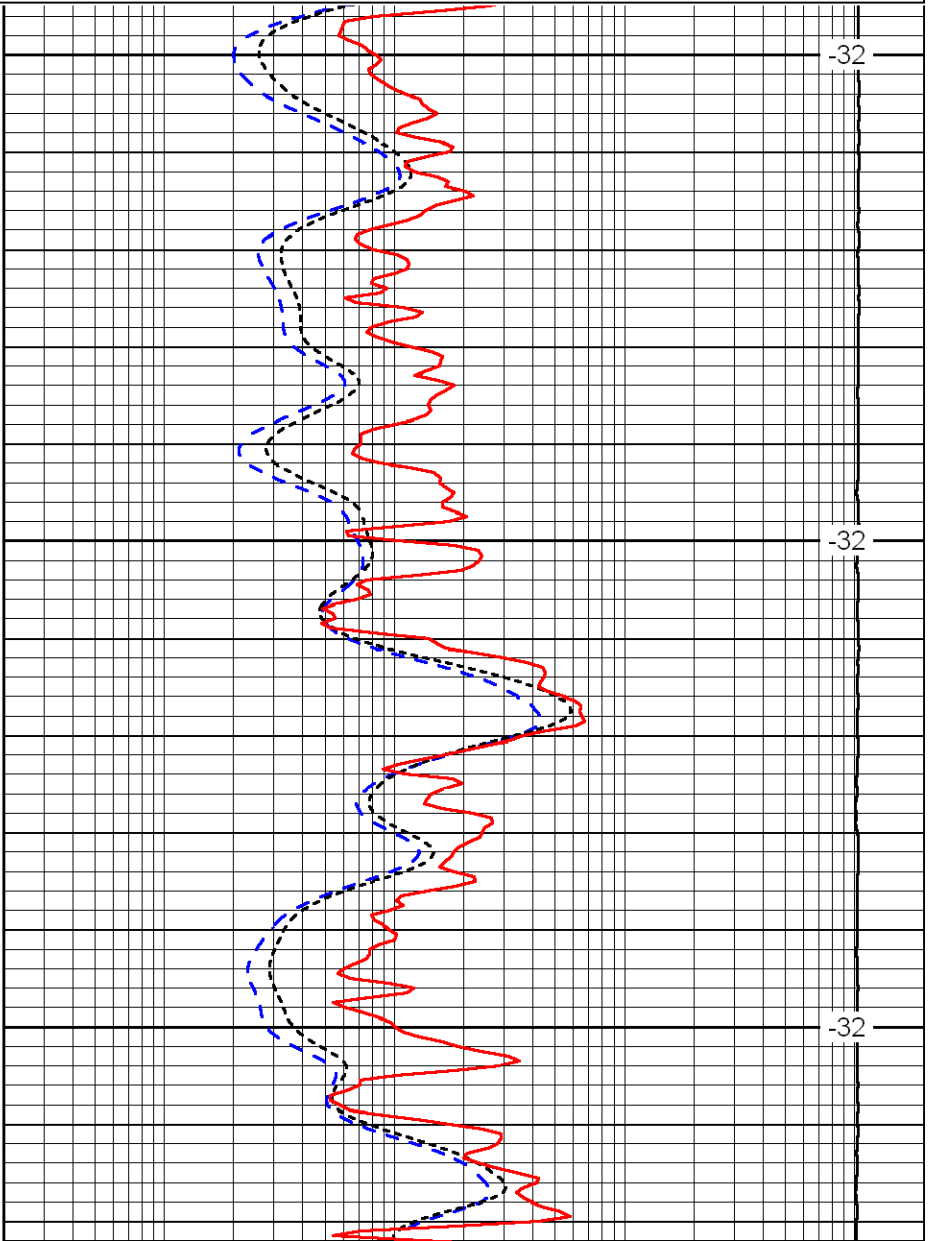

-32

-32

-32

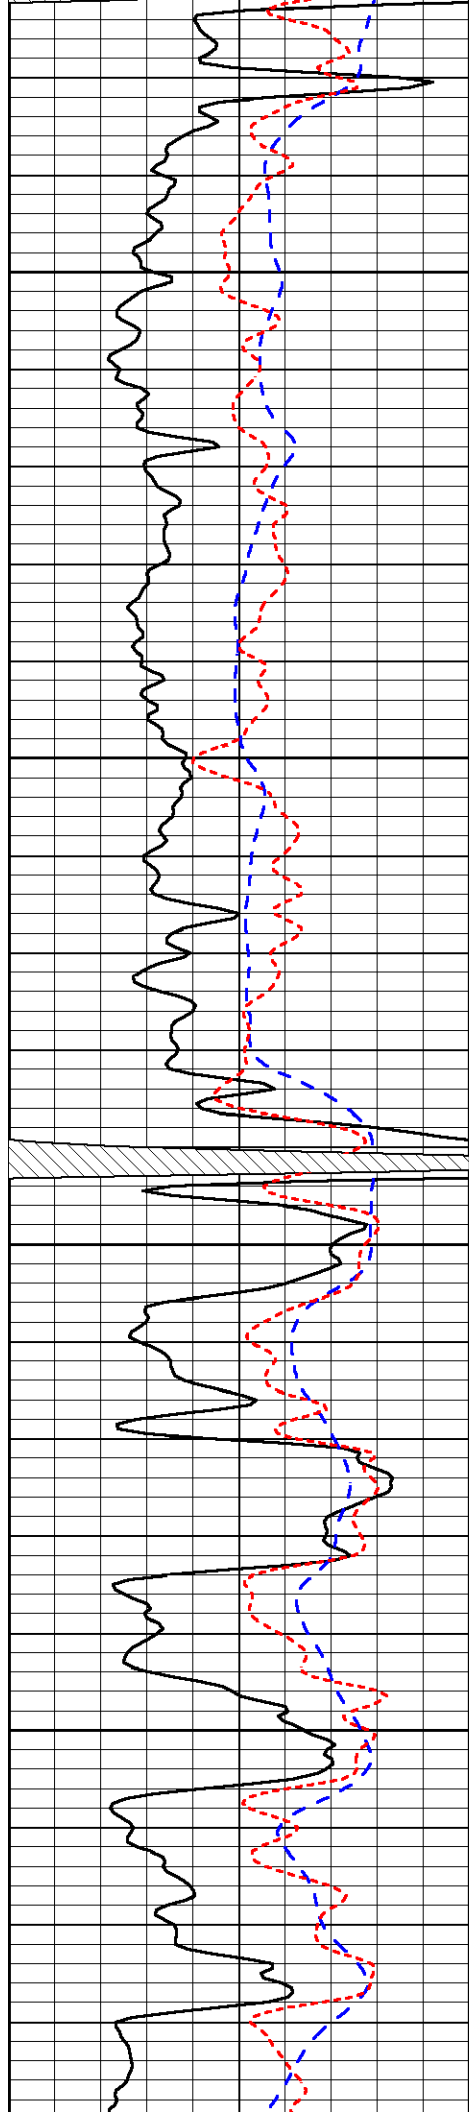


3650

3700

3750

3800

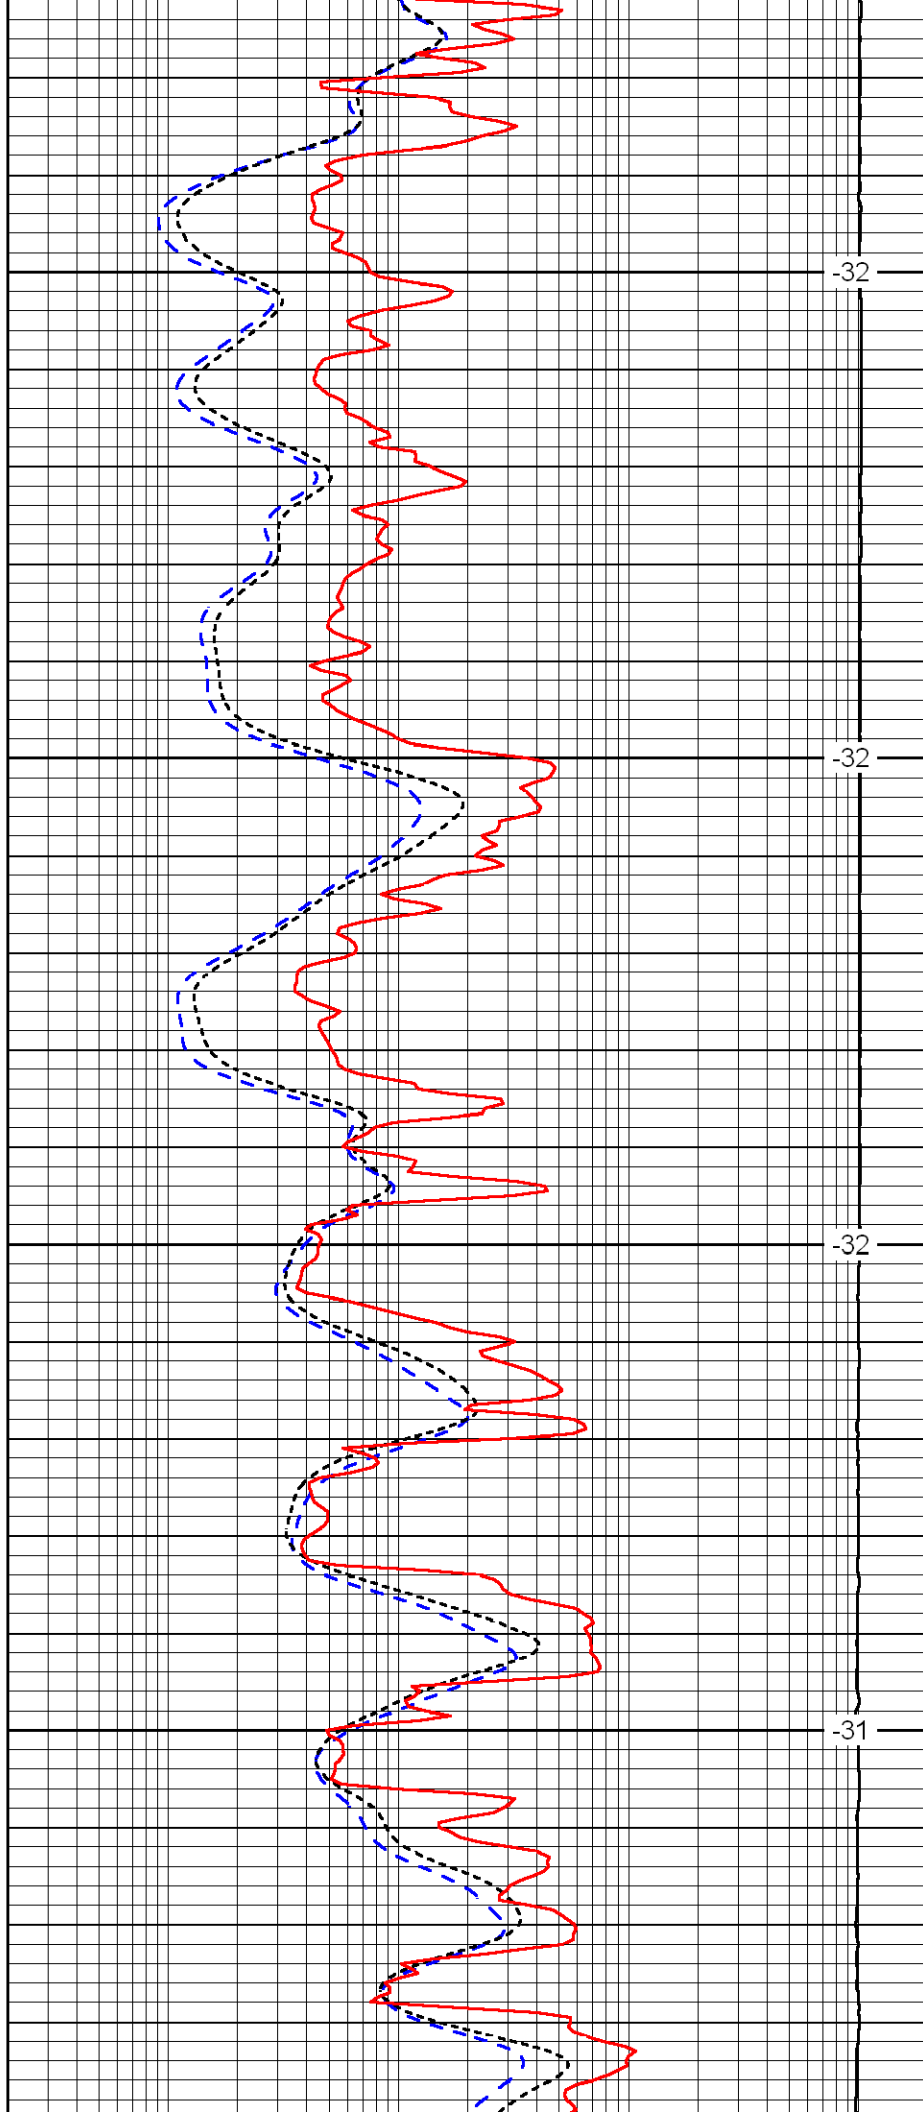


-32

-32

-32

-31

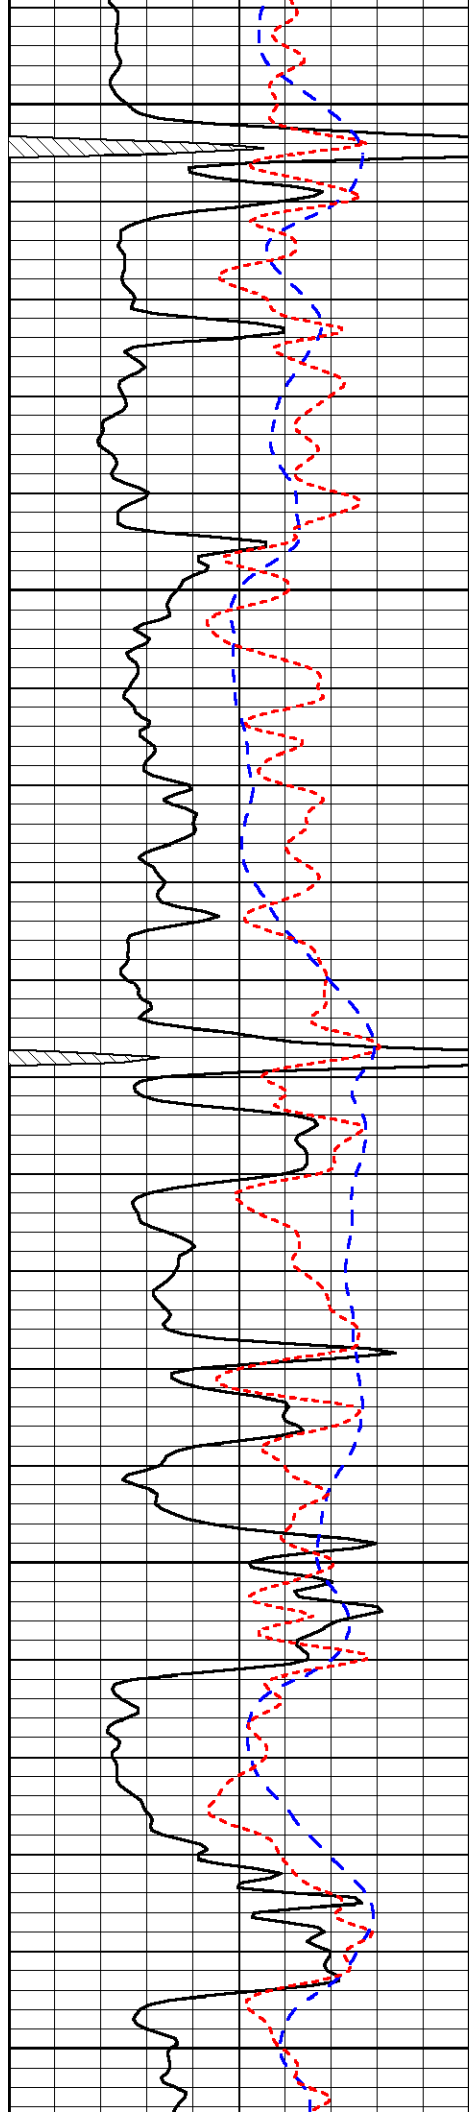


3850

3900

3950

4000

4050

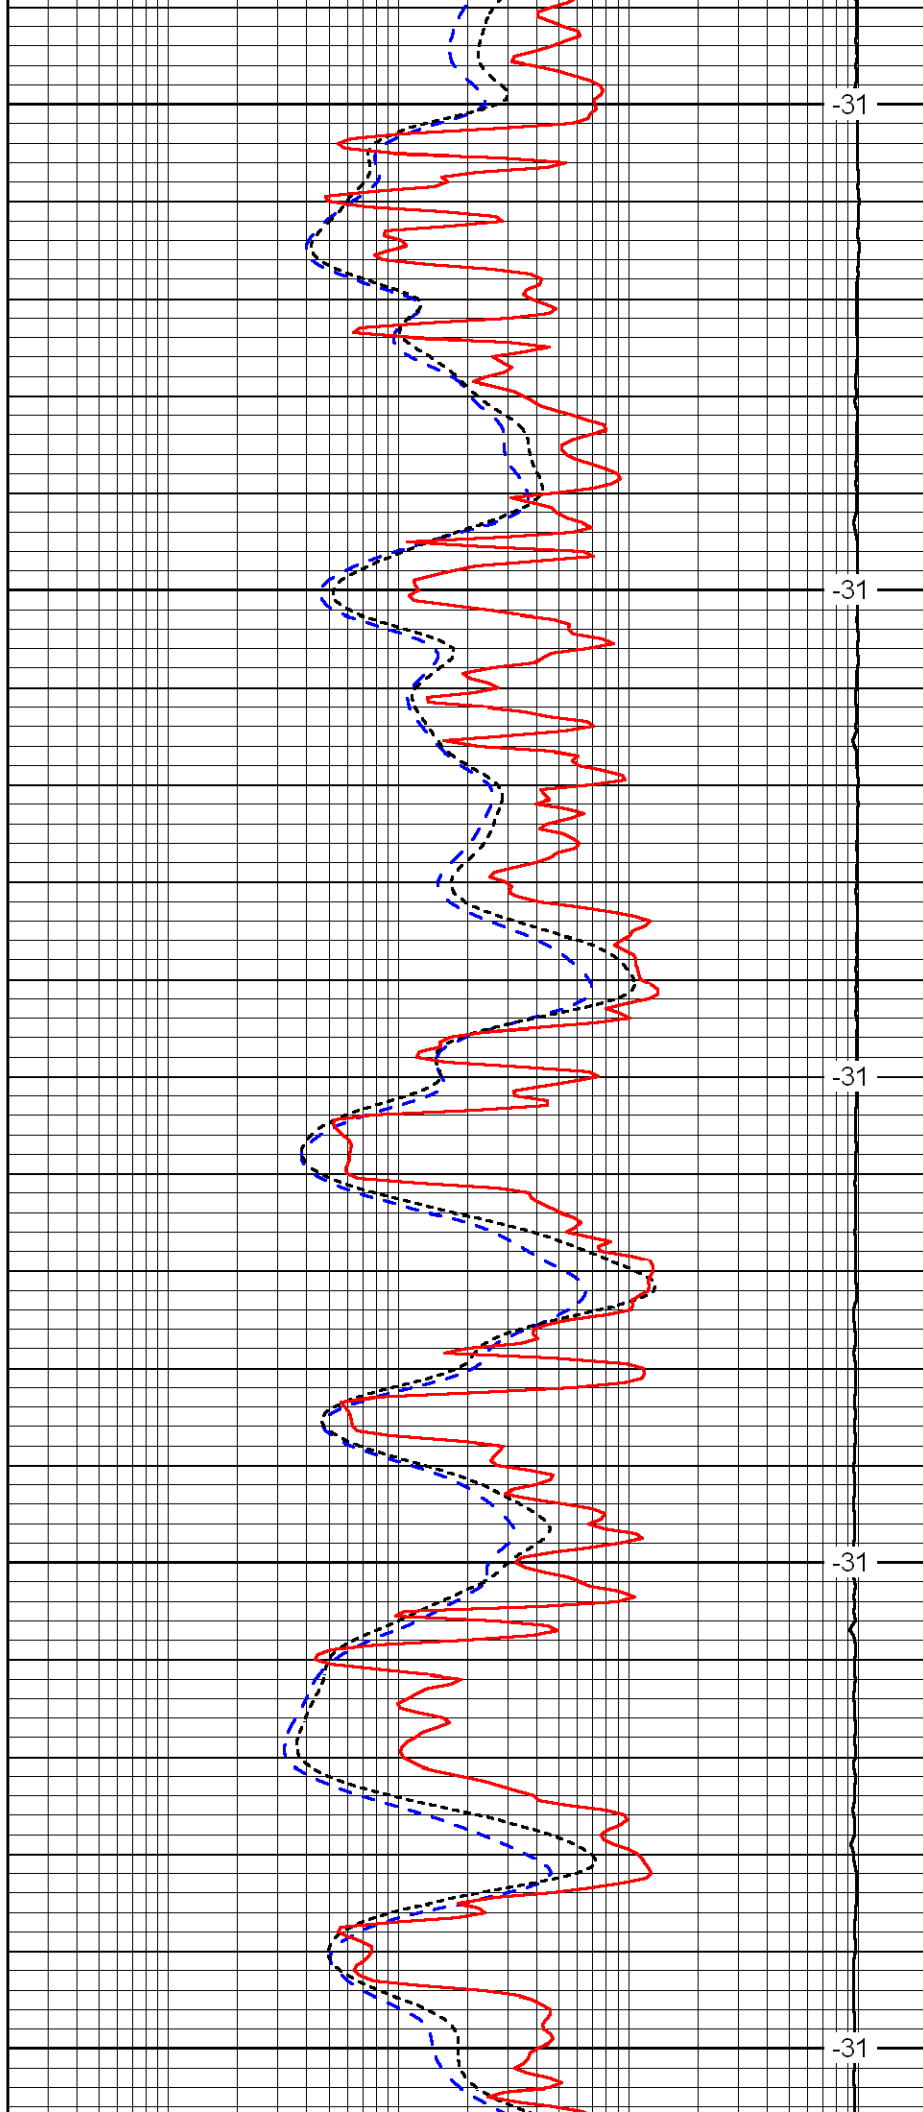


-31

-31

-31

-31

-31

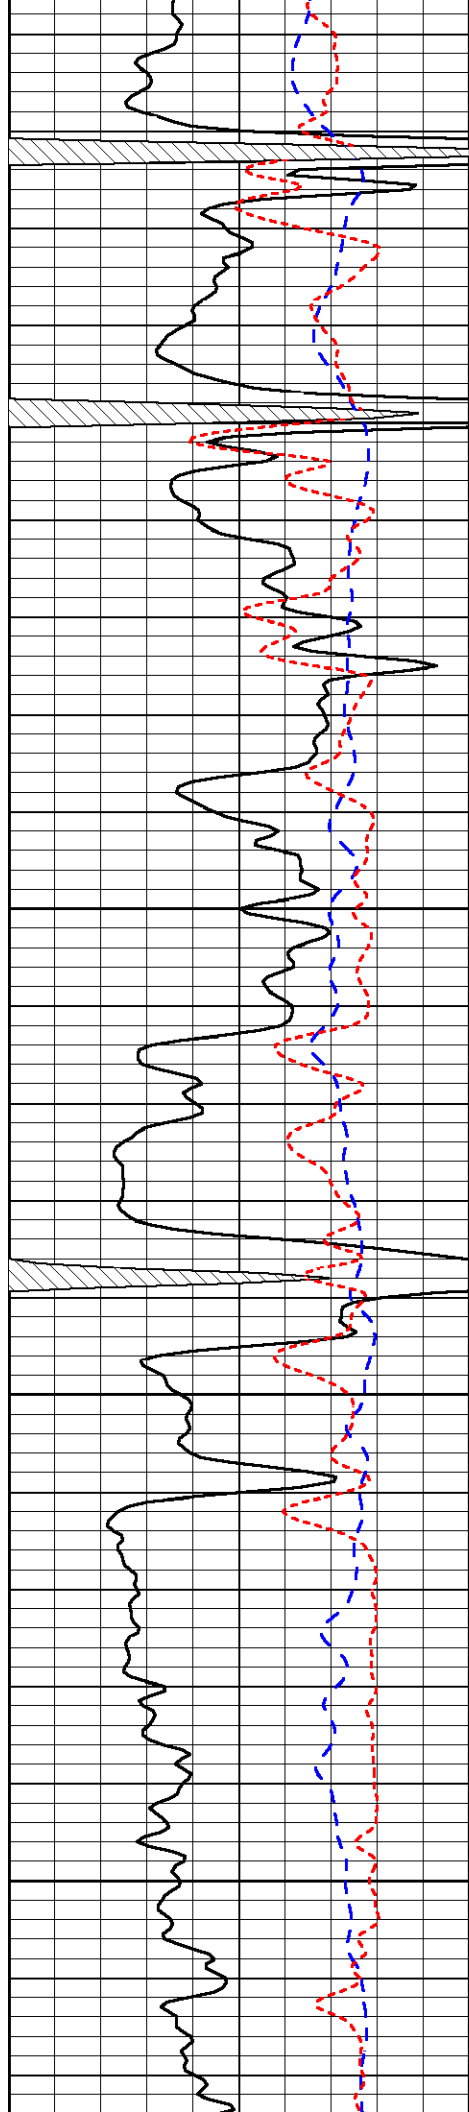



4100

4150

4200

4250

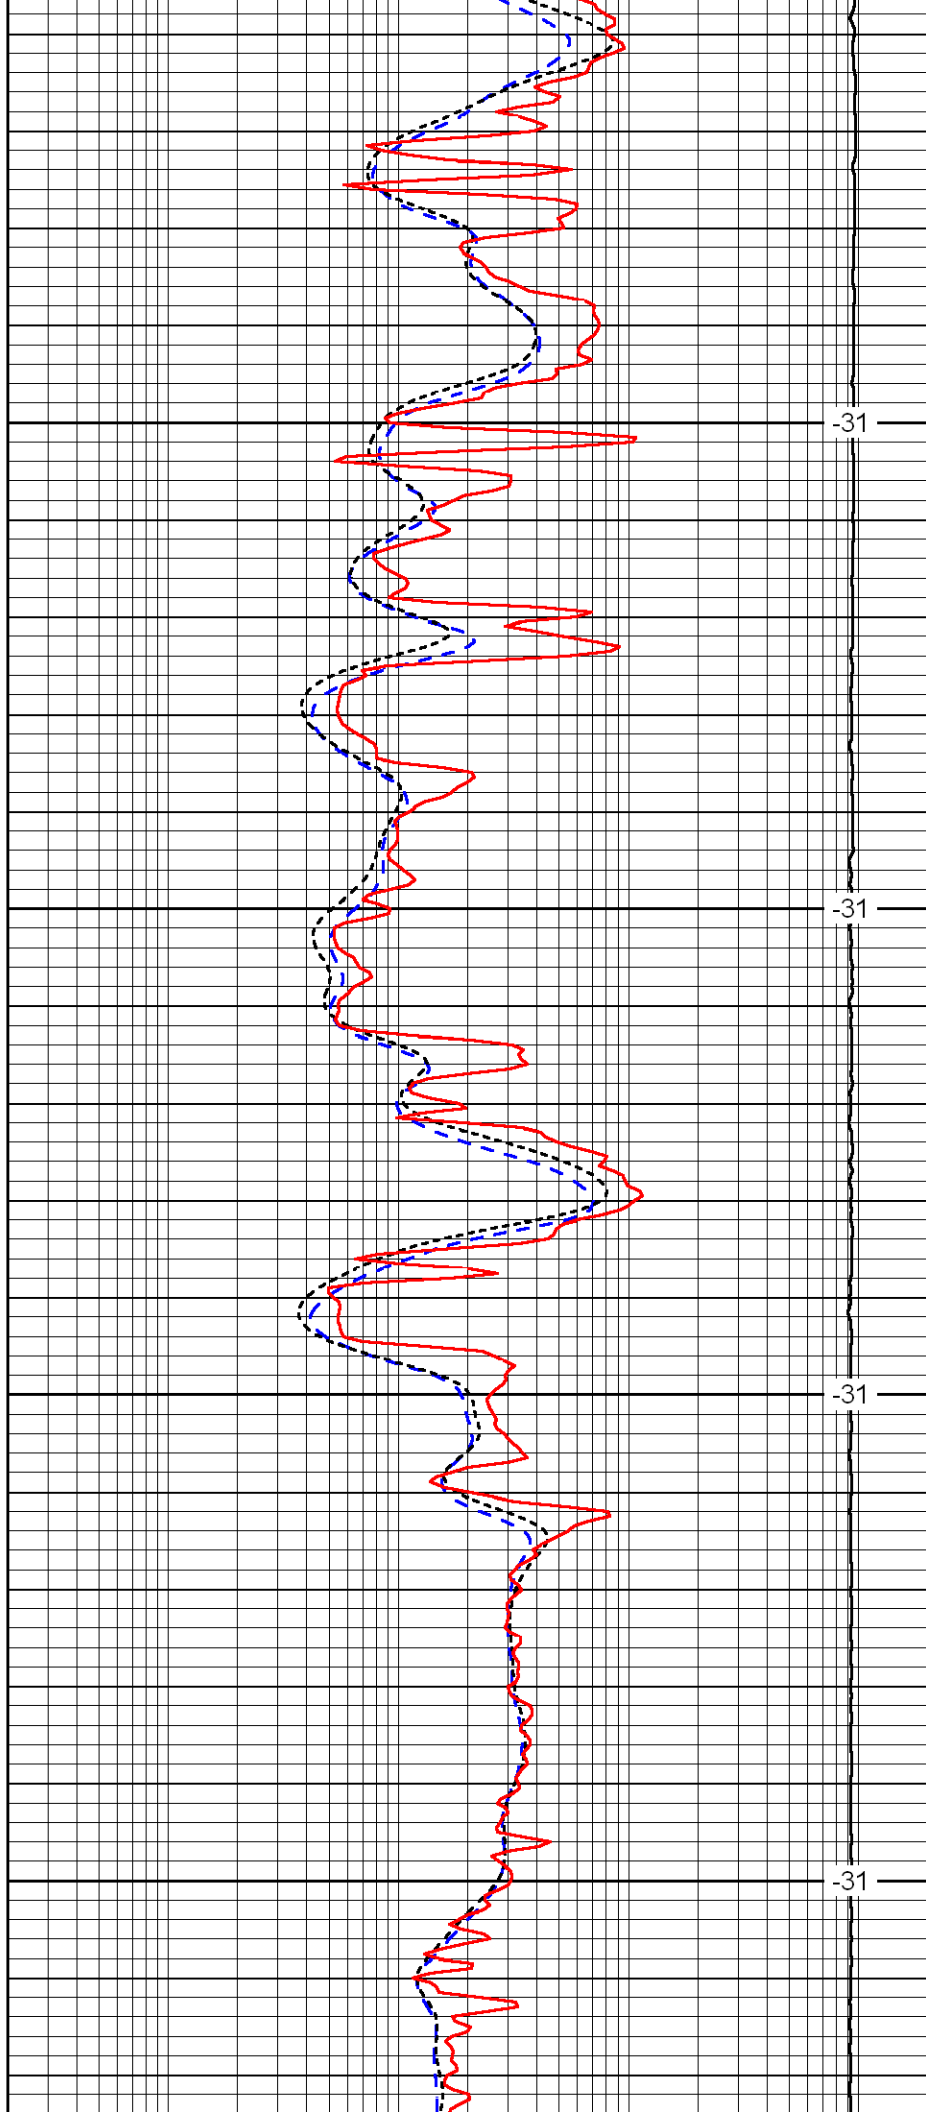

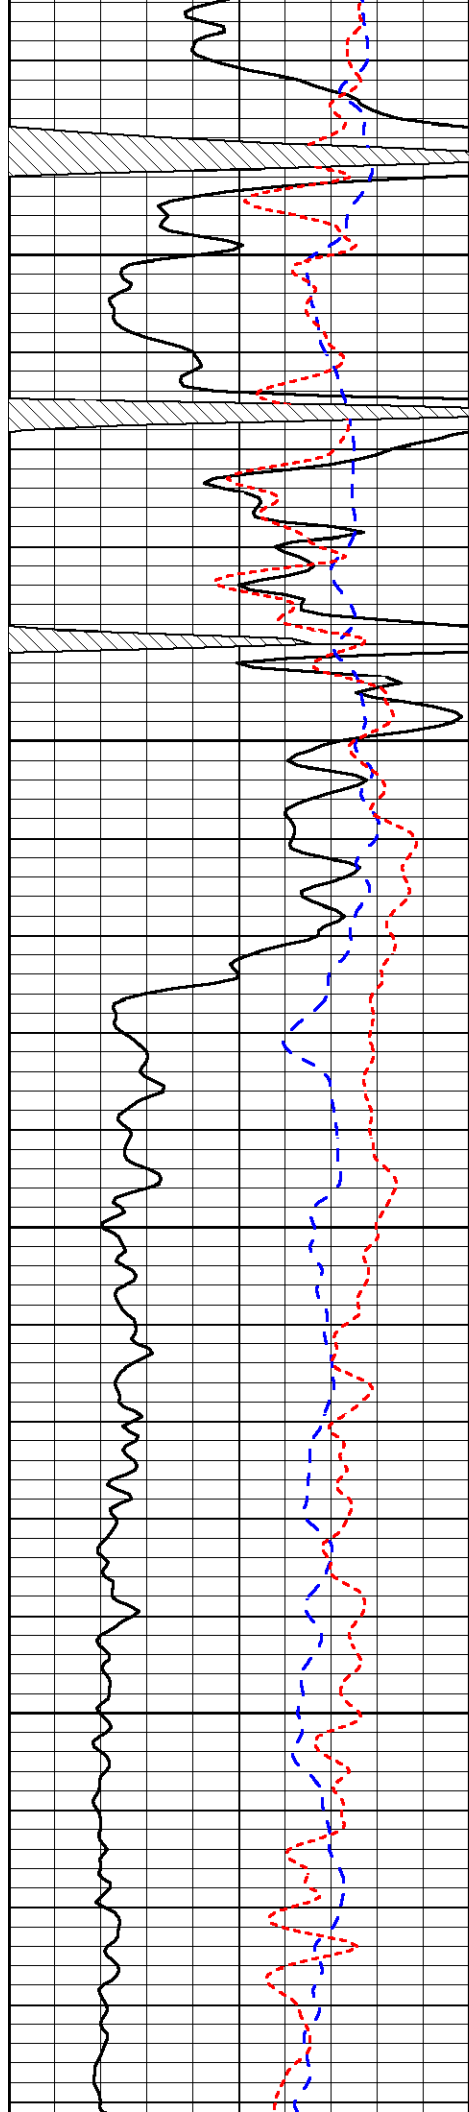


4300

4350

4400

4450

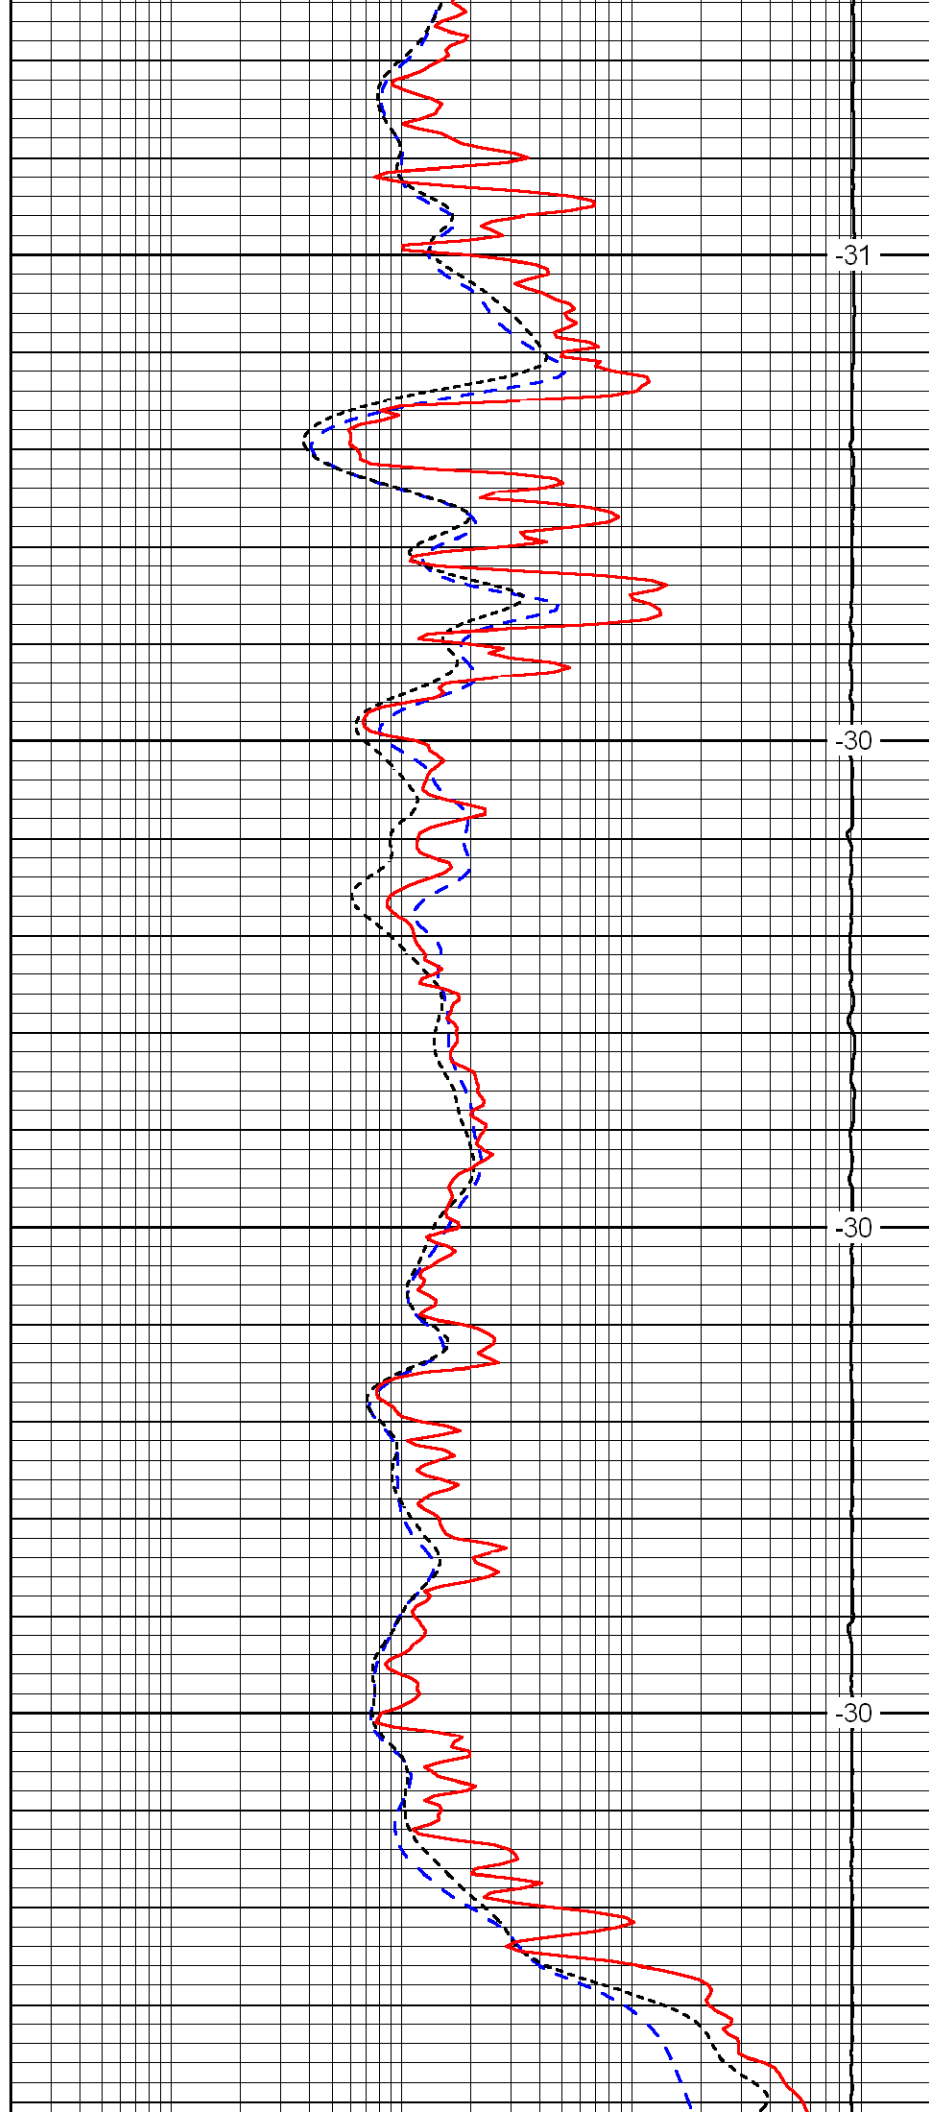


-31


-30

-30

-30

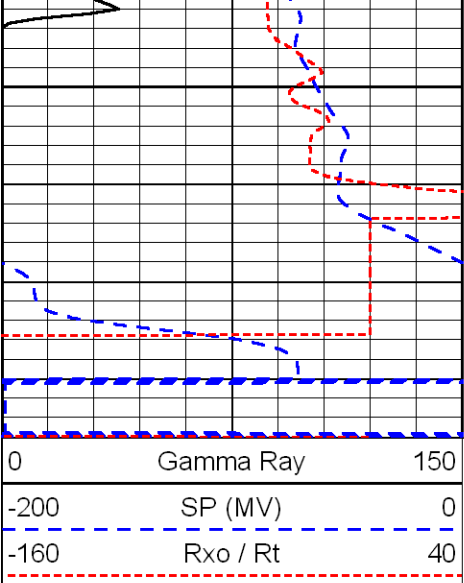

4500

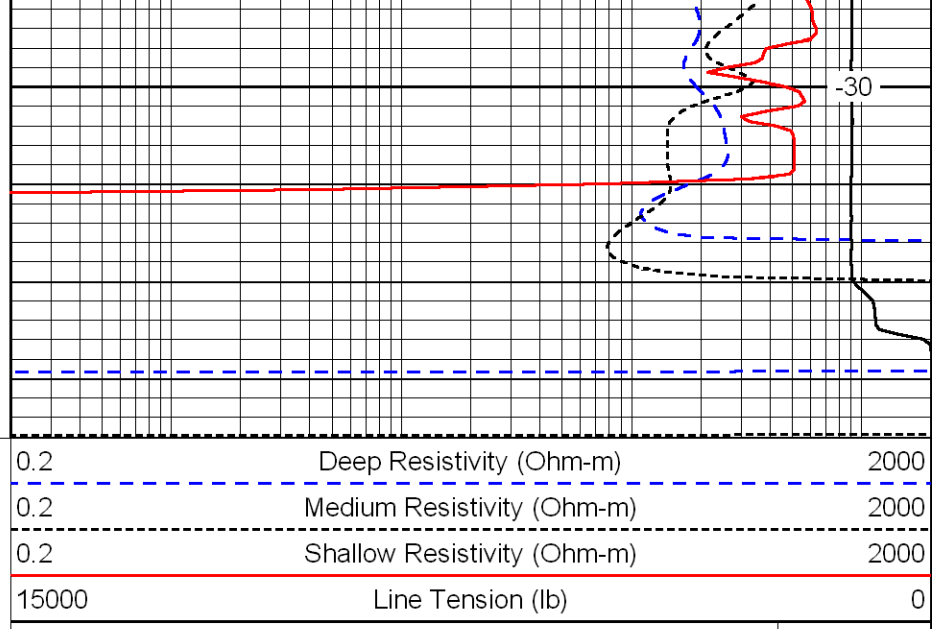

-30

LSPD
(ft/min)