



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-171-20,713-00-00

Company Berexco, Inc.

Well Joyce No. 1

Field Wildcat

County Scott

State

Kansas

Location

NE-NW
660' FNL & 1990' FWL

Other Services
CNL/CDL
DIL/BHCS

Sec: 36 Twp: 16 S Rge: 32 W

Elevation

Permanent Datum Ground Level Elevation 2963
Log Measured From Kelly Bushing 13 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2976
D.F.
G.L. 2963

Date

2/8/09

Run Number

Two

Depth Driller

4760

Depth Logger

4756

Bottom Logged Interval

4755

Top Log Interval

3600

Casing Driller

8.625 @ 328

Casing Logger

332

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

1.000

Density / Viscosity

9.2 43

pH / Fluid Loss

10.0 6.8

Source of Sample

Flowline

Rm @ Meas. Temp

.82 @ 64

Rmf @ Meas. Temp

.62 @ 64

Rmc @ Meas. Temp

1.11 @ 64

Source of Rmf / Rmc

Charts

Rm @ BHT

.42 @ 126

Operating Rig Time

6 Hours

Max Rec. Temp. F

126

Equipment Number

4

Location

Hays

Recorded By

K. Bange

Witnessed By

Brian Bynog

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Healy, W to MM 5, N 1 1/2, E into

Database File: c:\warrior\data\berexco_joyce no. 1\berexcohd.db
Dataset Pathname: dil/ber2in
Presentation Format: micro
Dataset Creation: Sun Feb 08 23:52:51 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

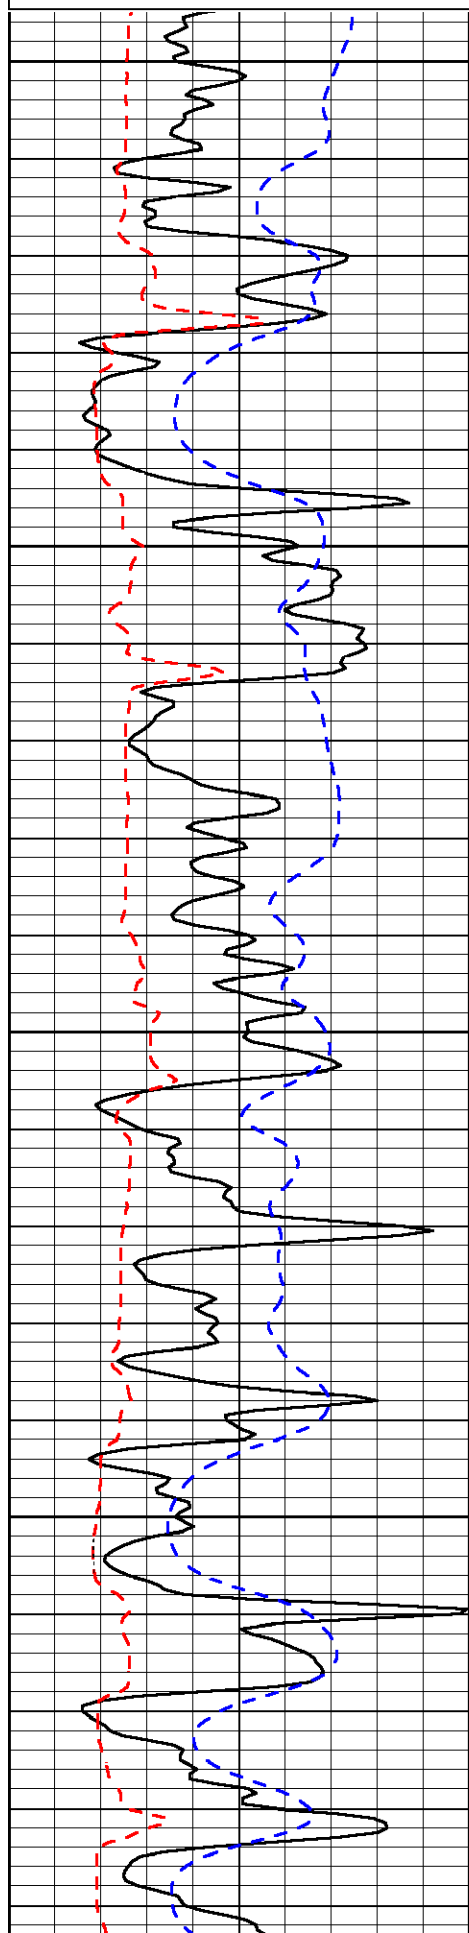

3600


3650

3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

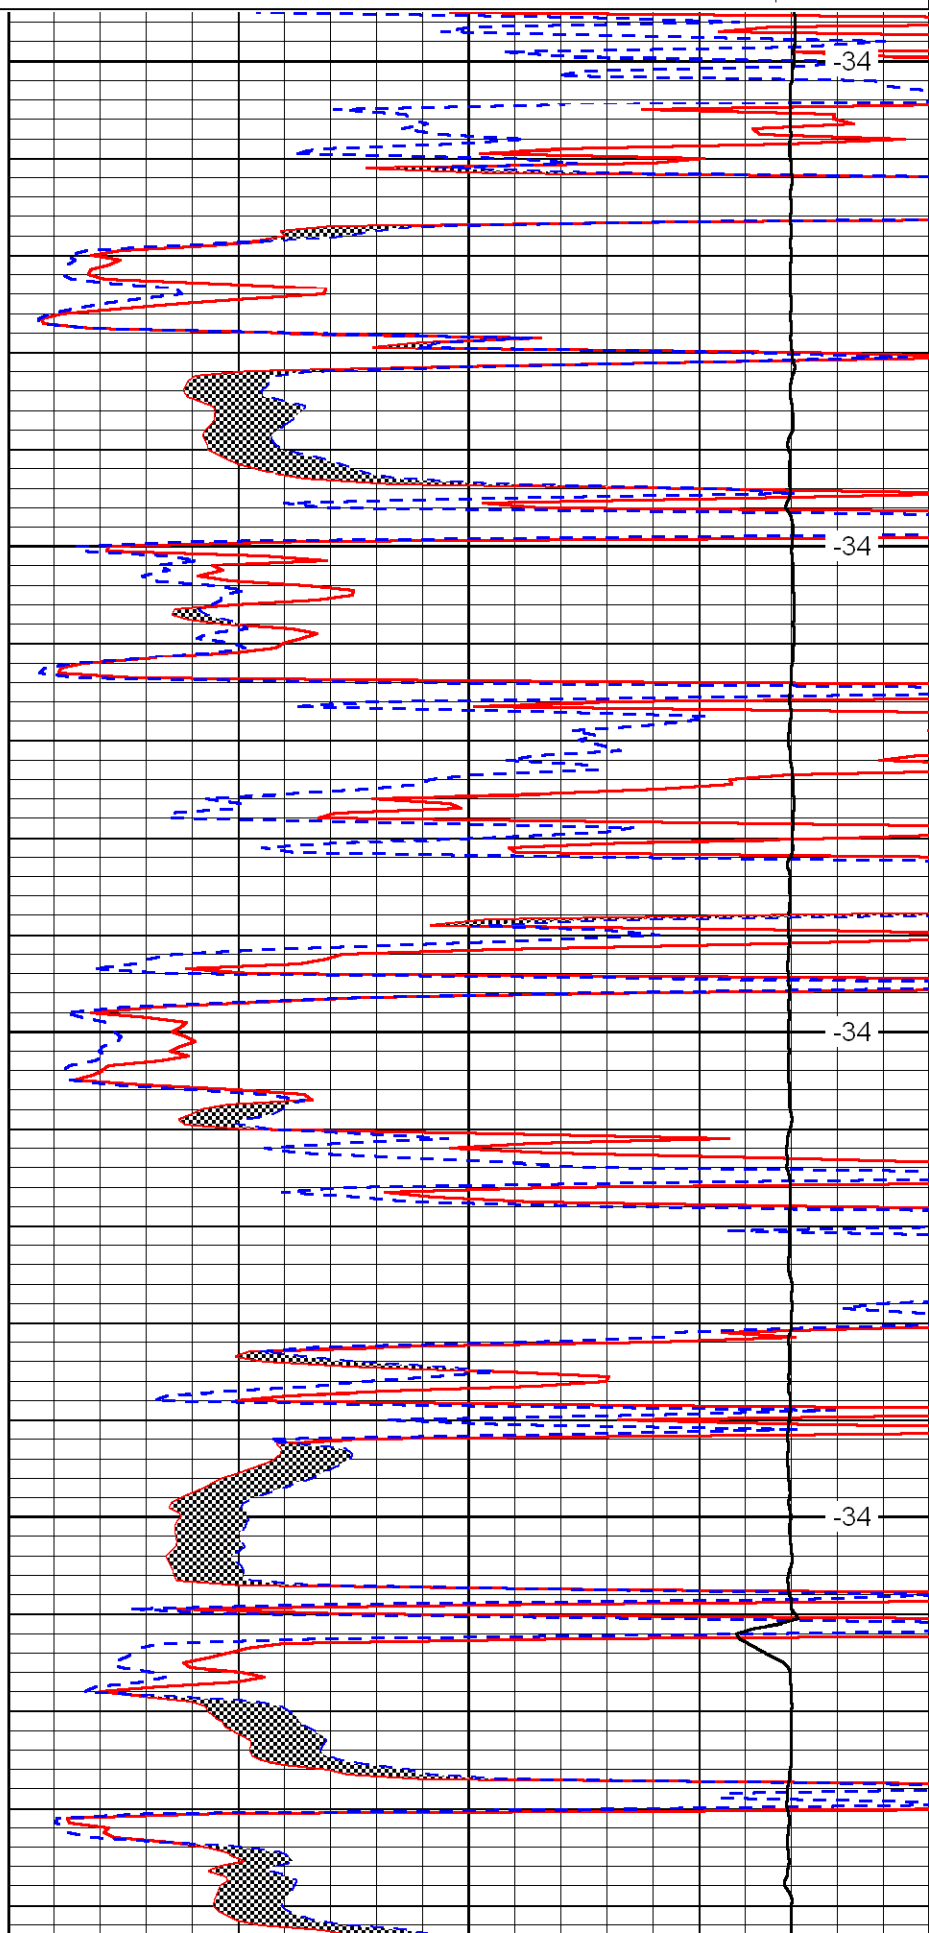


-34

-34

-34

-34

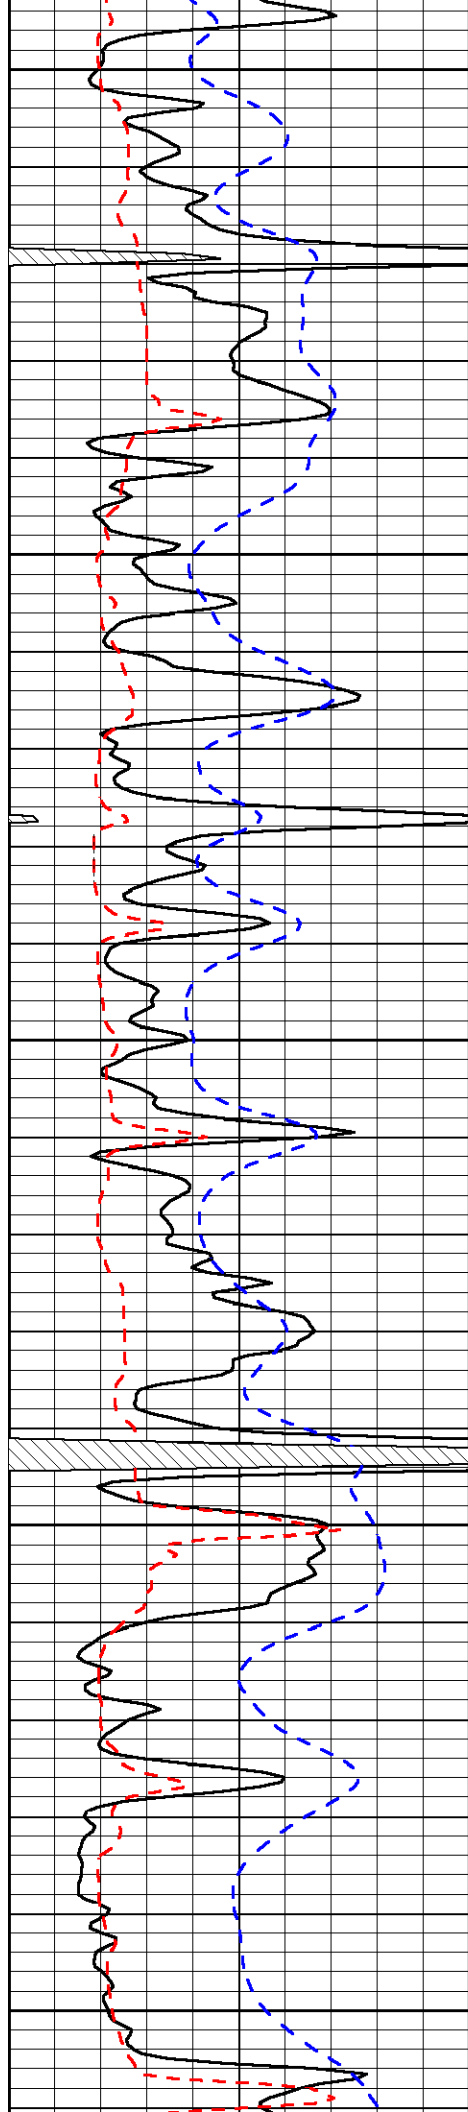


3800

3850

3900

3950

4000

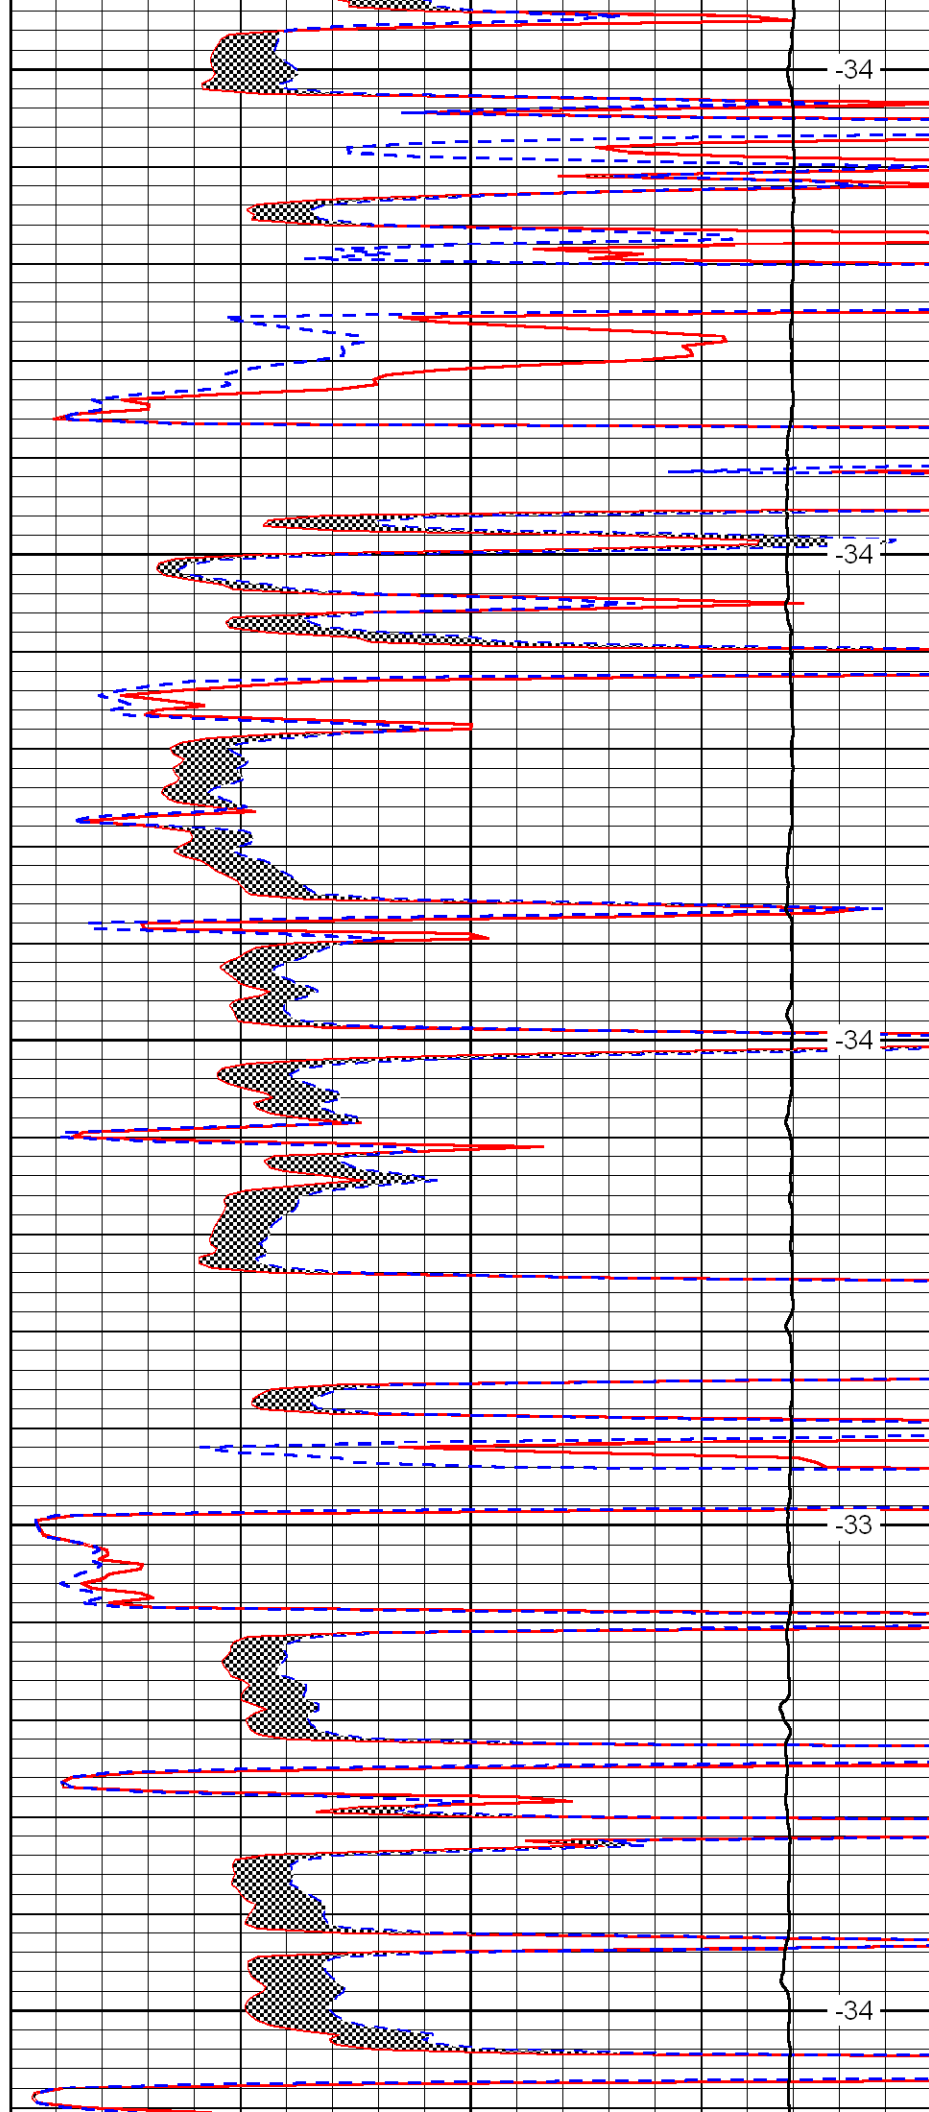


-34-

-34-

-34-

-33-

-34-

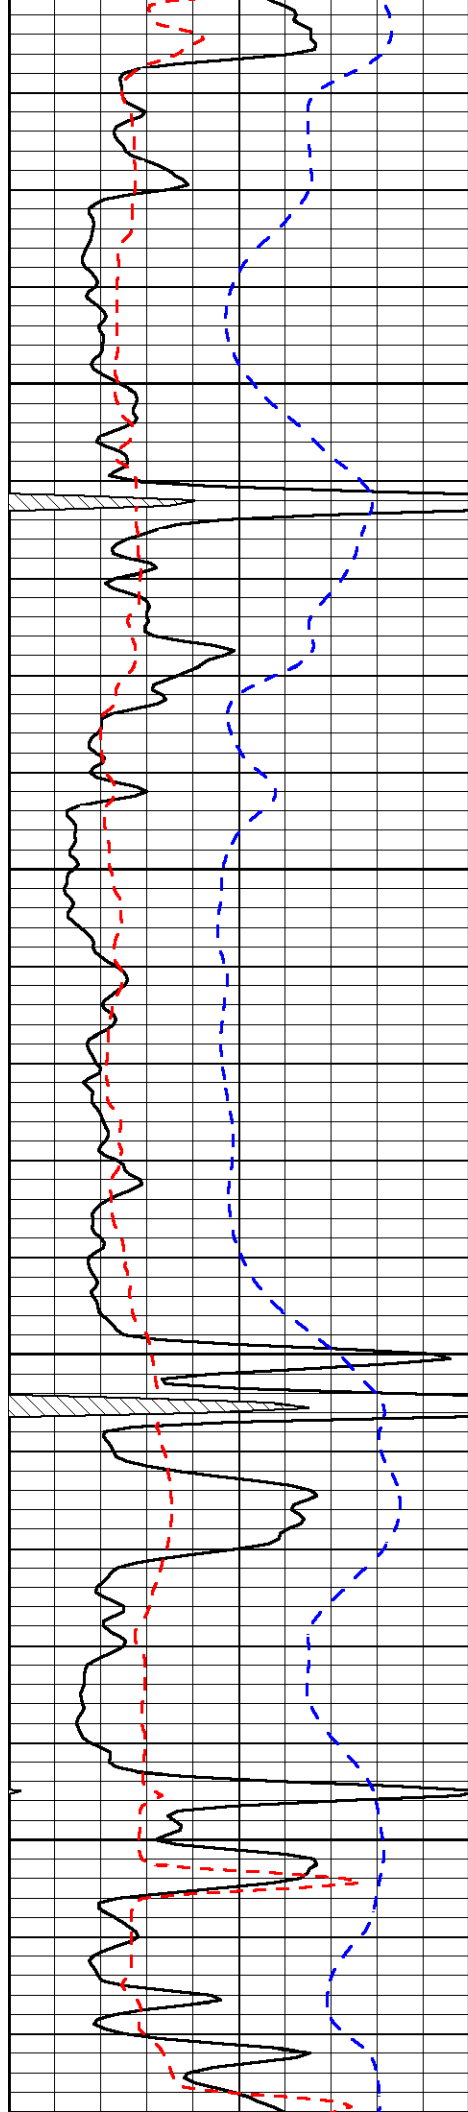


4050

4100

4150

4200

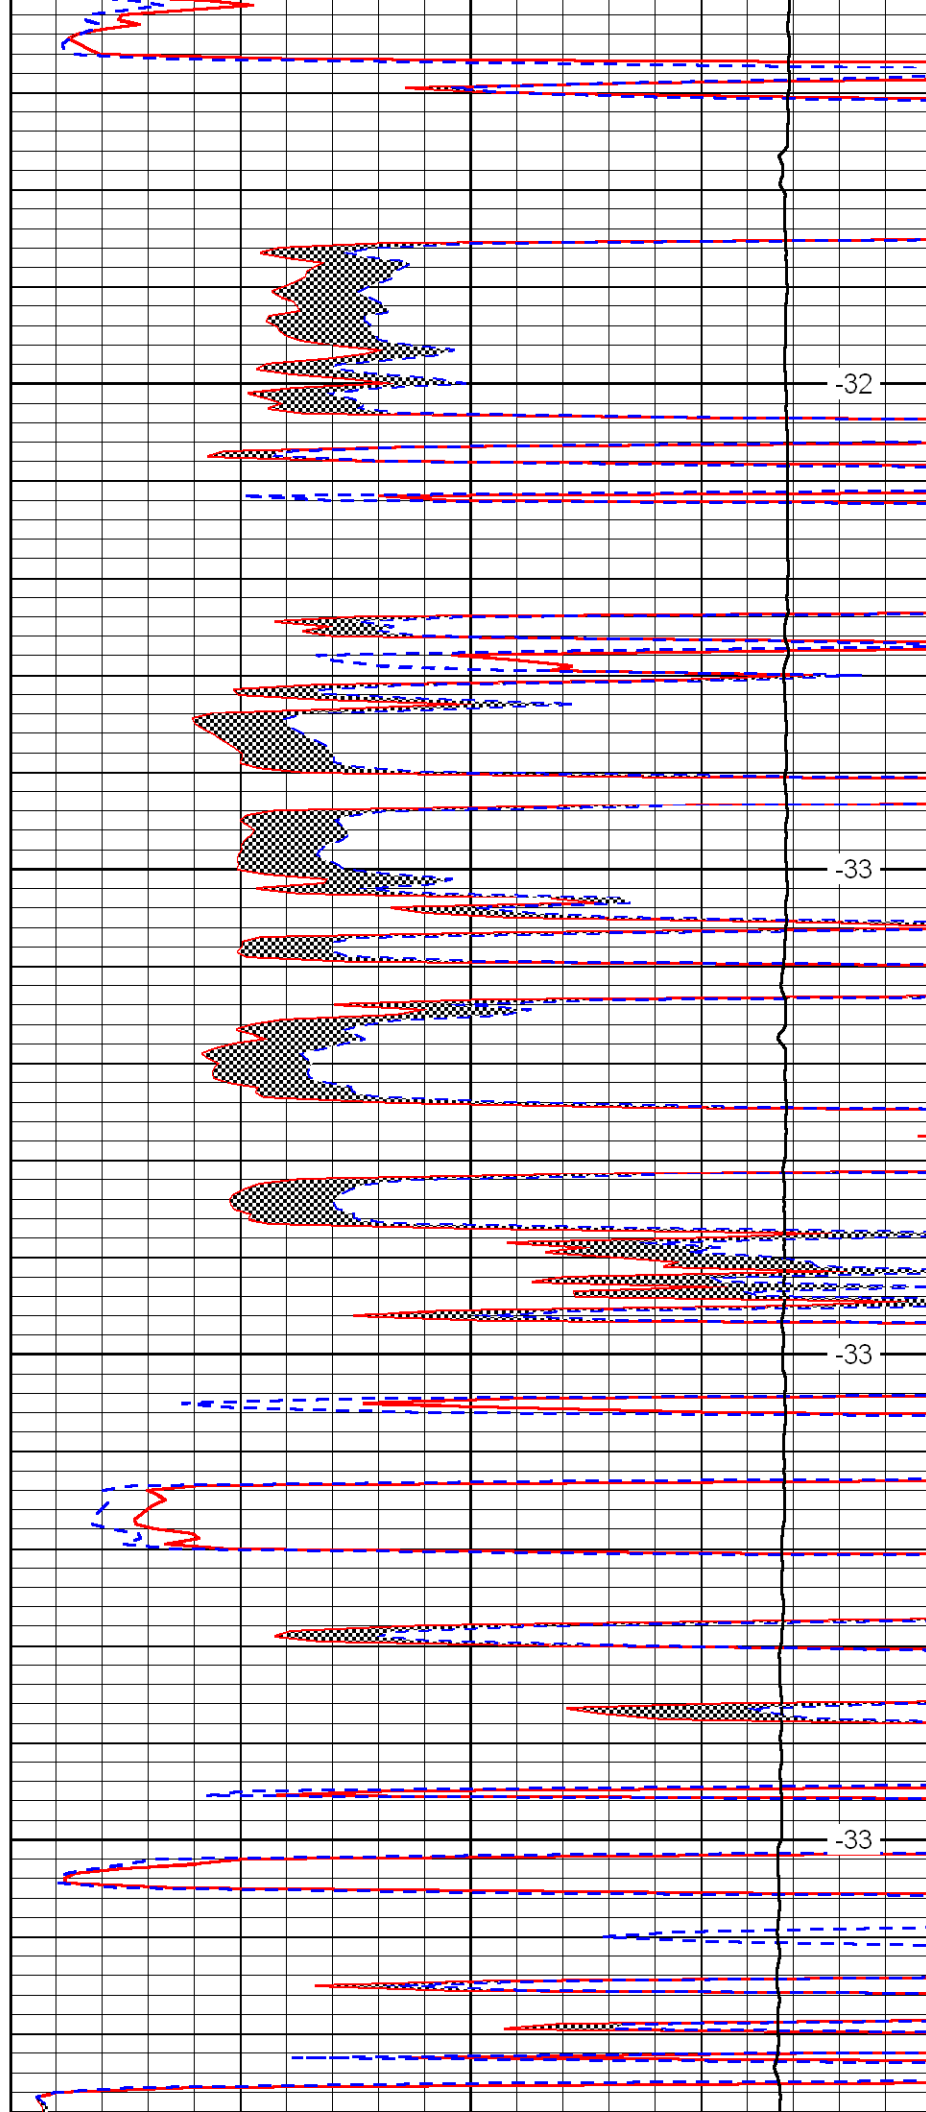


-32

-33

-33

-33

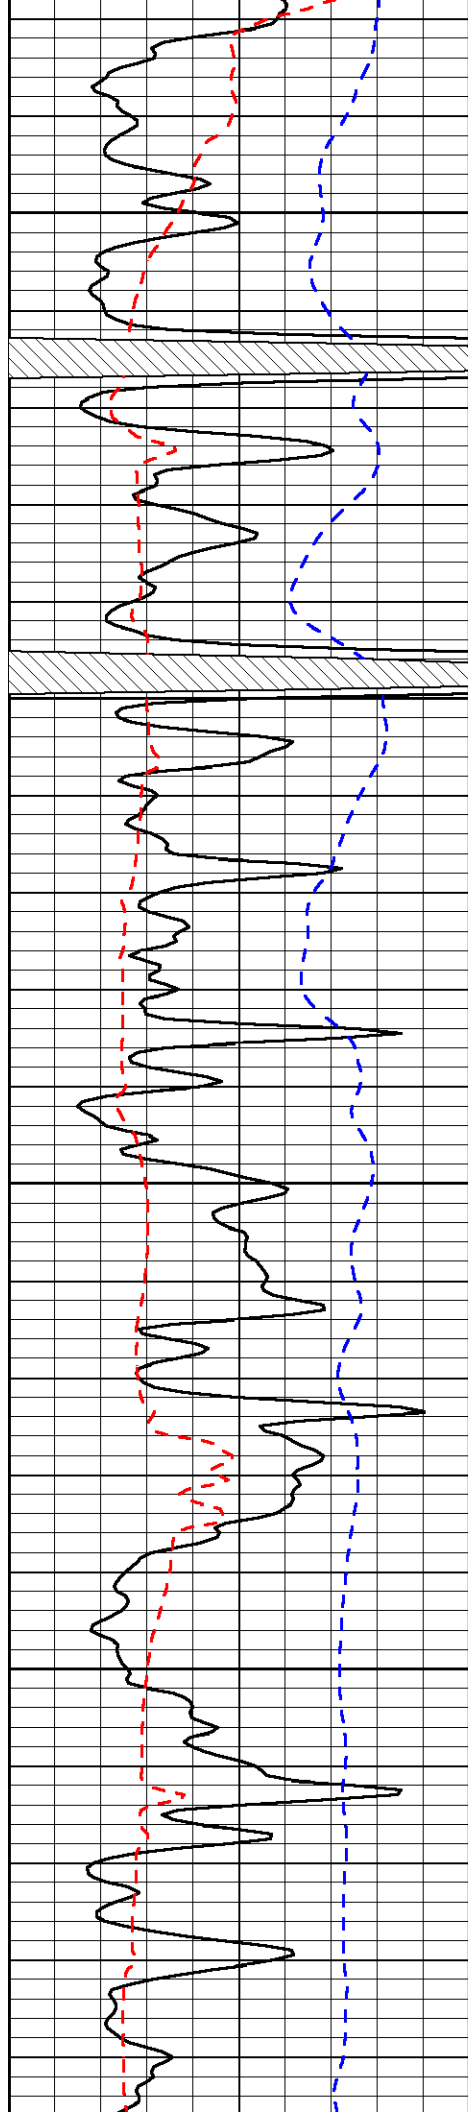



4250

4300

4350

4400

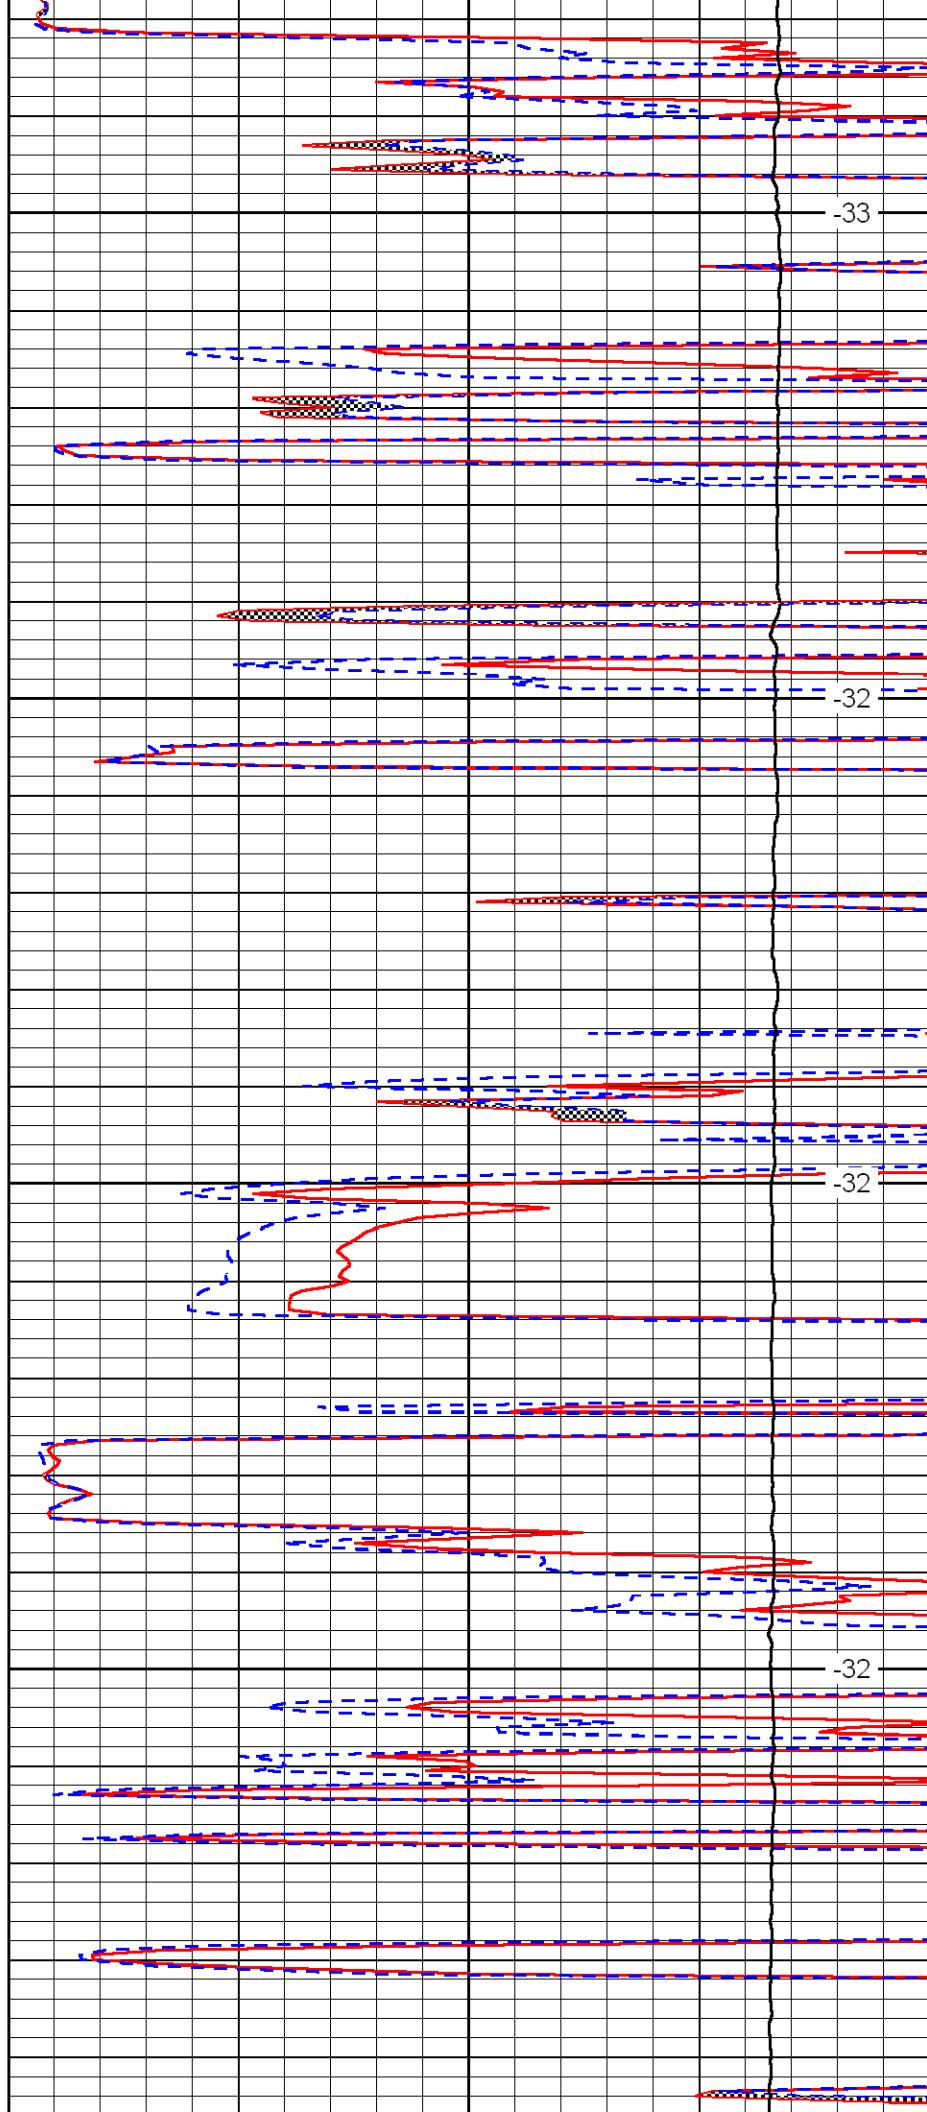

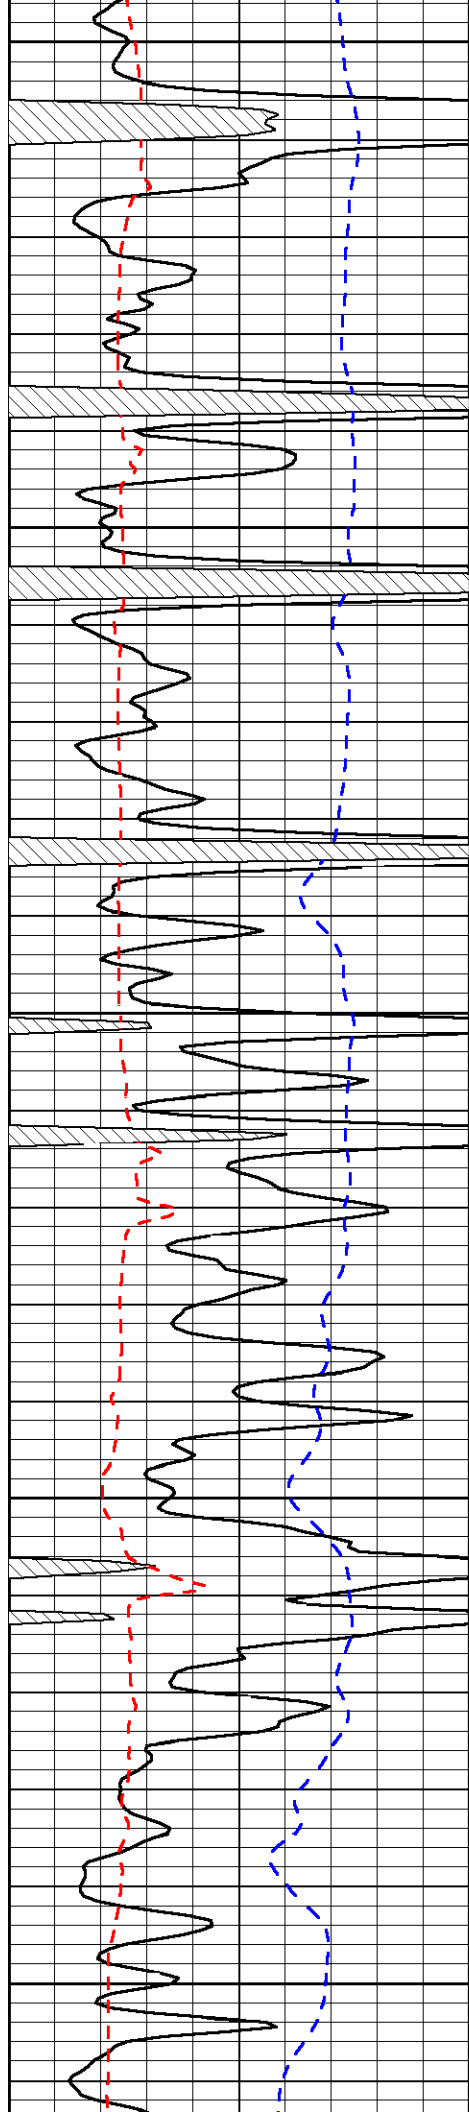


4450

4500

4550

4600

4650

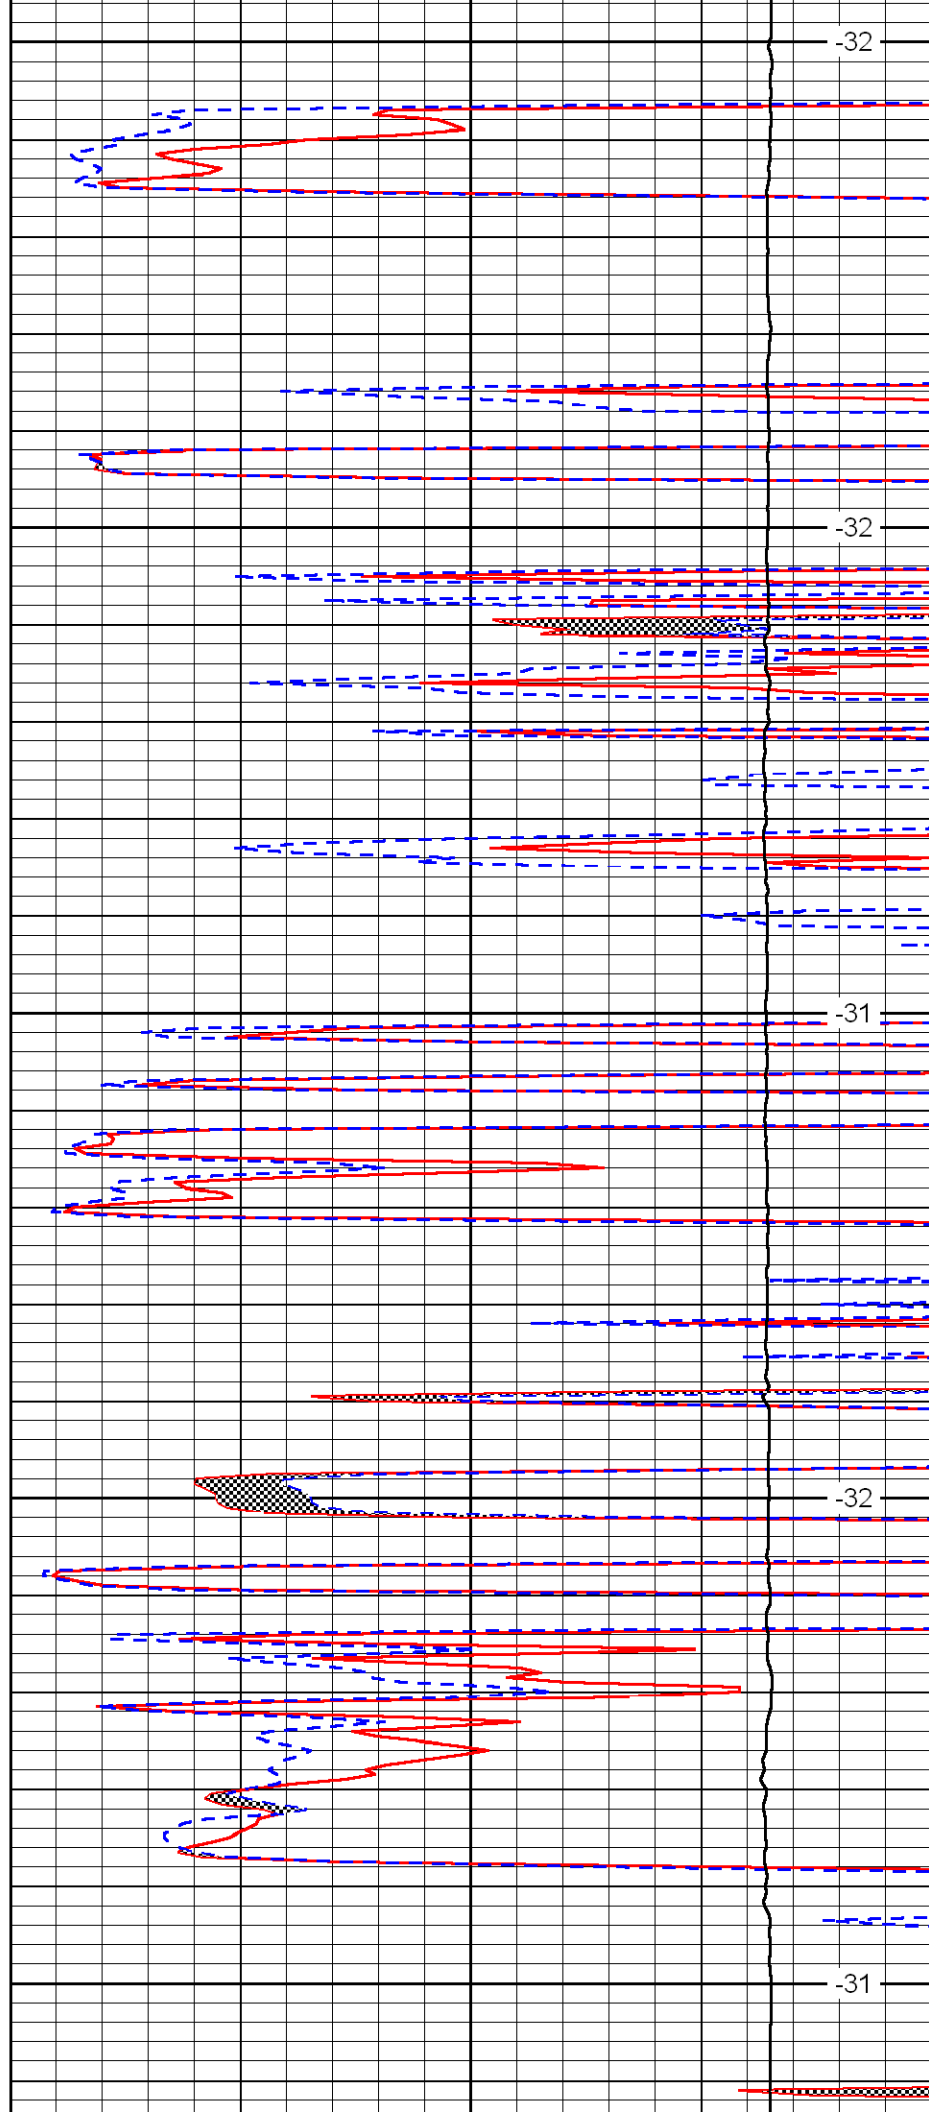


-32

-32

-31


-32

-31

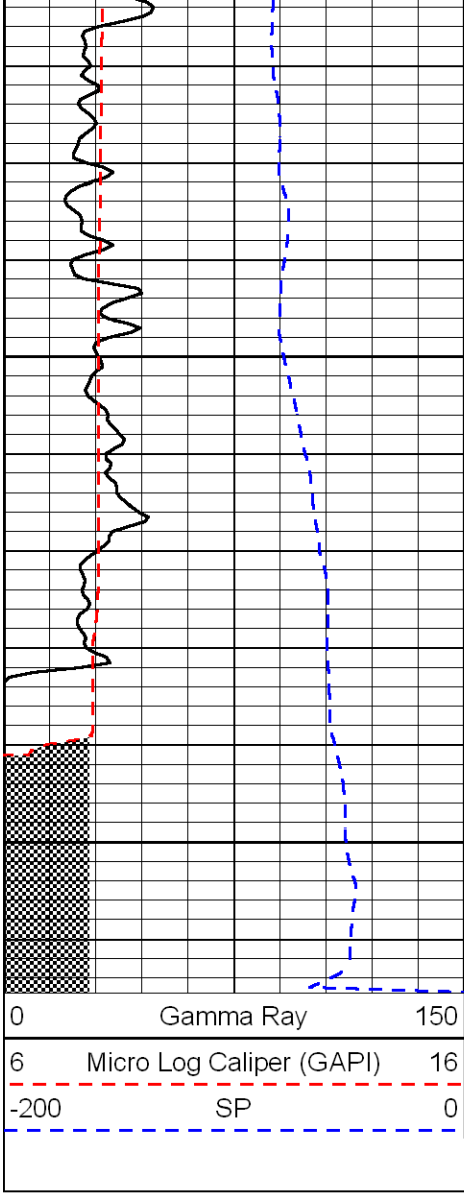

4700

4750

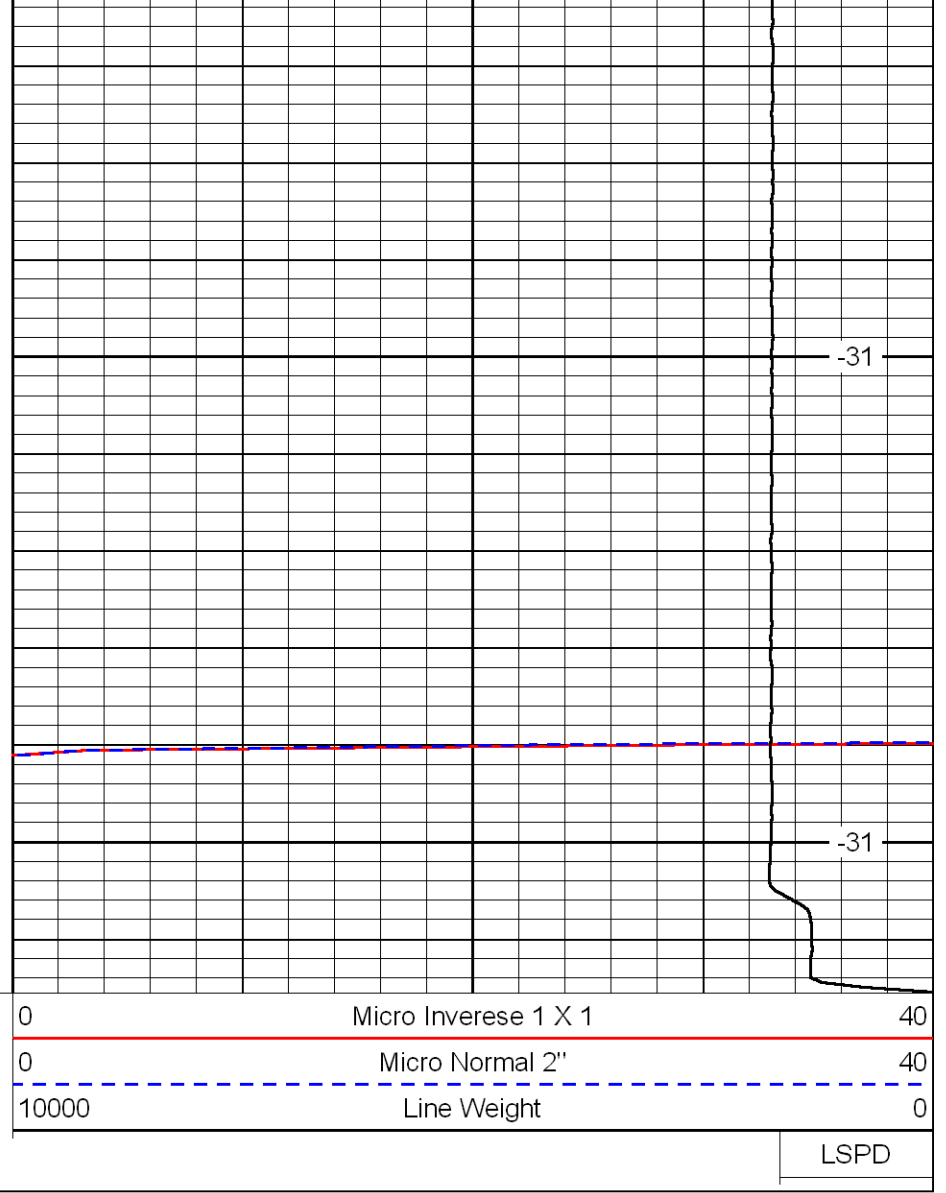

-31

-31