



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-083-21,576-00-00

Company American Warrior, Inc.

Well Sprier Unit # 1-29

Field Wildcat

County Hodgeman State

Kansas

Location

2457' FNL & 2387' FEL

Other Services
CNL/CDL
DIL/BHCS

Sec: 29 Twp: 22S Rge: 23W

Elevation

Permament Datum Ground Level Elevation 2303

Log Measured From Kelly Bushing 12 Ft. Above Perm. Datum

Dilling Measured From Kelly Bushing K.B. 2315
D.F. 2303
G.L. 2303

Date 11/22/2008

Run Number Two

Depth Driller 4608

Depth Logger 4609

Bottom Logged Interval 4608

Top Log Interval 3700

Casing Driller 8.625 @ 224

Casing Logger 222

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 3.900

Density / Viscosity 9.2 56

pH / Fluid Loss 11.0 8.8

Source of Sample Flowline

Rm @ Meas. Temp 2.0 @ 70

Rmf @ Meas. Temp 1.5 @ 70

Rmc @ Meas. Temp 2.7 @ 70

Source of Rmf / Rmc Charts

Rm @ BHT 1.05 @ 124

Operating Rig Time 5 Hours

Max Rec. Temp. F 124

Equipment Number 10

Location Hays

Recorded By Jason Wellbock

Witnessed By Jason Alm

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Ness City S to O Rd, 1 1/2 E, S Into

Database File: amerhd.db
Dataset Pathname: dil/amer2in
Presentation Format: micro
Dataset Creation: Sat Nov 22 22:46:43 2008
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

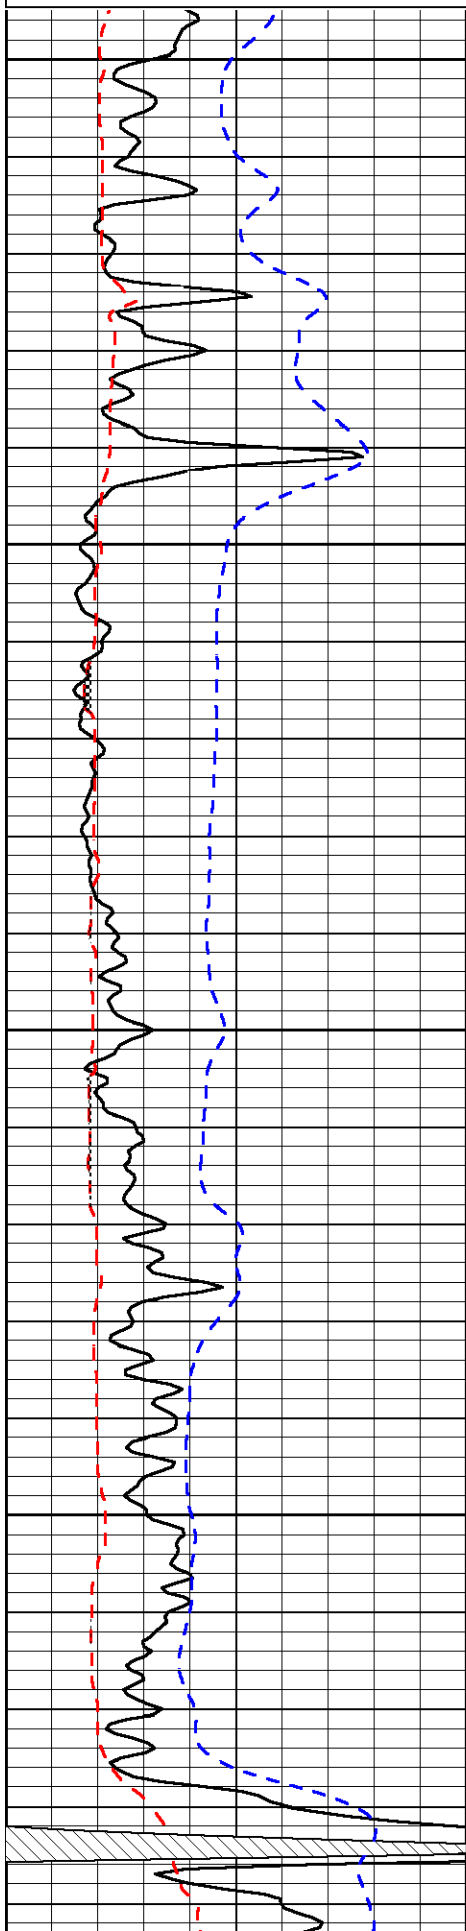

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

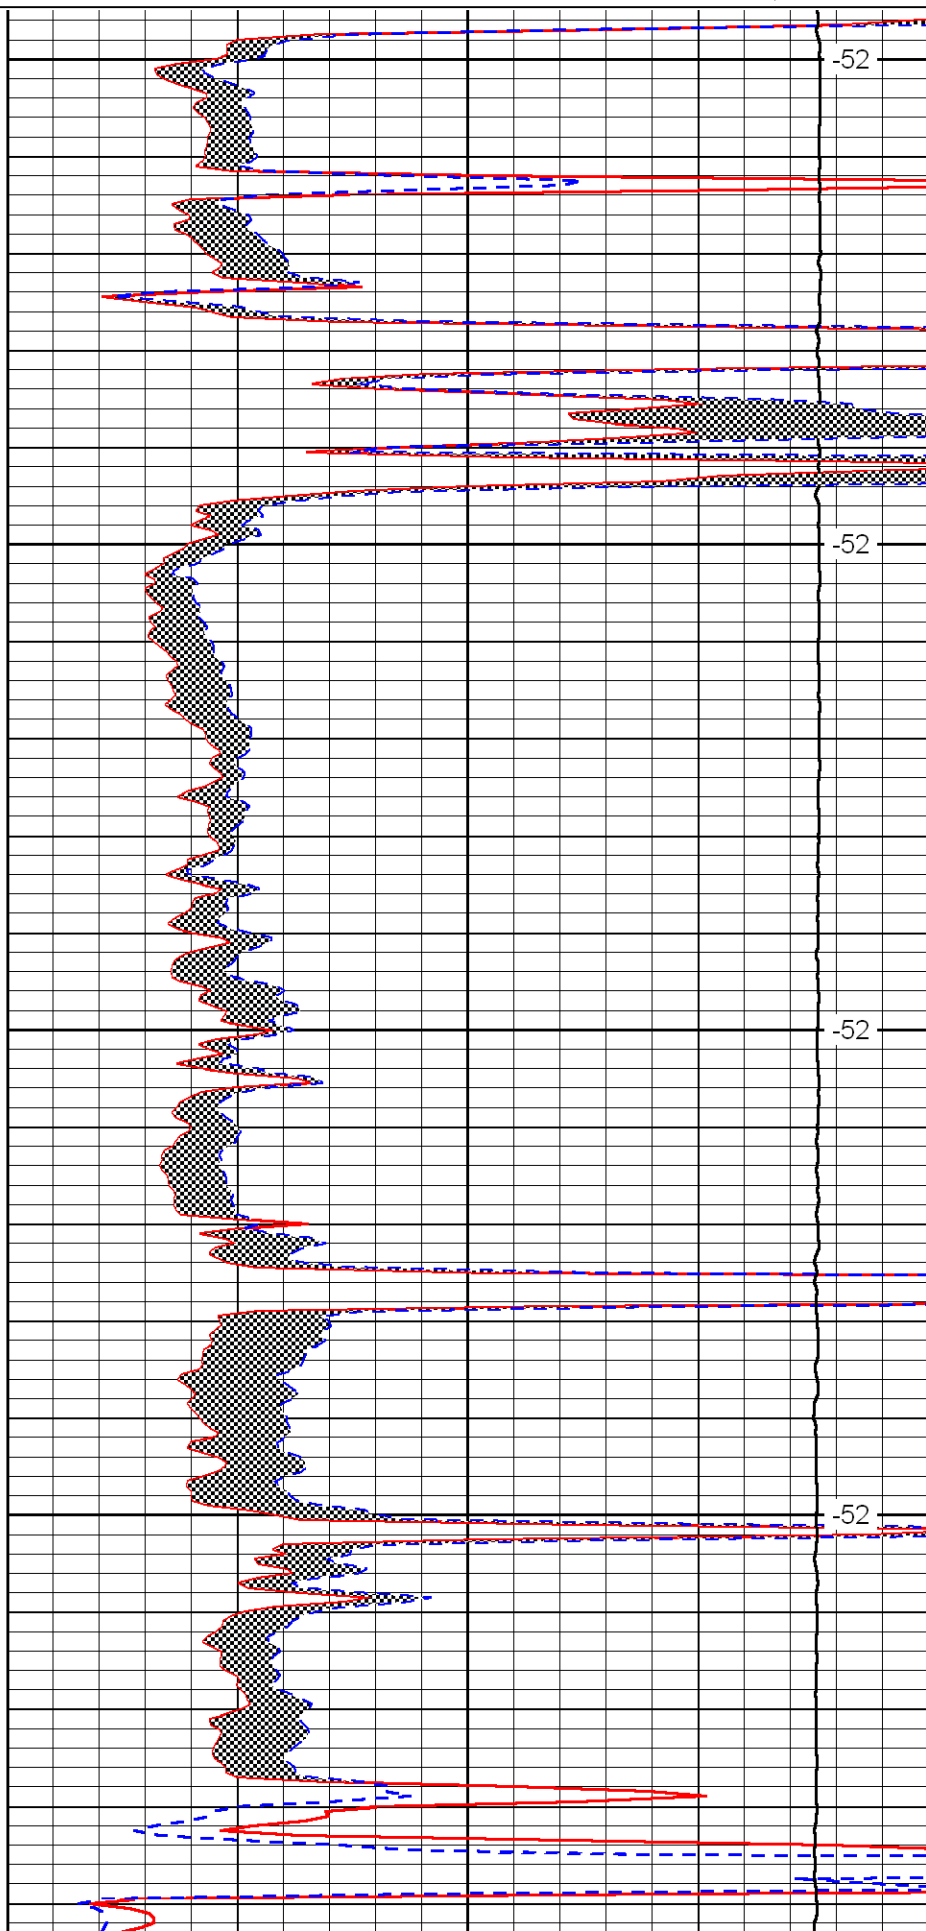

3700

3750

3800


3850

-52

-52

-52

-52

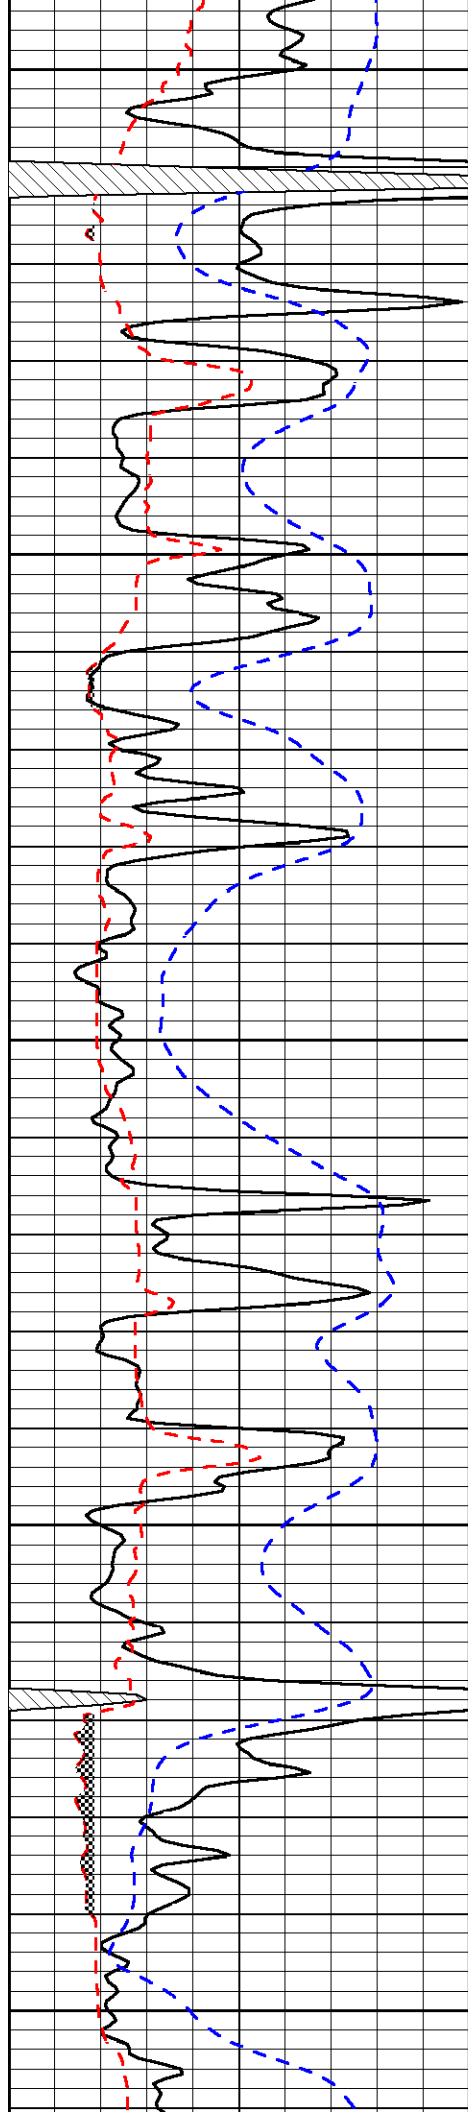


3900

3950

4000

4050

4100

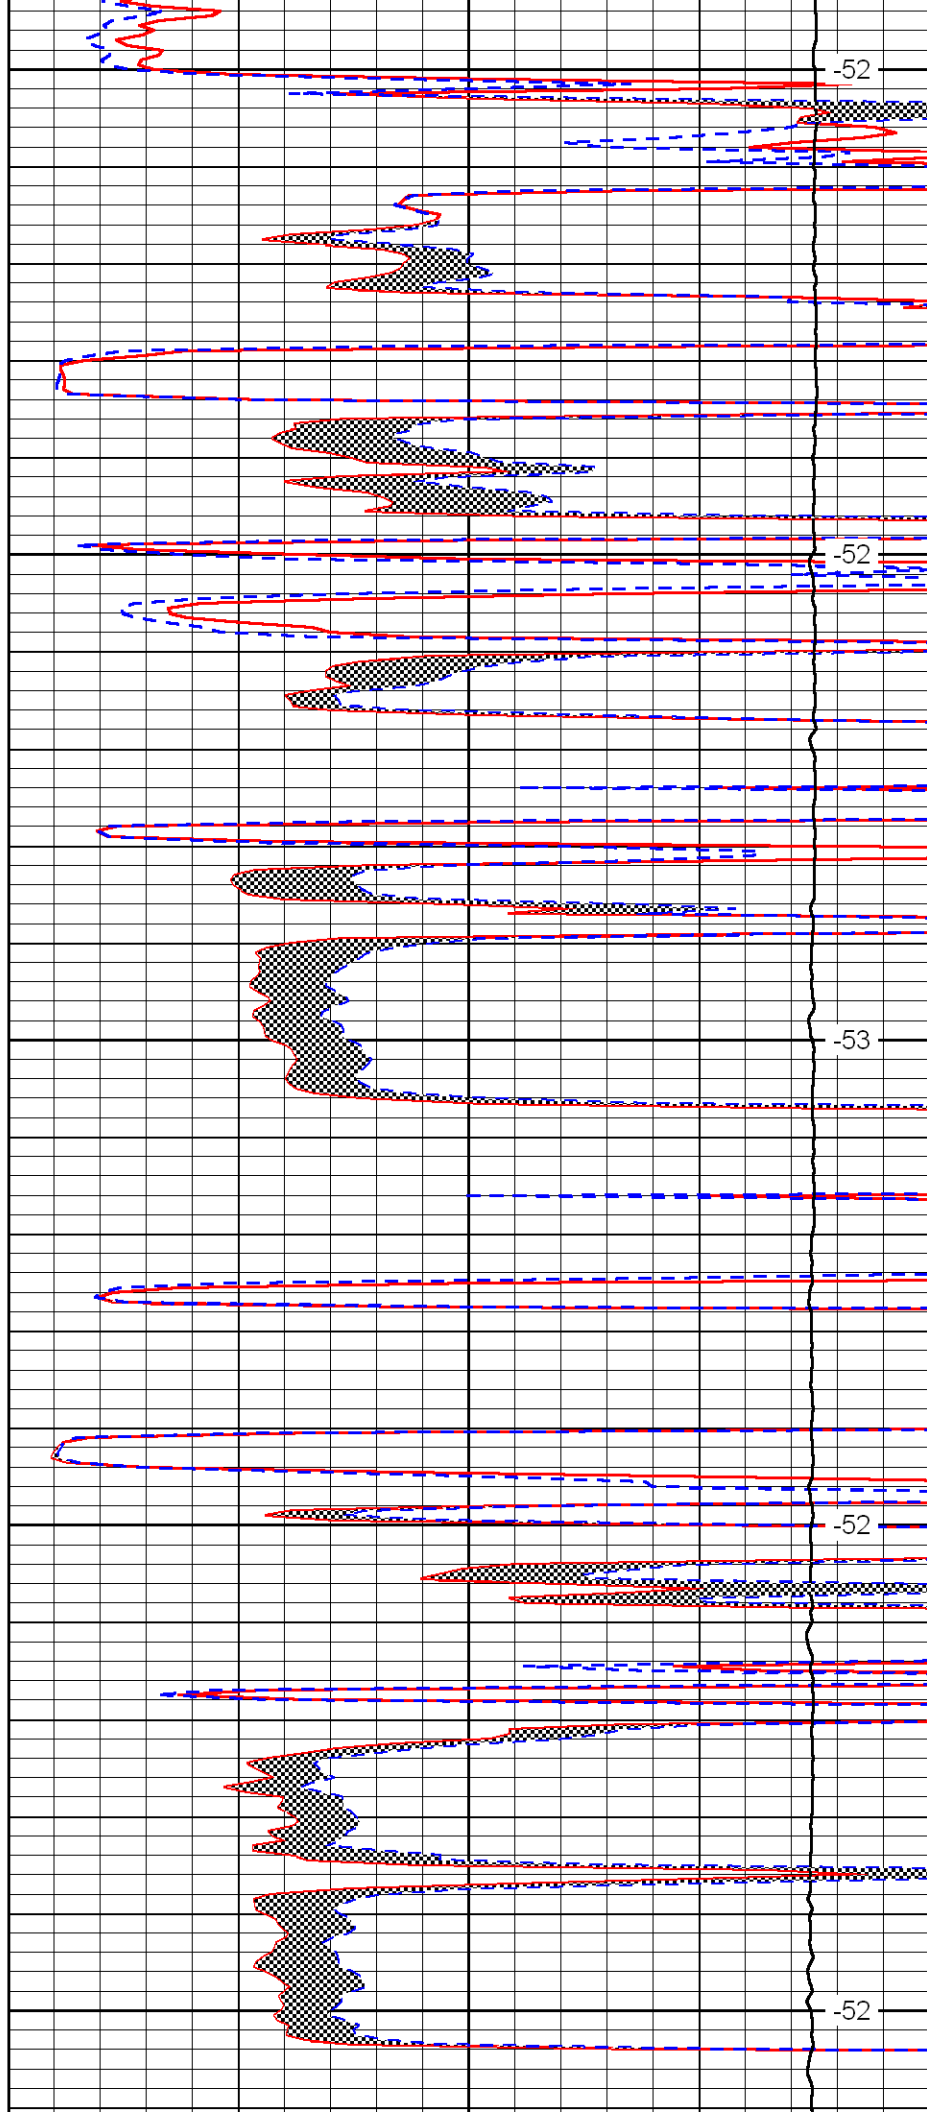


-52

-52

-53

-52

-52

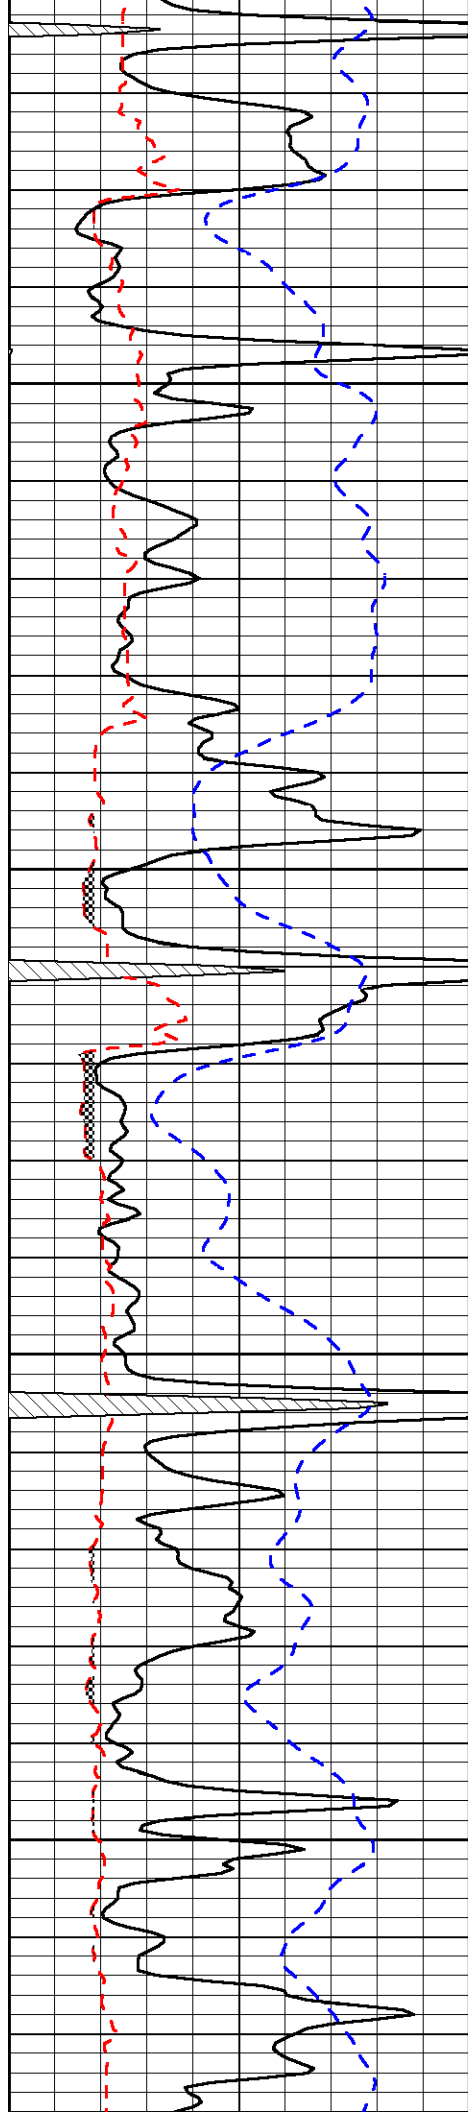



4150

4200

4250

4300

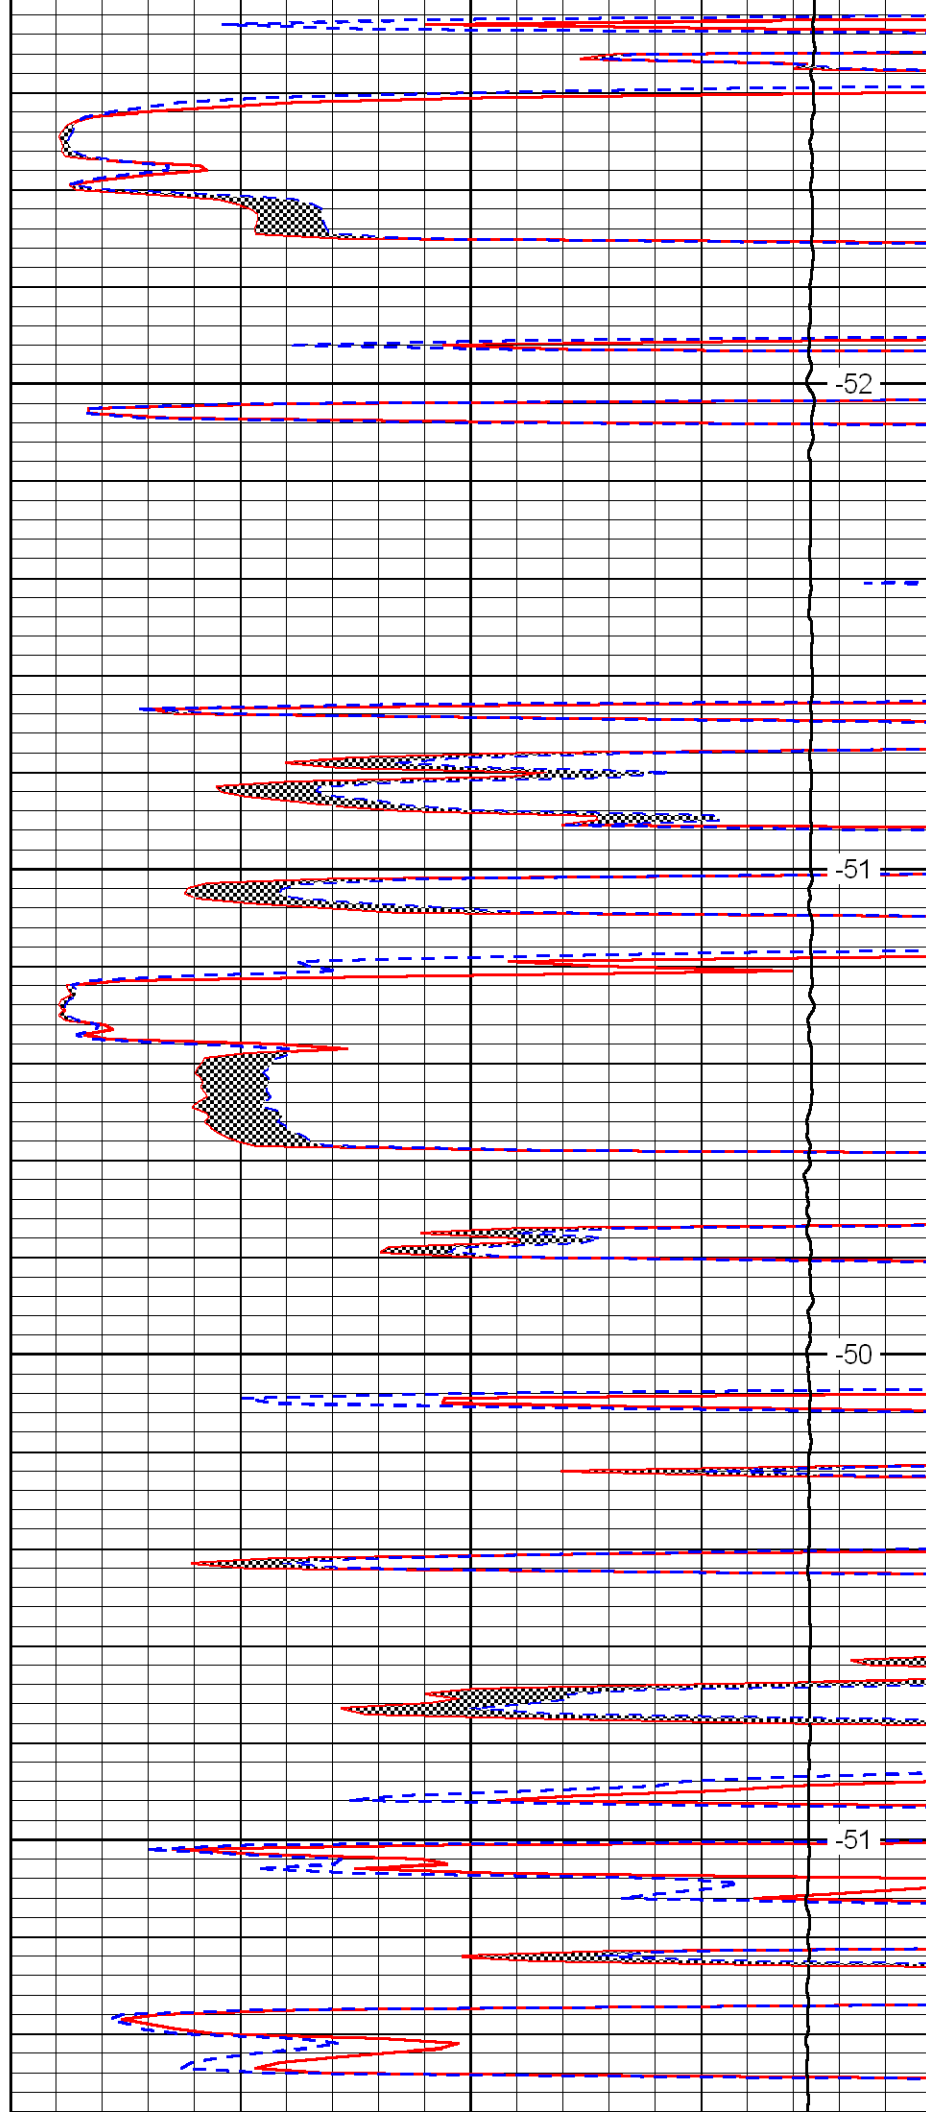

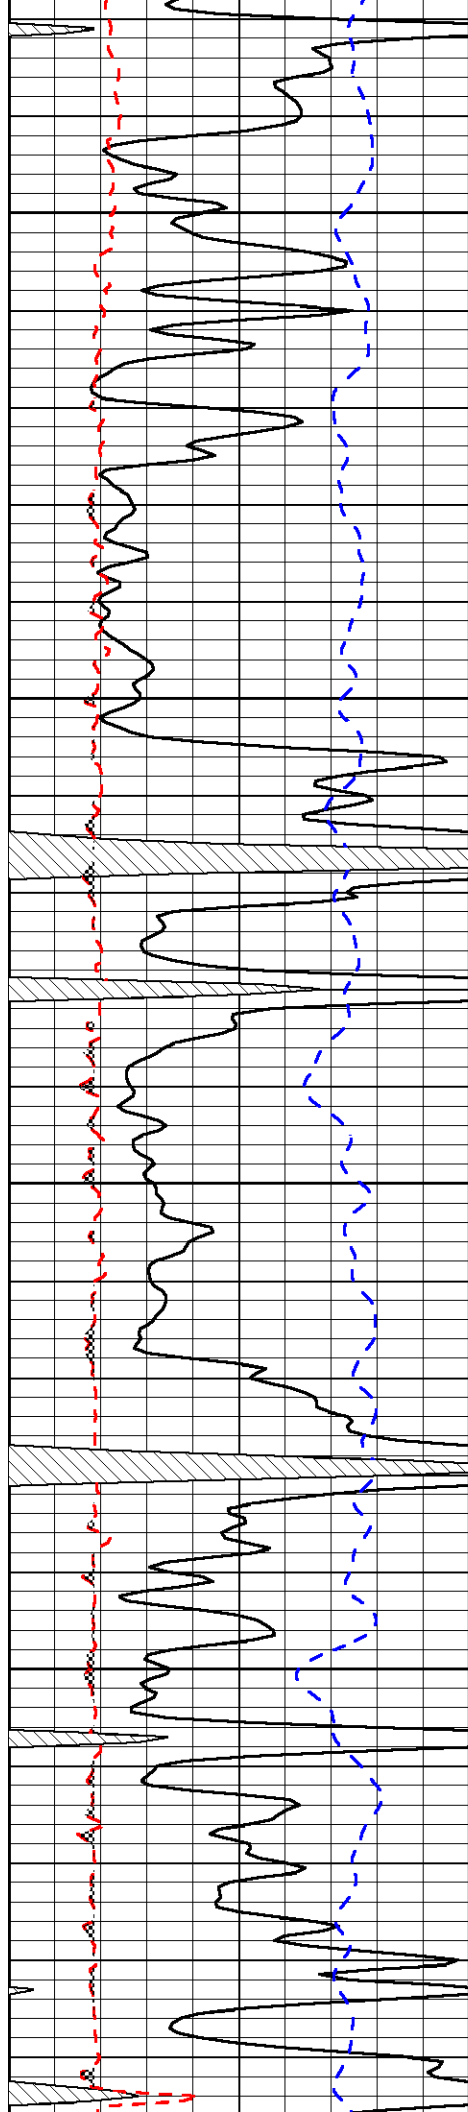


4350

4400

4450

4500

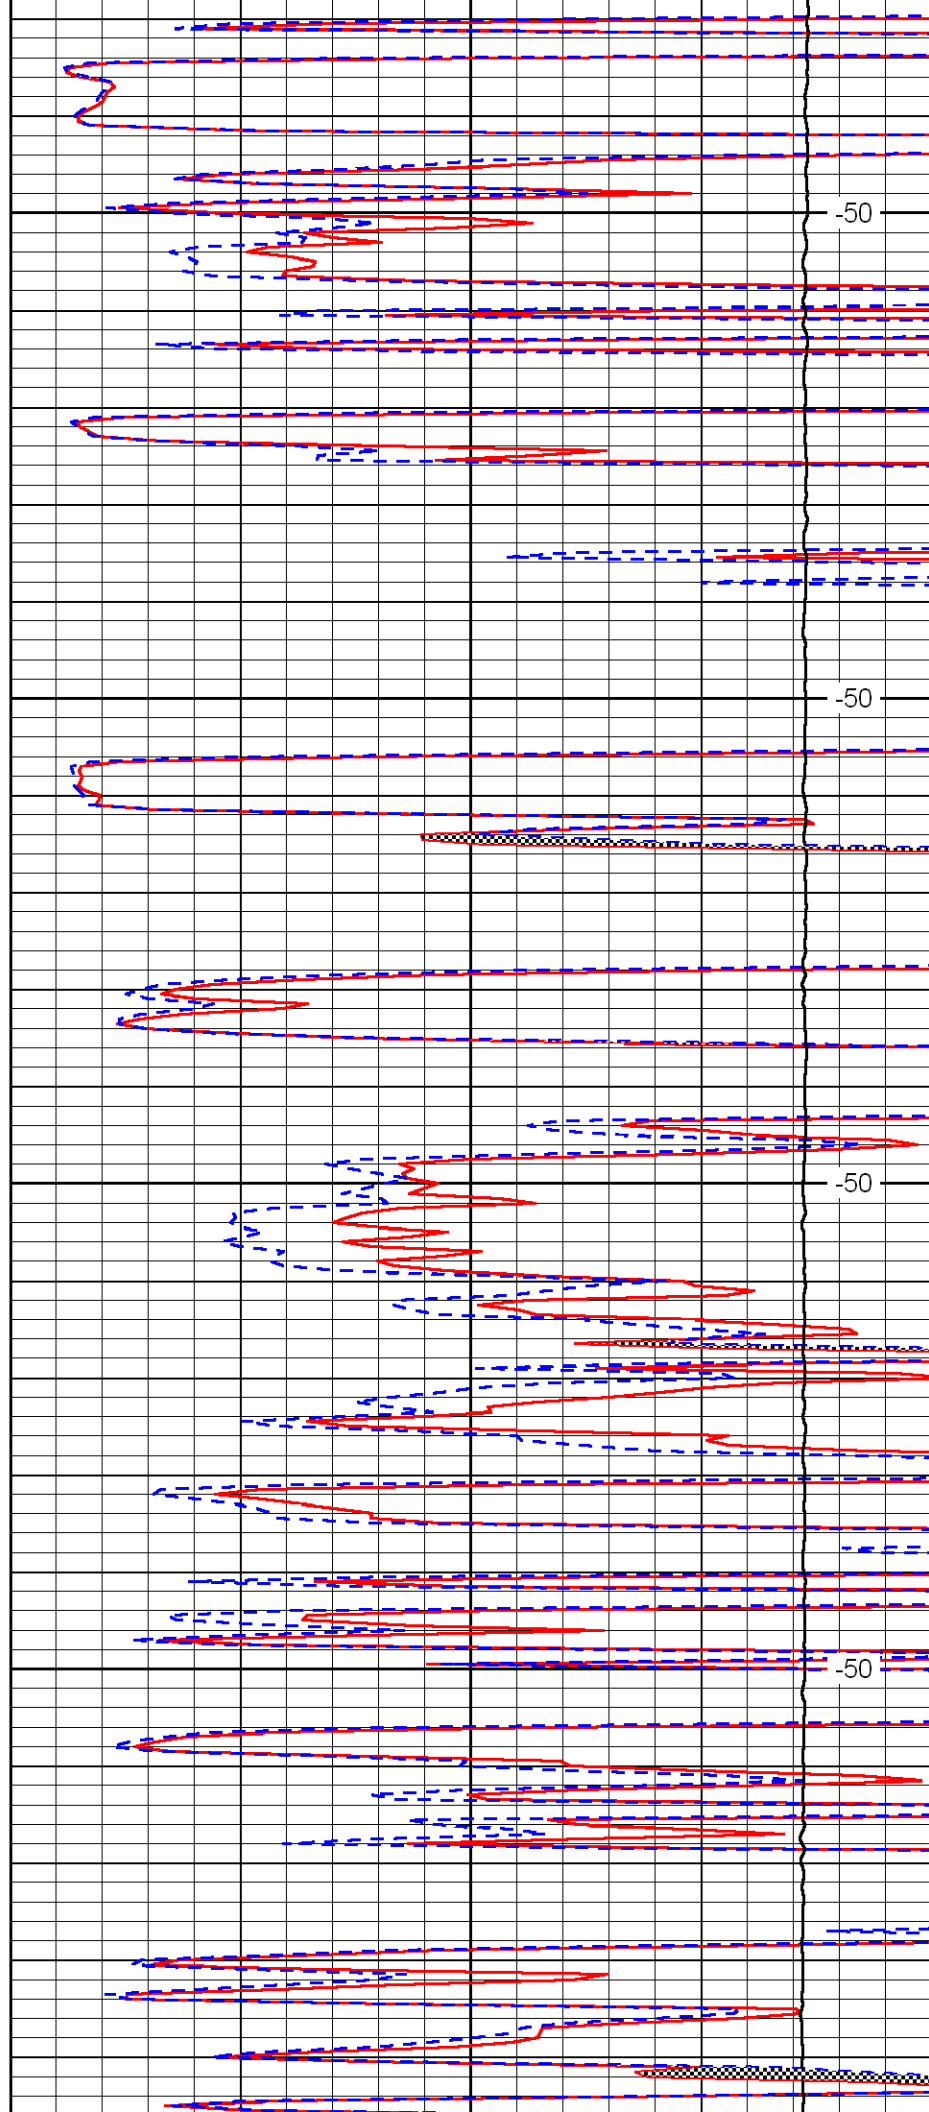

-50

-50

-50

-50

