



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company American Warrior, Inc.		
	Well Beltz No. 1-23		
	Field Jetmore		
	County Hodgeman	State	Kansas
	Location	1660' FSL & 525' FEL	
	Sec: 23	Twp: 22S	Rge: 24W
	Elevation		Other Services CNL/CDL DIL

Permanent Datum	Ground Level	Elevation 2412
Log Measured From	Kelly Bushing	12 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	K.B. 2424 D.F. 2412 G.L. 2412

Date	11/11/08	
Run Number	Two	
Depth Driller	4760	
Depth Logger	4768	
Bottom Logged Interval	4767	
Top Log Interval	3700	
Casing Driller	8.625 @ 211	
Casing Logger	224	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity, ppm CL	3600	
Density / Viscosity	9.2 59	
pH / Fluid Loss	10.5 7.2	
Source of Sample	Flowline	
Rm @ Meas. Temp	1.2 @ 54	
Rmf @ Meas. Temp	.9 @ 54	
Rmc @ Meas. Temp	1.62 @ 54	
Source of Rmf / Rmc	Charts	
Rm @ BHT	.74 @ 126	
Operating Rig Time	4 Hours	
Max Rec. Temp. F	126	
Equipment Number	17	
Location	Hays	
Recorded By	M. Garrison	
Witnessed By	Jason Alm	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



9 S of Hodgeman/Ness County Line to Rd P, 1 W to 217, 3/4 S, W Into


Database File: c:\warrior\data\amwar_beltz no. 1-23\awhd.db
Dataset Pathname: dil\awstck
Presentation Format: micro
Dataset Creation: Wed Nov 12 02:26:14 2008
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

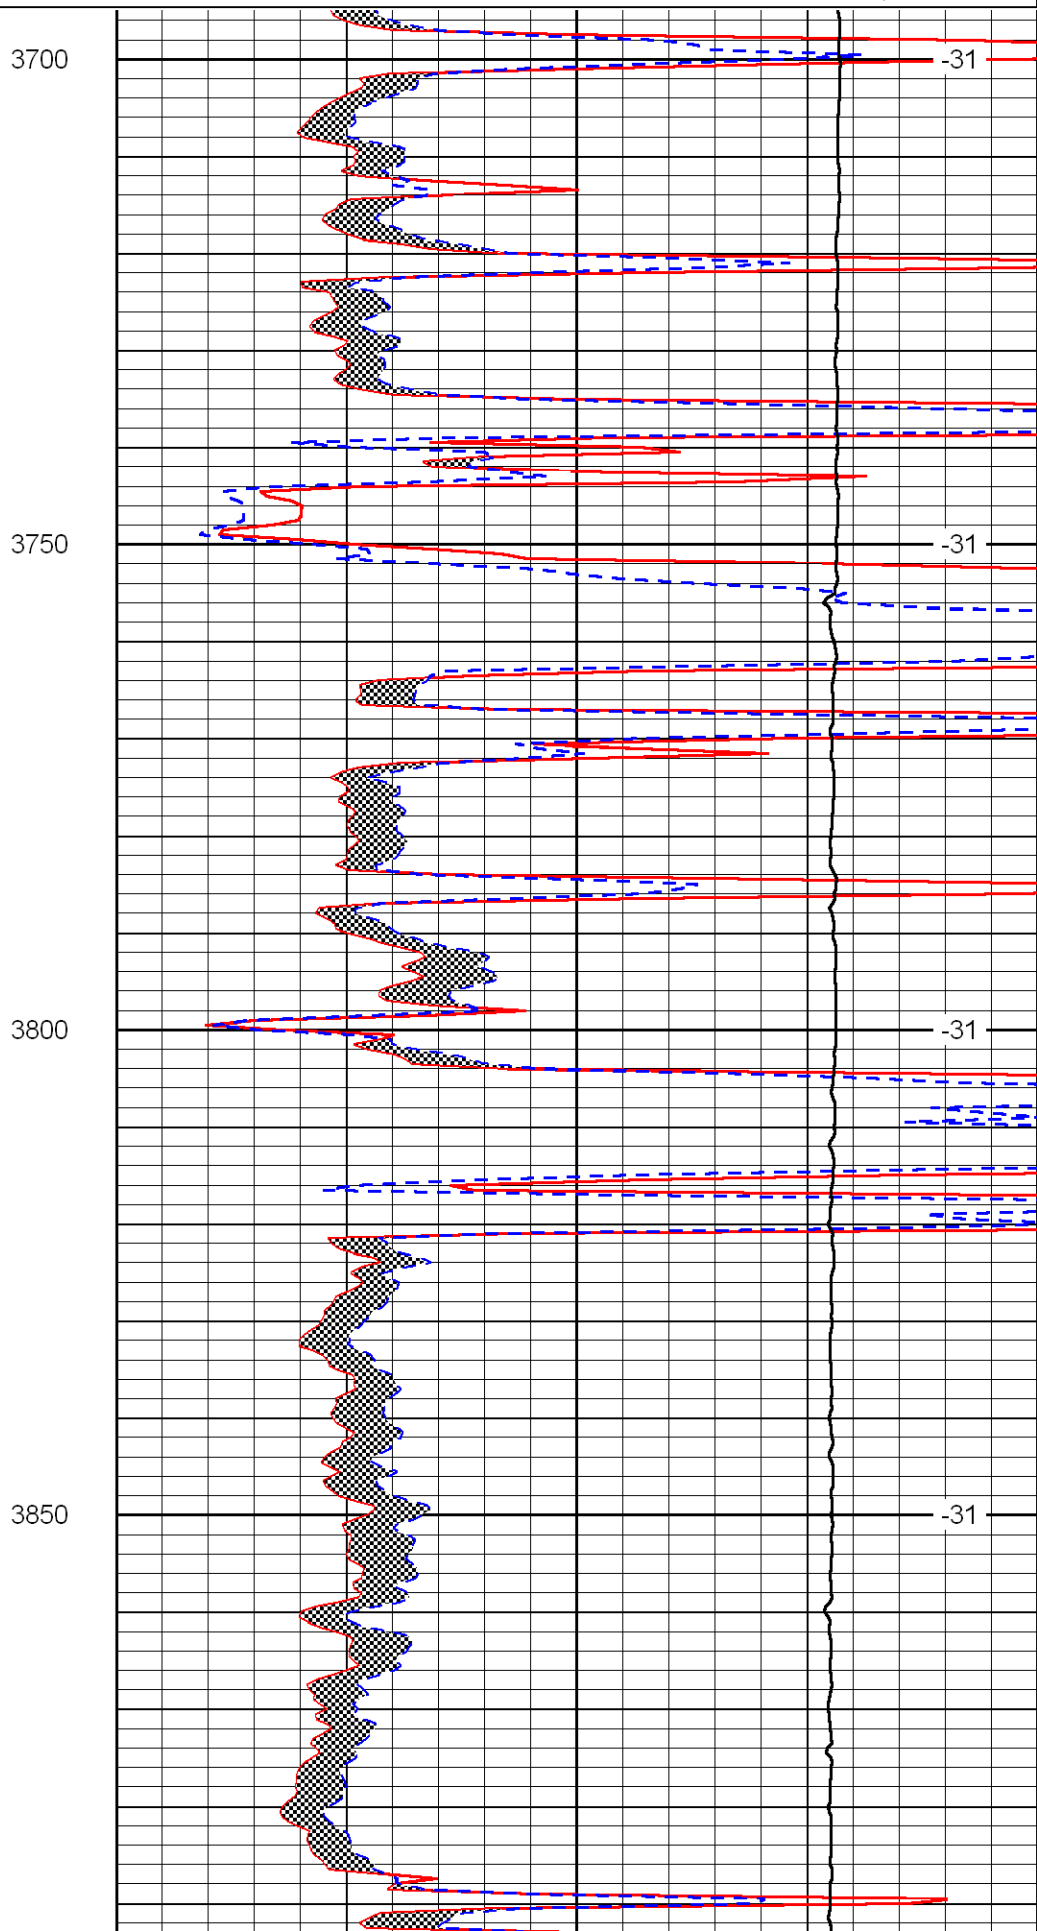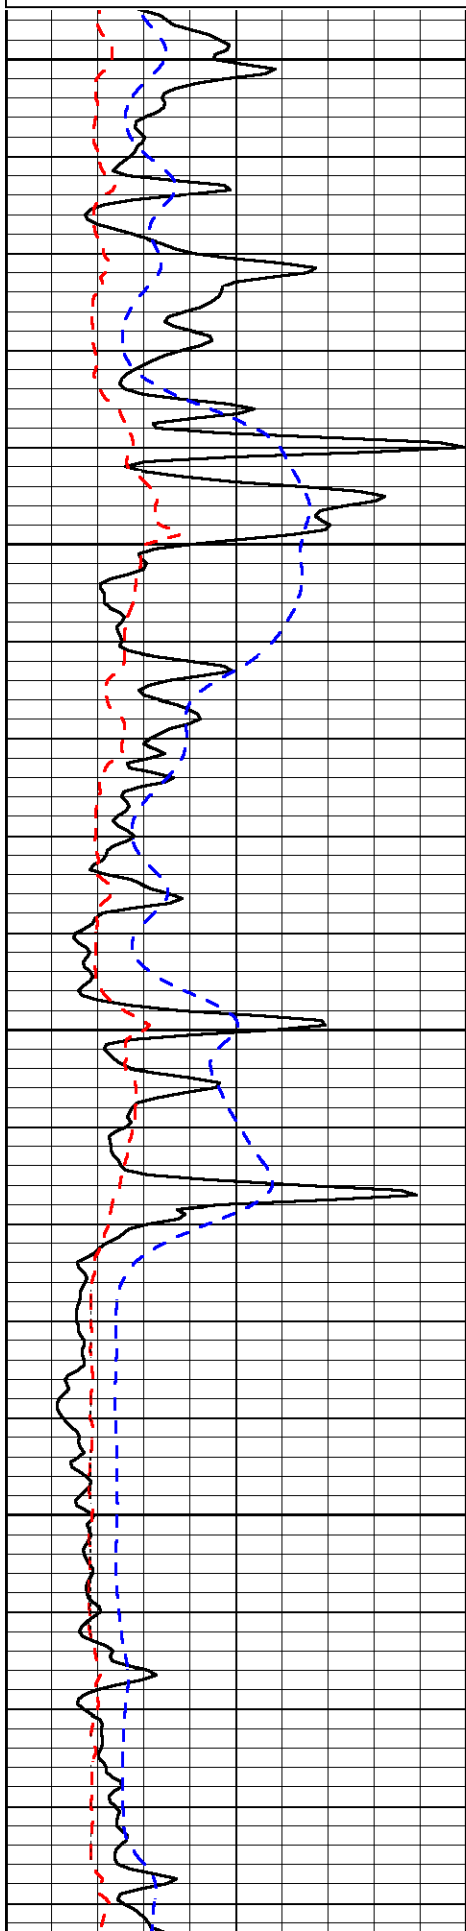

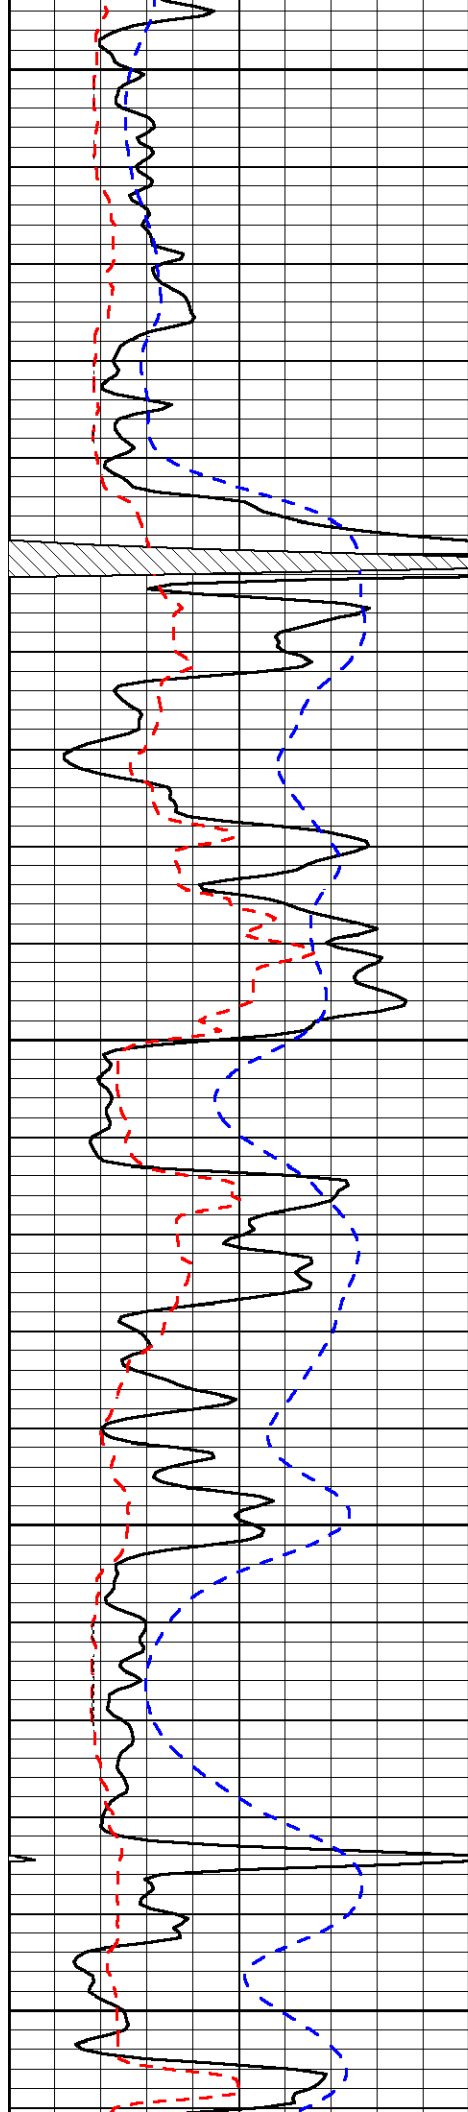


3900

3950

4000

4050

4100

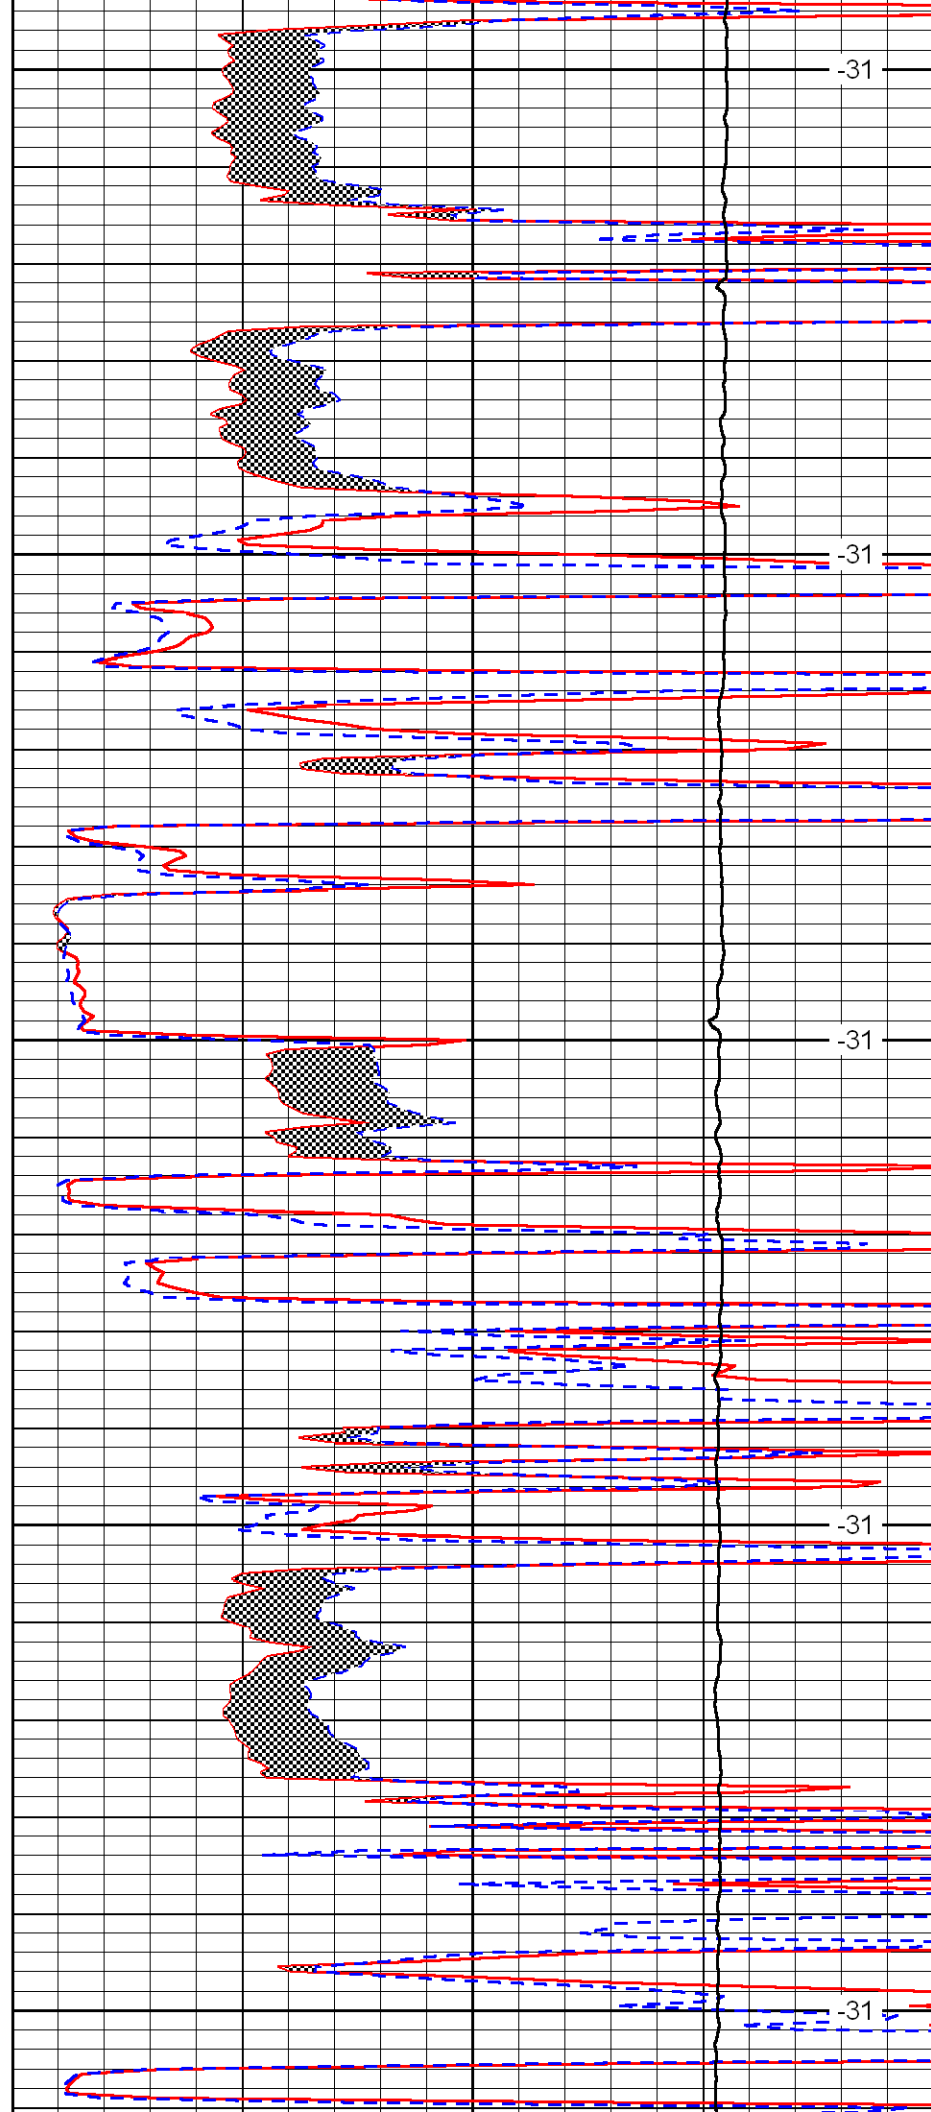


-31

-31

-31

-31

-31

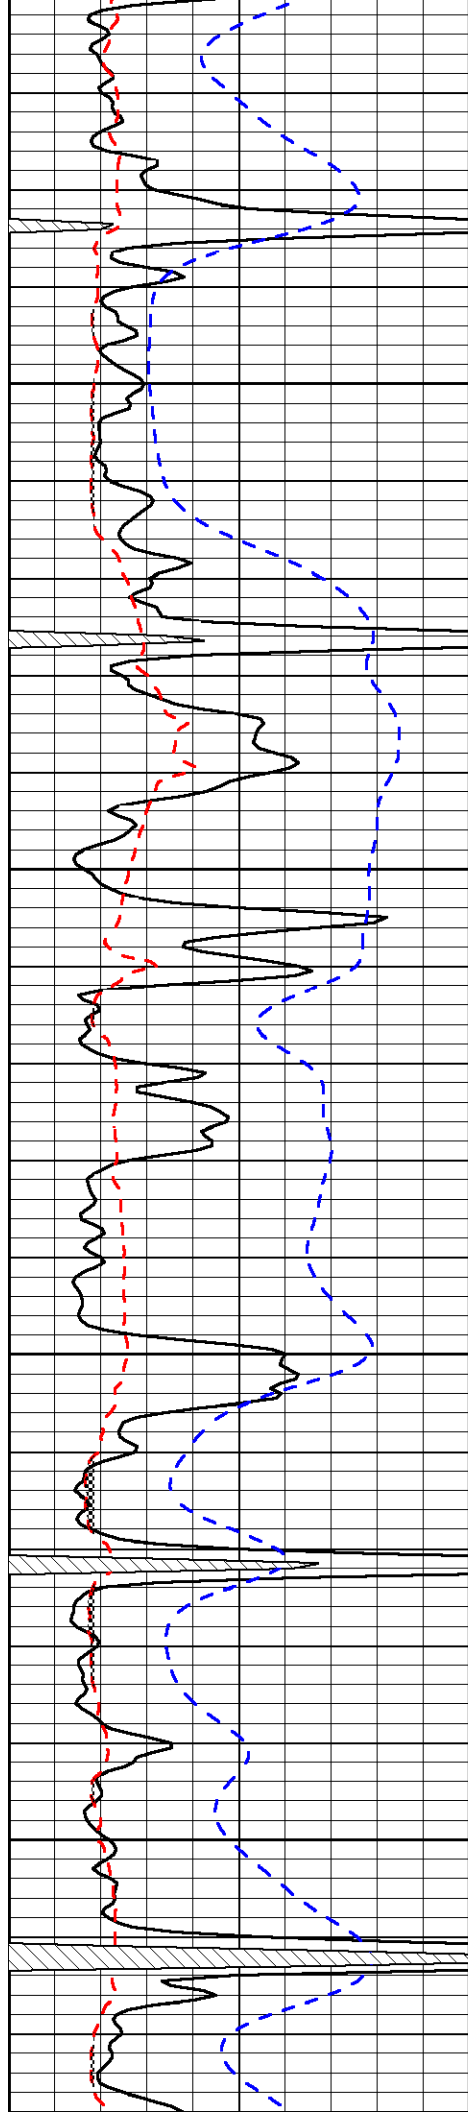



4150

4200

4250

4300

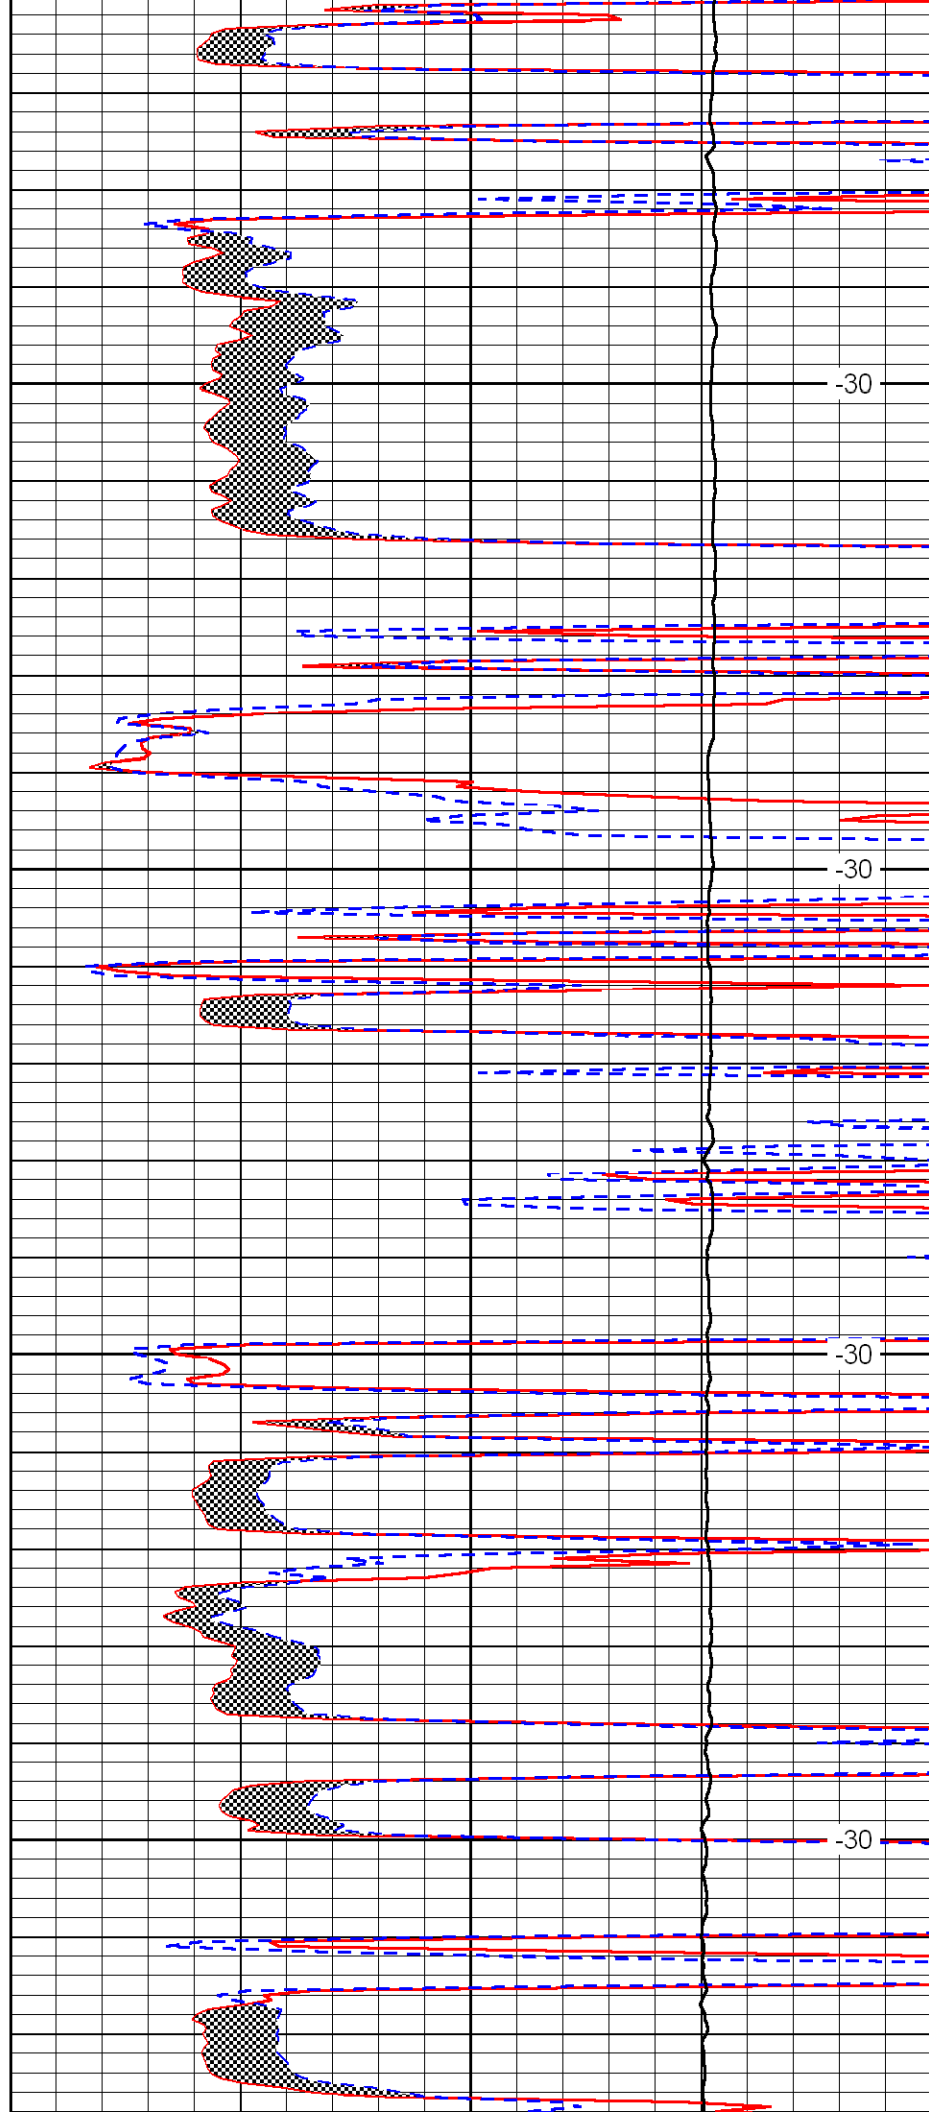

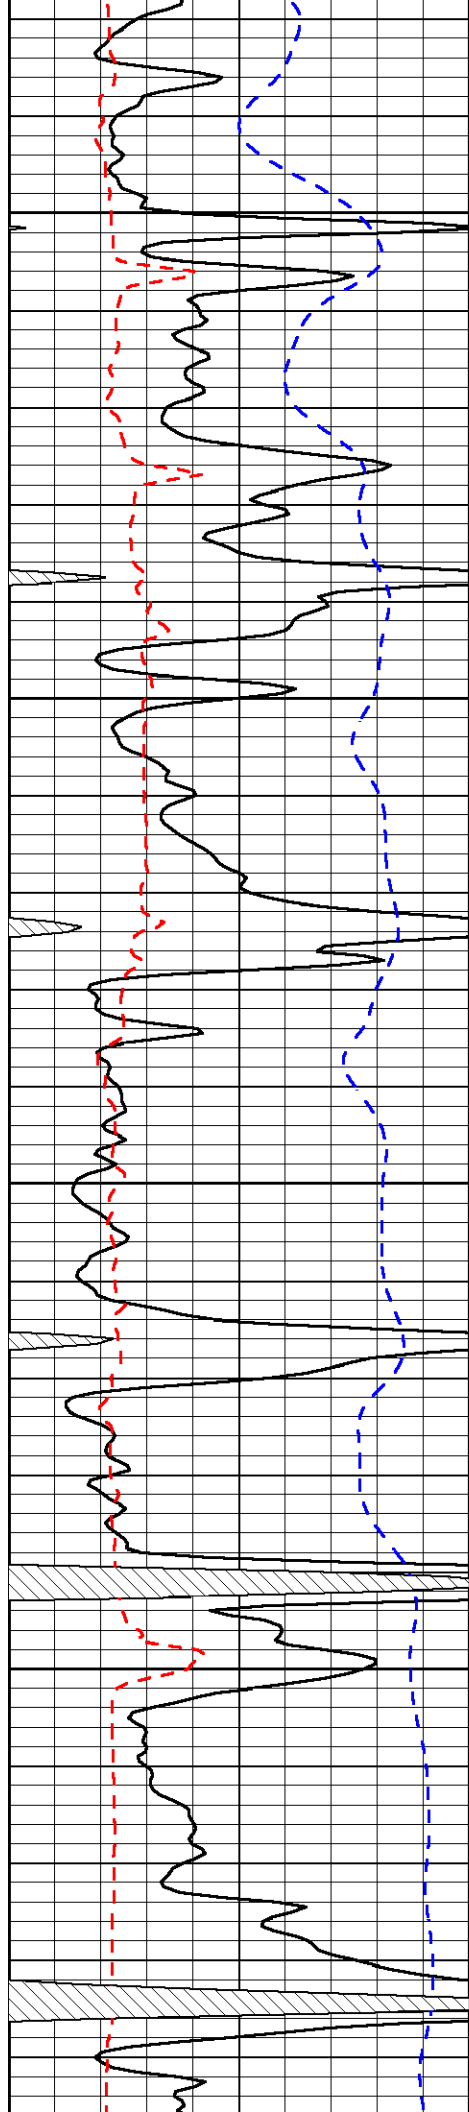



4350

4400

4450

4500

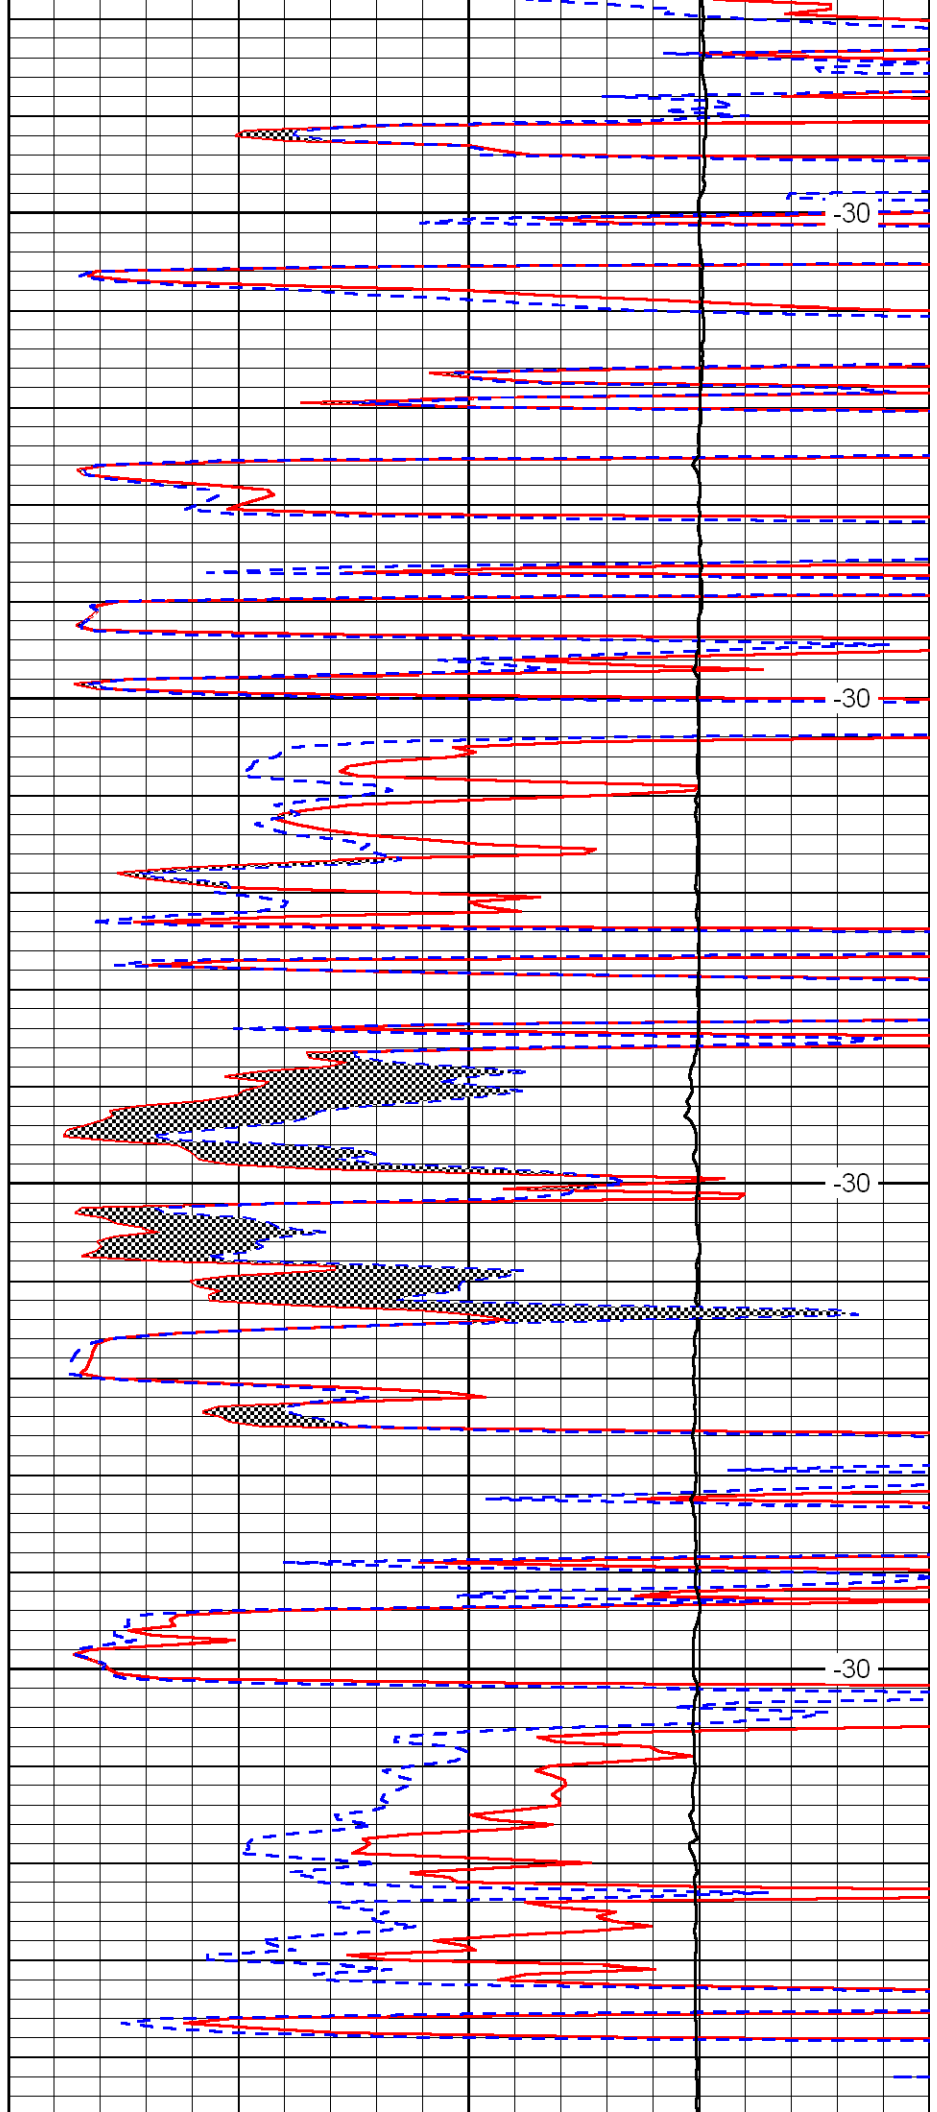

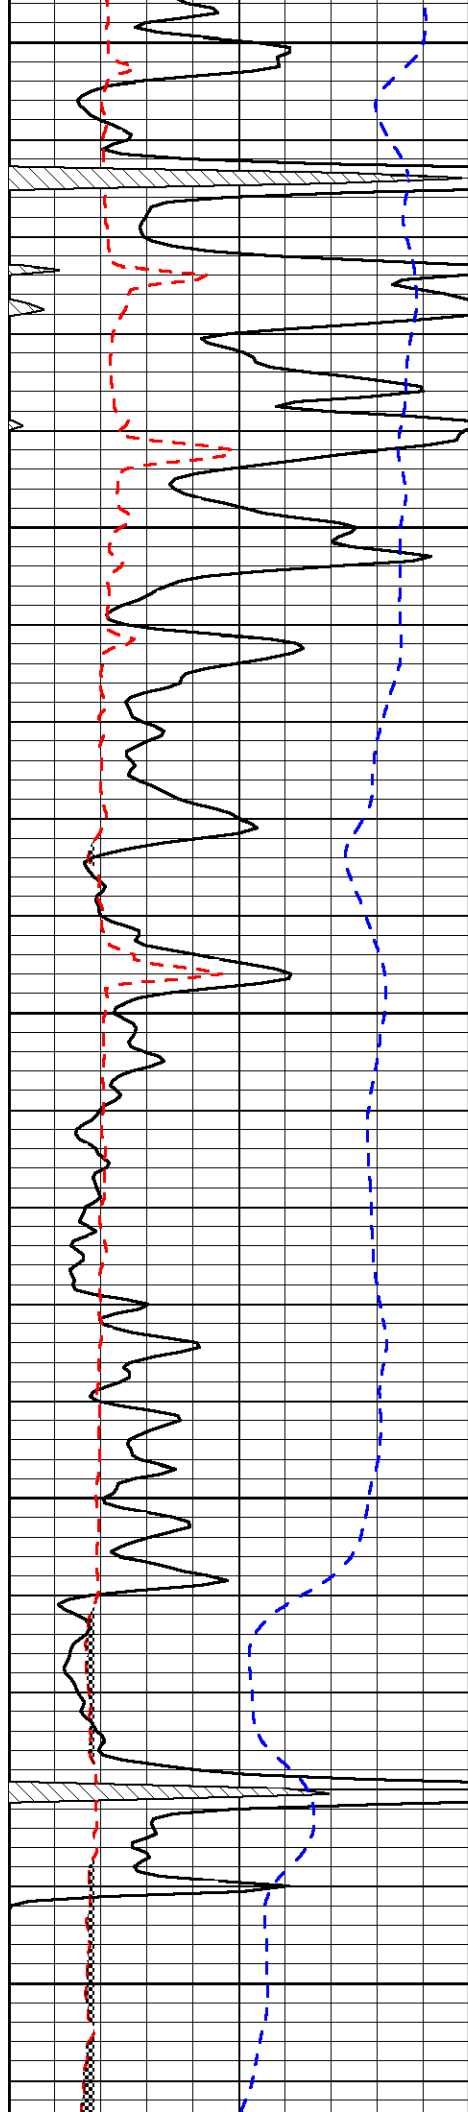


4550

4600

4650

4700

4750

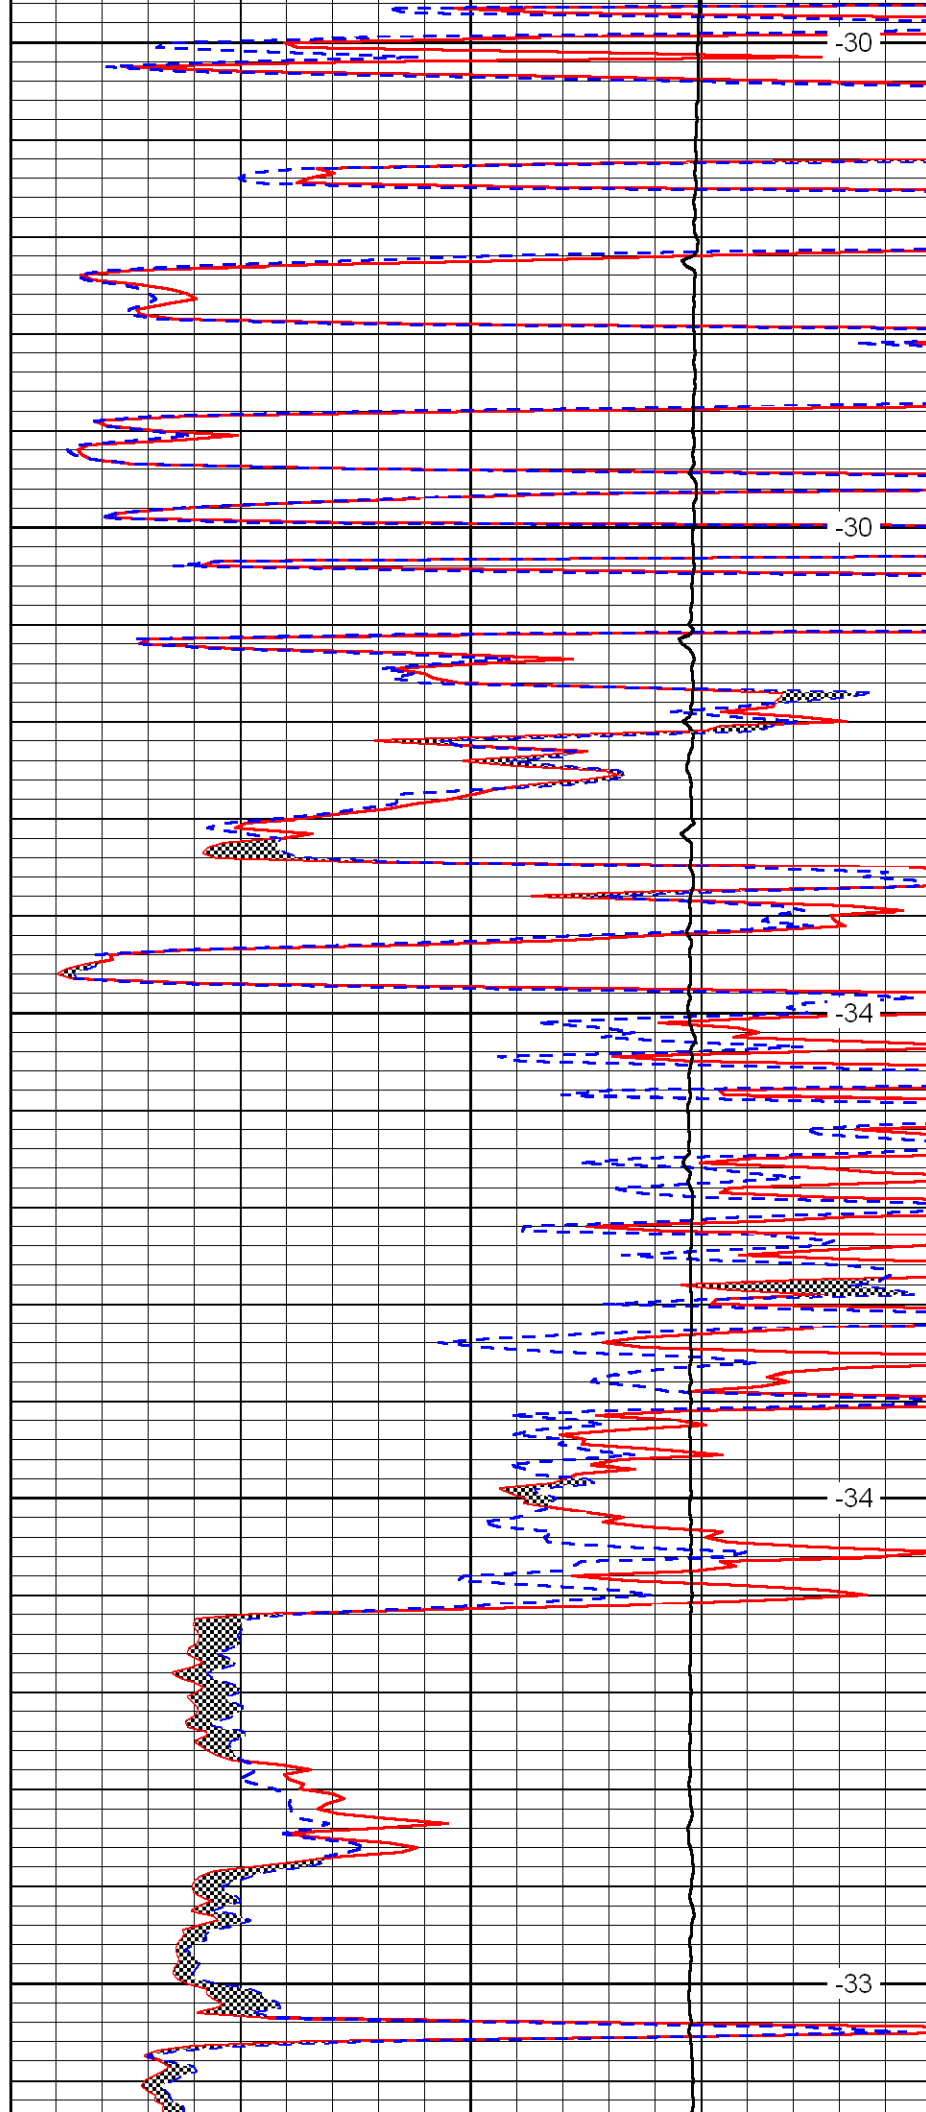



-30

-30

-34

-34

-33

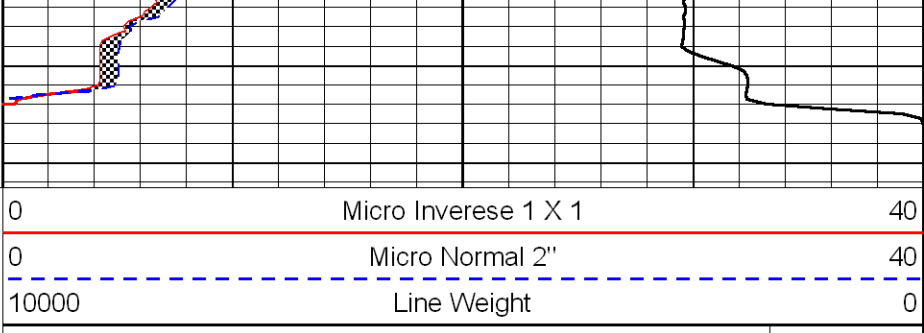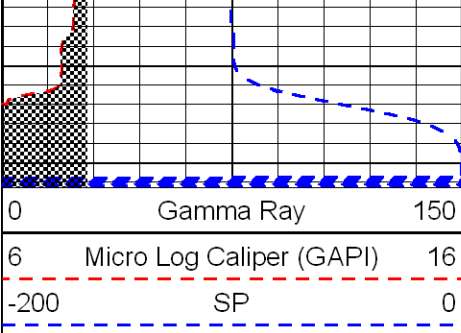

LSPD