



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-055-22,051-00-00		
Company	Lebsack Oil Production		
Well	Garden City Company No. 5-18		
Field	Damme		
County	Finney	State	Kansas
Location	NW SE SE 990' FSL & 990' FEL		Other Services CNL/CDL DIL
Sec: 18	Twp: 22S	Rge: 33W	Elevation

Permanent Datum	Ground Level	Elevation 2897
Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	K.B. 2908 D.F. 2897 G.L. 2897

Date	10/06/2009	
Run Number	Two	
Depth Driller	4900	
Depth Logger	4884	
Bottom Logged Interval	4883	
Top Log Interval	3700	
Casing Driller	8.625 @ 426	
Casing Logger	227	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity, ppm CL	1.800	
Density / Viscosity	9.3 48	
pH / Fluid Loss	11.0 8.0	
Source of Sample	Flowline	
Rm @ Meas. Temp	1.0 @ 65	
Rmf @ Meas. Temp	.75 @ 65	
Rmc @ Meas. Temp	1.35 @ 65	
Source of Rmf / Rmc	Charts	
Rm @ BHT	.51 @ 127	
Operating Rig Time	4 Hours	
Max Rec. Temp. F	127	
Equipment Number	17	
Location	Hays	
Recorded By	Mike Garrison	
Witnessed By	Wayne Lebsack	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Scott City South to Big Lowe Rd, West to Marlow Rd, South to curve, West 1/2 , North Into

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)

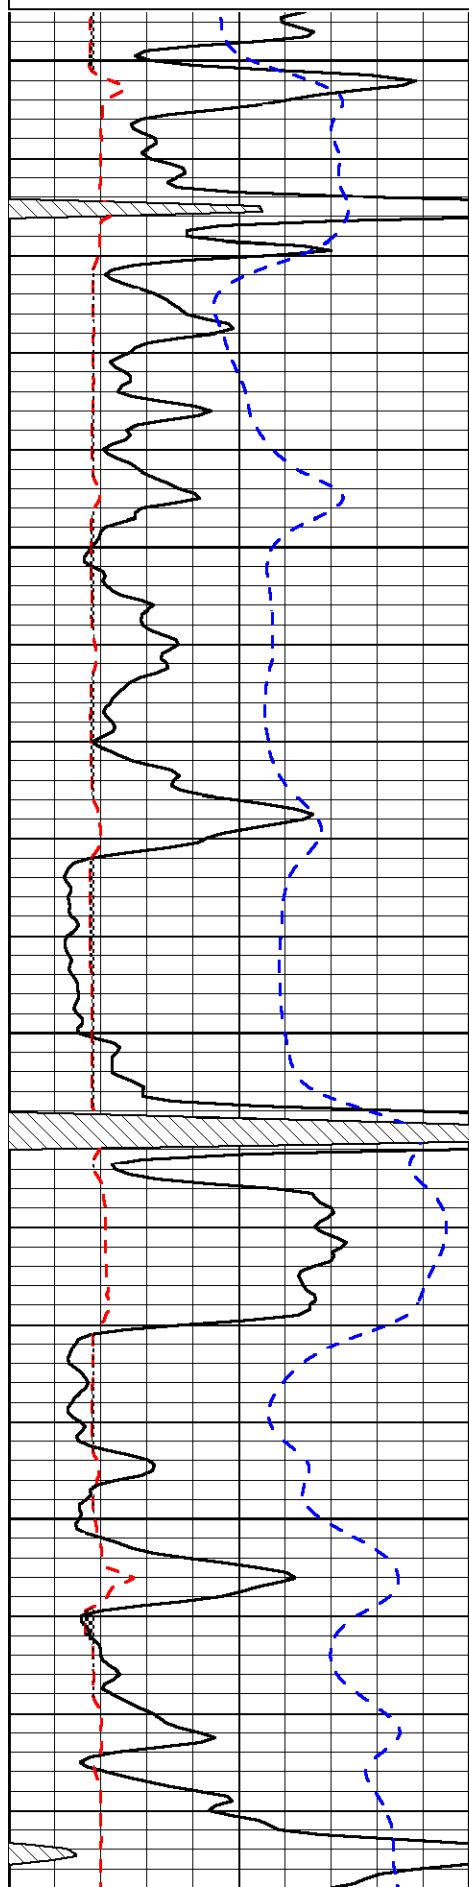



3700

3750

3800

3850

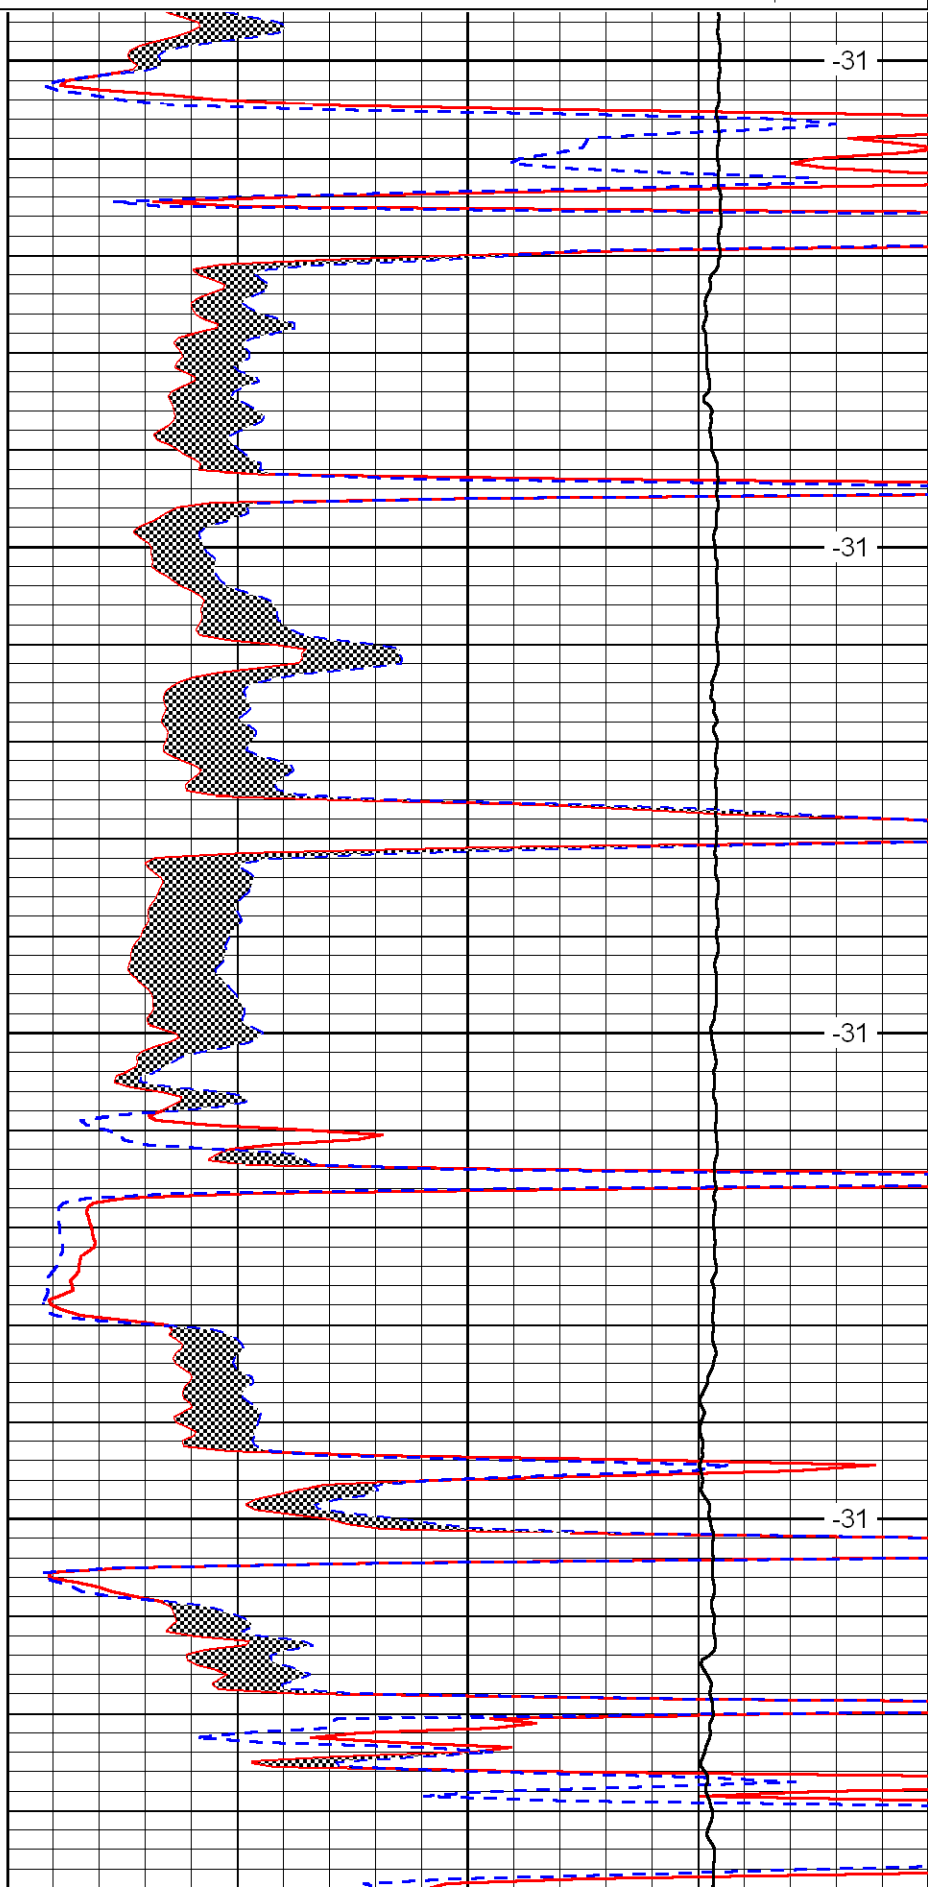

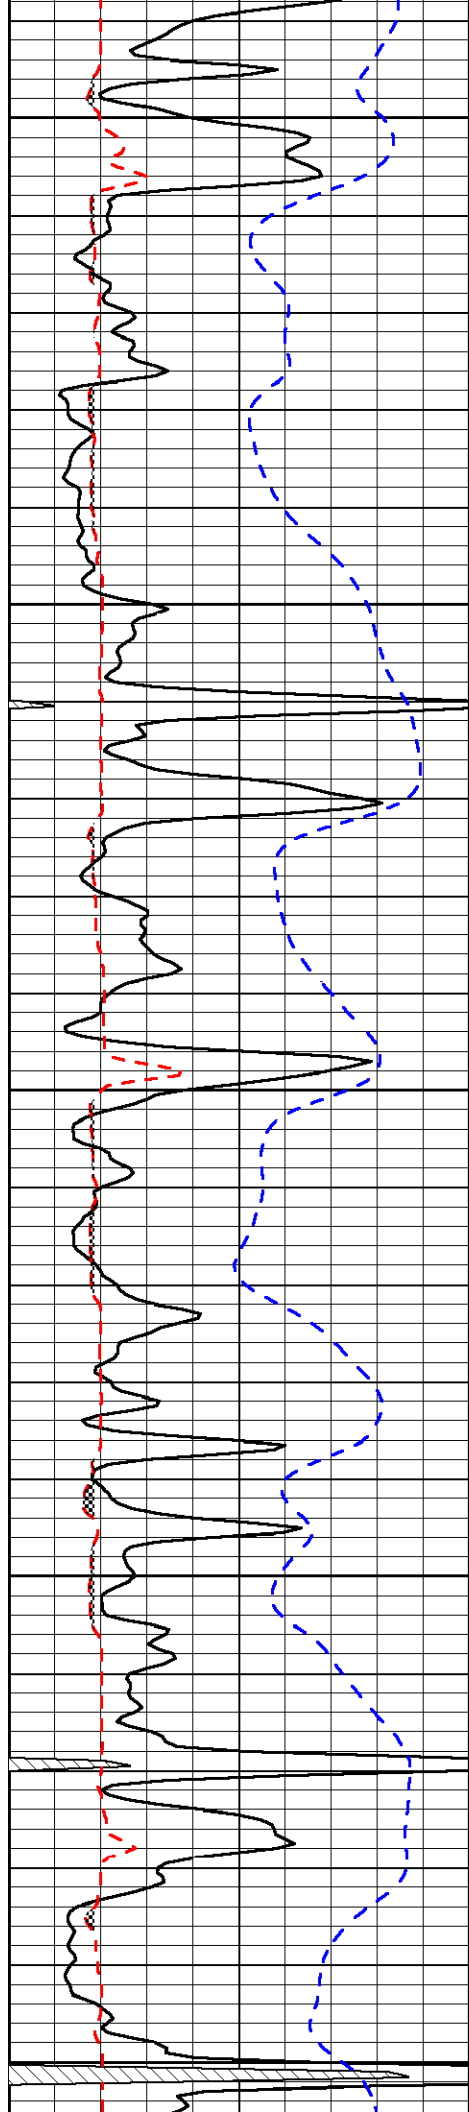


3900


3950

4000

4050

4100

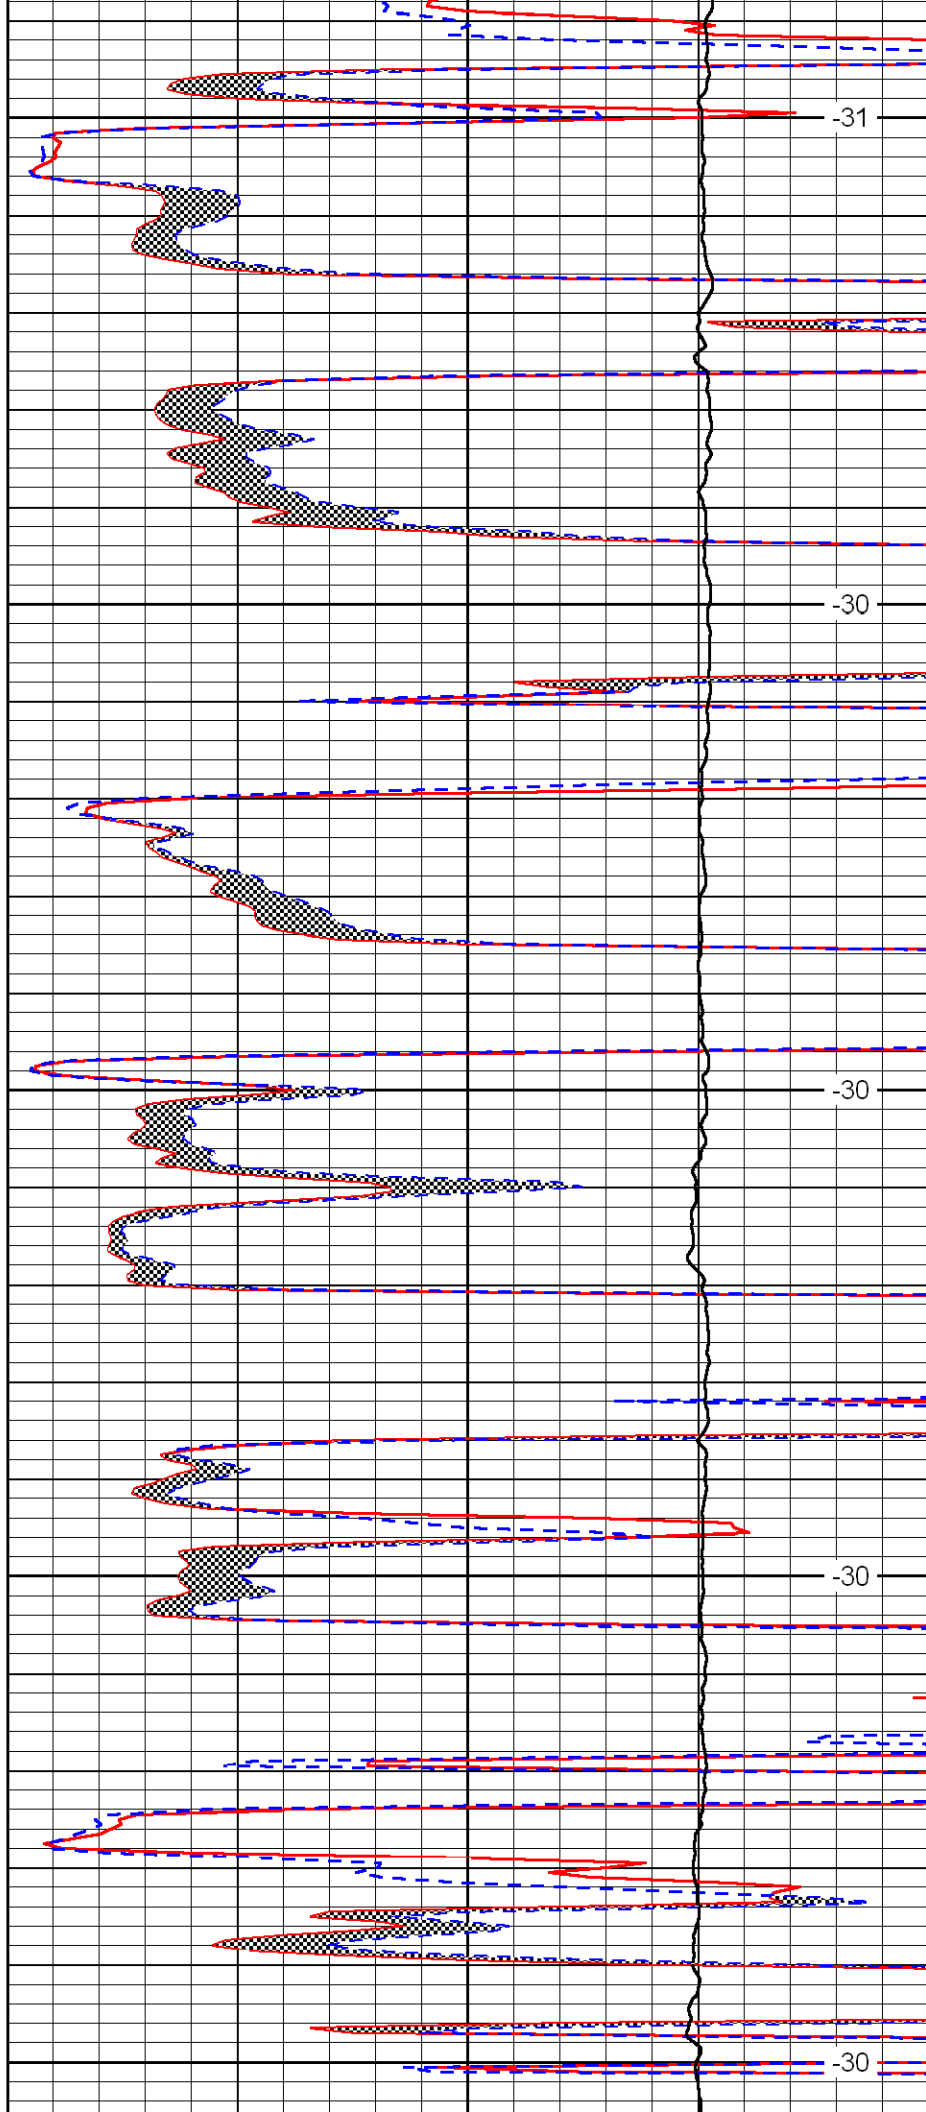

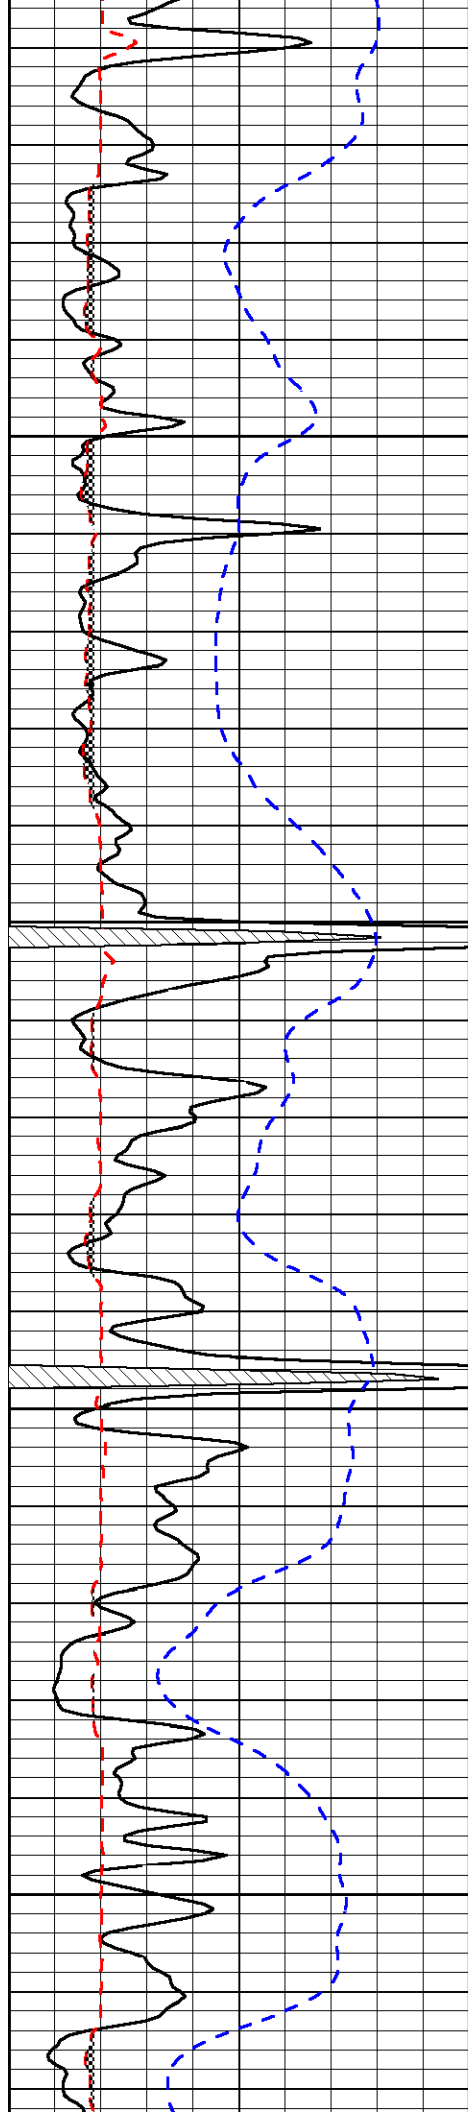



4150

4200

4250

4300

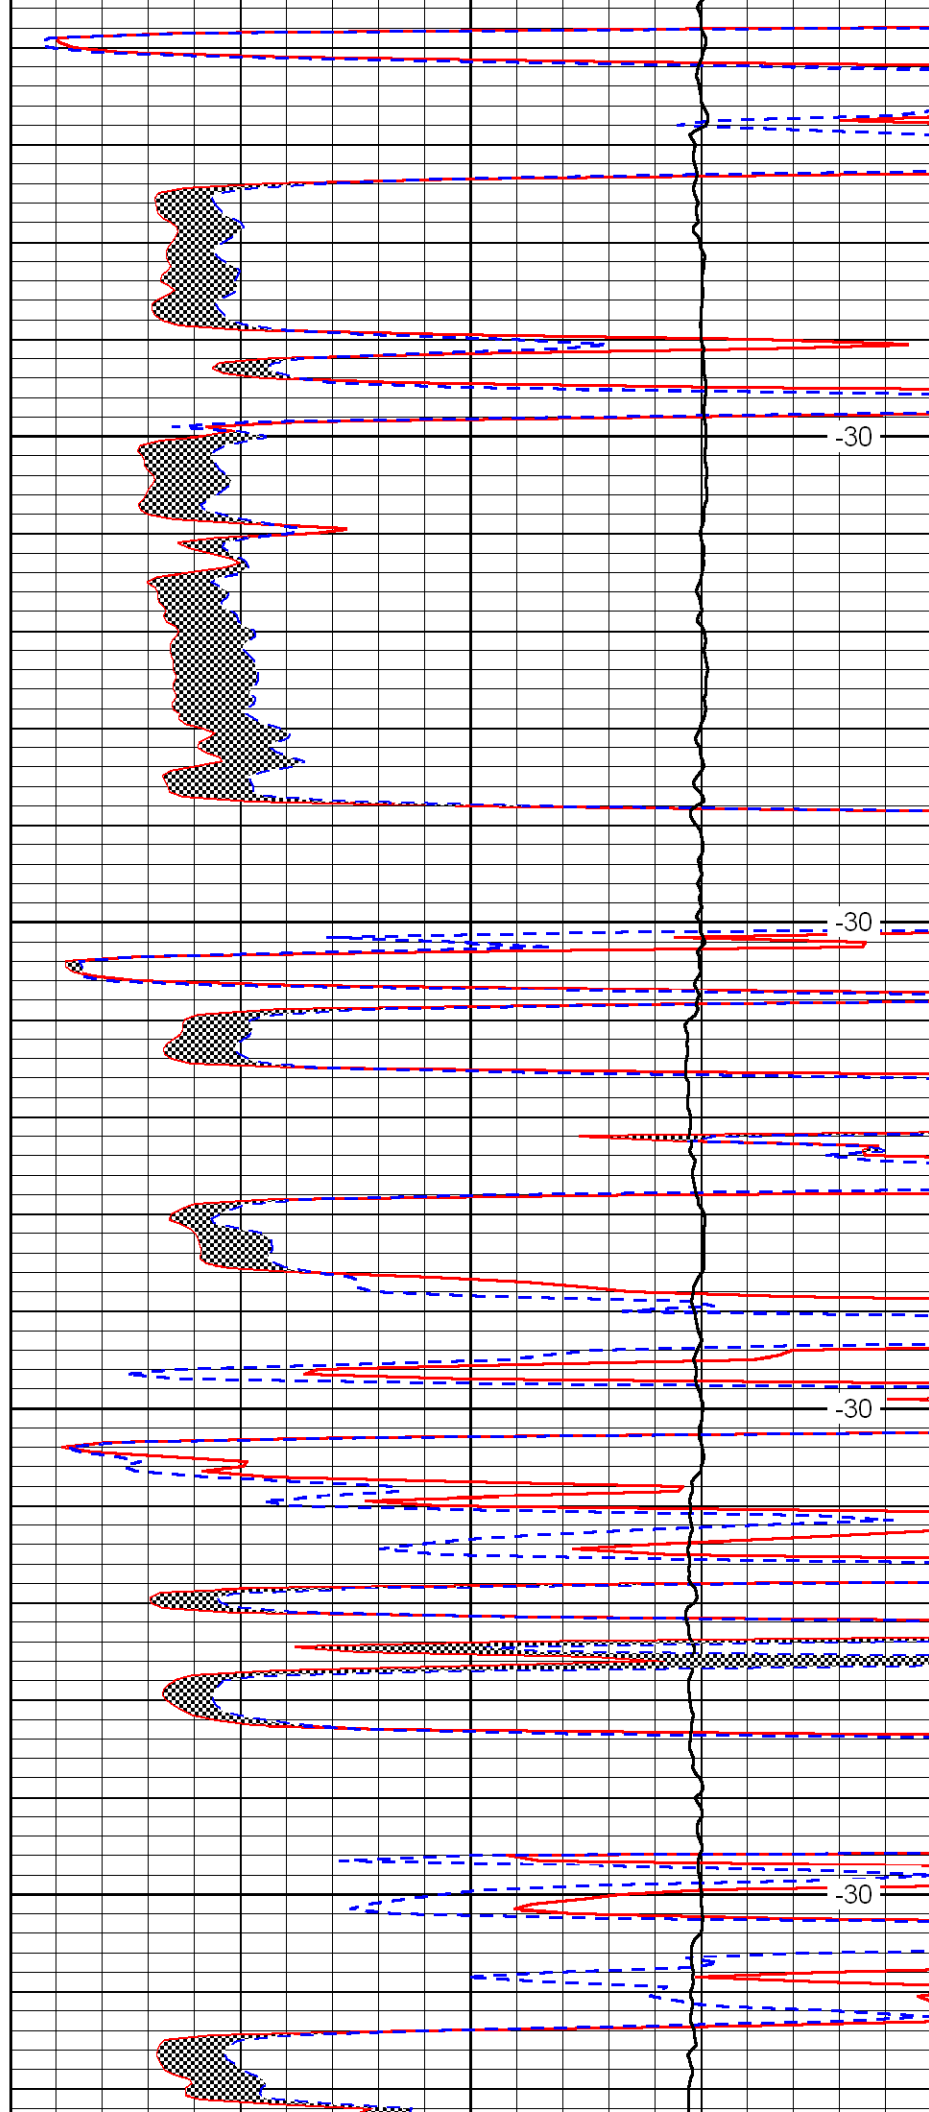

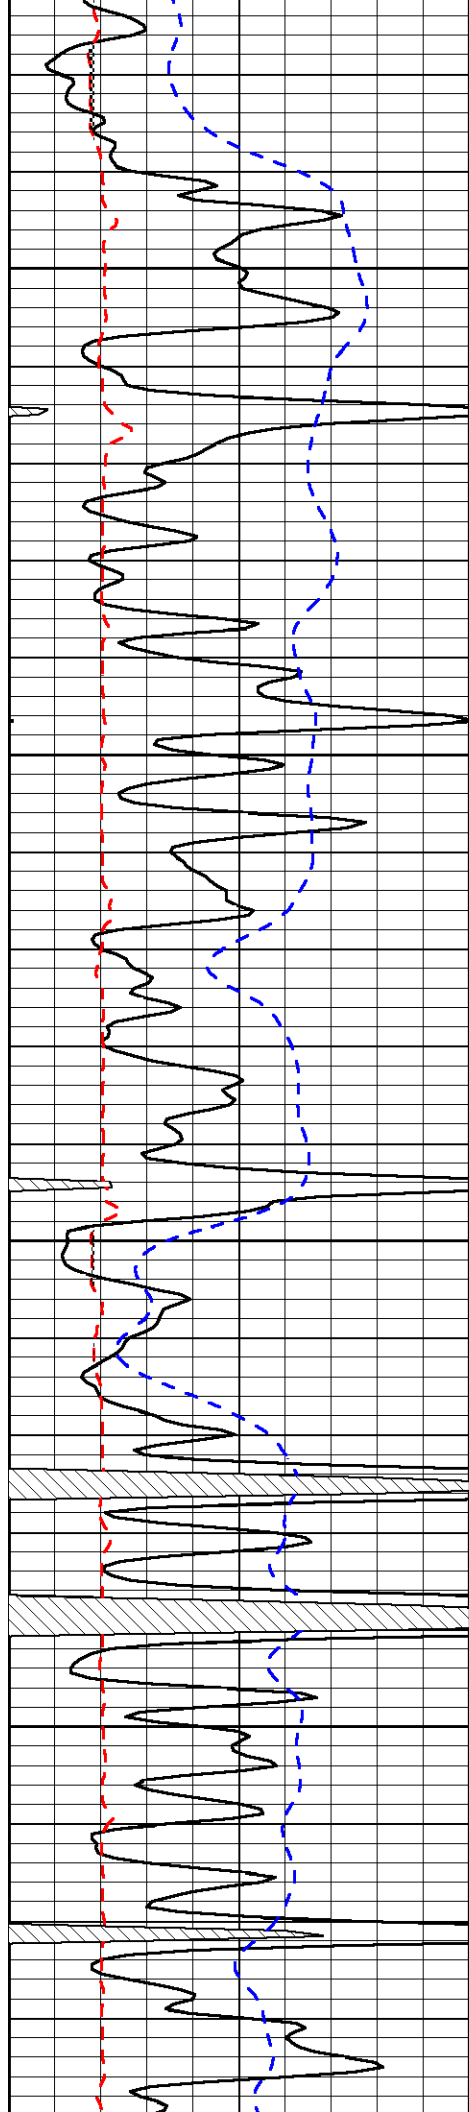



4350

4400

4450

4500

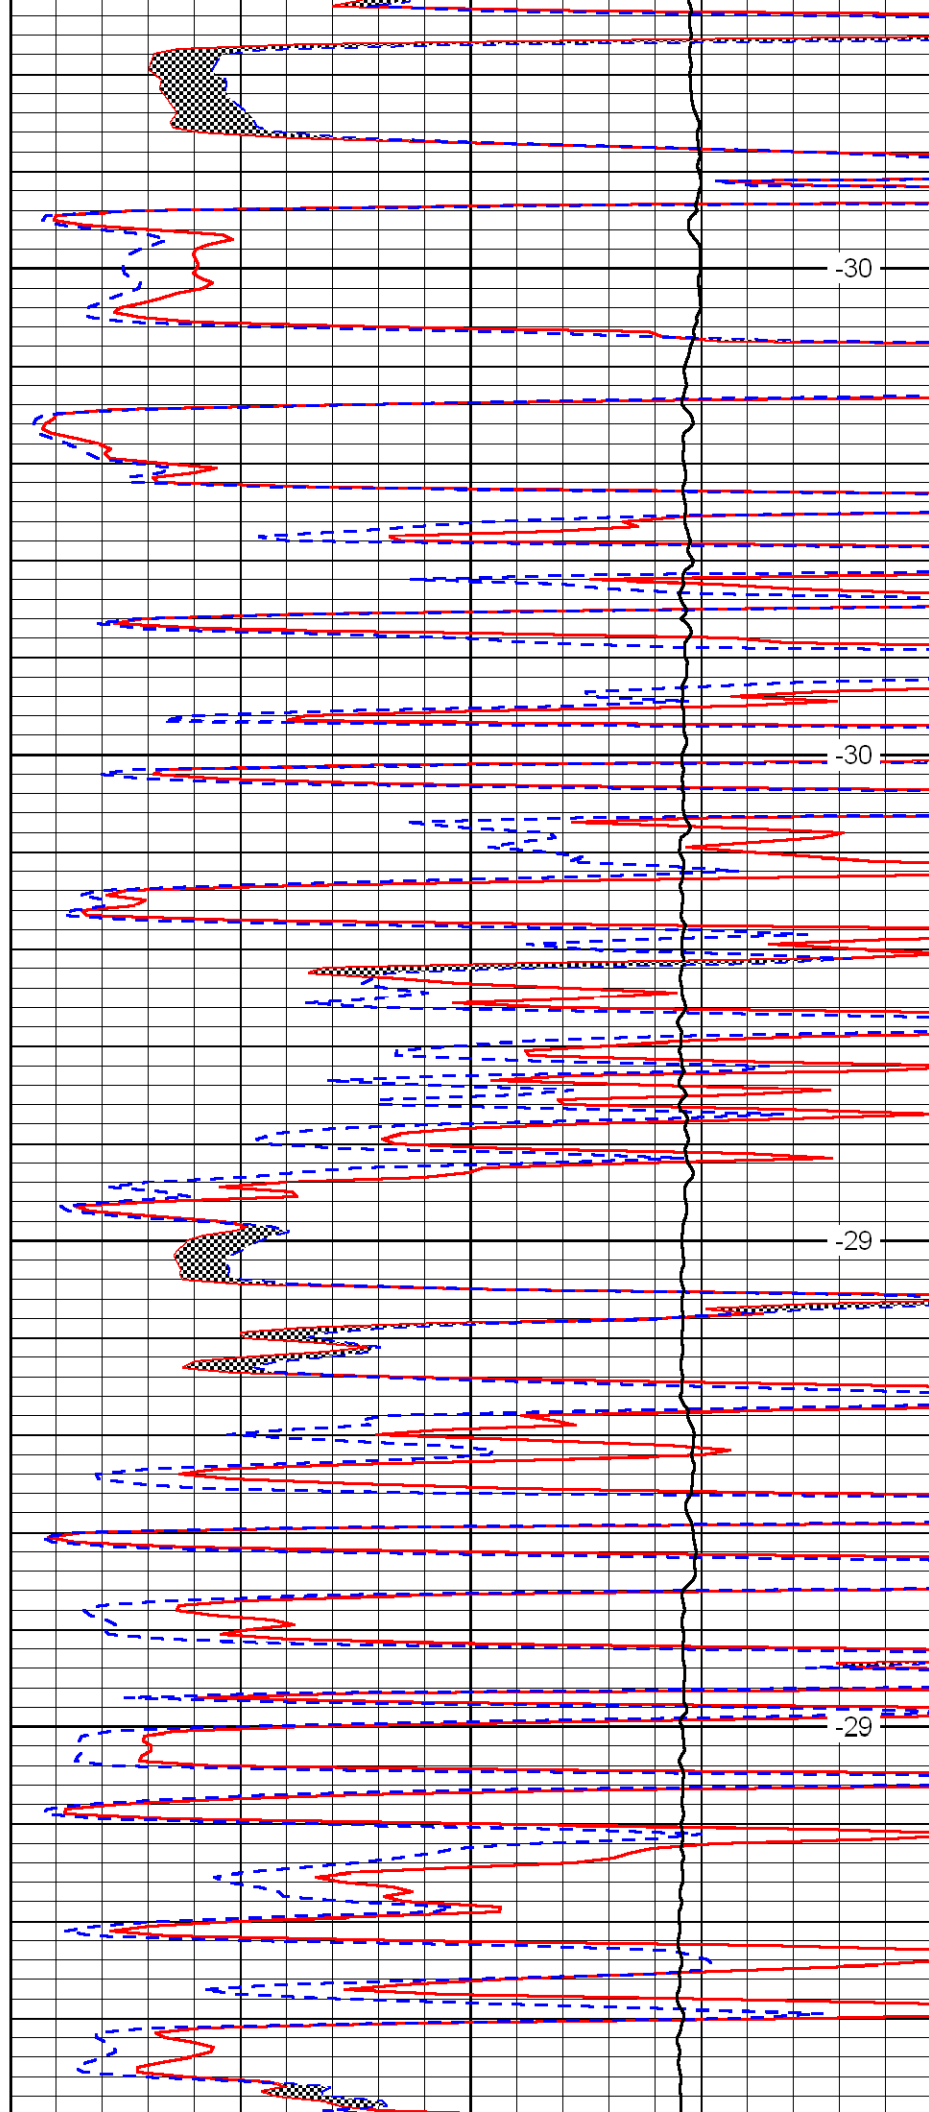

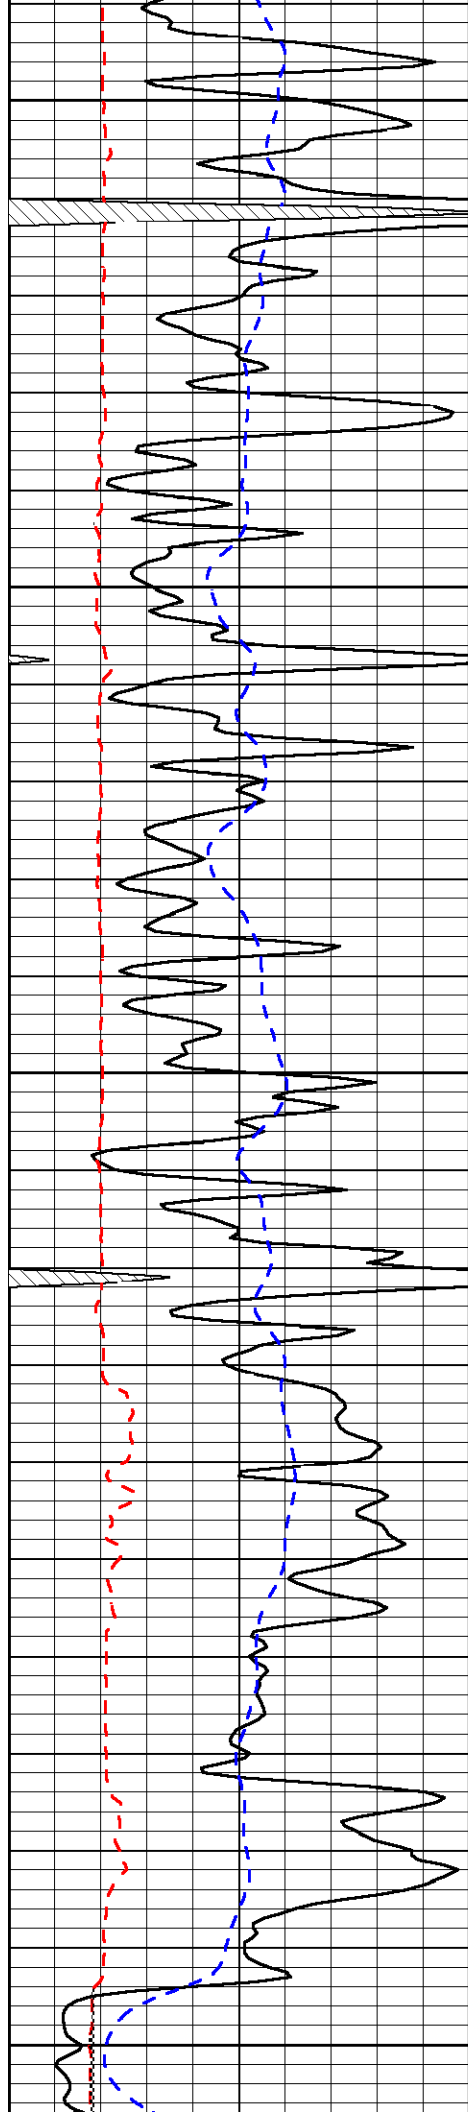


4550

4600

4650

4700

4750

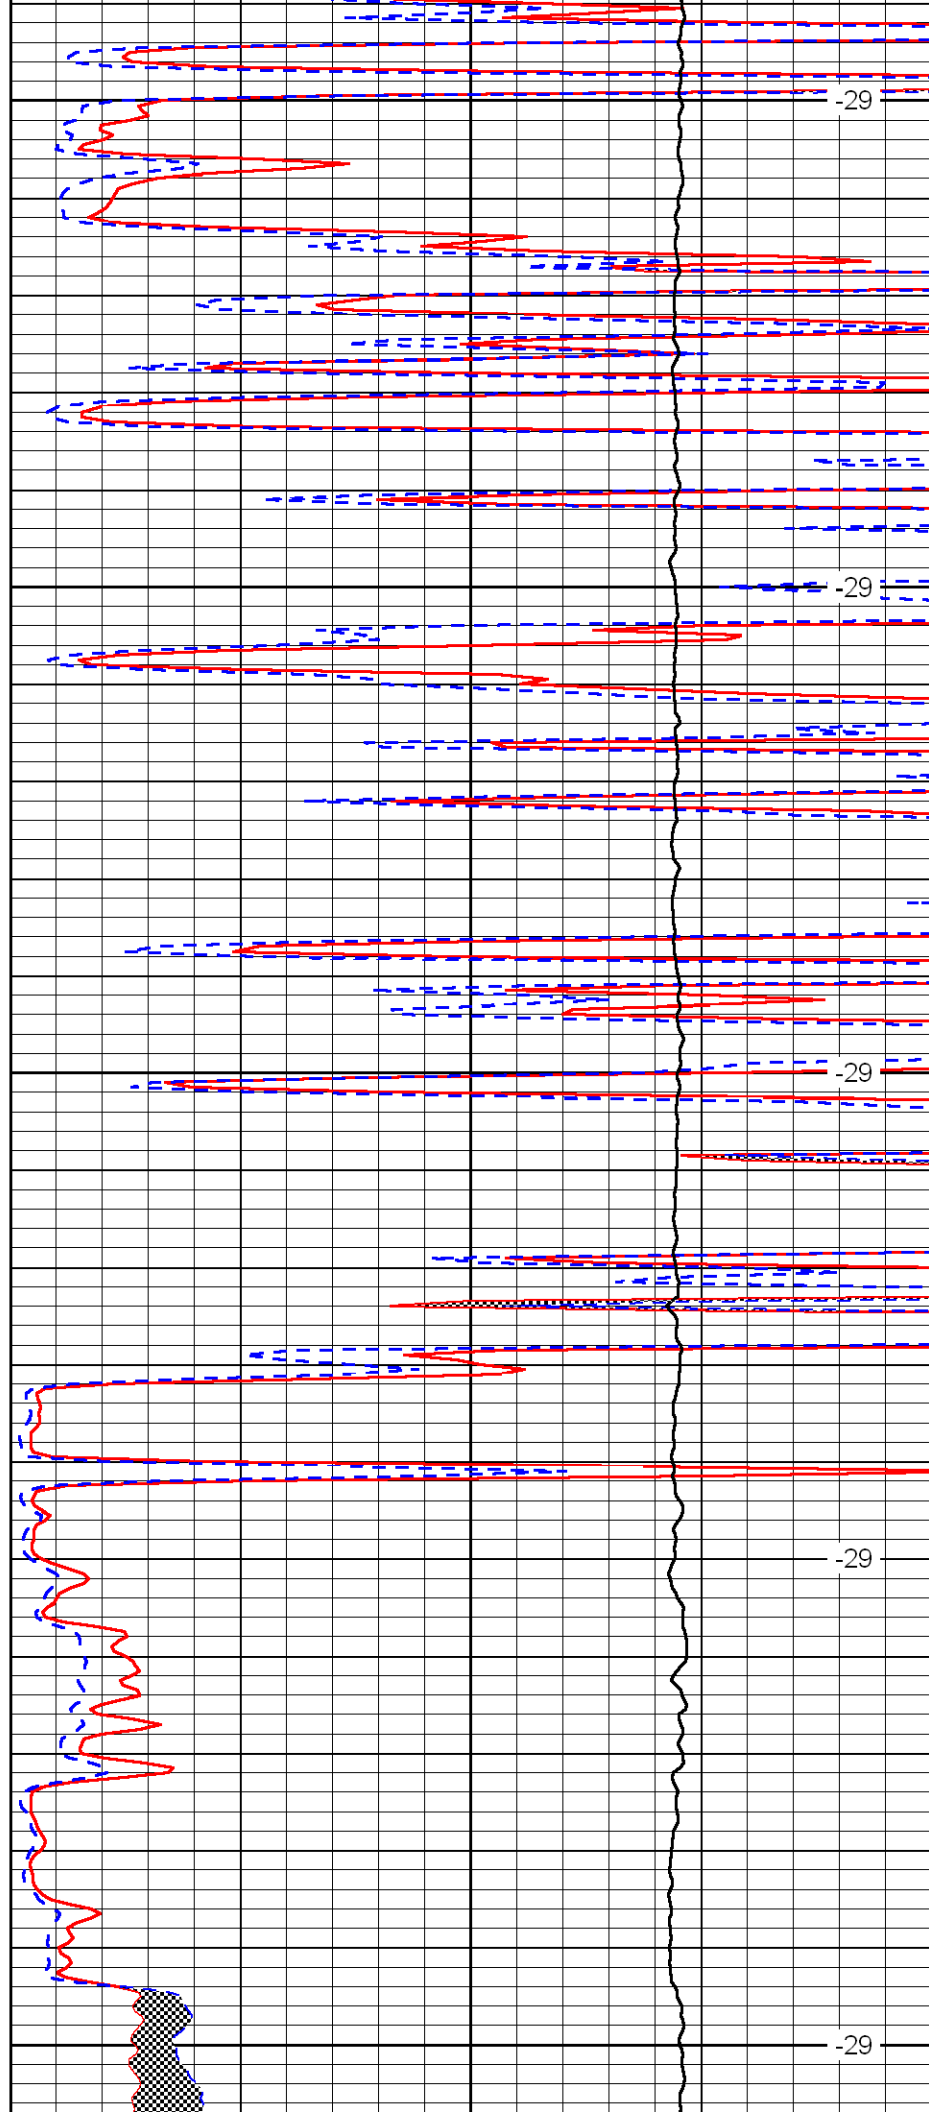



-29

-29

-29

-29

-29

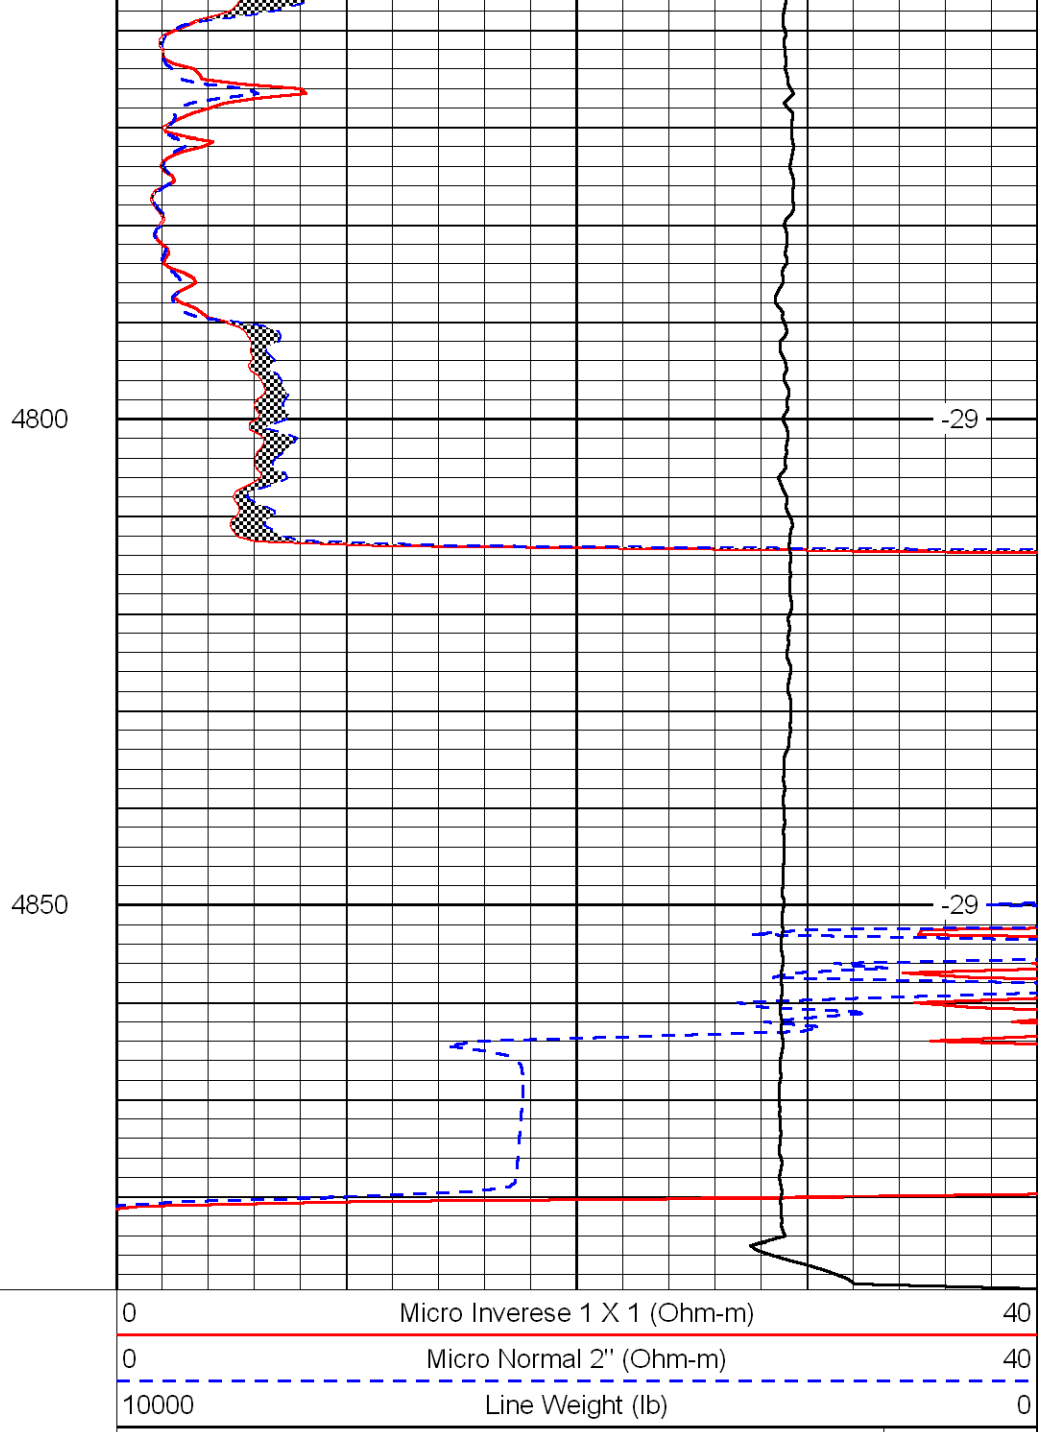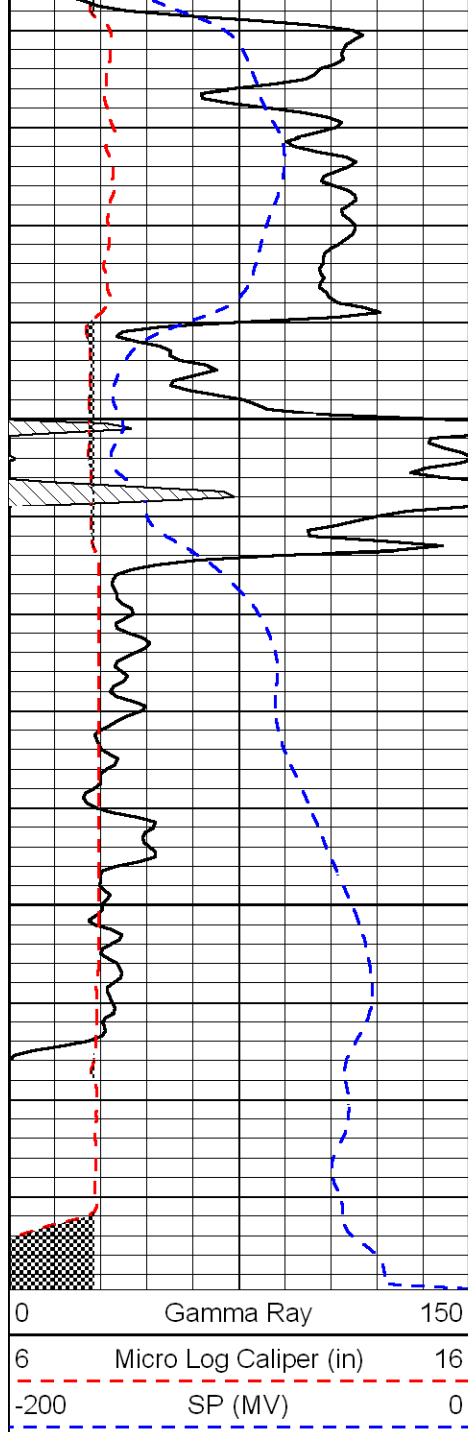

LSPD
(ft/min)