



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-159-22,593-00-00		
Company	Te-Pe Oil & Gas		
Well	Reese No.4		
Field	Chase-Silica		
County	Rice	State	Kansas
Location	SE NW NW 990' FNL & 990' FWL		
Sec: 16	Twp: 19S	Rge: 9W	
Permanent Datum	Ground Level	Elevation	1694
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum	
Drilling Measured From	Frotkelly Bushing		
		Other Services	CNL/CDL DIL
		Elevation	K.B. 1704 D.F. 1694 G.L. 1694

Date	2/24/2009	
Run Number	Two	
Depth Driller	3361	
Depth Logger	3358	
Bottom Logged Interval	3357	
Top Log Interval	2500	
Casing Driller	8.625 @ 365	
Casing Logger	354	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity, ppm CL	3.600	
Density / Viscosity	8.5	50
pH / Fluid Loss	10.5	8.8
Source of Sample	Flowline	
Rm @ Meas. Temp	.7 @ 65	
Rmf @ Meas. Temp	.53 @ 65	
Rmc @ Meas. Temp	.95 @ 65	
Source of Rmf / Rmc	Charts	
Rm @ BHT	.42 @ 110	
Operating Rig Time	3 Hours	
Max Rec. Temp. F	110	
Equipment Number	15	
Location	Hays	
Recorded By	C. Desaire	
Witnessed By	Terry Bandy	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
 (785) 625-3858


 Hwy 4 & Chase Blkt, 8 S, 1 E, 1/4 S, E Into


Database File: c:\warrior\data\te-pe_reese no.4\te-pehd.db
 Dataset Pathname: dil\tepestk
 Presentation Format: micro
 Dataset Creation: Tue Feb 24 09:52:53 2009
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150
6	Micro Log Caliper (GAPI)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)

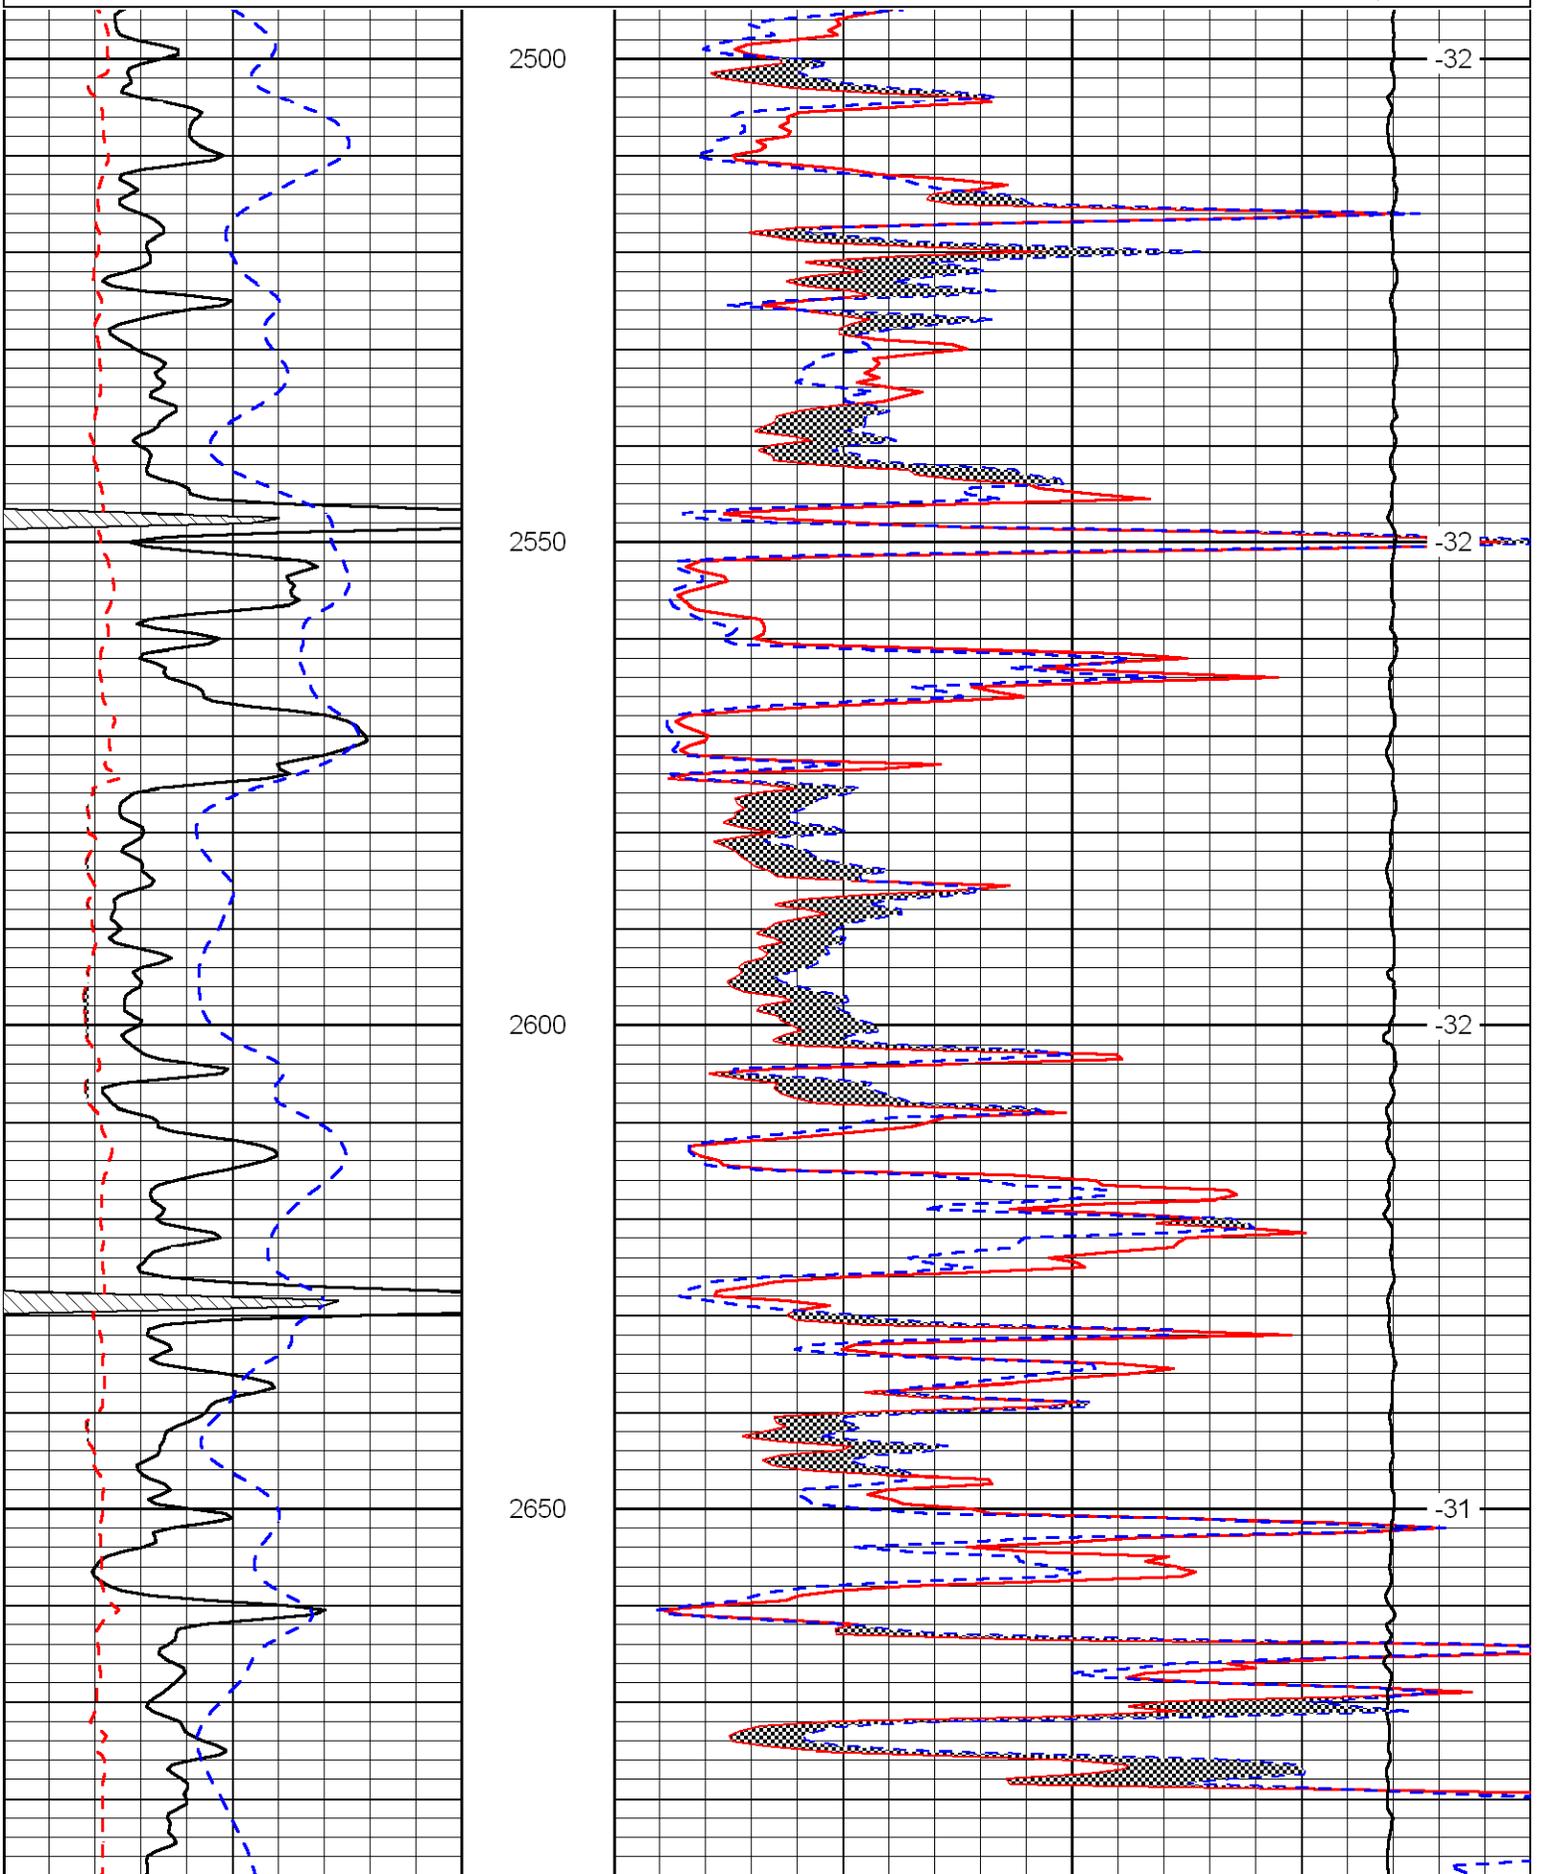

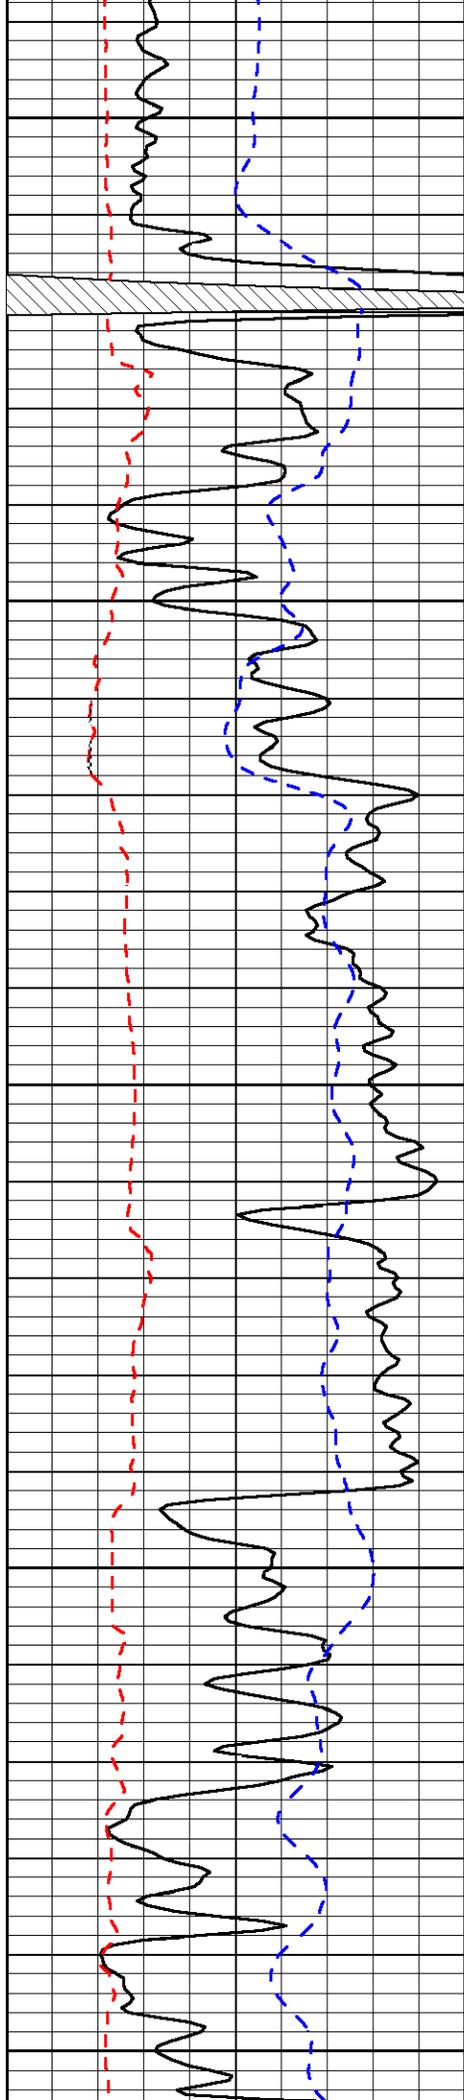


2700

2750

2800

2850

2900

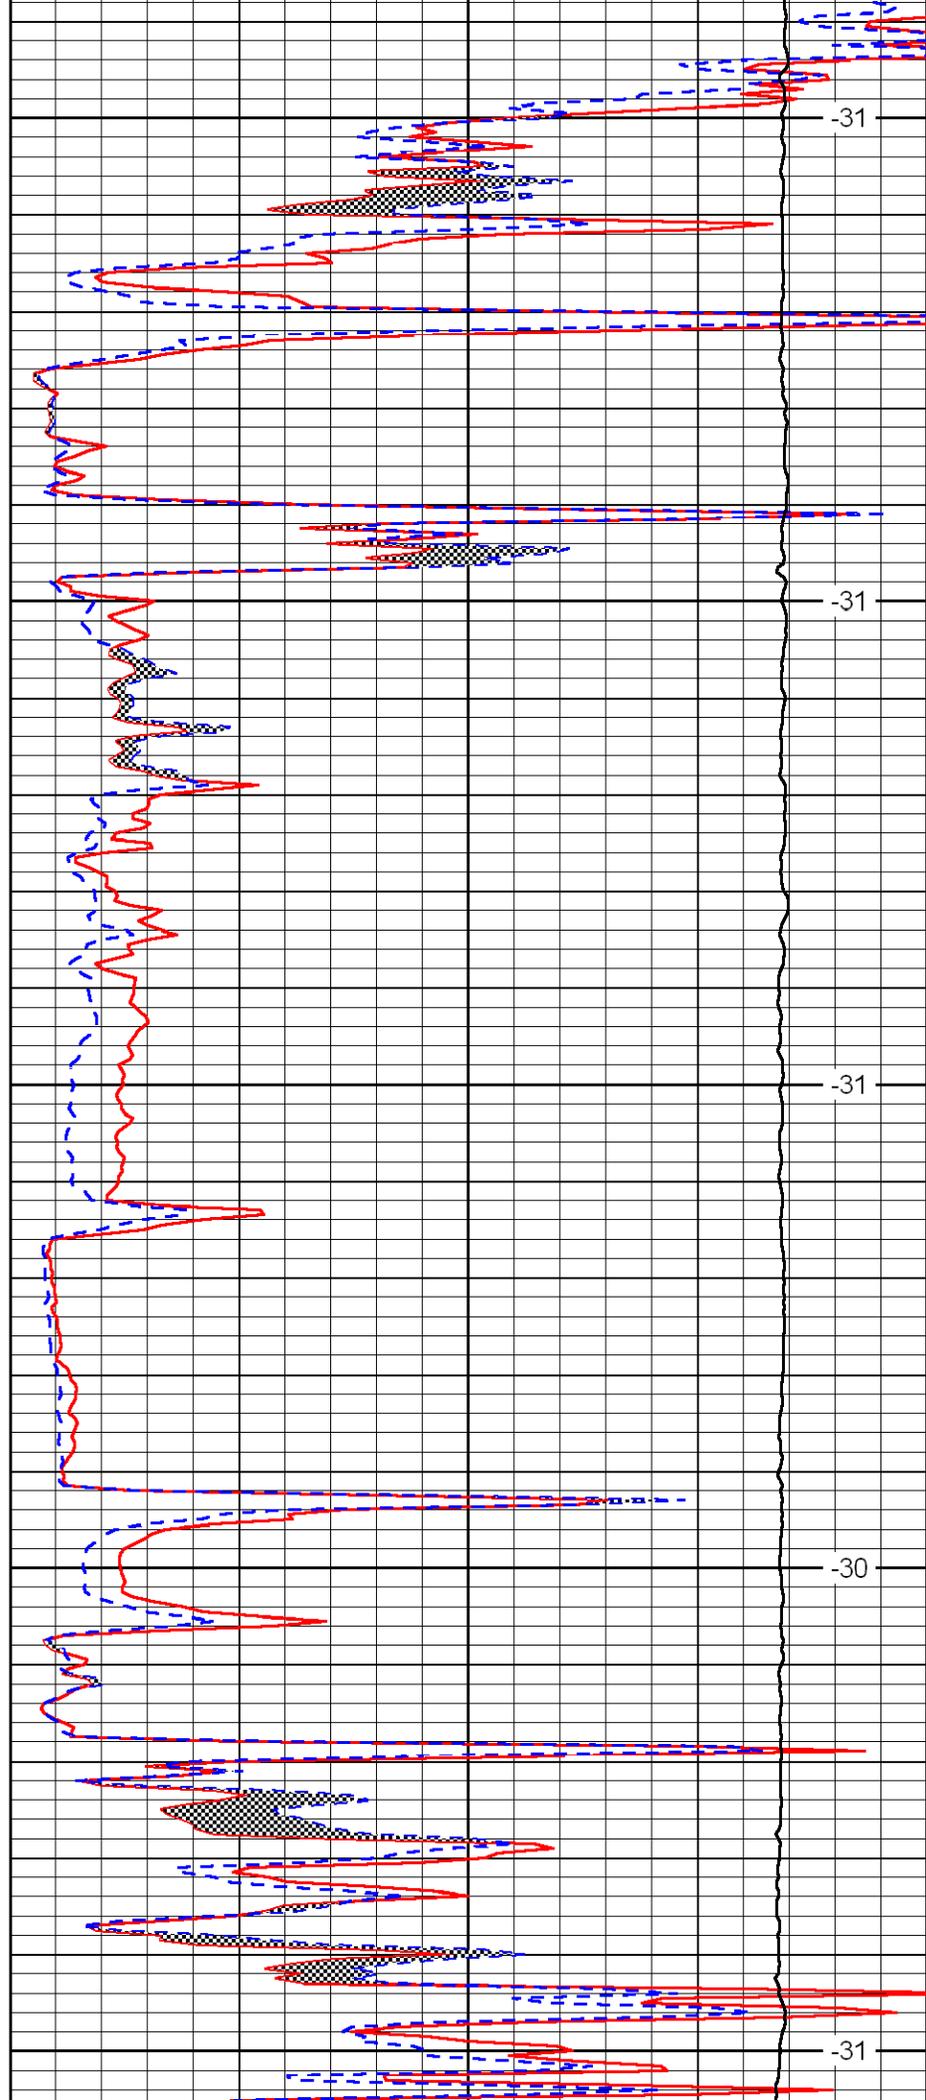


-31

-31

-31

-30

-31

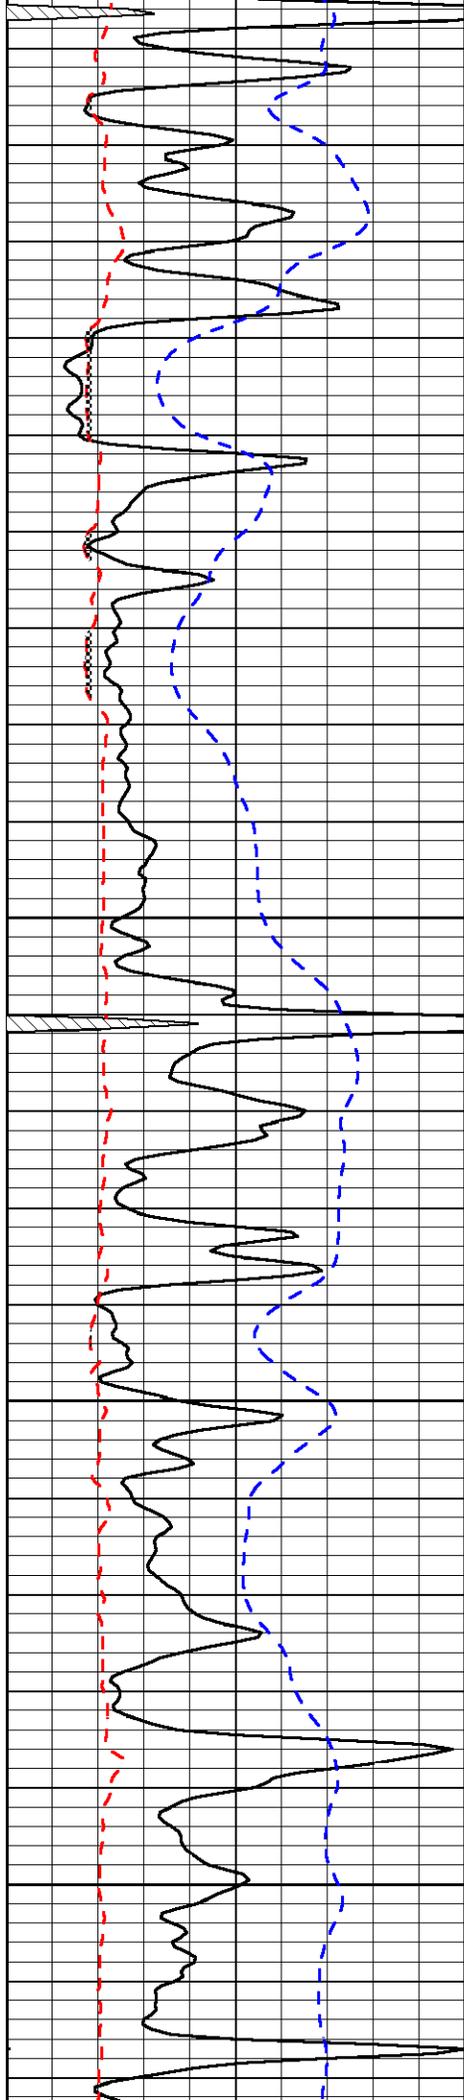


2950

3000

3050

3100

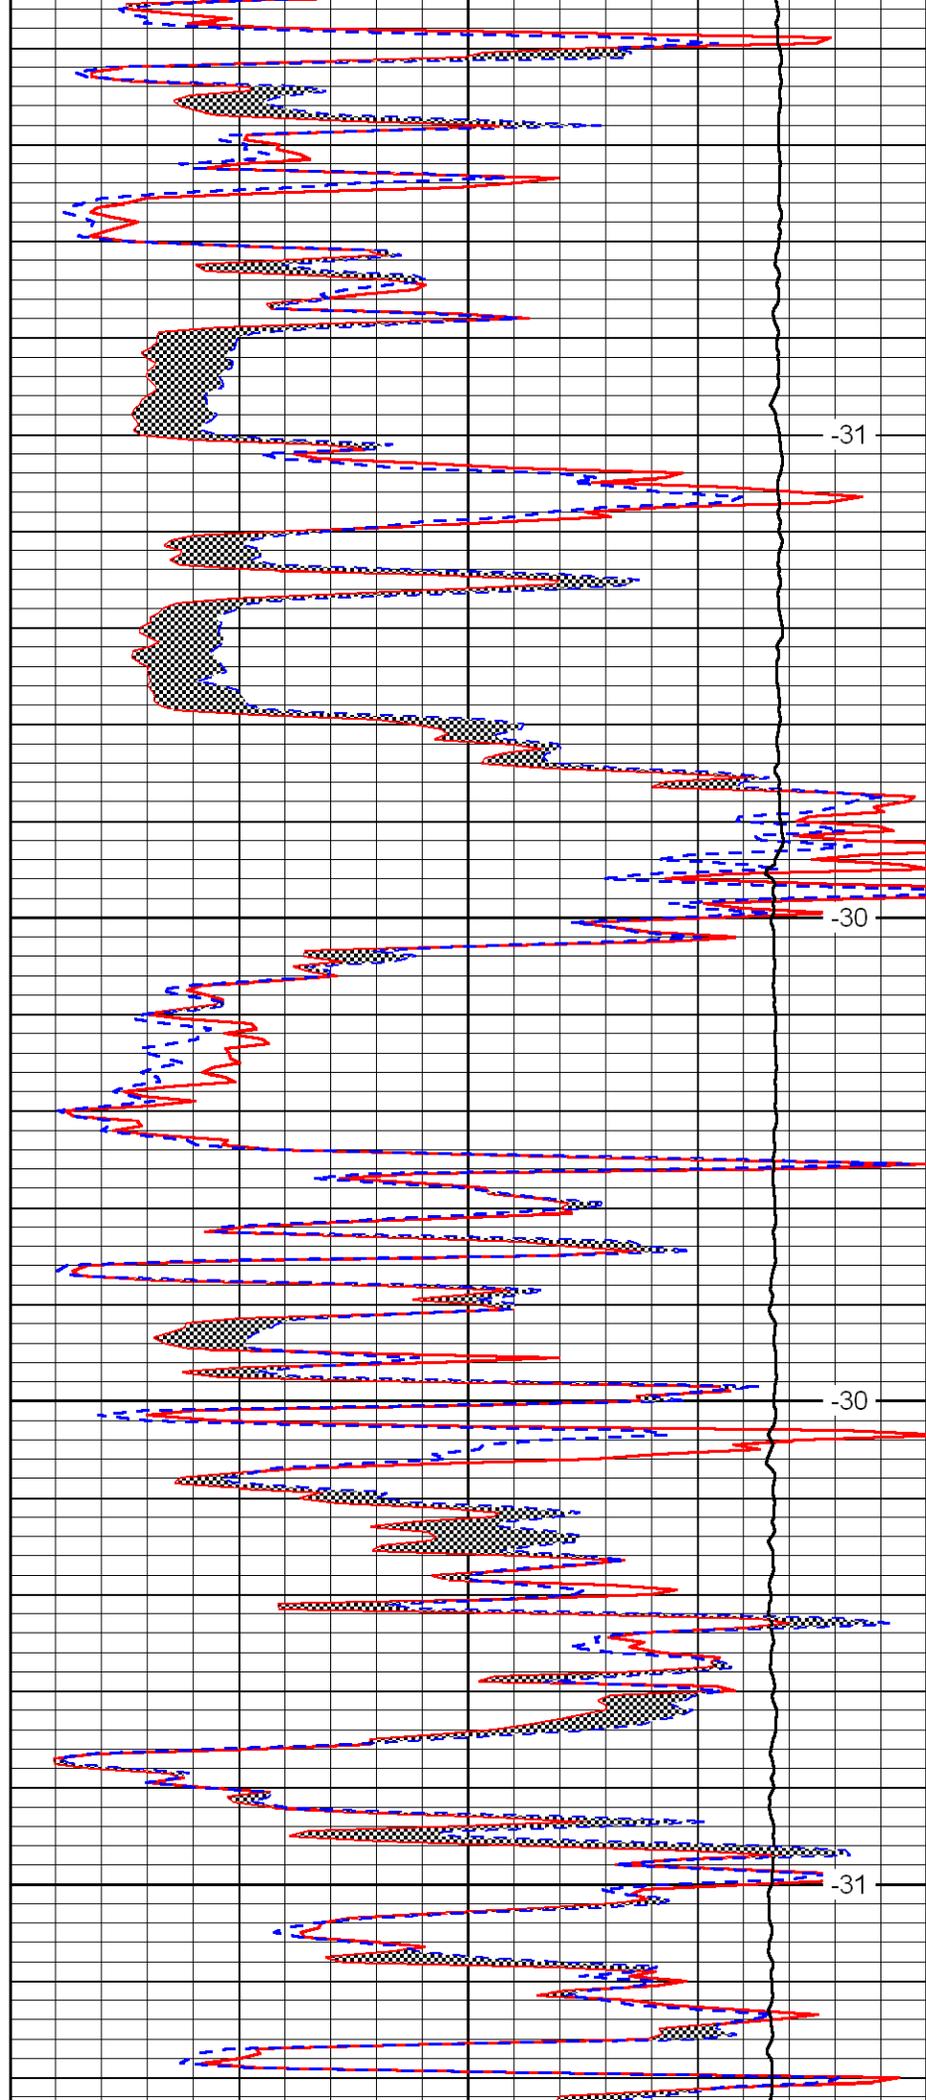


-31

-30

-30

-31

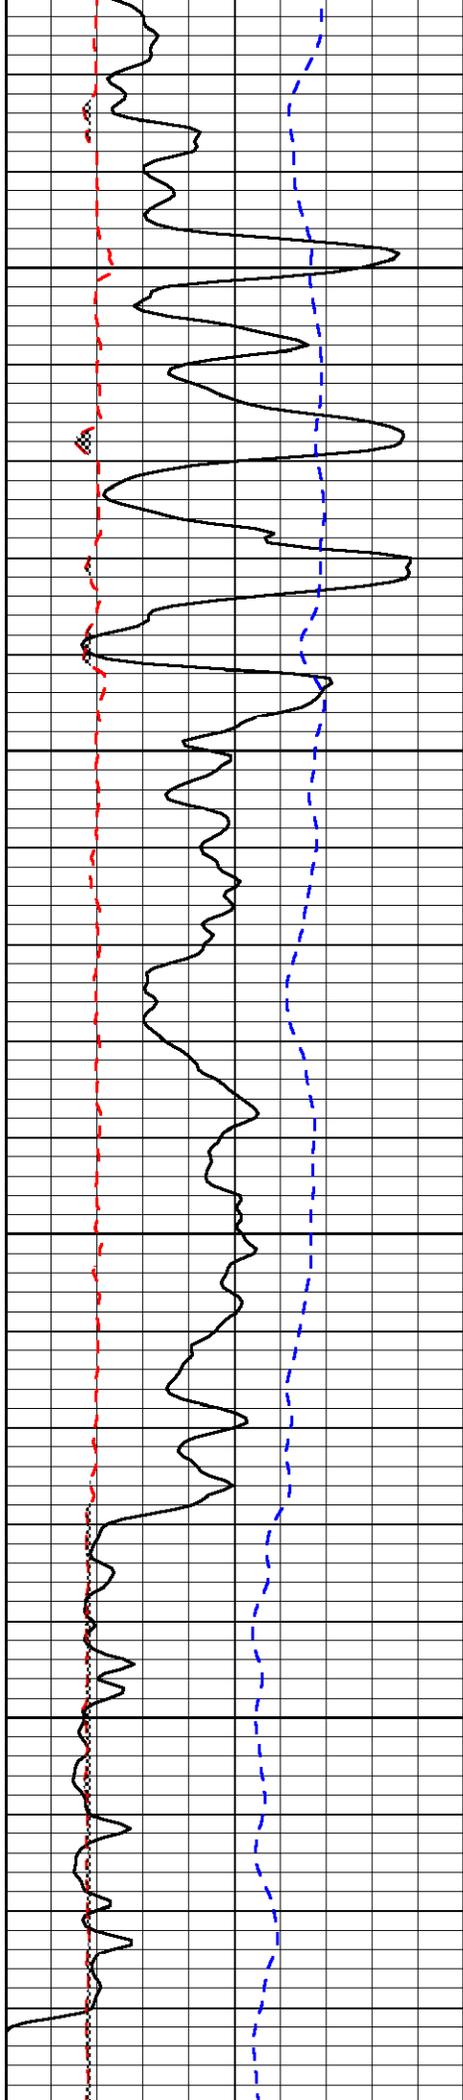


3150

3200

3250

3300

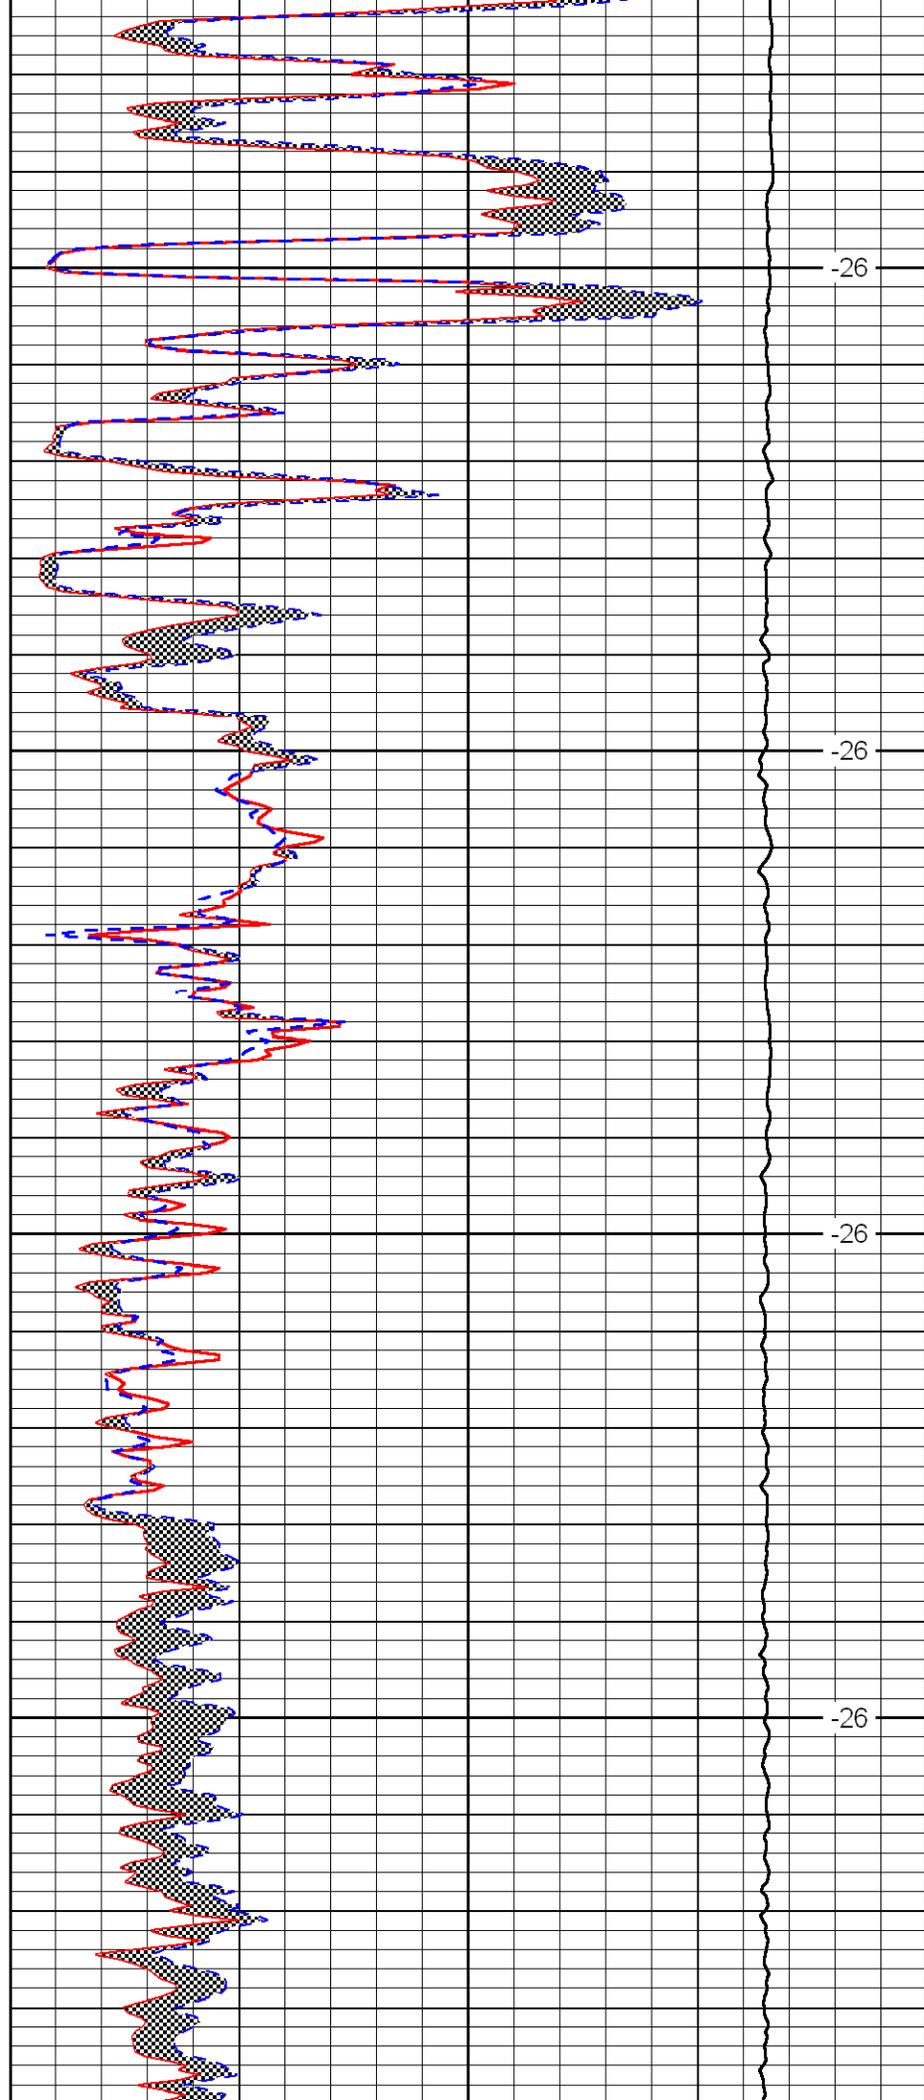


-26


-26

-26

-26

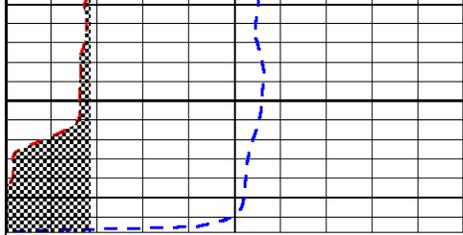

3350

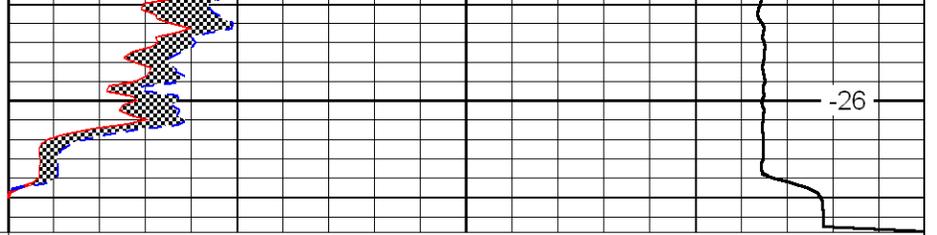

0	Gamma Ray (GAPI)	150
6	Micro Log Caliper (GAPI)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)