



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-009-25,302-00-00

Company Russell Oil, Inc.

Well Hubert Radke #1-6

Field Nuss

County Barton State

Kansas

Location 990' FNL & 840' FEL

Sec: 6

Twp: 16S

Rge: 14W

Elevation

Permanent Datum Ground Level Elevation 1882
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 1892
D.F. 1882
G.L. 1882

Date

1/24/2009

Run Number

Two

Depth Driller

3400

Depth Logger

3400

Bottom Logged Interval

3399

Top Log Interval

2400

Casing Driller

8.625 @ 895

Casing Logger

895

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

10,000

Density / Viscosity

8.9 48

pH / Fluid Loss

11.0 11.6

Source of Sample

Flowline

Rm @ Meas. Temp

.4 @ 50

Rmf @ Meas. Temp

.3 @ 50

Rmc @ Meas. Temp

.54 @ 50

Source of Rmf / Rmc

Charts

Rm @ BHT

.18 @ 110

Operating Rig Time

4 Hours

Max Rec. Temp. F

110

Equipment Number

15

Location

Hays

Recorded By

T. Martin

Witnessed By

Kevin Bailey

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Milberger, 1 S, 1/8 E, S into

Database File: russhd.db
Dataset Pathname: dil/russtk
Presentation Format: micro
Dataset Creation: Sat Jan 24 16:31:41 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

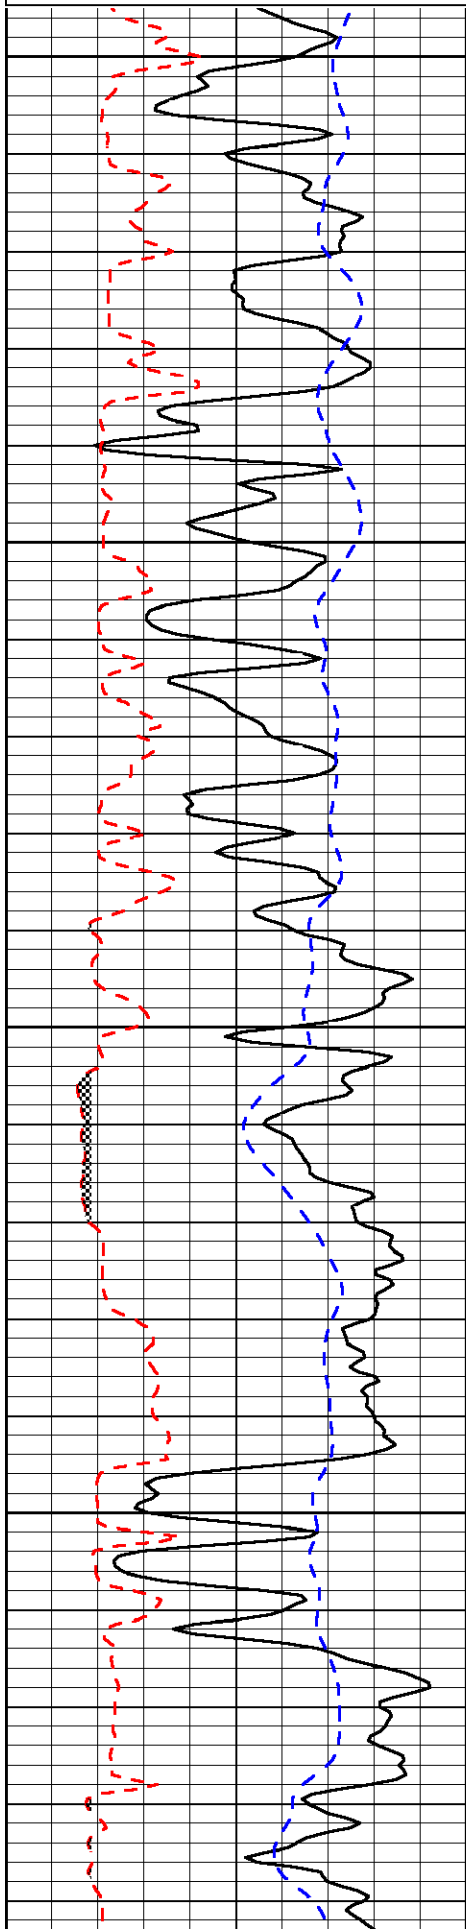

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

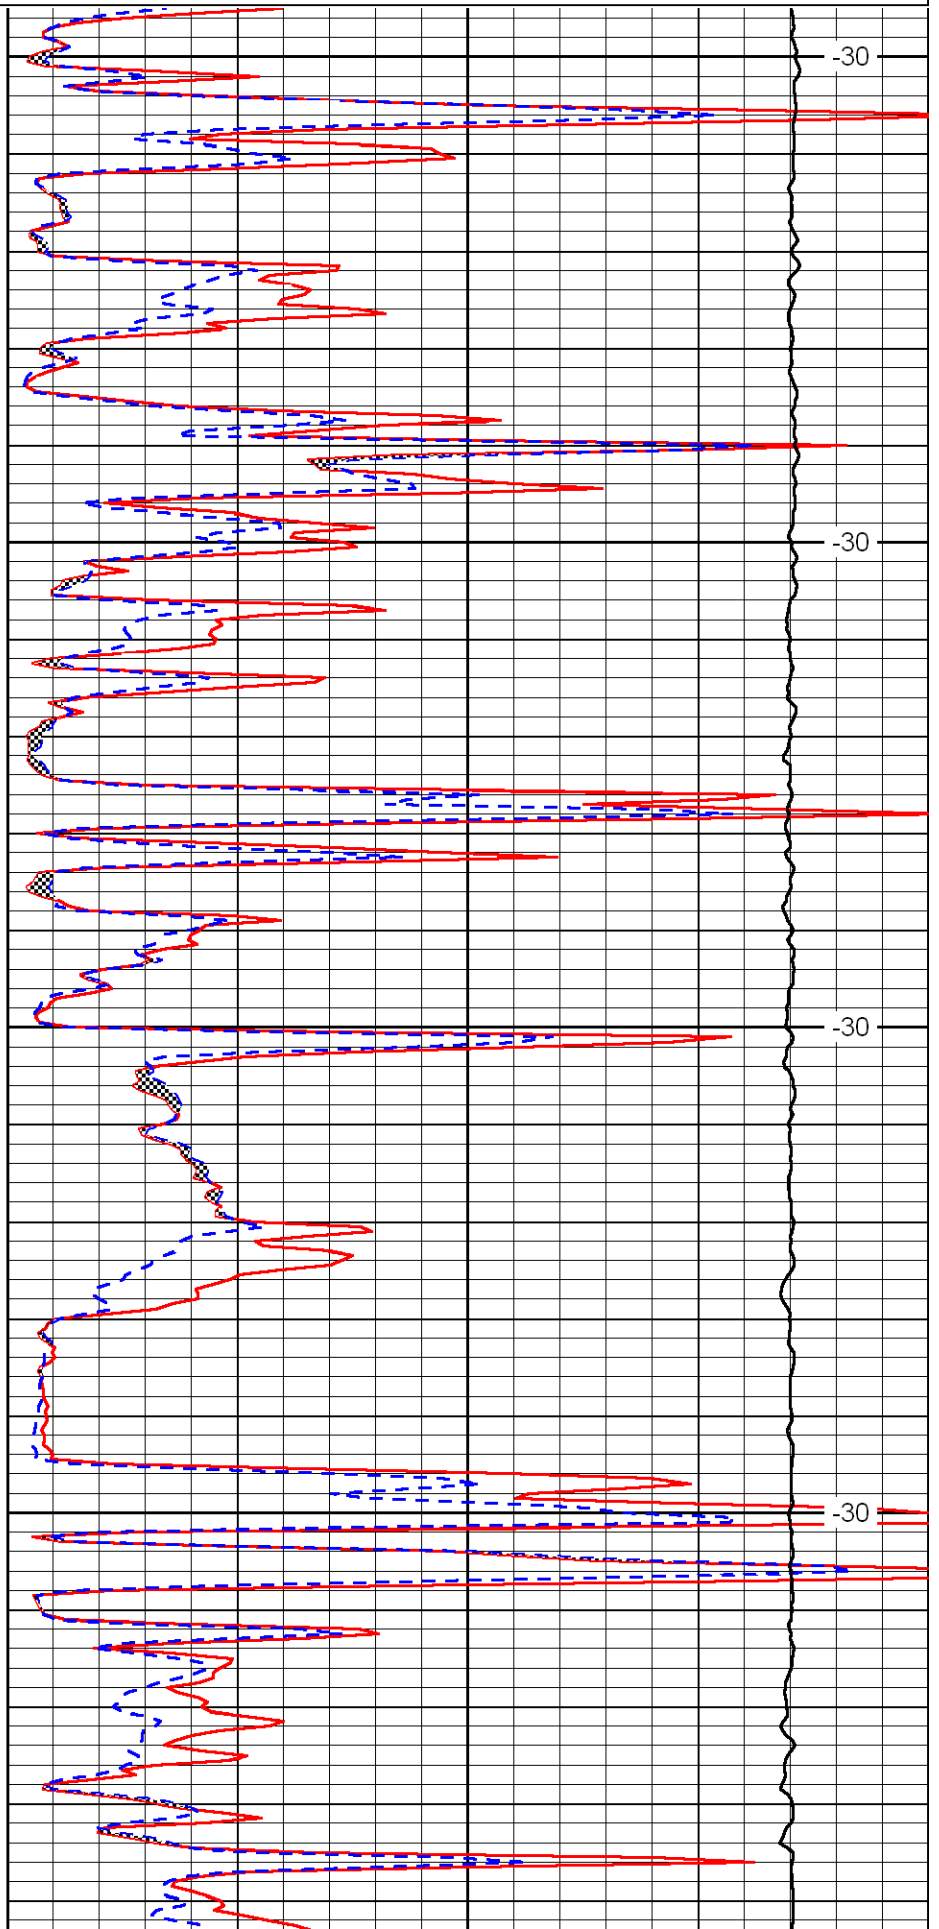

LSPD

2400

2450

2500


2550

-30

-30

-30

-30

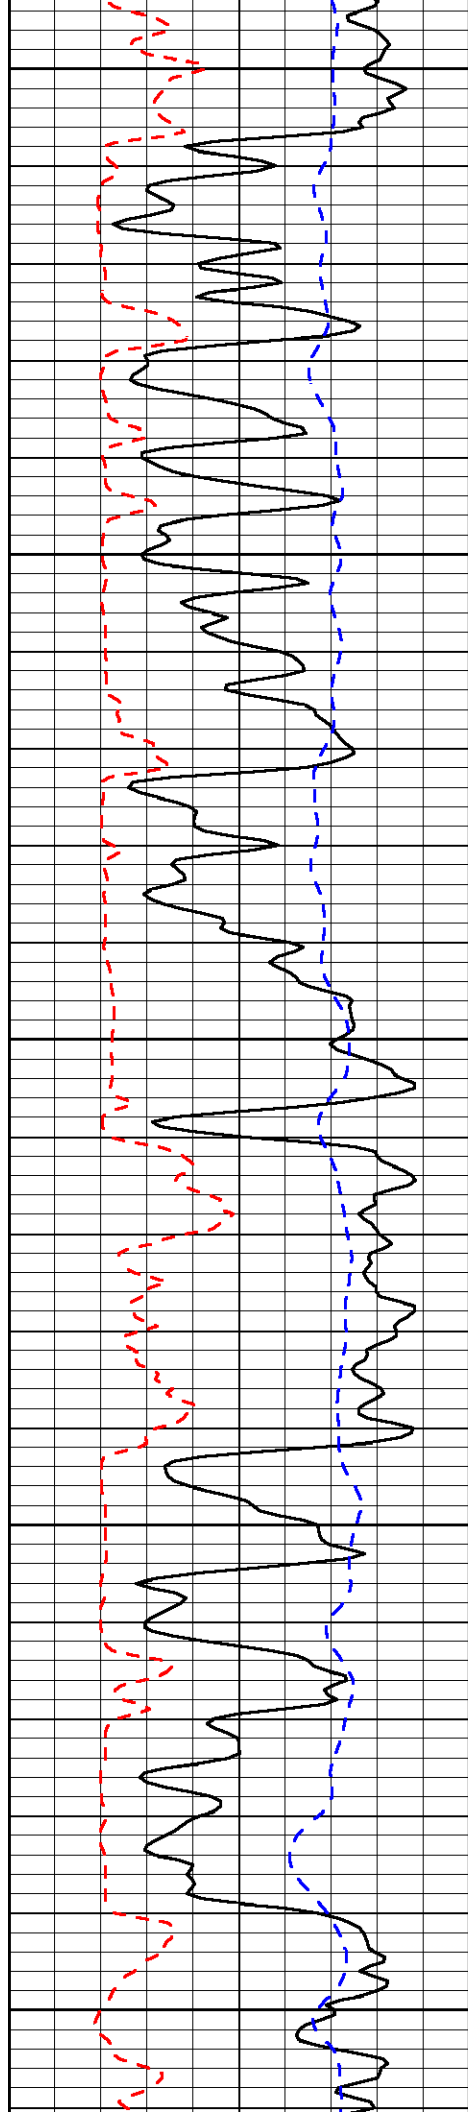


2600

2650

2700

2750

2800

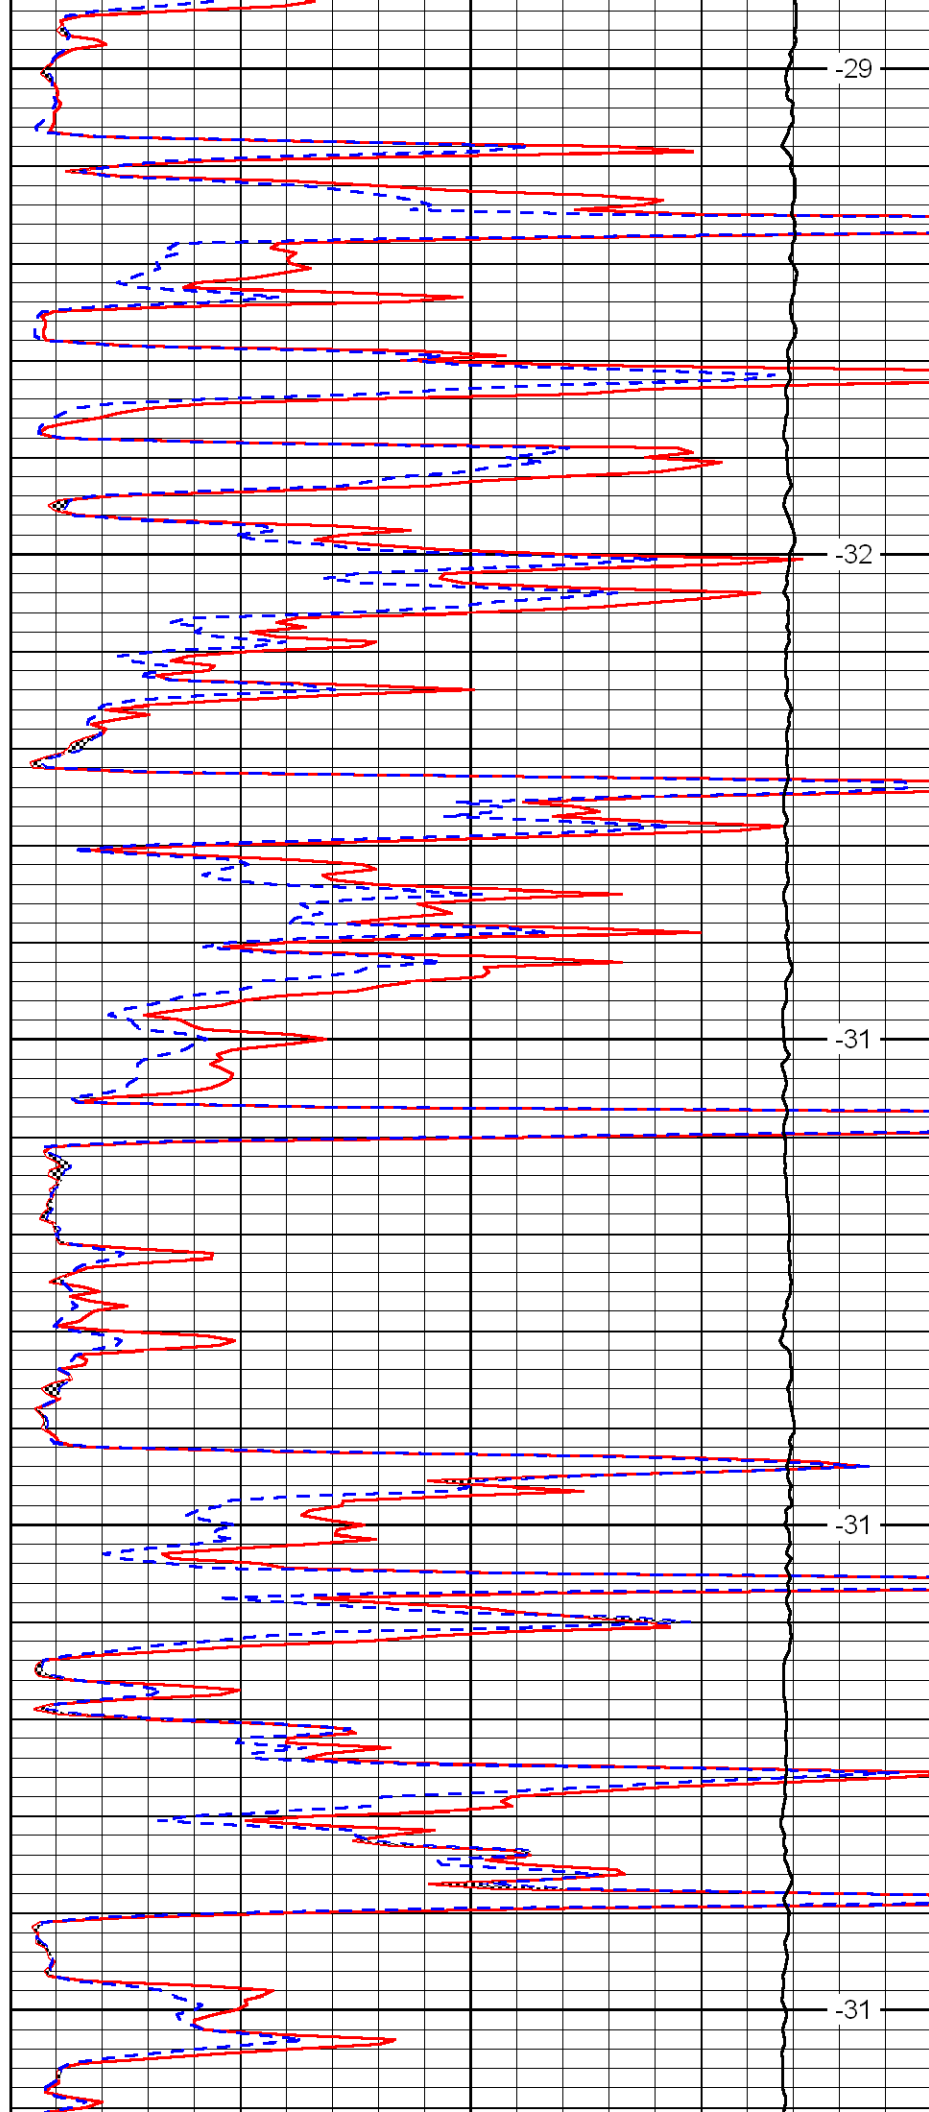


-29

-32

-31

-31

-31

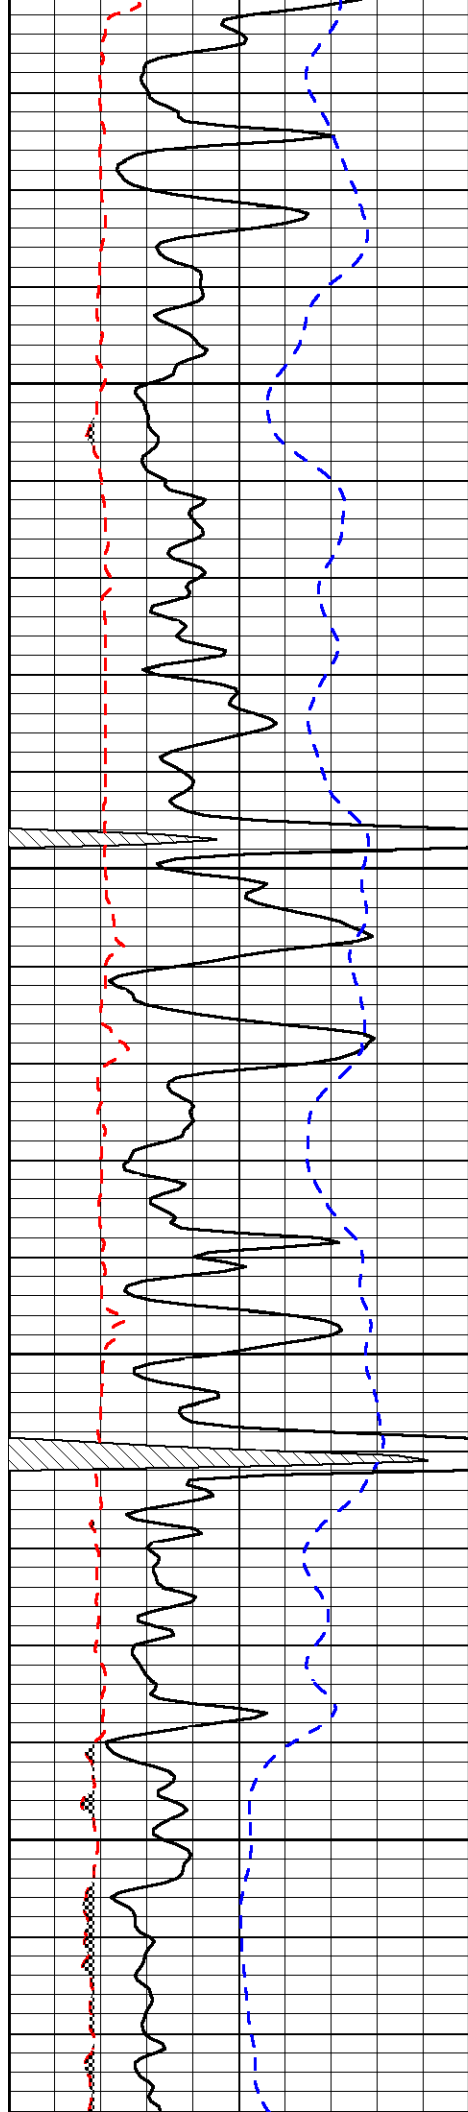


2850

2900

2950

3000

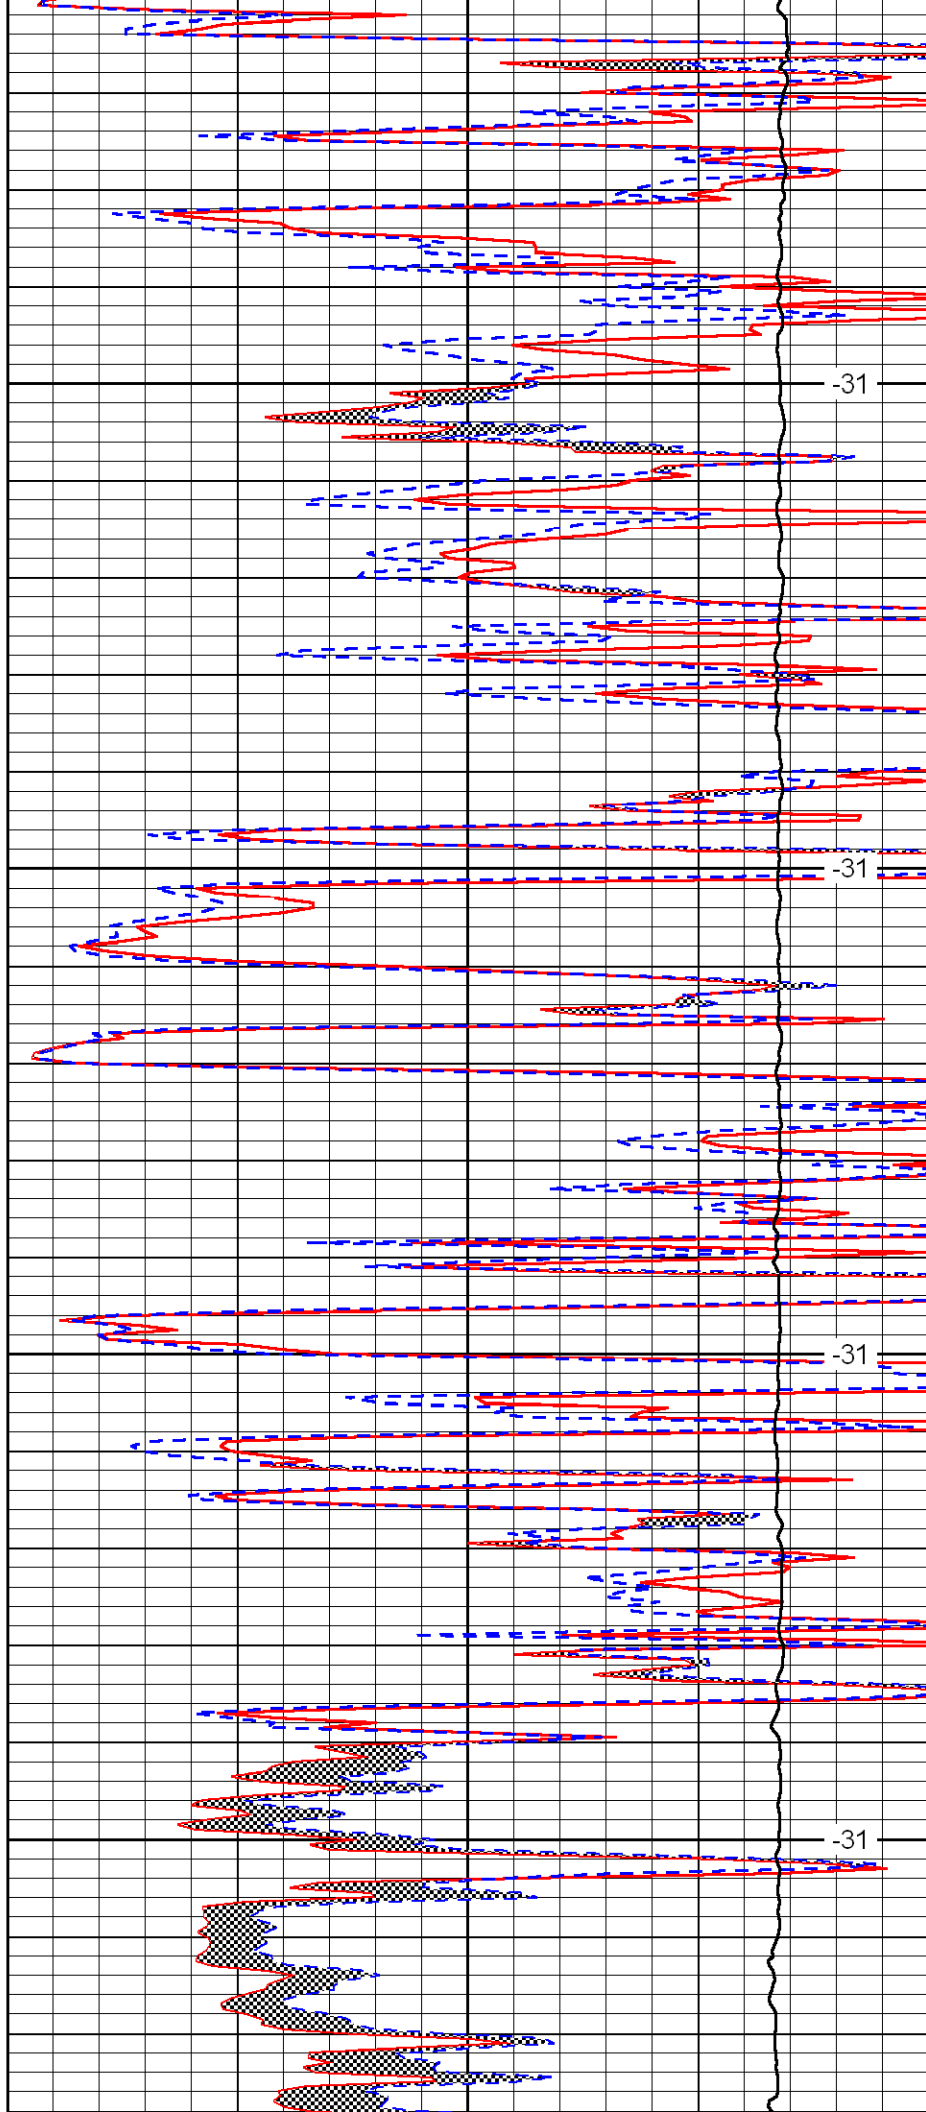


-31

-31

-31

-31

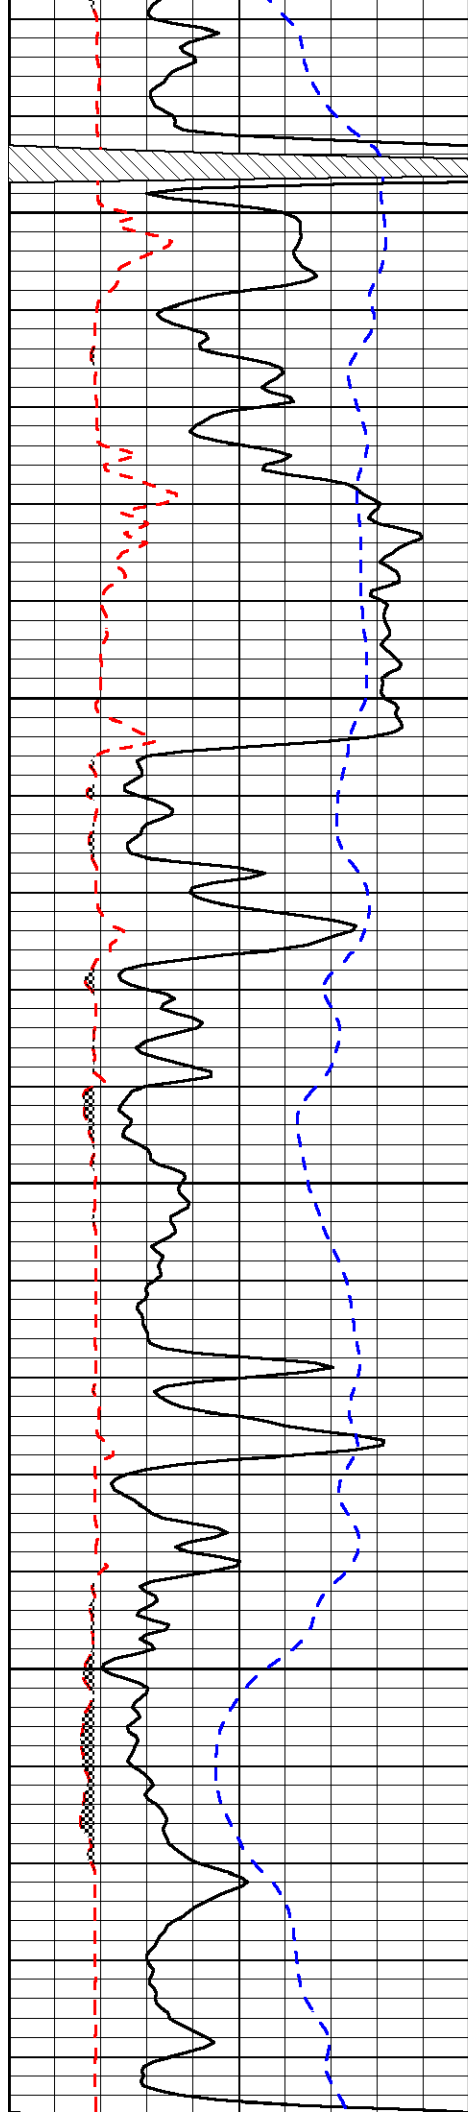


3050

3100

3150

3200


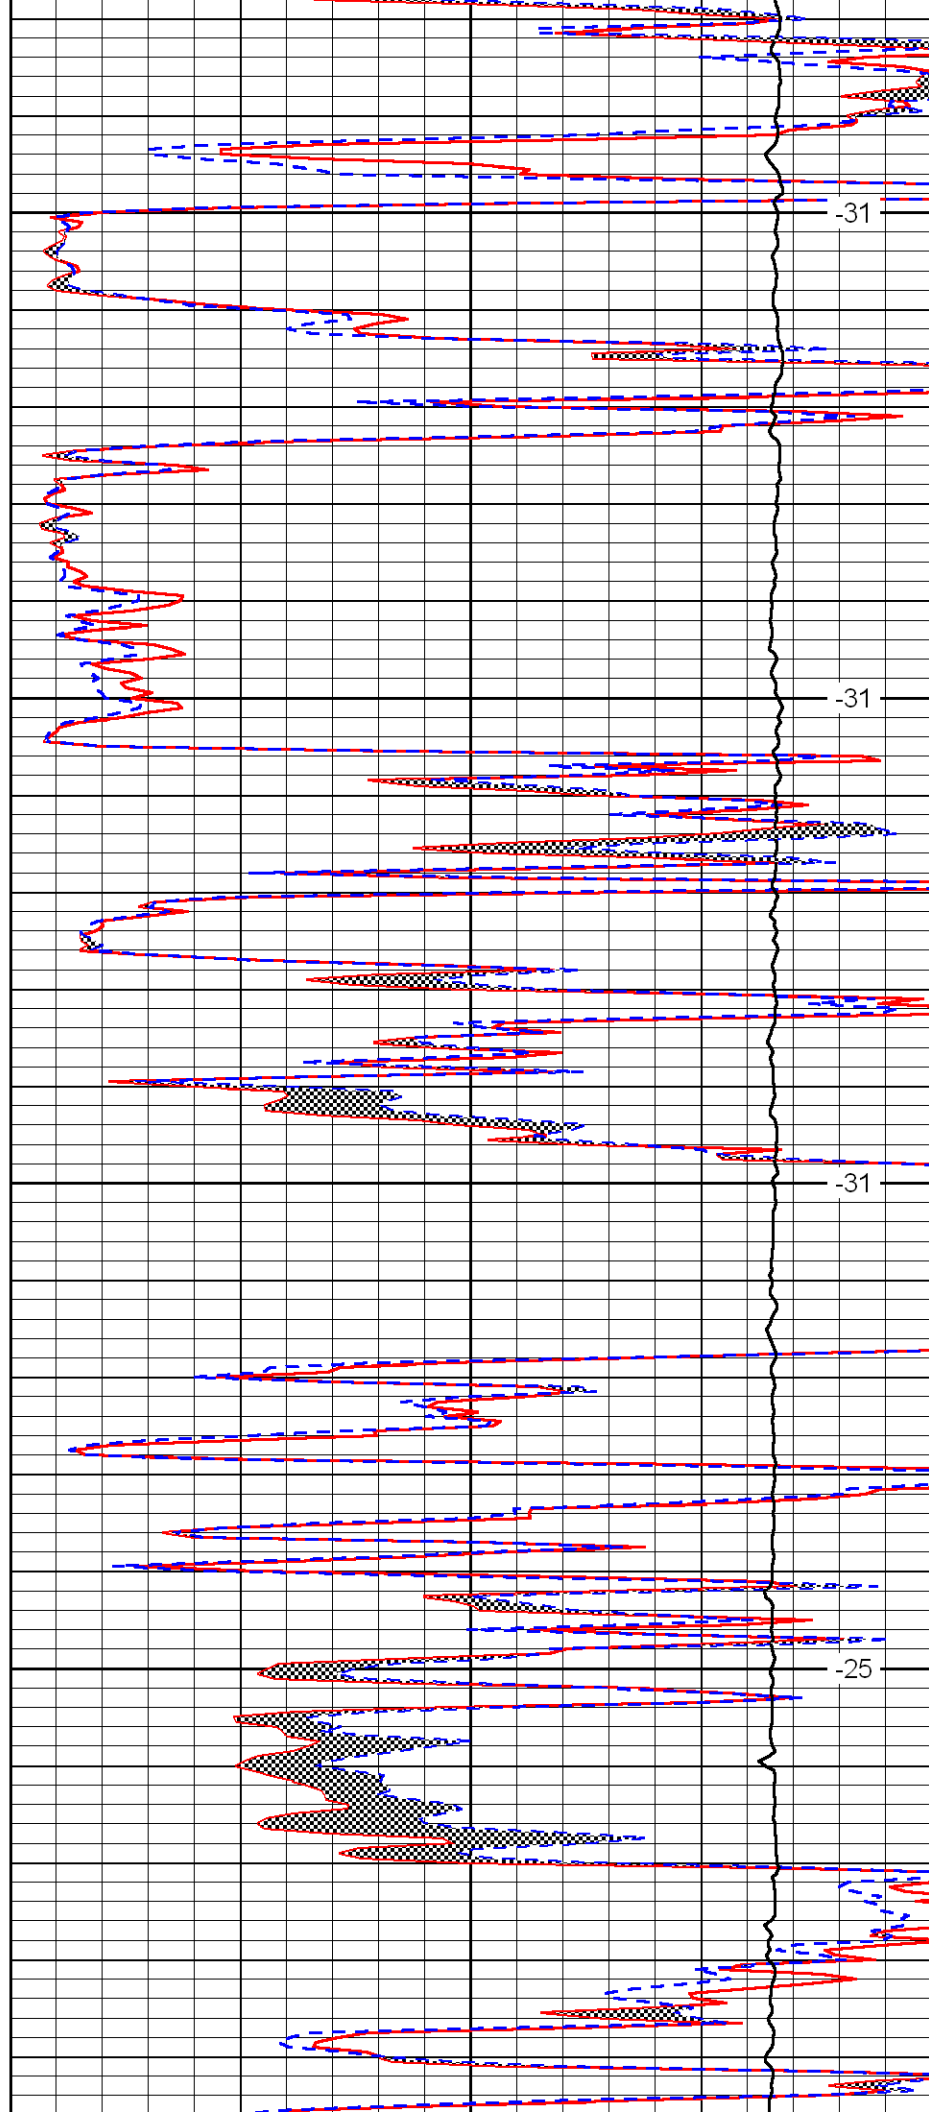


-31

-31

-31

-25

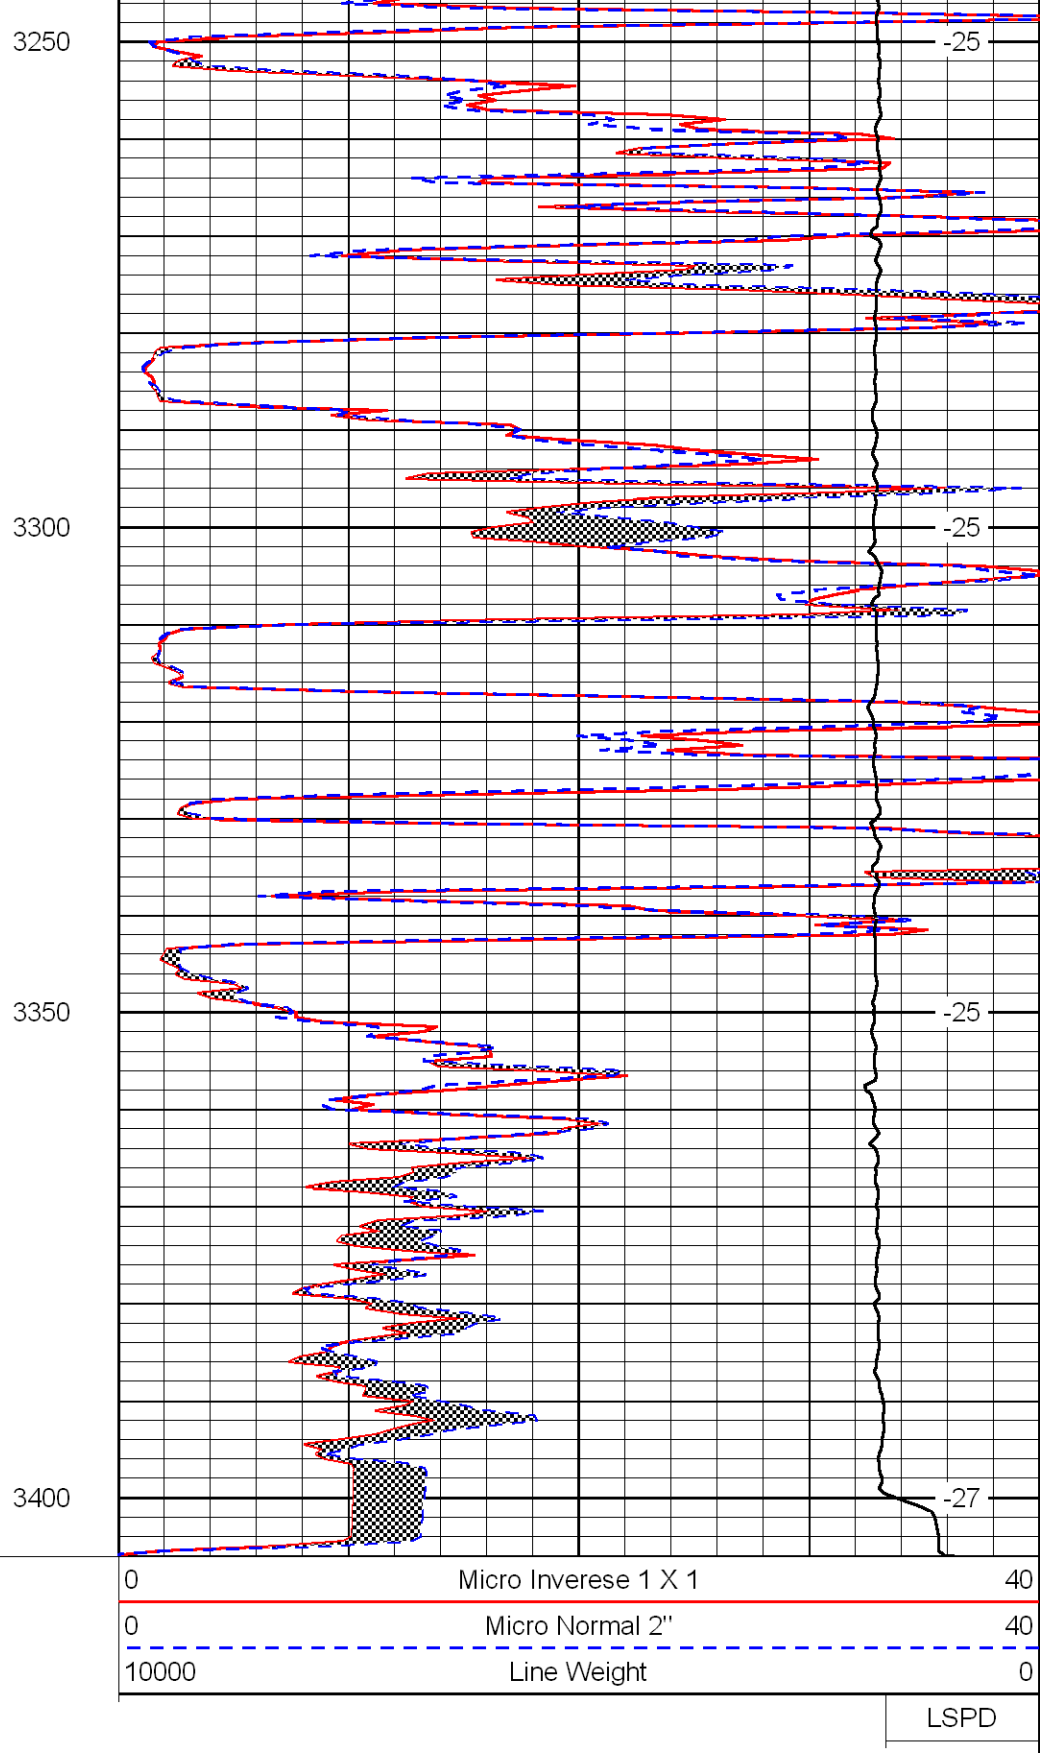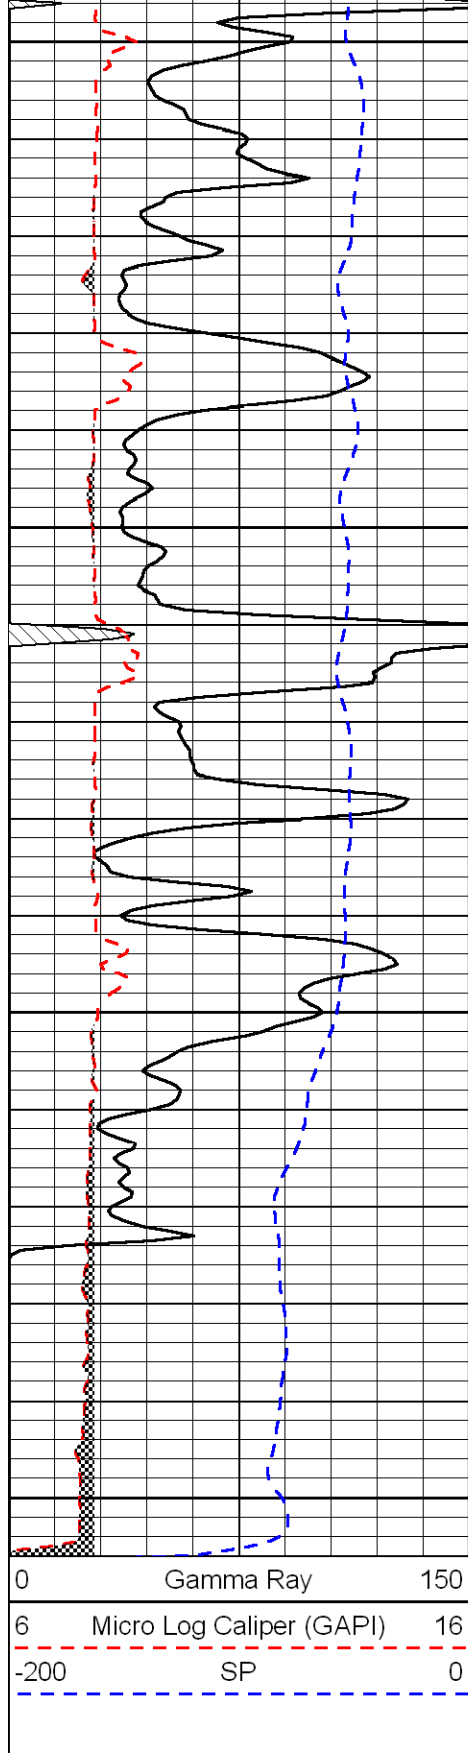

LSPD