



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-065-23,504-00-00		
Company	Berecxco, Inc.		
Well	Knoll North Unit No. D-2		
Field	Knoll North		
County	Graham	State	Kansas
Location	N2 - NE - SE - NE 1482' FNL & 330' FEL		
Sec: 32	Twp: 8S	Rge: 25W	Other Services RAG BHCS
Permanent Datum	Ground Level	Elevation 2504	Elevation
Log Measured From	Kelly Bushing	9 Ft. Above Perm. Datum	K.B. 2513
Drilling Measured From	Kelly Bushing		D.F. 2504
			G.L. 2504

Date	11 / 18 / 2008
Run Number	Two
Depth Driller	4080
Depth Logger	4083
Bottom Logged Interval	4082
Top Log Interval	3400
Casing Driller	8.625 @ 288
Casing Logger	286
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	1,400
Density / Viscosity	9.5 58
pH / Fluid Loss	10.5 8.0
Source of Sample	Flowline
Rm @ Meas. Temp	.75 @ 61
Rmf @ Meas. Temp	.56 @ 61
Rmc @ Meas. Temp	1.01 @ 61
Source of Rmf / Rmc	Charts
Rm @ BHT	.39 @ 117
Operating Rig Time	5 Hours
Max Rec. Temp. F	117
Equipment Number	4
Location	Hays
Recorded By	J. Loffredi
Witnessed By	Bryan Bynog

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Morland, in town at Main St.,
3 West, 2 South into

Database File: c:\warrior\data\berexco_knoll north unit no. d-2\berexhd.db
 Dataset Pathname: rag/berexrag
 Presentation Format: micro
 Dataset Creation: Tue Nov 18 04:07:44 2008
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

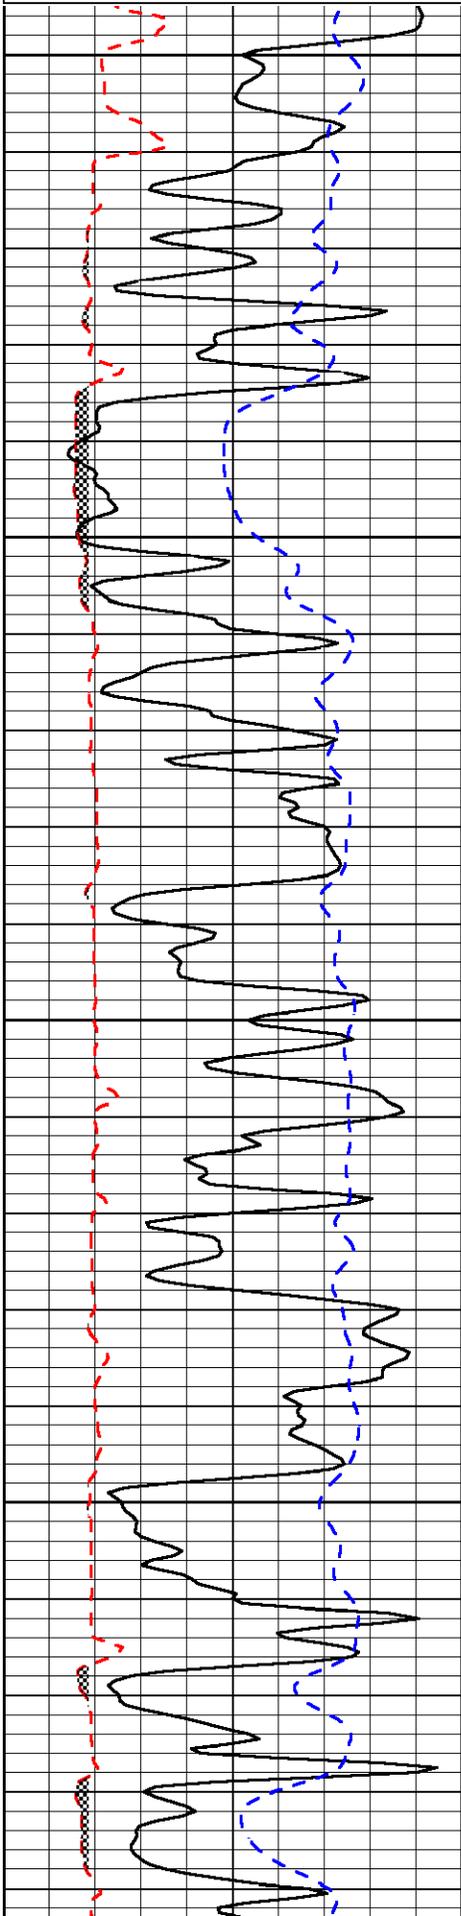


3400

3450

3500

3550

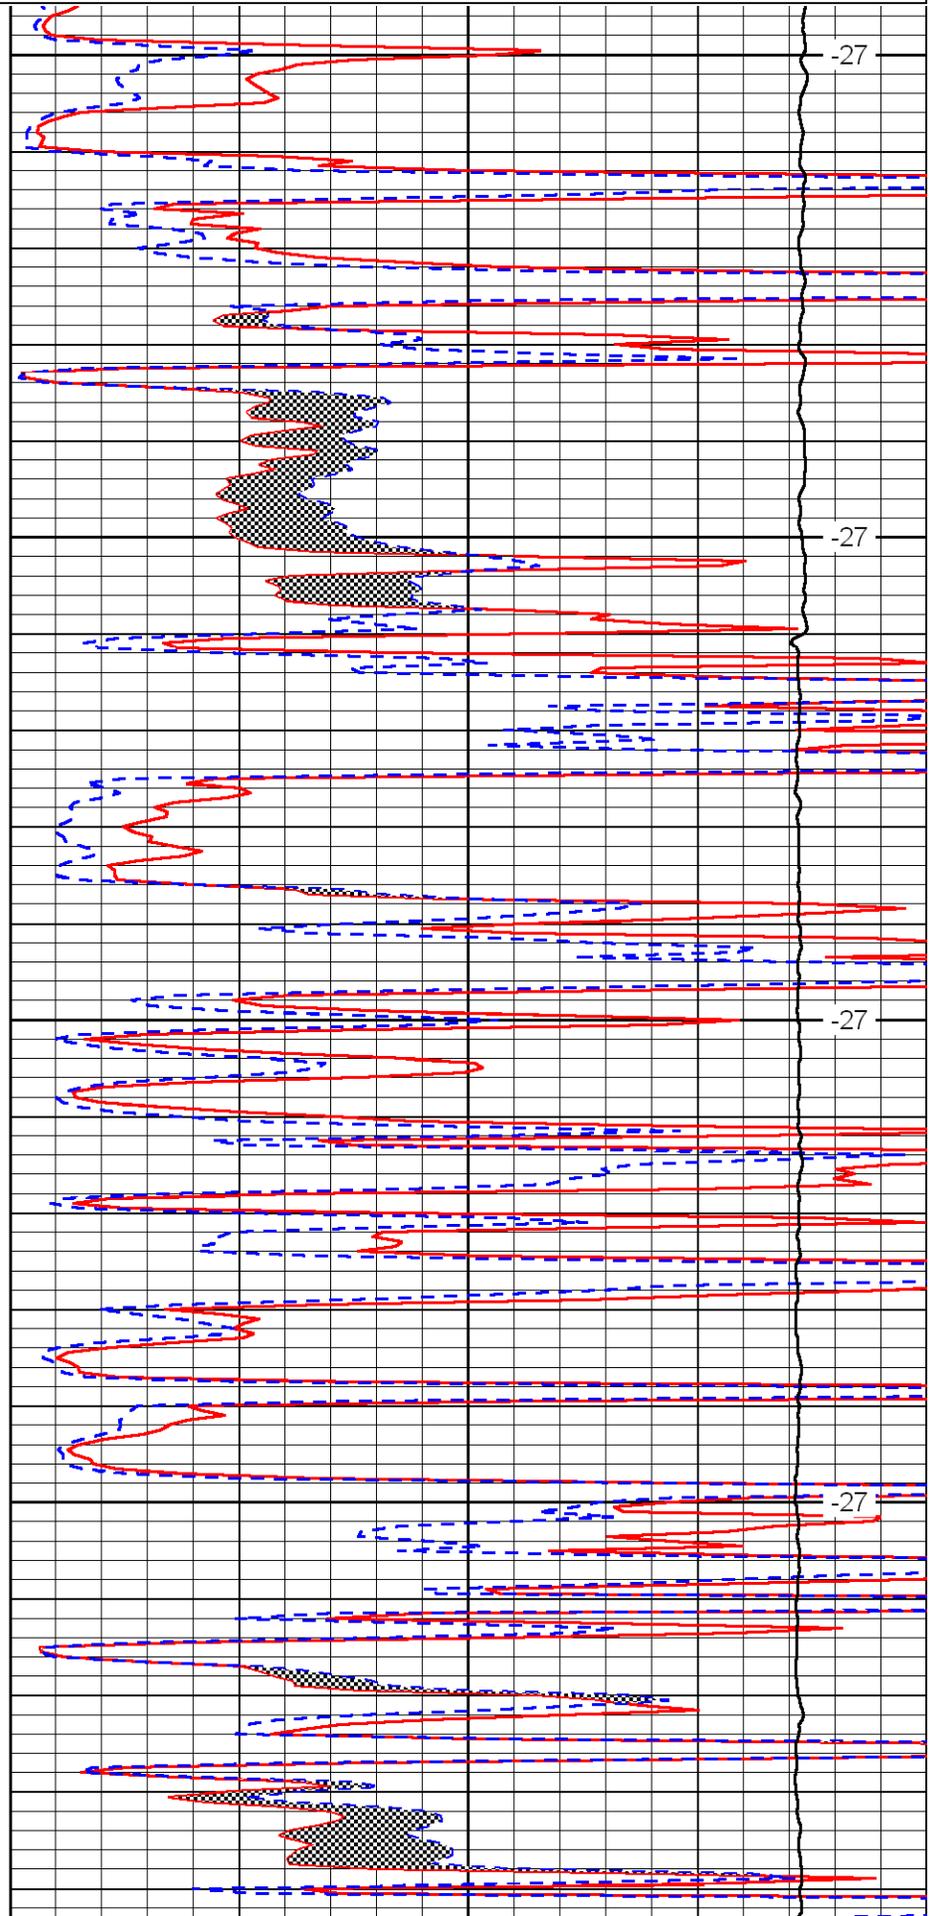


-27

-27

-27

-27

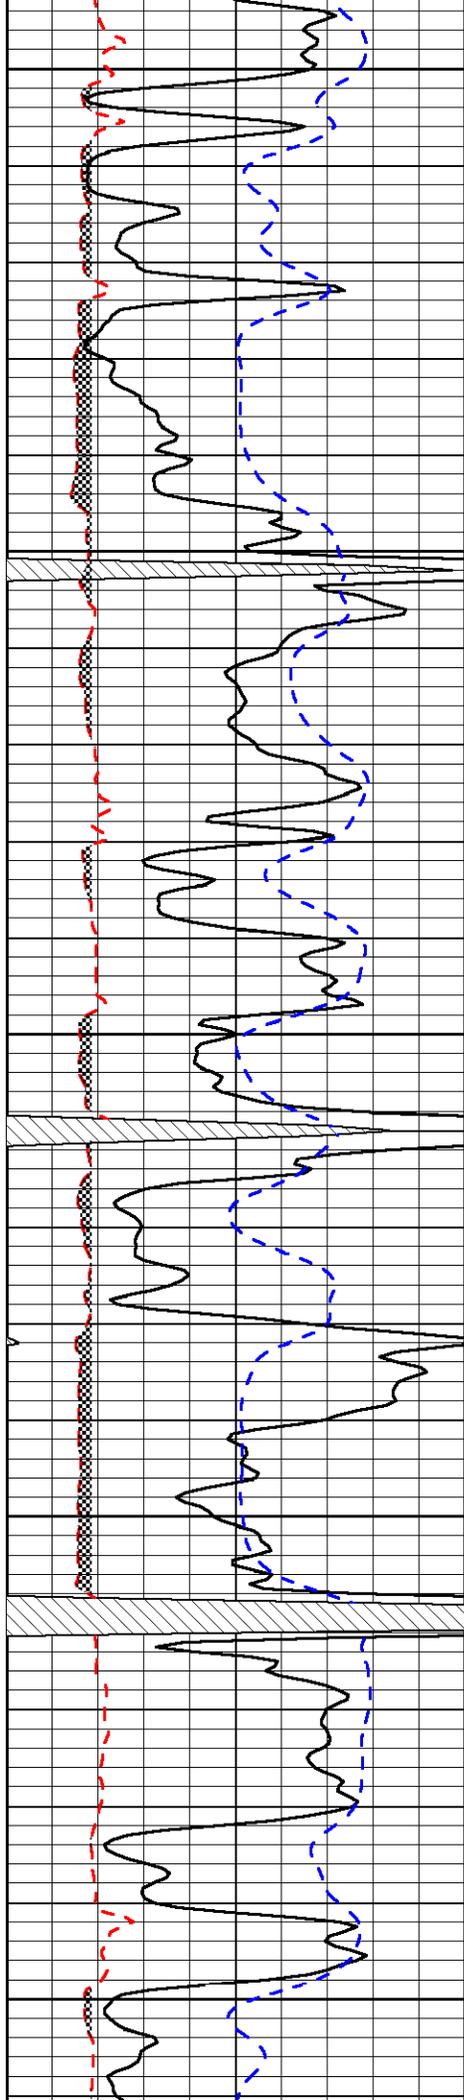


3600

3650

3700

3750

3800

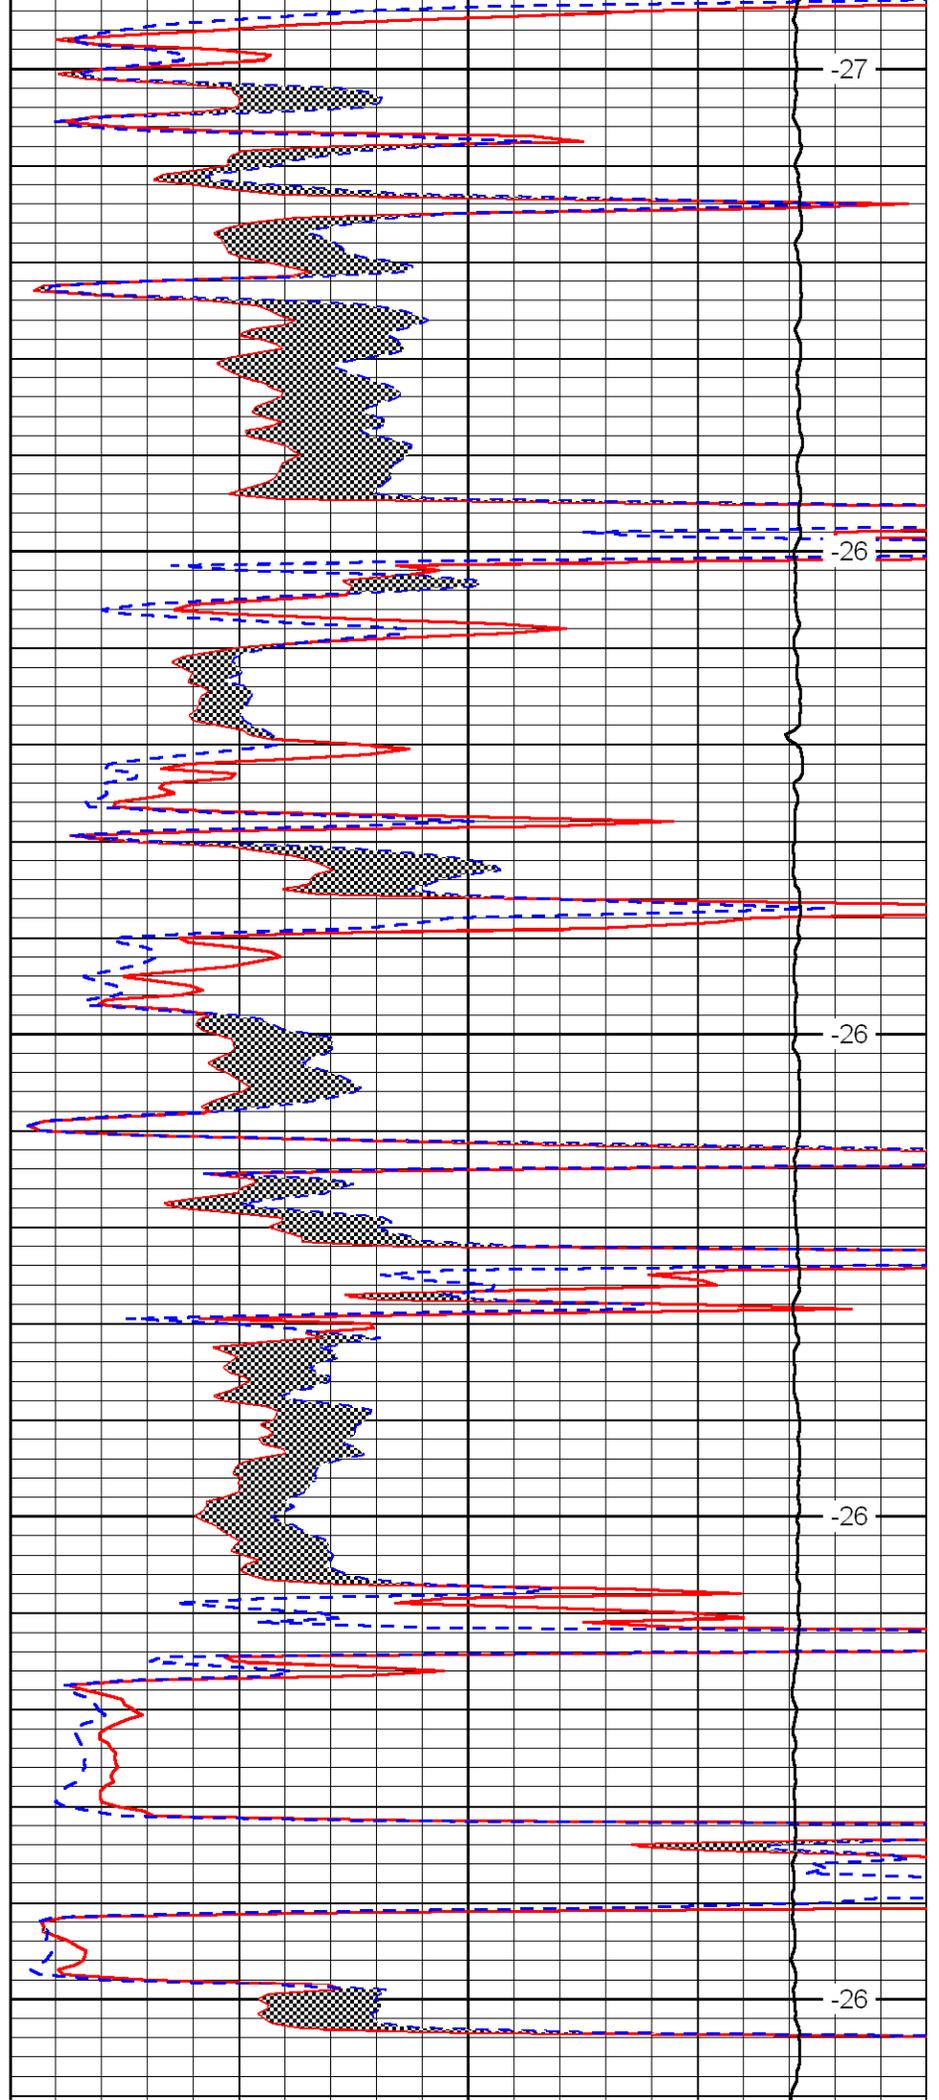


-27

-26

-26

-26

-26

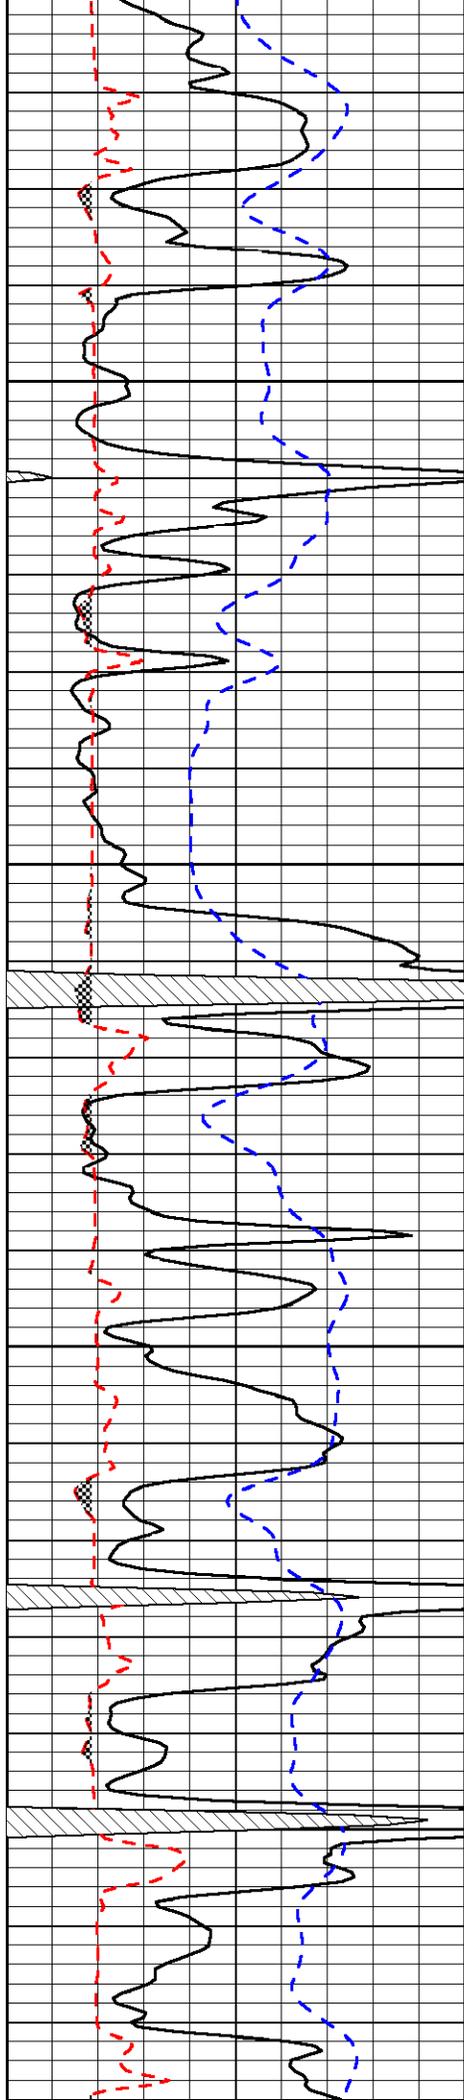


3850

3900

3950

4000

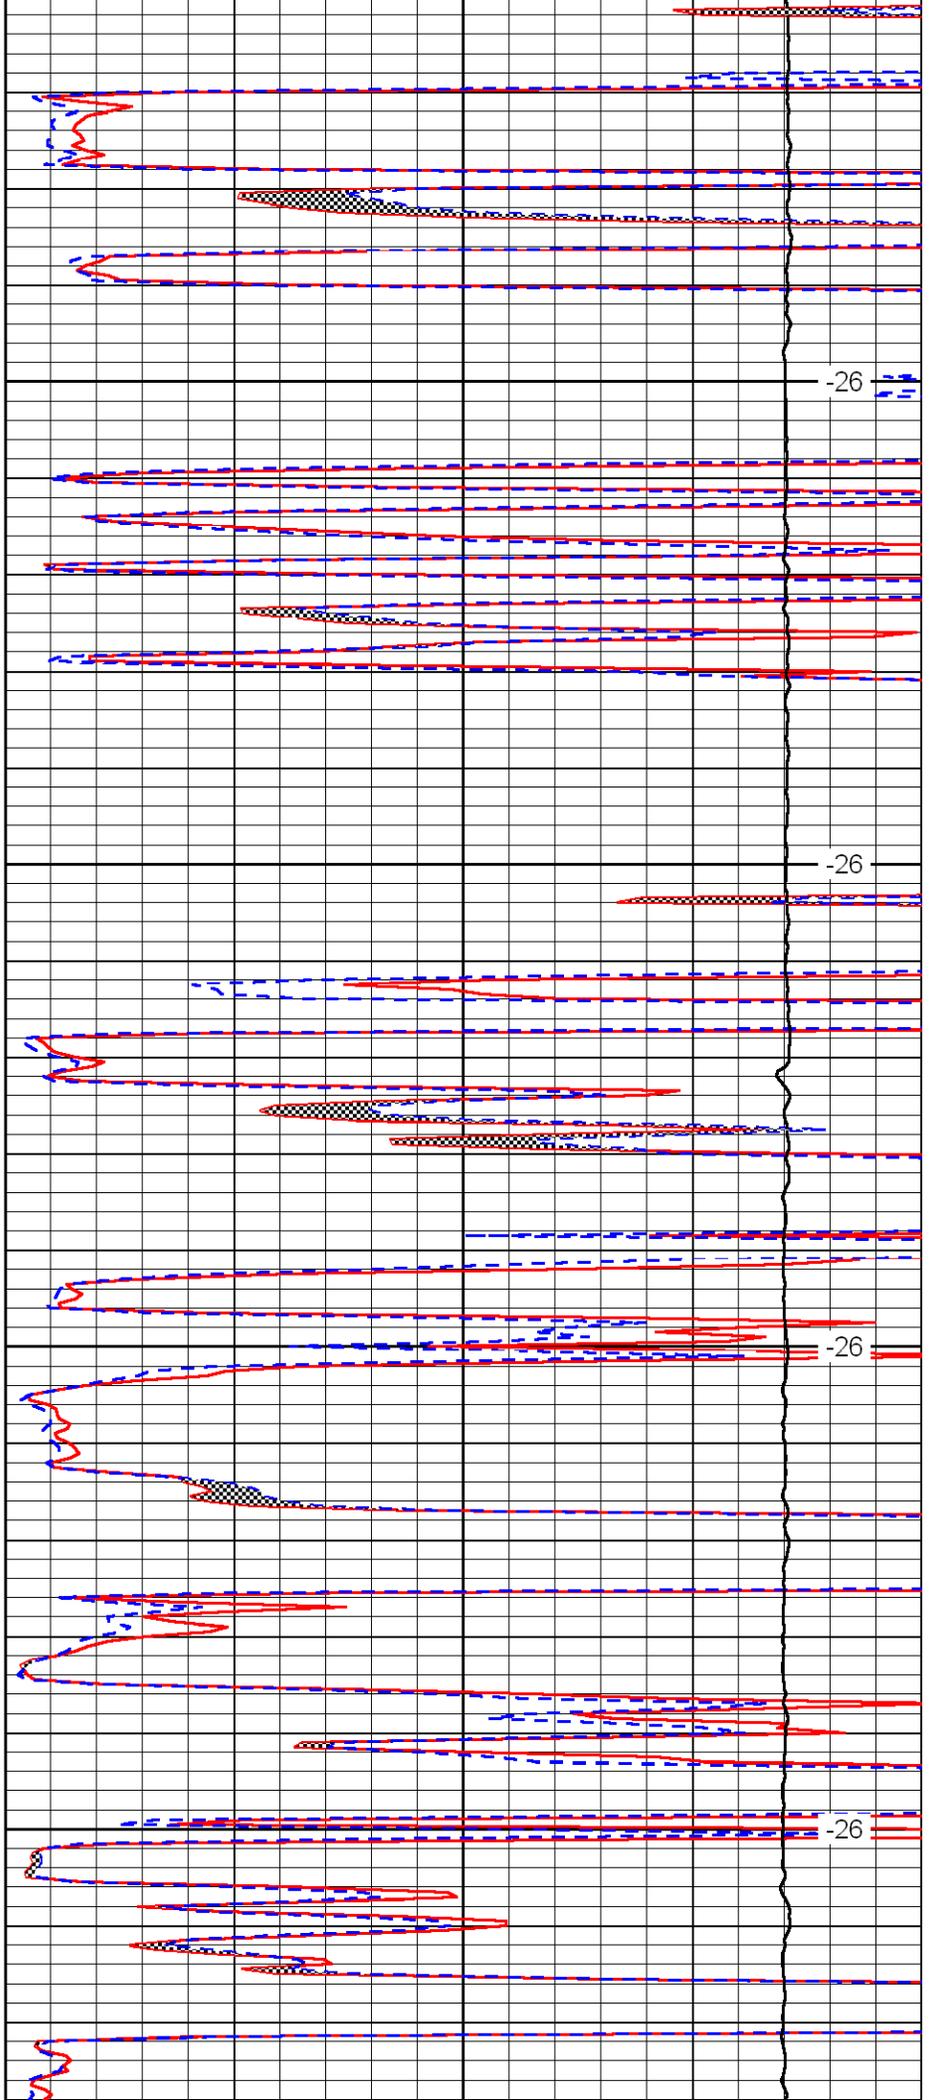


-26

-26


-26

-26

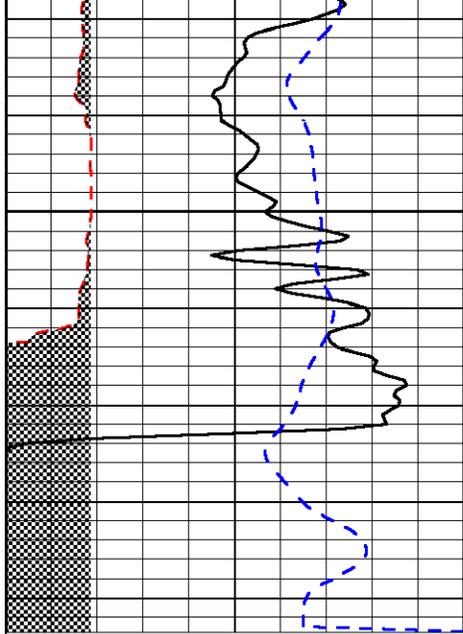

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

4050

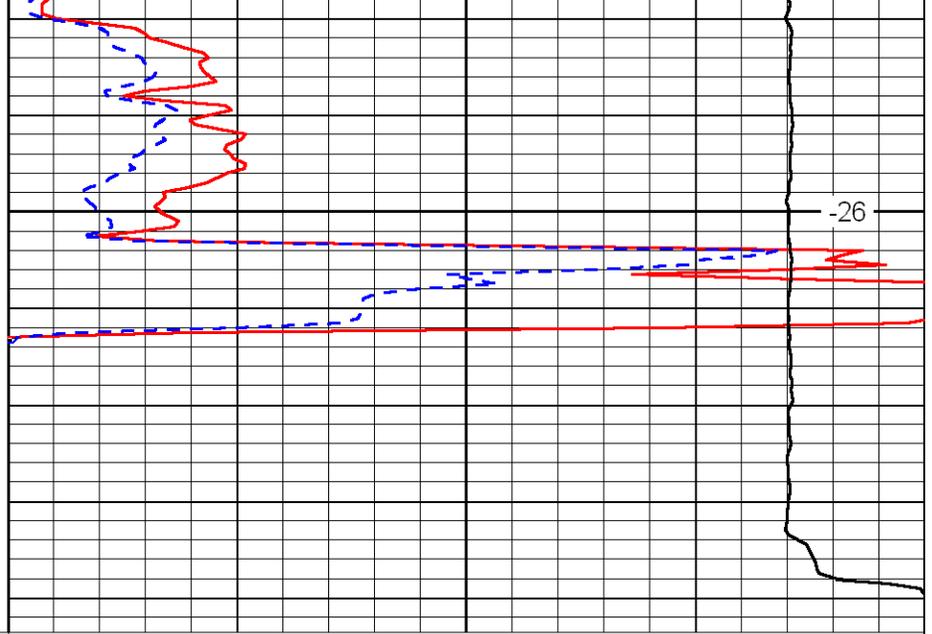

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

-26

LSPD