

Orig - State Corp. Comm. ✓  
Copy - B. A. Conner - 357 FPB  
Copy - Mary Crump - Okla. City  
Copy - Well File

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Bldg.  
Wichita, Kansas 67202


Form CP-4  
Rev. 12-15-80

15-137-00694-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit

COUNTY Norton SEC. 26 TWP. 5S RGE. 21W E/W  
Location as in quarters or footage from lines:  
2970' FEL & 2310' FNL of Sec. 26 SE SE NW

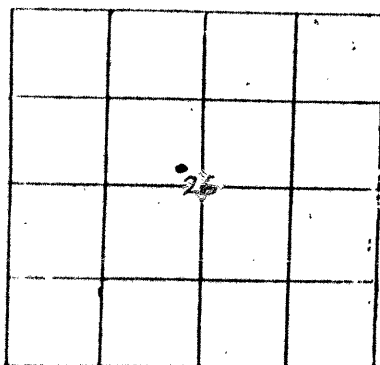

Locate Well  
correctly on above  
Section Platt.

Lease Owner Phillips Petroleum Company  
Lease Name Kemper Well No. 4  
Office Address Box 287, Great Bend, Kansas 67530  
Character of Well (Completed as Oil, Gas or Dry Hole): Oil  
Date Well Completed May 24, 1953  
Application for plugging filed March 2, 1983  
Plugging commenced April 22, 1983  
Plugging completed April 22, 1983  
Reason for abandonment of well or producing formation Uneconomical

Was permission obtained from the Conservation Division or it's  
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Dennis Hamel  
Producing formation Arbuckle Depth to top 3651 bottom 3677 T.D. 3677

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Surface	Water	0	475.5	8 5/8"	472.5	-0-
Production	Oil & Wtr	0	3650.7	5 1/2"	3672.5	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set. MIRU Hallib & ran SIM to 3677'. Conn cmtg head and pumped 2 sx hulls mixed w/75 sx 50-50 Pozmix w/6% gel & 3% CaCl, then 15 sx gel. Release wiper plug. Pmpd 125 sx 50-50 Pozmix w/6% gel & 3% CaCl. Max press 500 psi. ISIP - Vac. Let set 2 1/2 hours. Ran SIM to 430' to top of cmt. Pmpd 50 sx 50-50 Pozmix w/6% gel & 3% CaCl. Max press = 250 psi. ISIP = 250 psi. Release Hallib. State plugger on loc. Cut off 8 5/8" & 5 1/2" csg 6' below GL. Filled top 20' of 8 5/8" csg w/cmt. Welded on plate over csg. Well P&A 4-22-83.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services  
Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.

C. D. Dohrer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. D. Dohrer Area Mgr.  
Box 287, Great Bend, Kansas  
(Address)



SUBSCRIBED AND SWORN TO before me this 26th day of April, 1983

Velma L. Mog Notary Public.

My Commission expires: February 15, 1984

RECEIVED  
STATE CORPORATION COMMISSION

APR 28 1983

CONSERVATION DIVISION  
Wichita, Kansas