


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

15-137-00643-00-00

NORTH

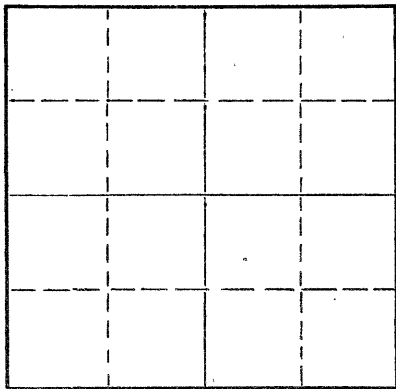

Locate well correctly on above
Section Plat

Norton

County. Sec. 26 Twp. 5 Rge. 21 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW 1/4 NW 1/4 SE 1/4

Lease Owner Cranlyn Exploration Co., Inc.

Lease Name Dedrick

Well No. 1

Office Address 310 KFH Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 24, 19 54

Application for plugging filed July 23, 19 54

Application for plugging approved July 21 19 54

Plugging commenced July 6 19 54

Plugging completed July 16 19 54

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3700 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	173	None
				5-1/2	3683	3200

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3700 feet to surface. feet for each plug set.

Hole filled with sand from 3700 to 3670; four sacks of cement placed in hole with dump bailer to form cement plug from 3670 to 3638 feet; Hole filled with mud from 3628 to 260 feet; Twenty foot rock bridge installed between 260 feet and 240 feet; fifteen sacks of cement poured in hole, and hole mudded to 35 feet; five foot rock bridge installed between 35 and 30 feet; and hole capped with ten sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnes and Sons Pipe Pulling Co.

Address Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Stewart Varn

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Stewart Varn

310 KFH Bldg, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of July, 19 54

My commission expires January 30, 1957

Myrtle Thomas
Notary Public.

