



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-135-25,128-00-00	Company Damar Resources, Inc.		
	Well McCreight Unit No. 1		
Location County Ness State Kansas	Field Wildcat		
	Sec: 26 Twp: 20 S Rge: 24 W		
Permanent Datum Ground Level		SE NE SE SE	
Log Measured From Kelly Bushing		705' FSL & 295' FEL	
Drilling Measured From Kelly Bushing		8 Ft. Above Perm. Datum	
Date	9/10/2010	Other Services CNL/CDL DIL/BHCS	
Run Number	Two	Elevation K.B. 2265 D.F. 2257 G.L. 2257	
Depth Driller	4460		
Depth Logger	4464		
Bottom Logged Interval	4463		
Top Log Interval	3600		
Casing Driller	8.625 @ 348		
Casing Logger	347		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.000		
Density / Viscosity	9.2 56		
pH / Fluid Loss	8.5 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.60 @ 75		
Rmf @ Meas. Temp	.45 @ 75		
Rmc @ Meas. Temp	.81 @ 75		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.38 @ 122		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	122		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Jim Musgrove		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



Ness City, 11 S, 2 W, 7/8 S, W into


Charted by: Depth in Feet scaled 1:2.15

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

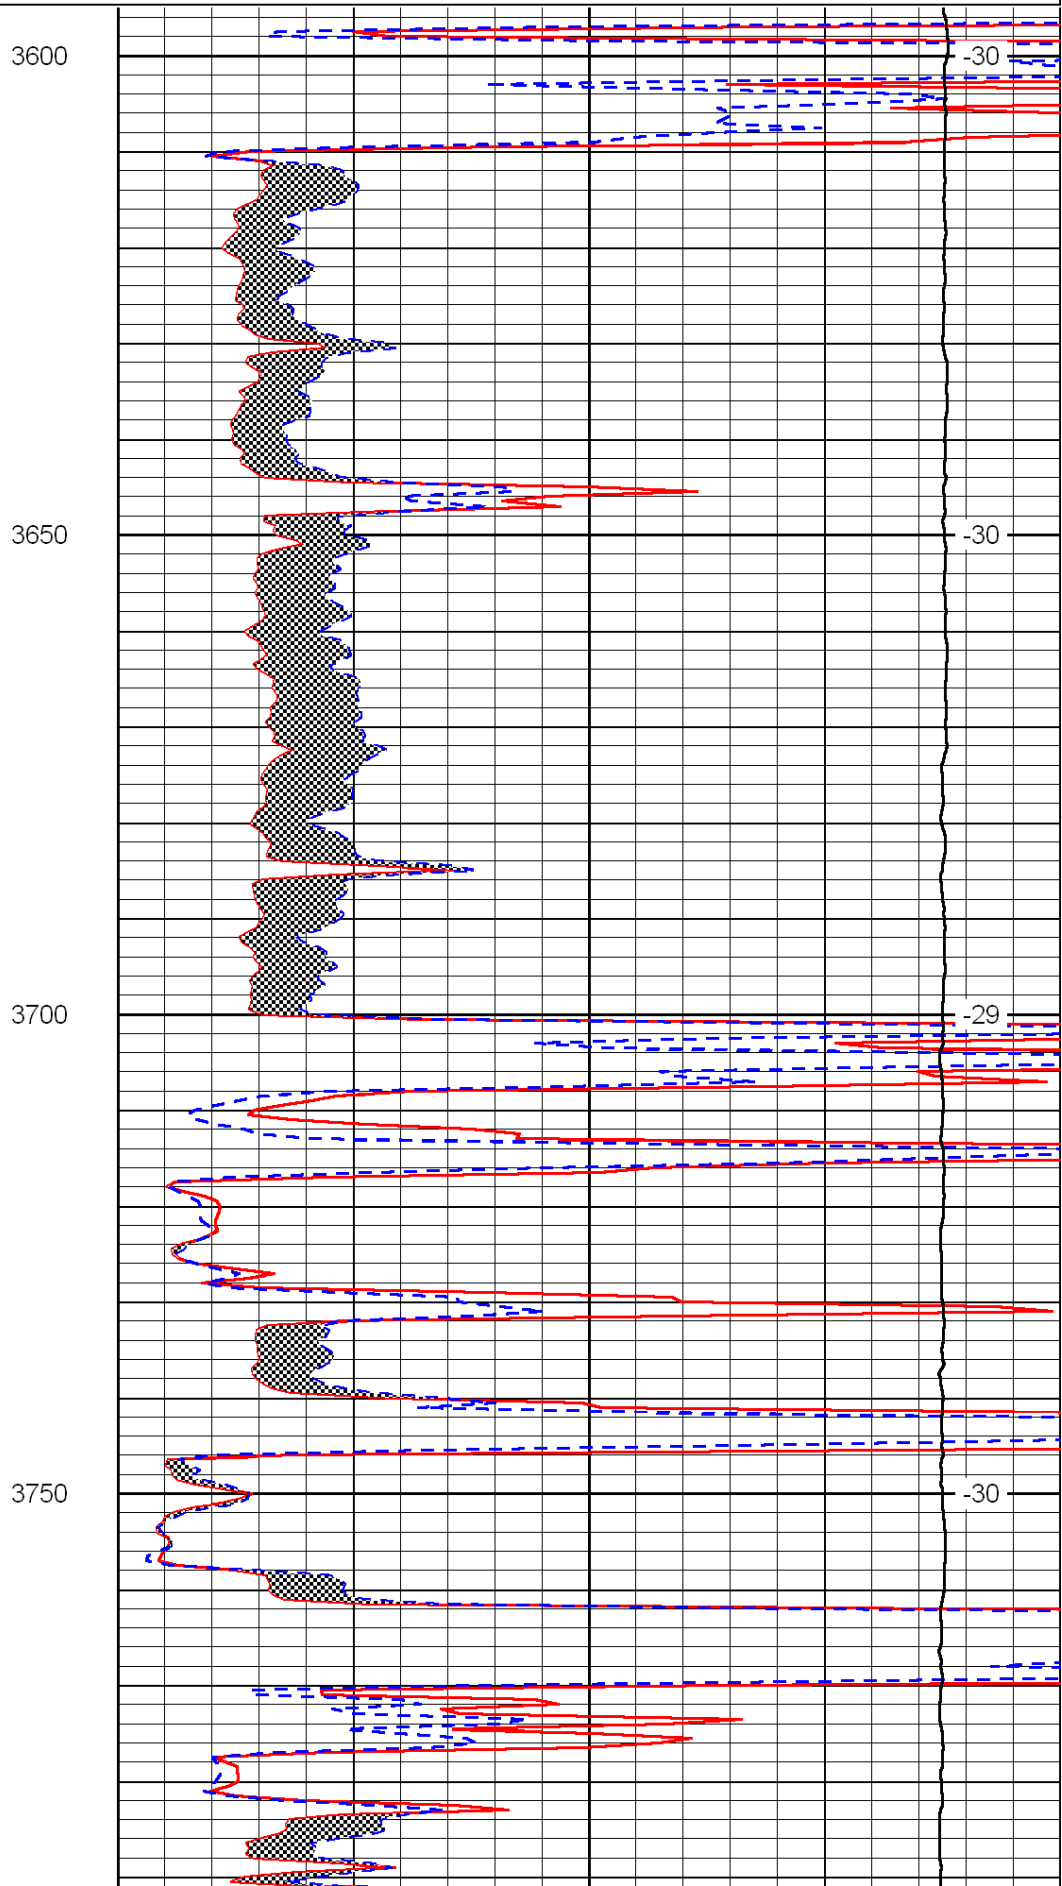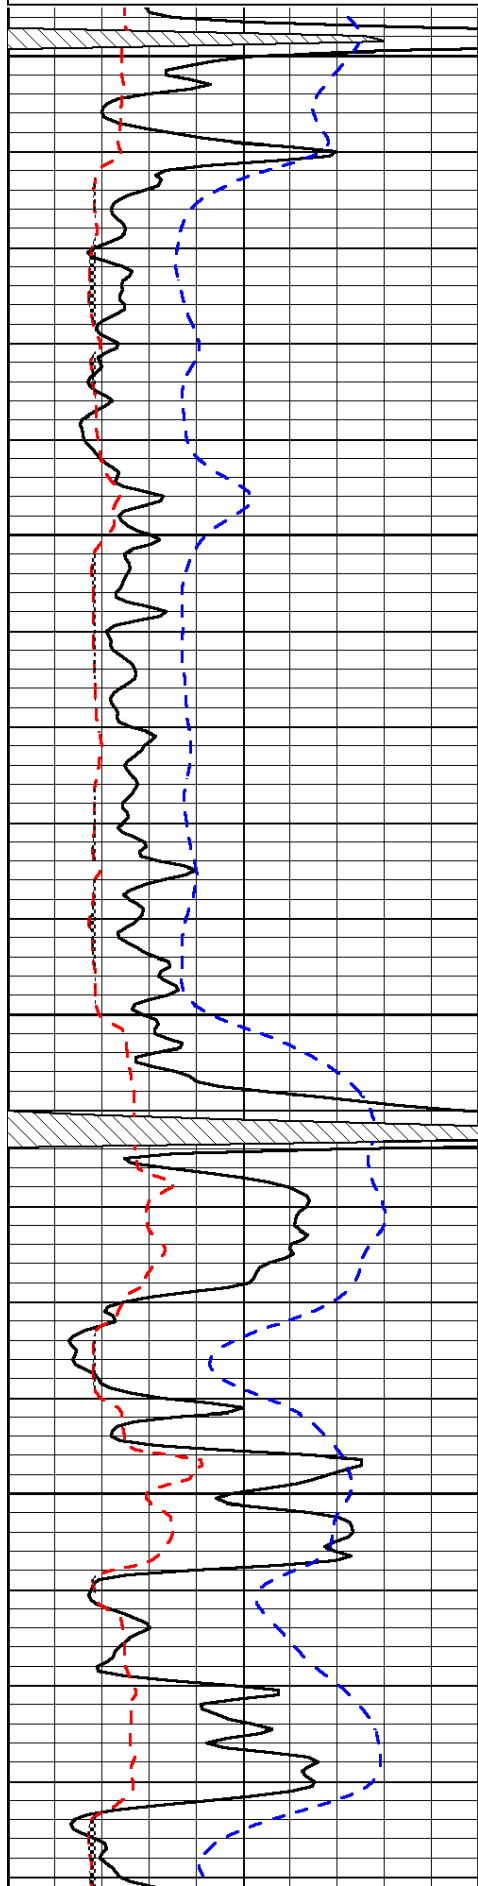

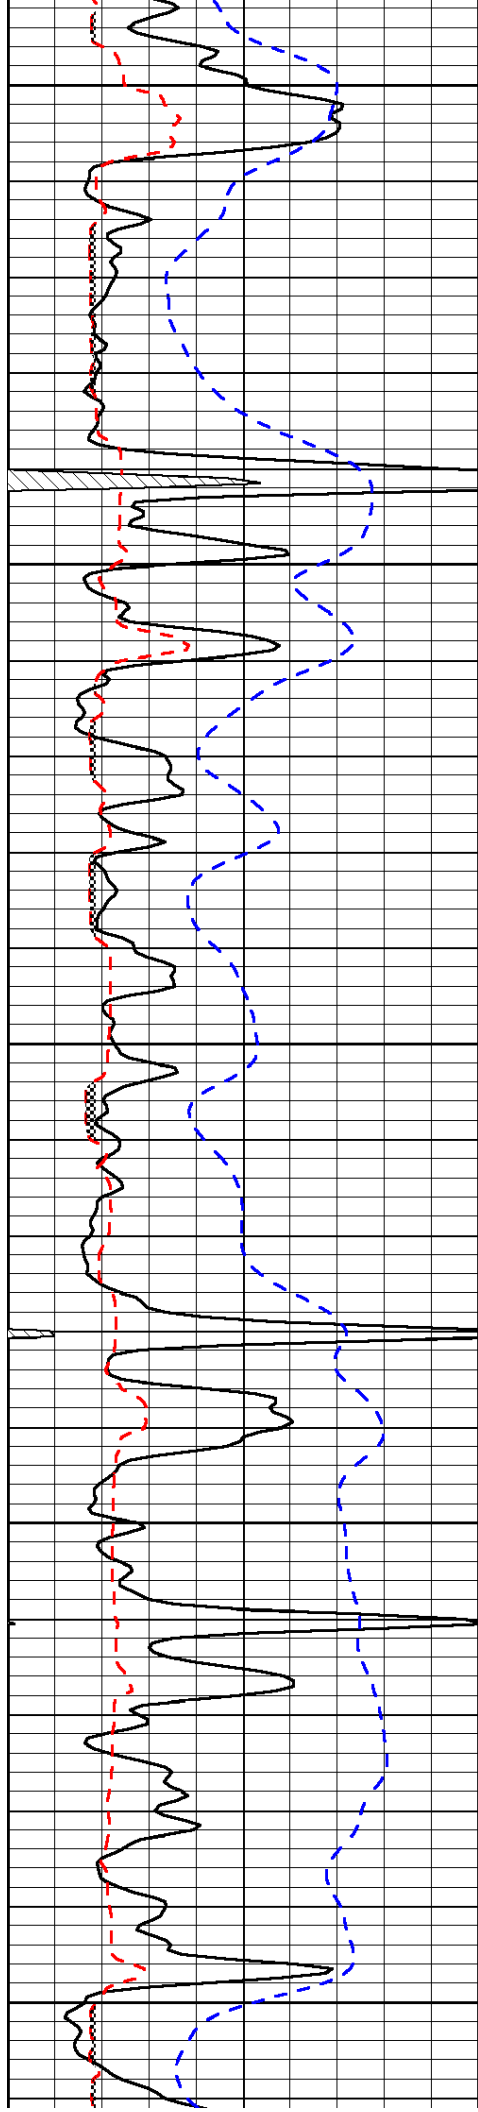


3800

3850

3900

3950

4000

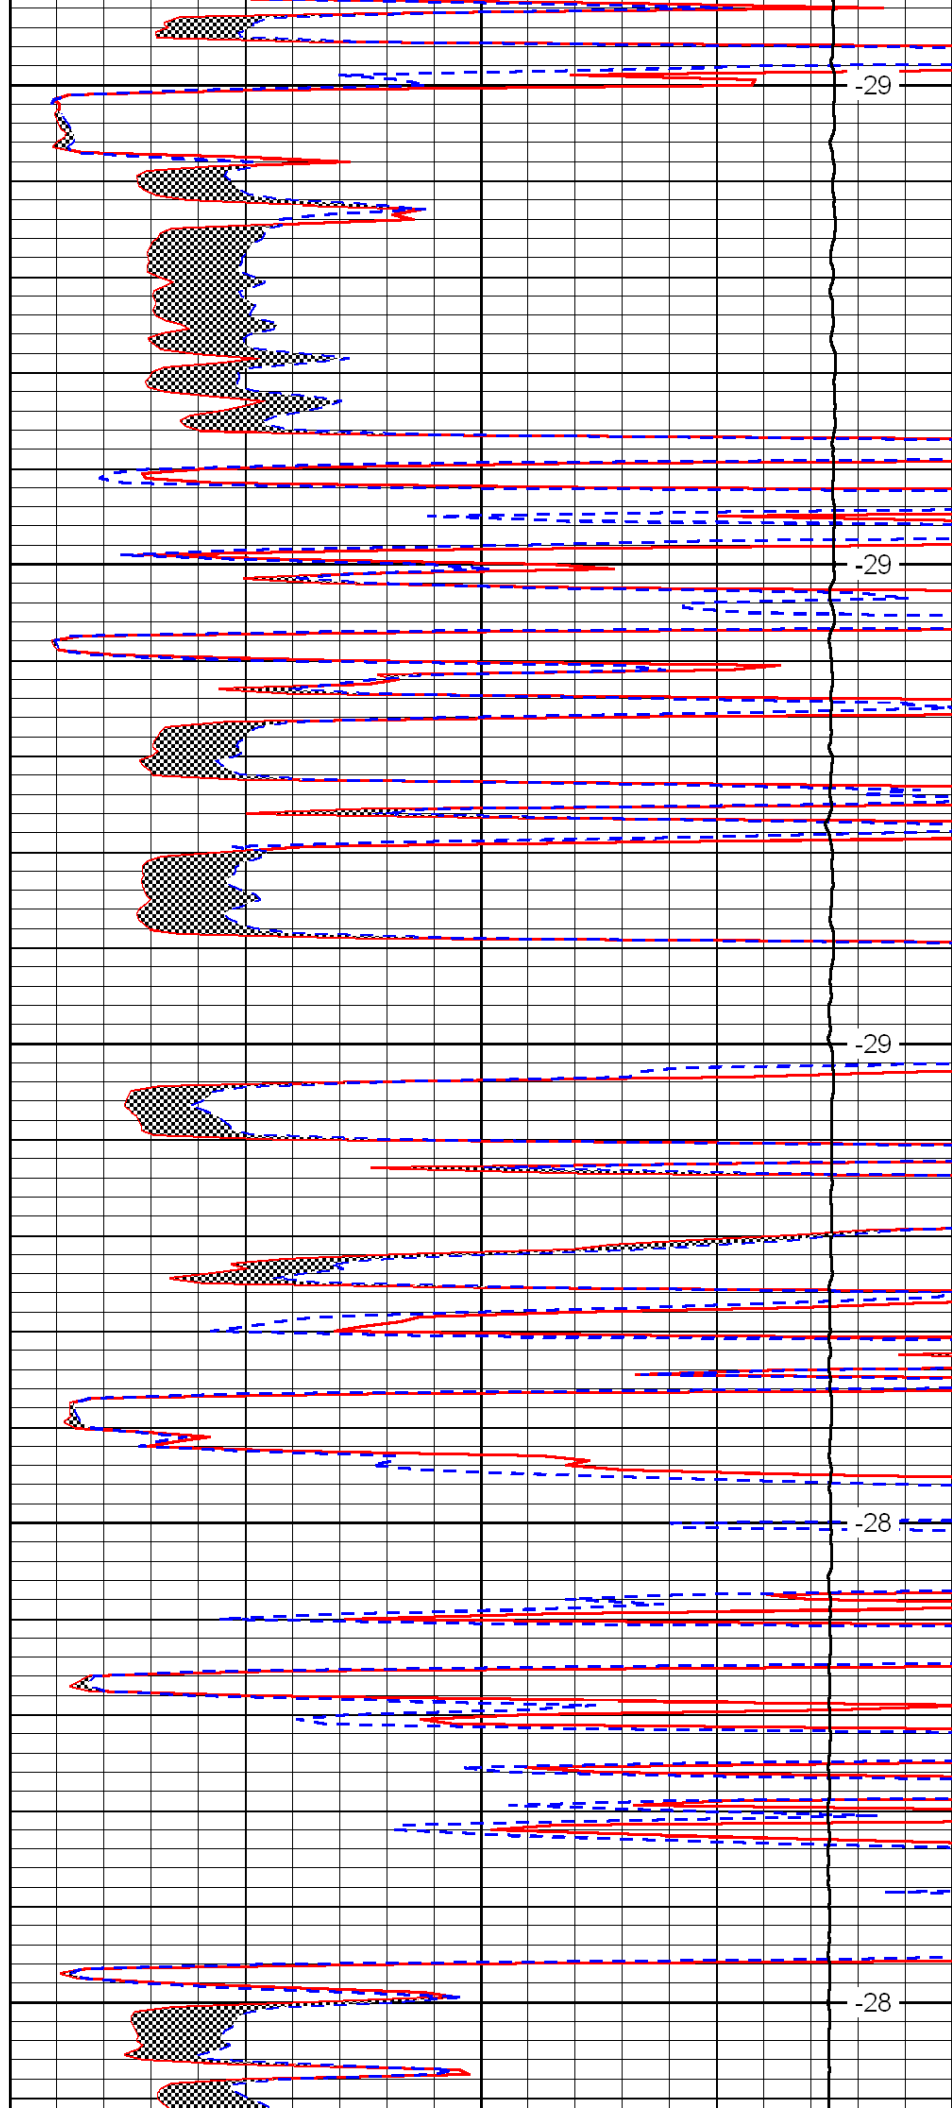


-29

-29

-29

-28

-28

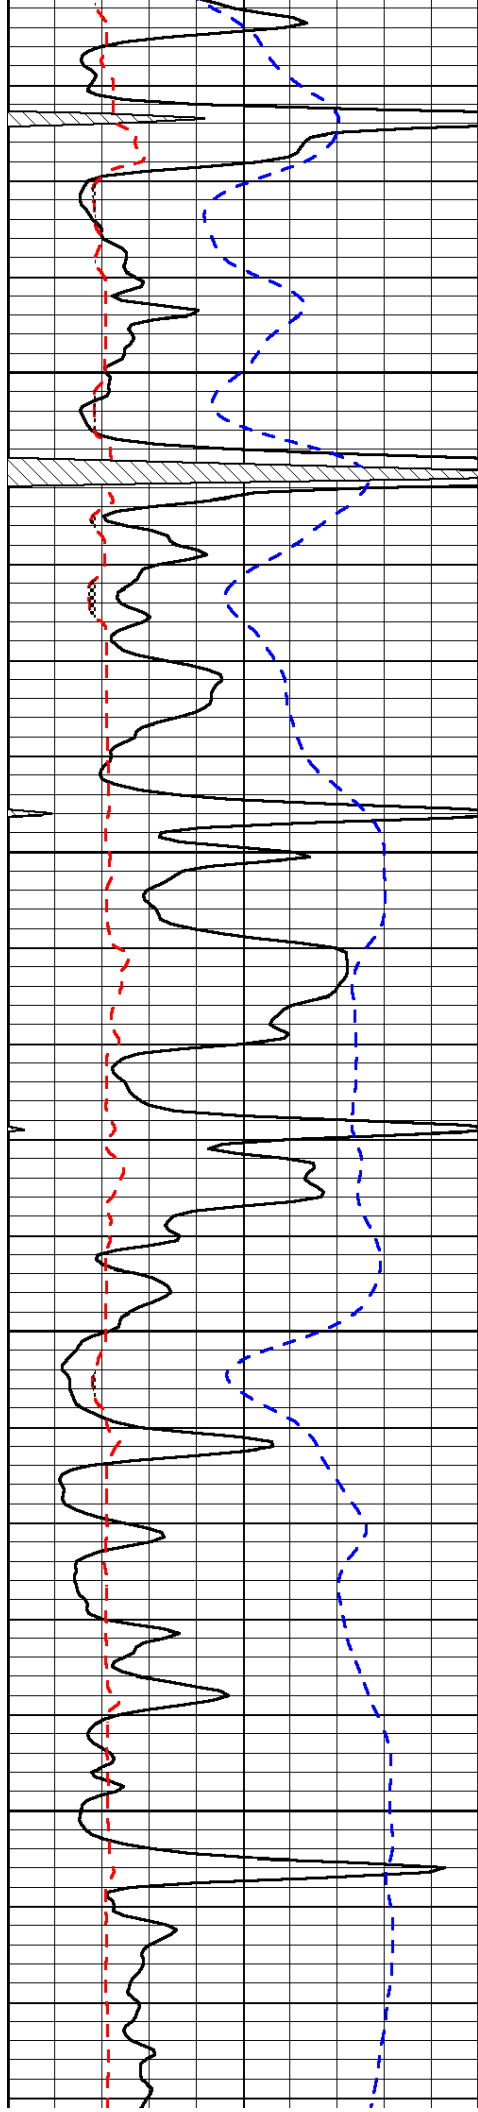


4050

4100

4150

4200

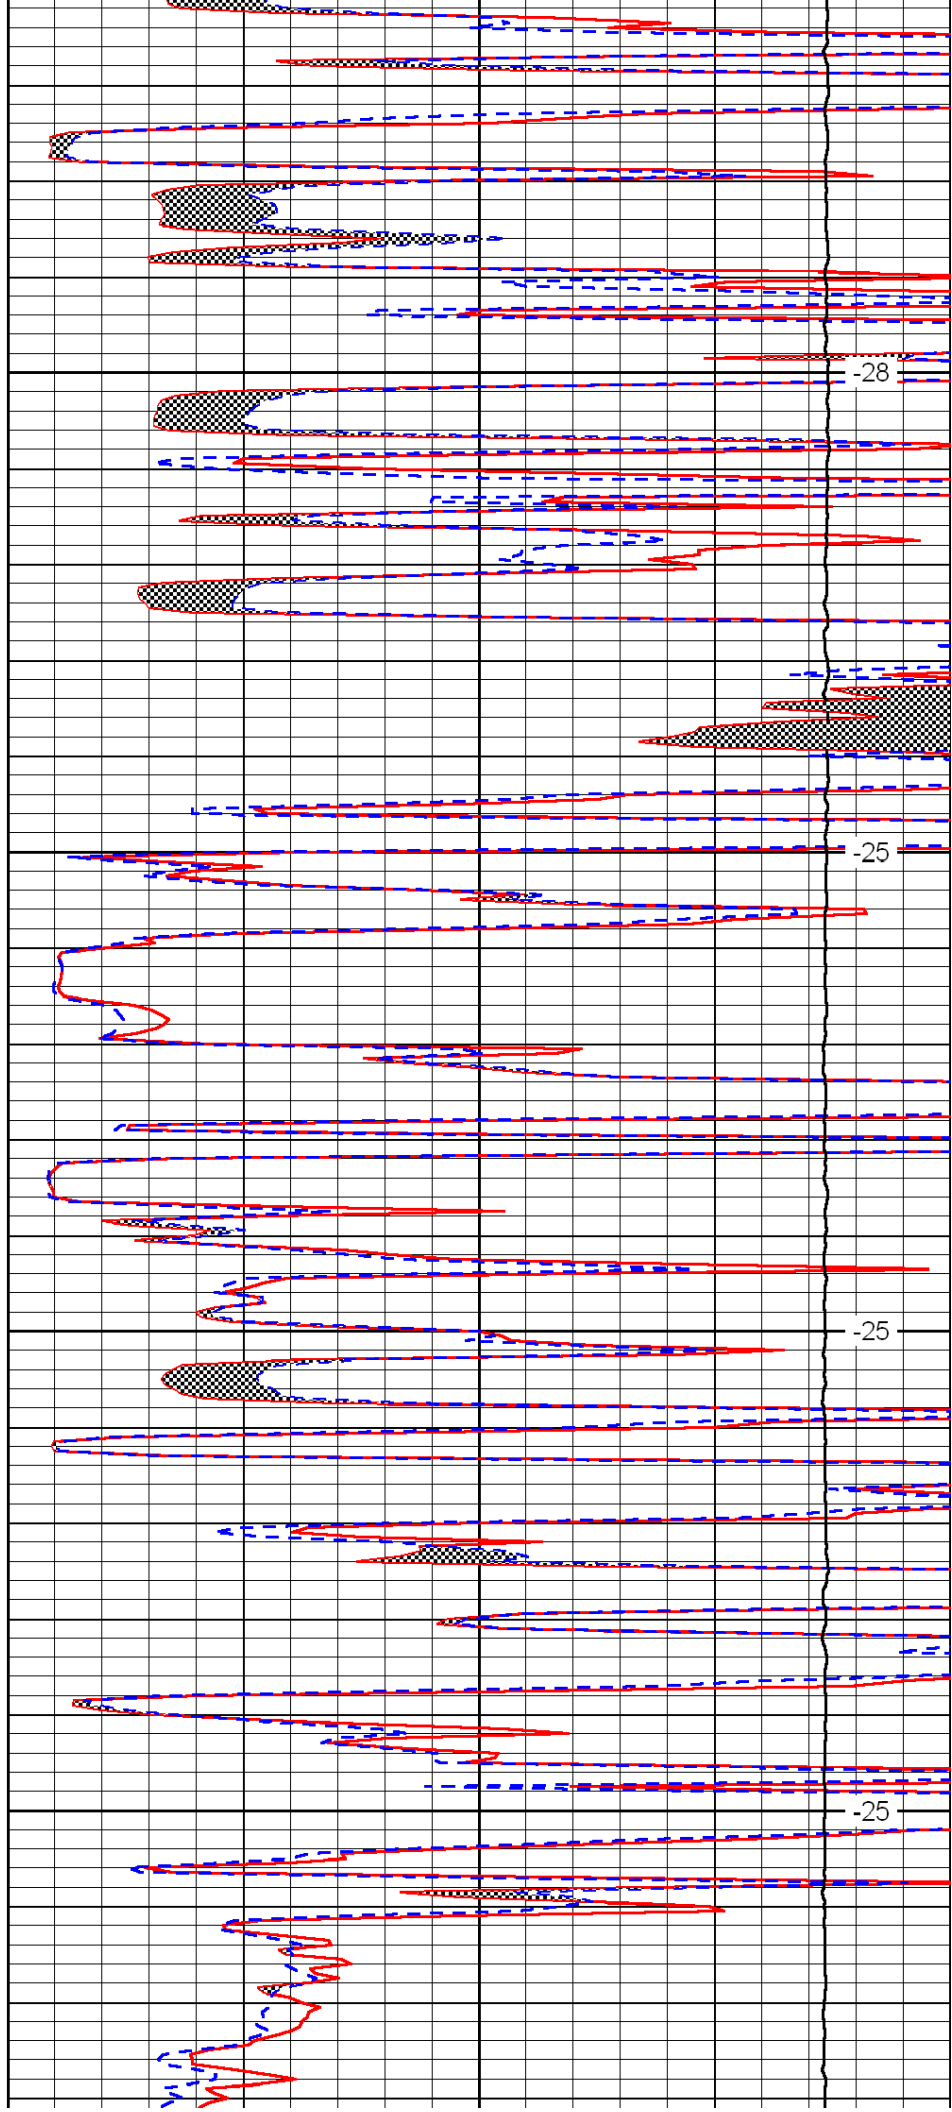


-28

-25

-25

-25

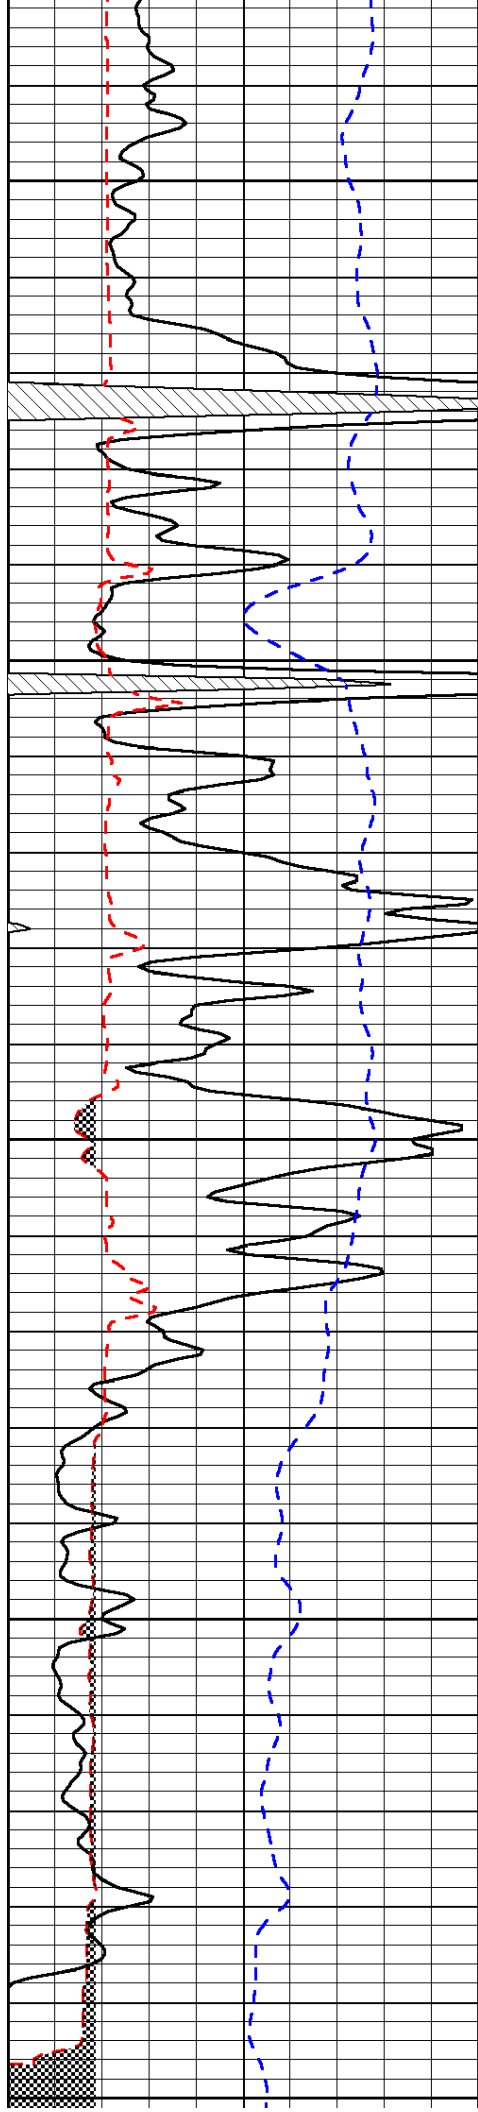


4250

4300

4350

4400

4450

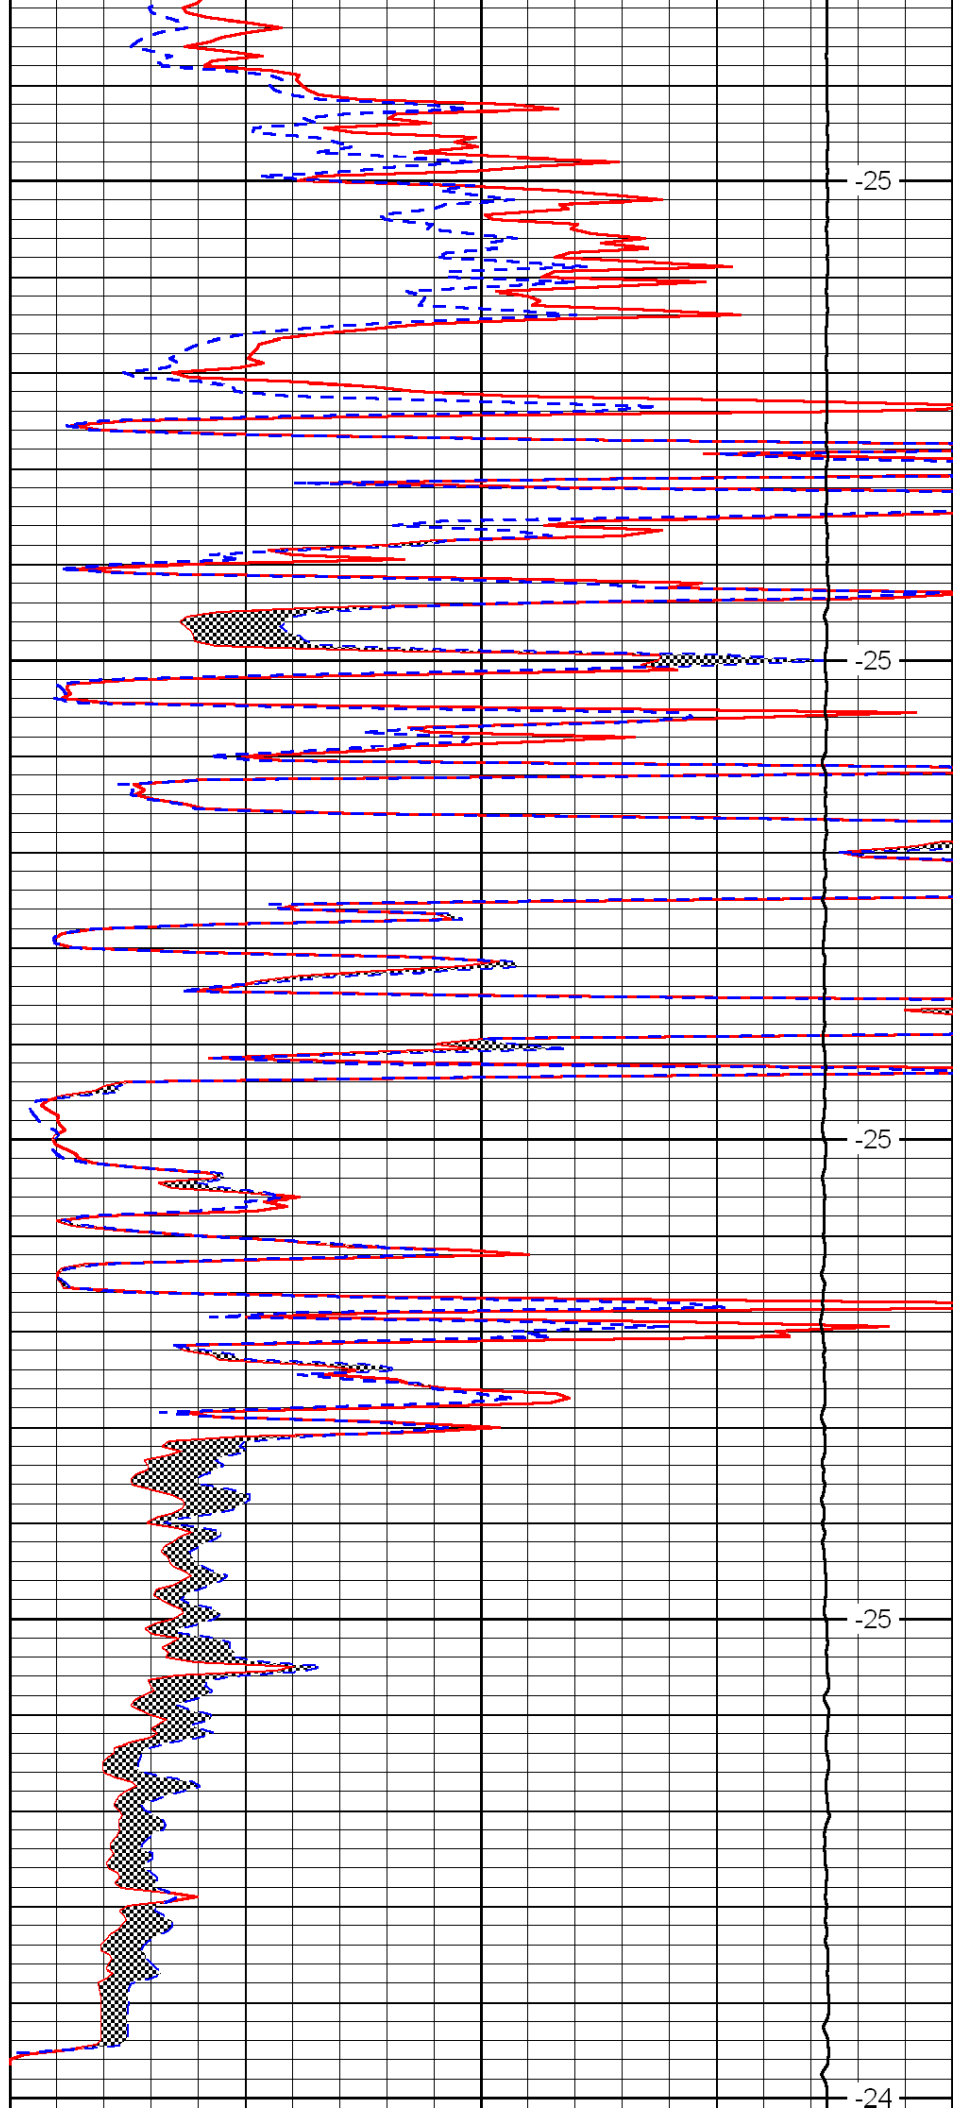



-25

-25

-25

-25

-24

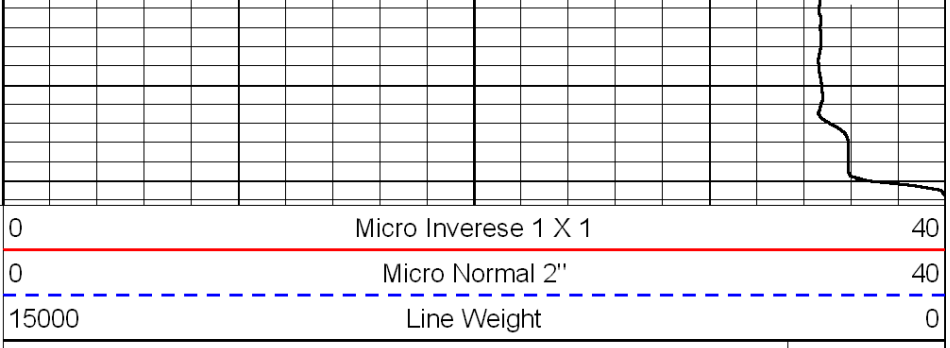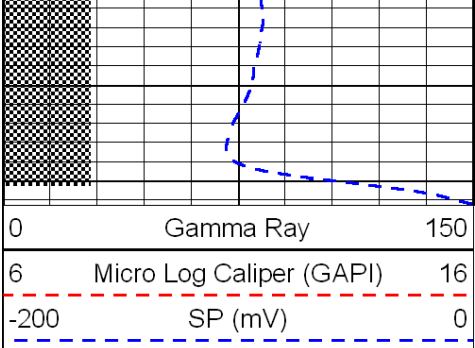

LSPD