LOG-TECH

DIGITAL LOG (785) 625-3858

Dual Compensated Porosity Log

API No. 15-053-21,234-00-00

Company Trans Pacific Oil Corporation

Well Ford 'A' No. 1-19

Field Wilson Creek

County Ellsworth State Kansas

Location 2970' FSL & 330' FWL

Sec: 19 Twp: 14S Rge: 10W

Other Services
DIL
MEL/BHCS

Elevation
K.B.: 1676
D.F.:
G.L.: 1669

Permanent Datum	Ground Level
Log Measured From	Kelly Bushing 7 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing
Date	02/25/2010
Run Number	One
Type Log	CNL / CDL
Depth Driller	2965
Depth Logger	2960
Bottom Logged Interval	2939
Top Logged Interval	1200
Type Fluid In Hole	Chemical
Salinity, PPM CL	10,500
Density	9.2
Level	Full
Max. Rec. Temp. F	108
Operating Rig Time	4 Hours
Equipment -- Location	10 Hays
Recorded By	Jason Wellbrock
Witnessed By	Bryce Bidleman

Borehole Record

Run No.	Bit	From	To
1	12.25	00	263
2	7.875	263	2965

Casing Record

Size	Wgt.	From	To
8.625	24#	00	263

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Wilson W3/4 to 1st rd., S 1/2, E Into

Database File:	c:\warrior\data\trans pacific_ford 'a' no. 1-19\transhd.db
Dataset Pathname:	dil/trans2in
Presentation Format:	cdl
Dataset Creation:	Thu Feb 25 23:28:36 2010
Charted by:	Depth in Feet scaled 1:600

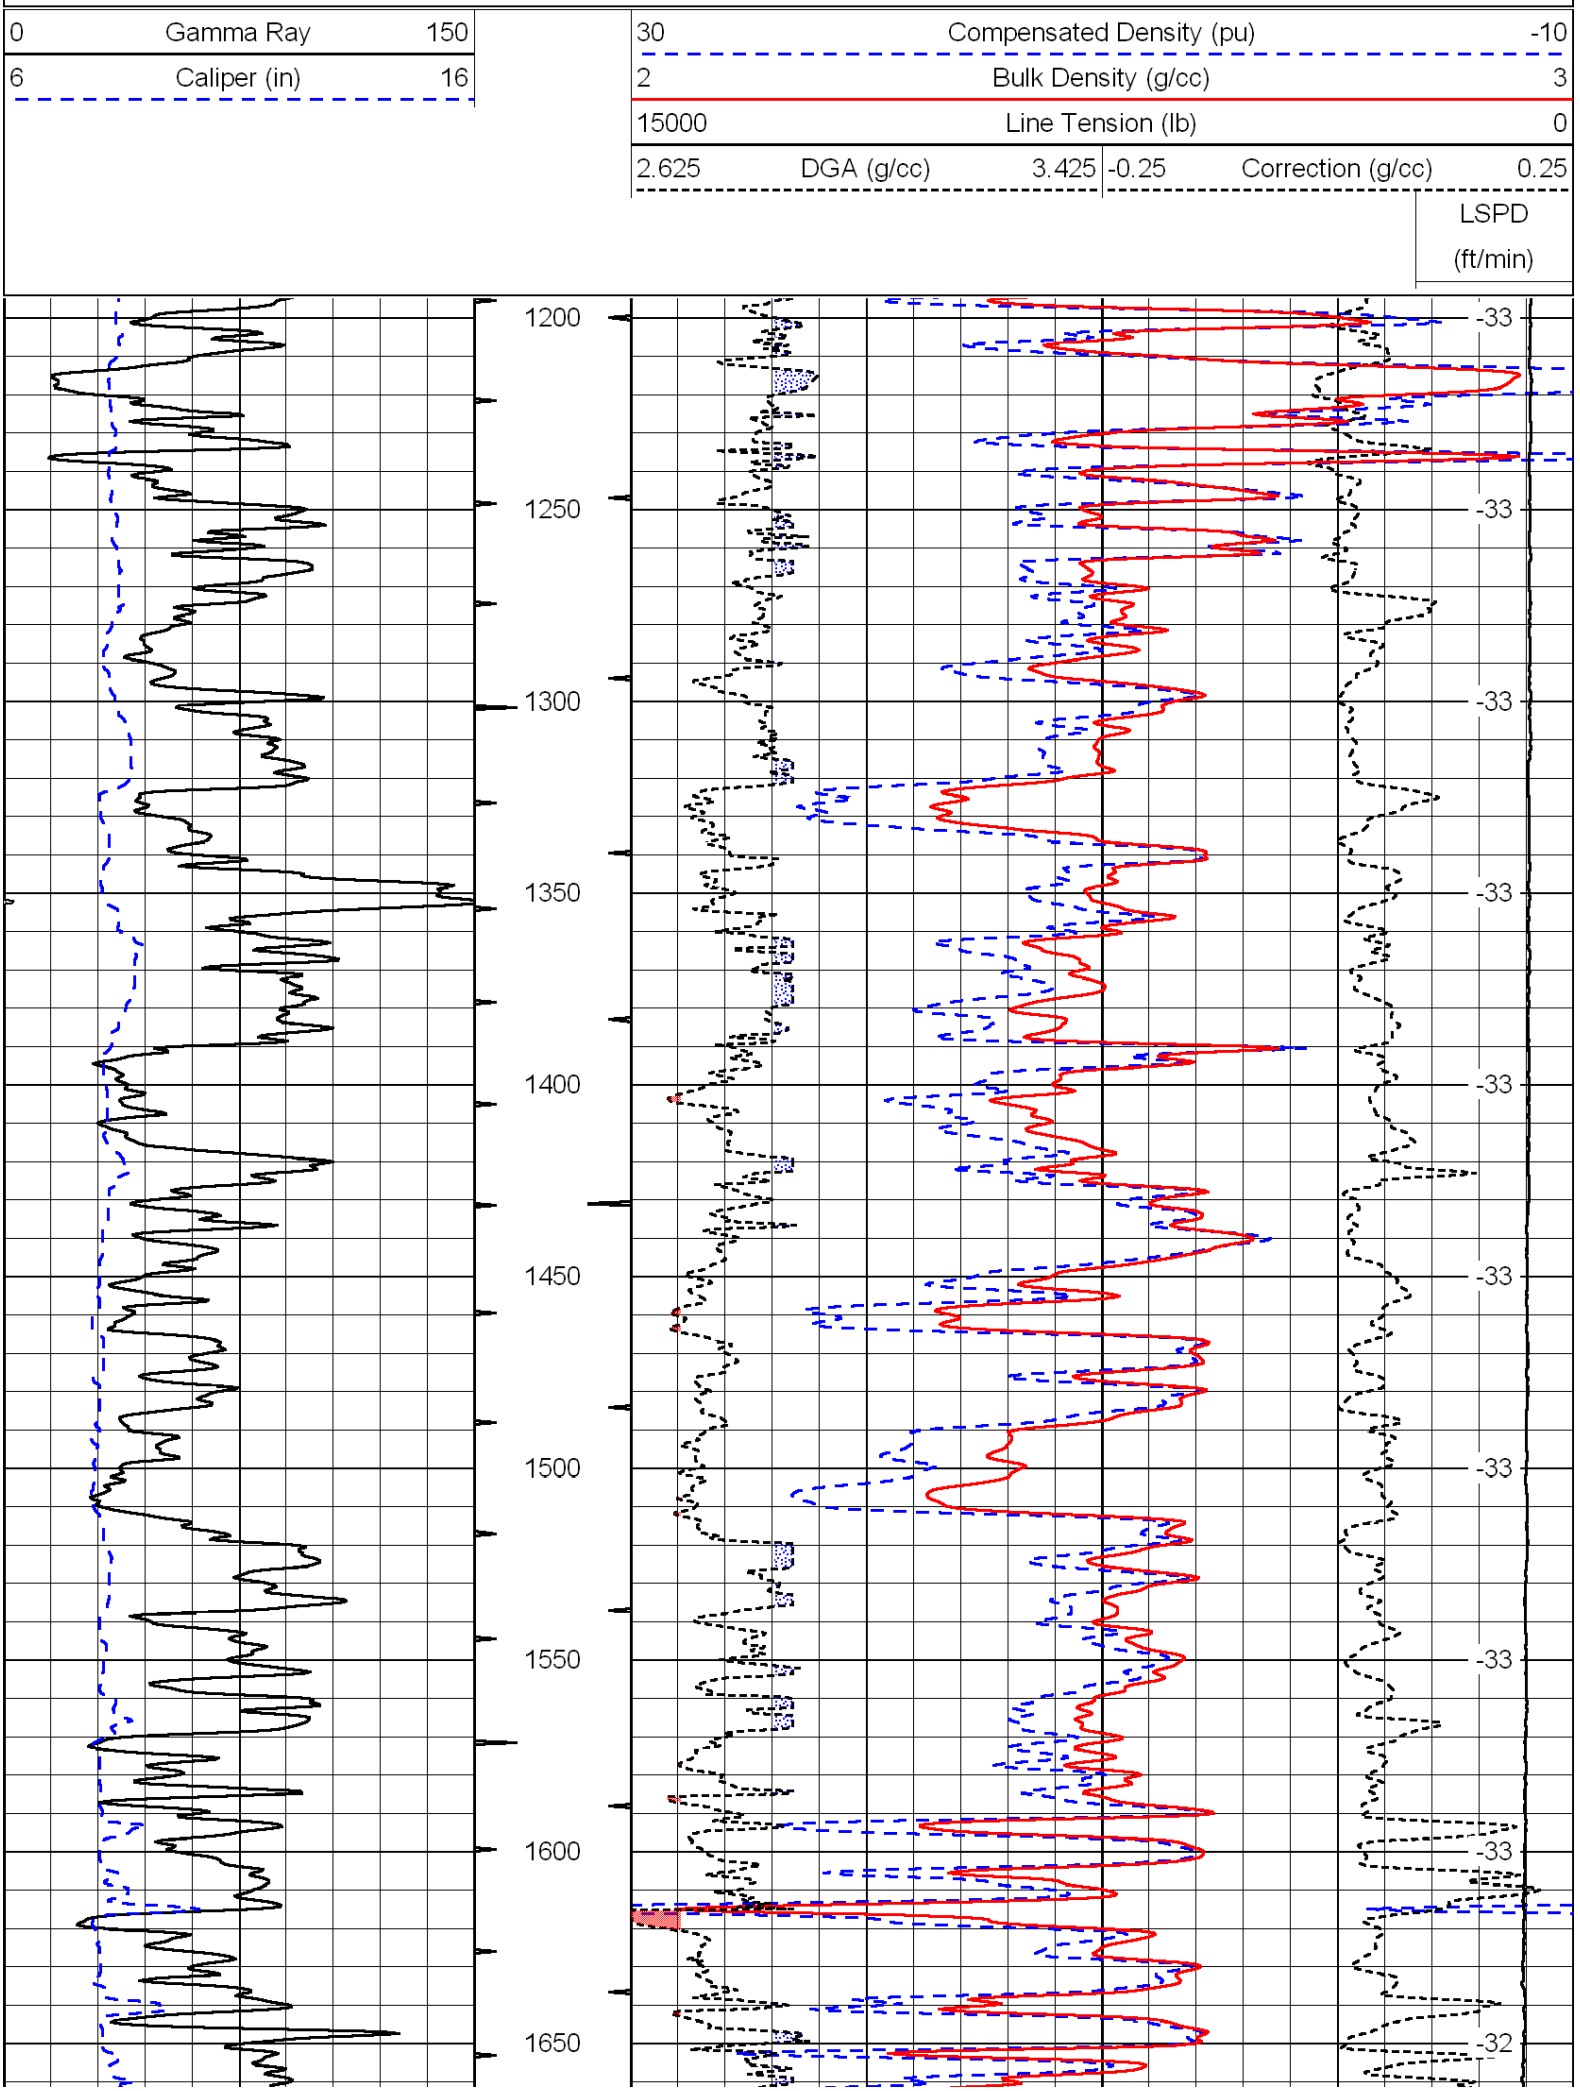
0 Gamma Ray 150
6 Caliper (in) 16
30 Compensated Density (pu) -10
2 Bulk Density (g/cc) 3
15000 Line Tension (lb) 0
2.625 DGA (g/cc) 3.425
-0.25 Correction (g/cc) 0.25
LSPD
(ft/min)
1200
1250
1300
1350
1400
1450
1500
1550
1600
1650
-33
-33
-33
-33
-33
-33
-33
-33
-32

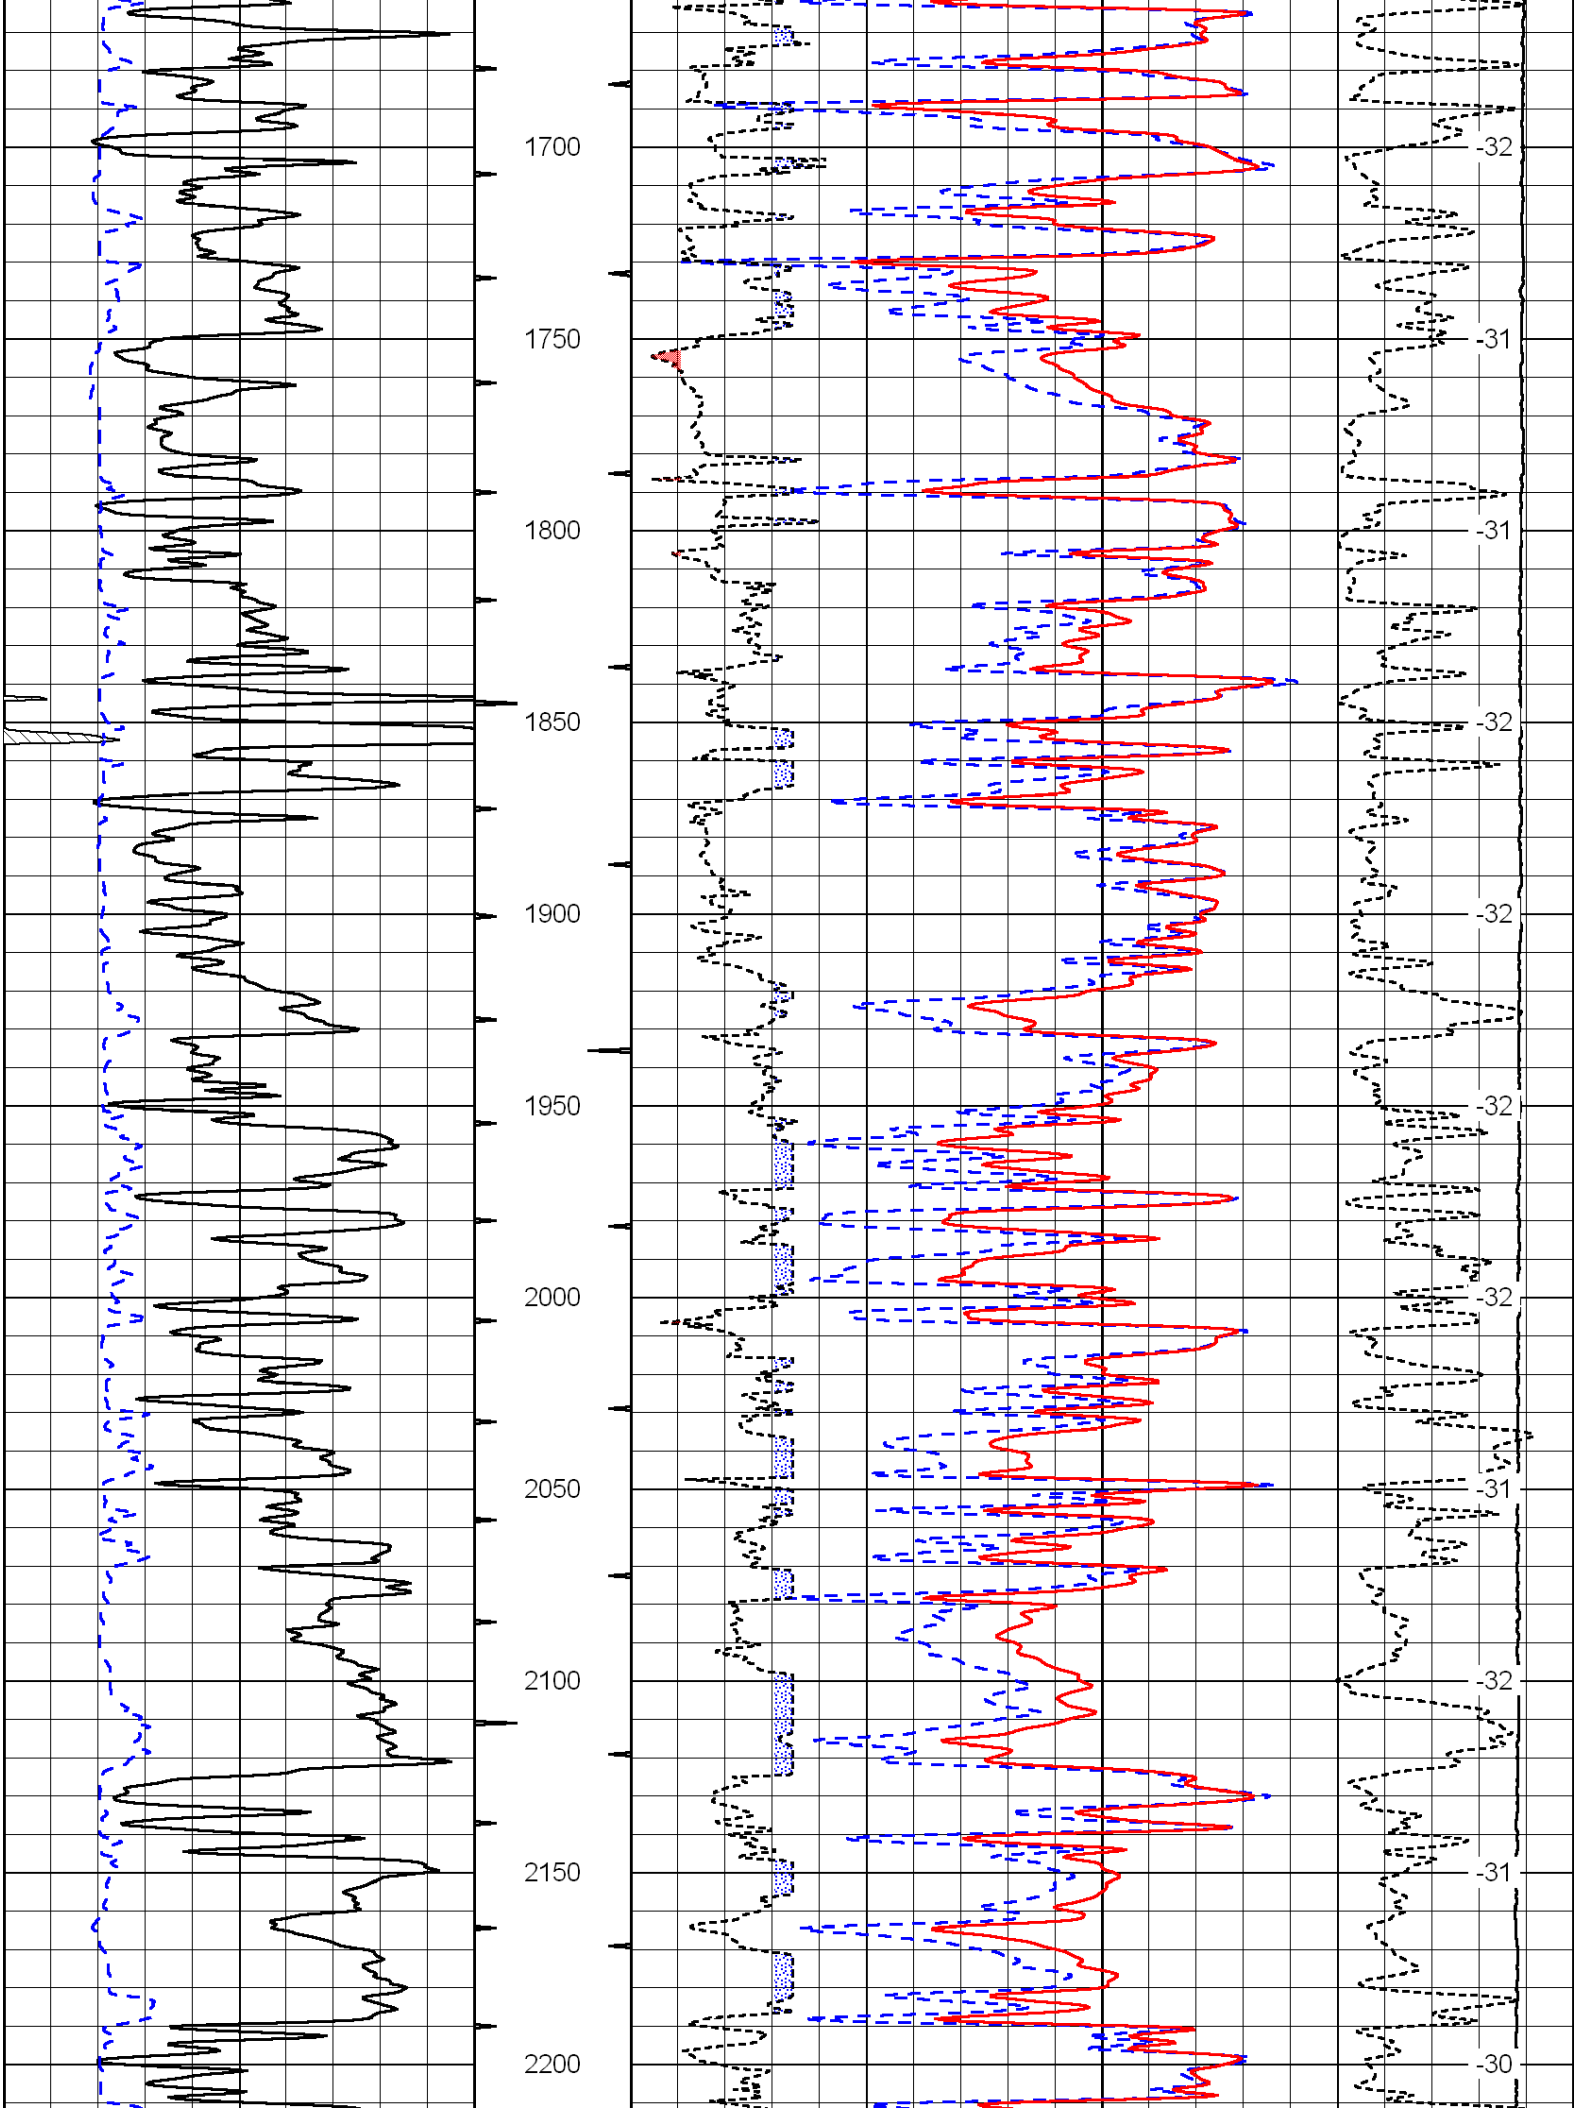
1700
1750
1800
1850
1900
1950
2000
2050
2100
2150
2200
-32
-31
-31
-32
-32
-32
-32
-31
-32
-31
-30

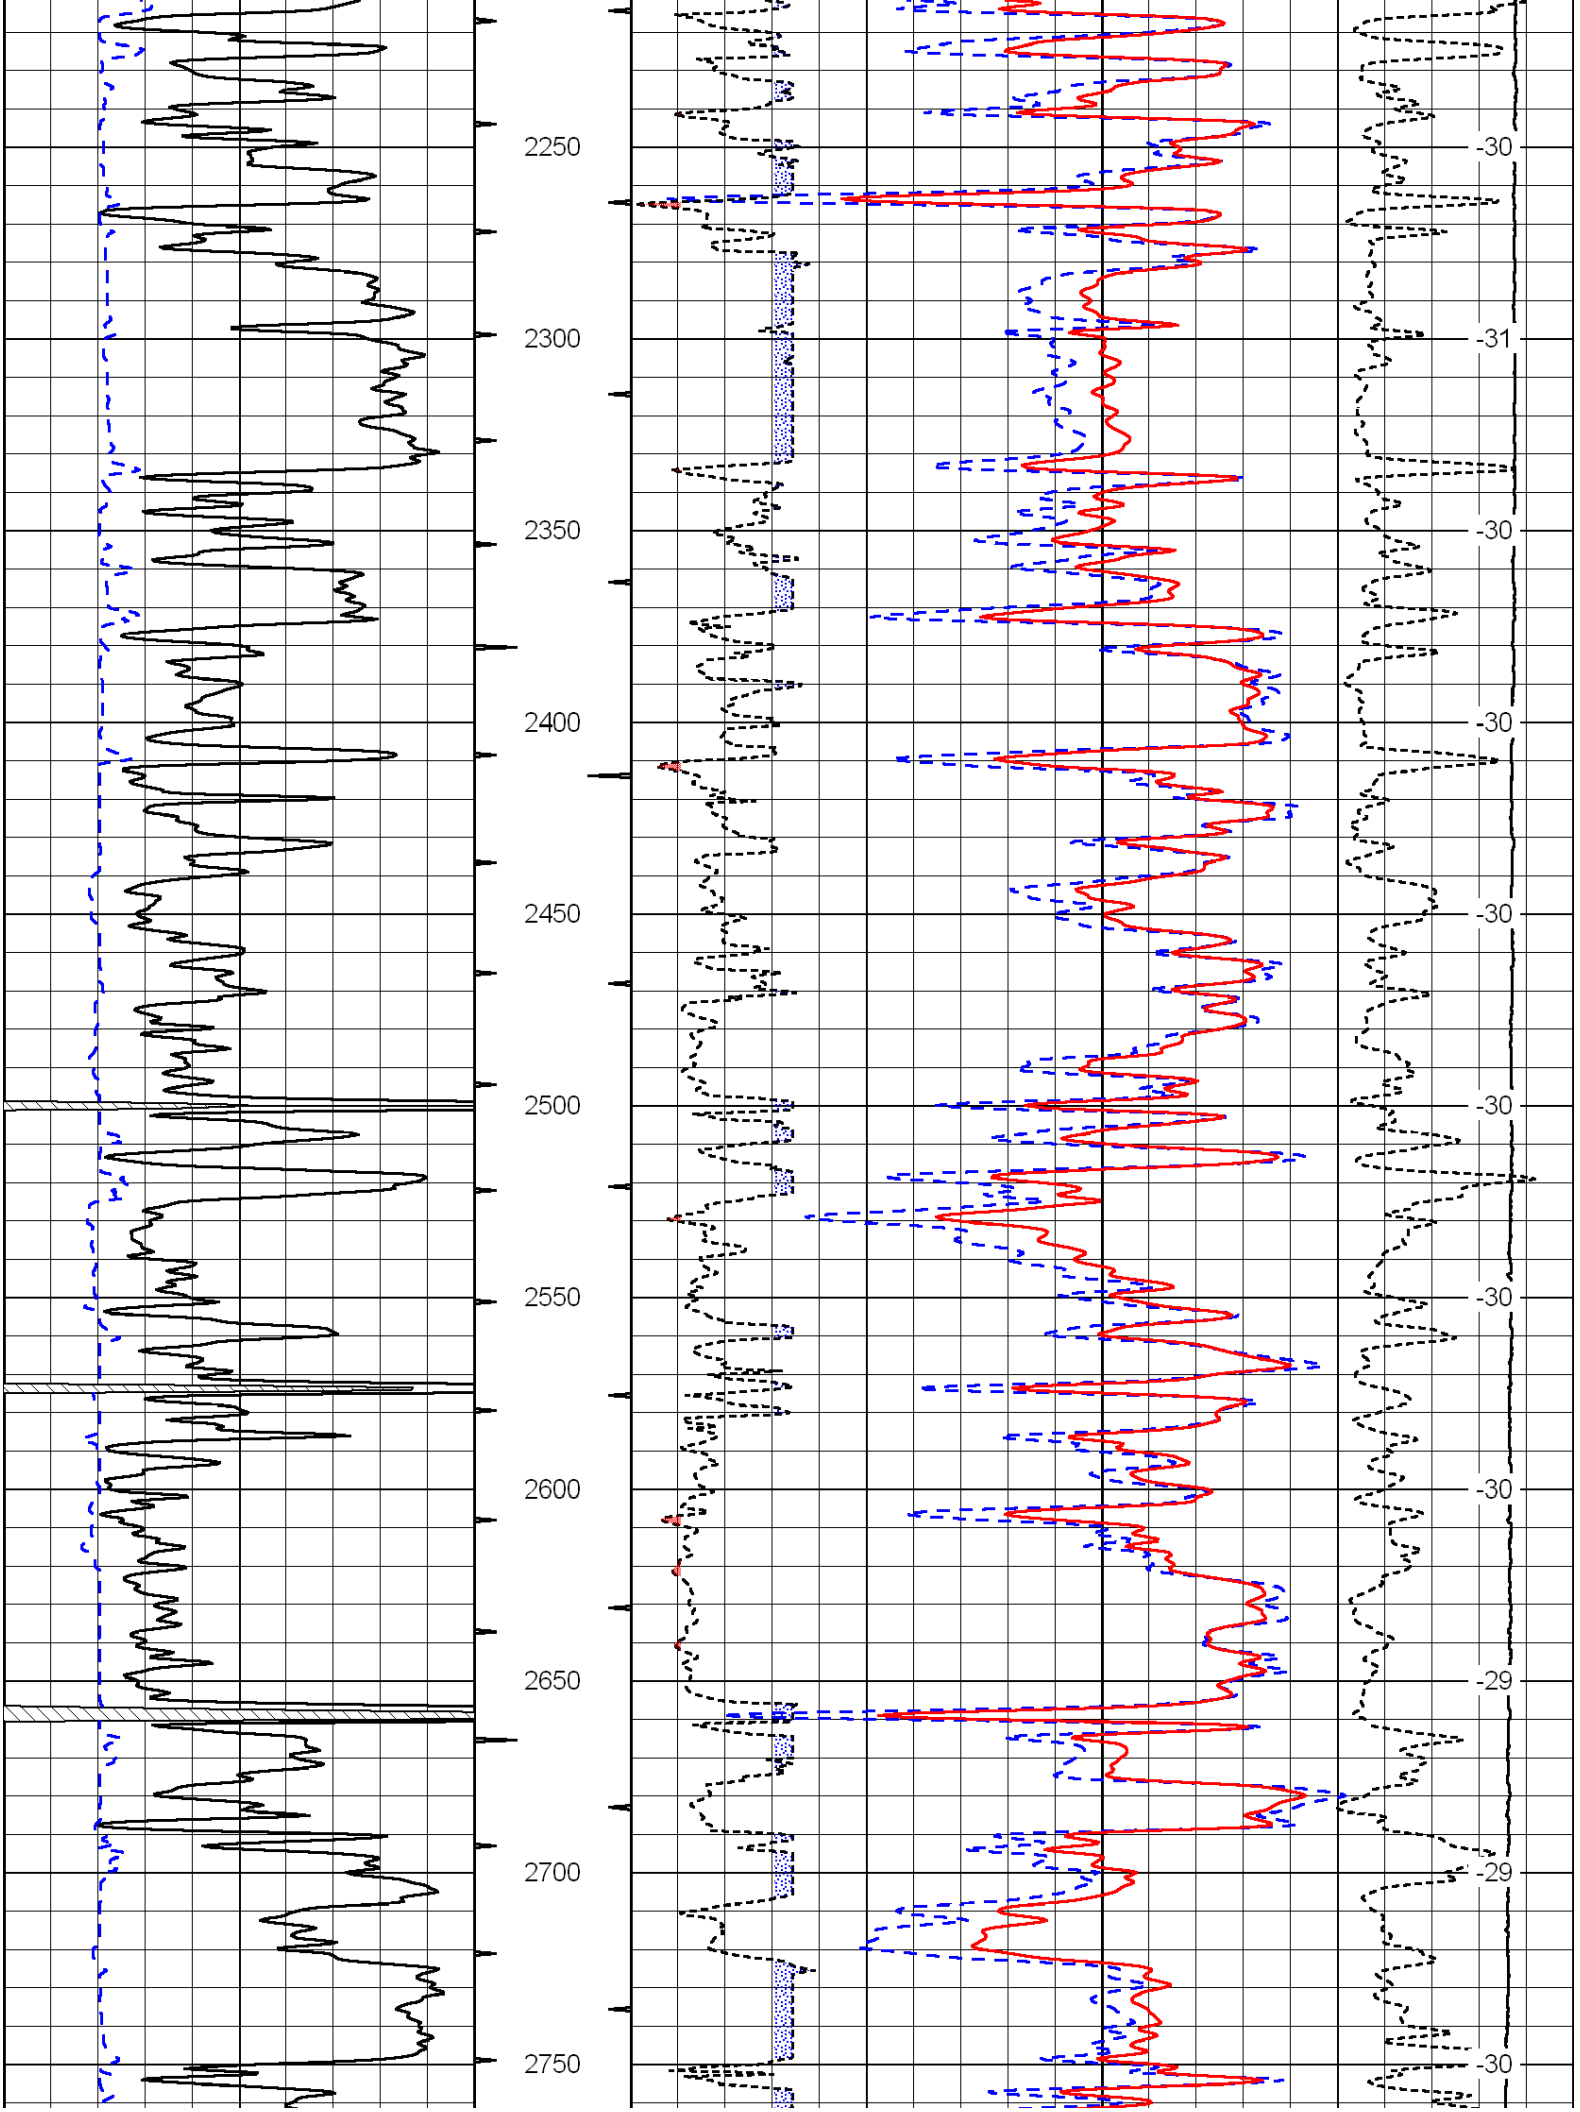
2250
2300
2350
2400
2450
2500
2550
2600
2650
2700
2750
-30
-31
-30
-30
-30
-30
-30
-29
-29
-30

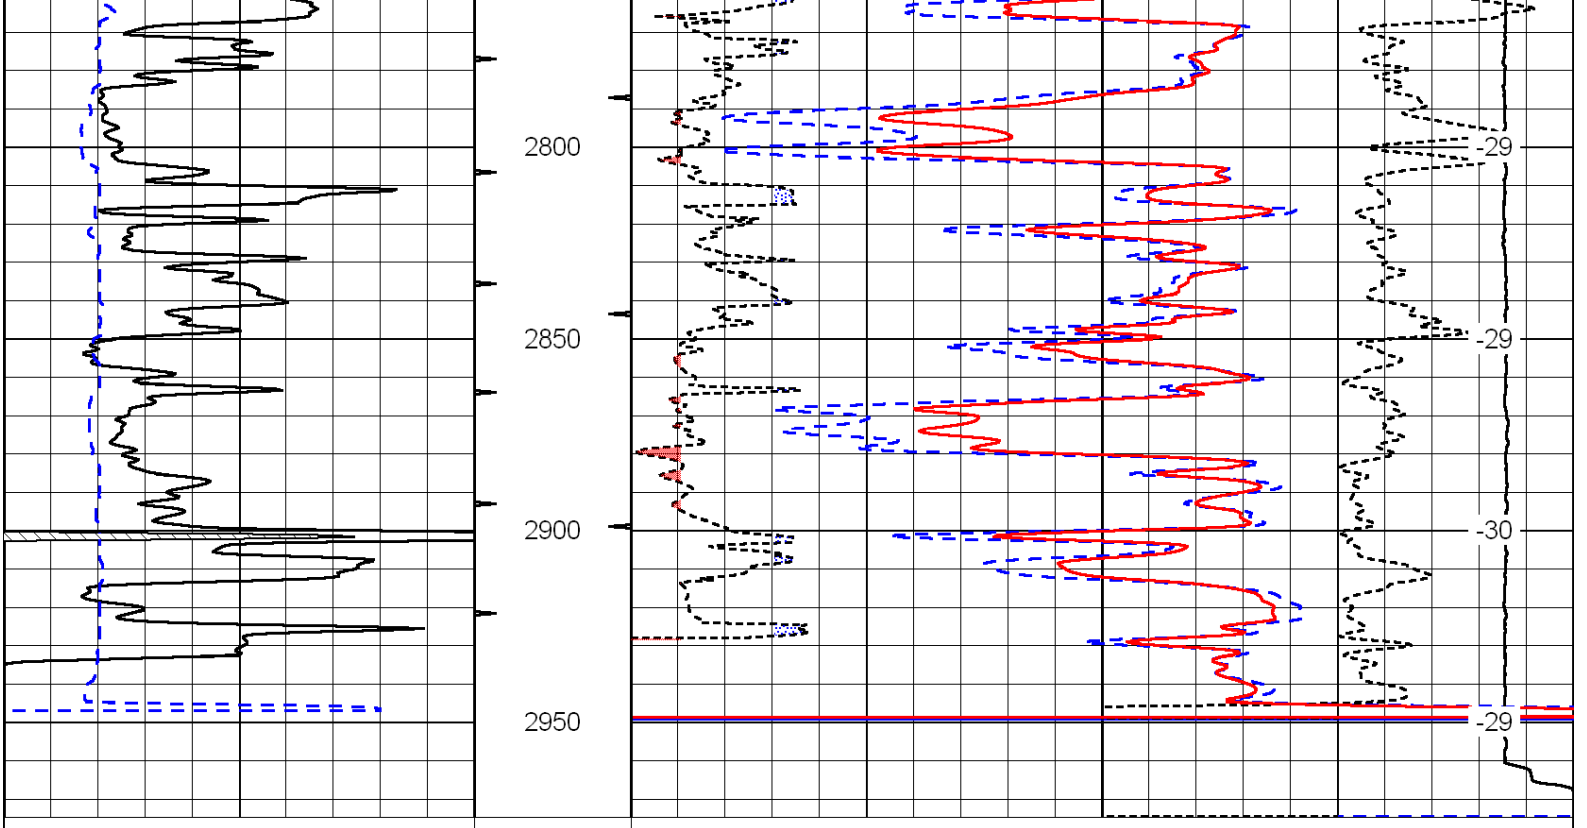

Database File: c:\warrior\data\trans pacific_ford 'a' no. 1-19\transhd.db
Dataset Pathname: dil/trans2in
Presentation Format: cndlspec
Dataset Creation: Thu Feb 25 23:28:36 2010
Charted by: Depth in Feet scaled 1:240

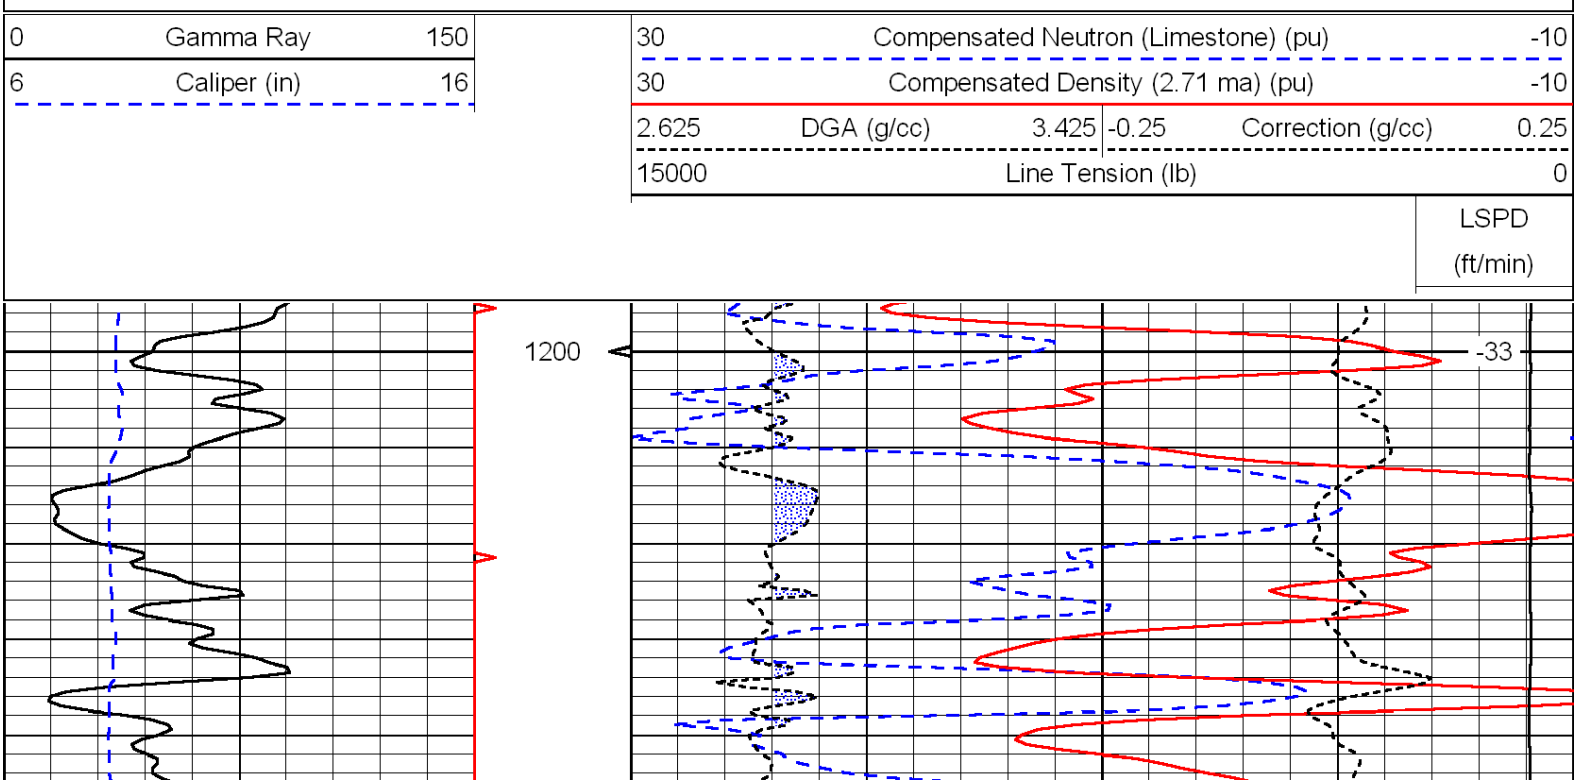

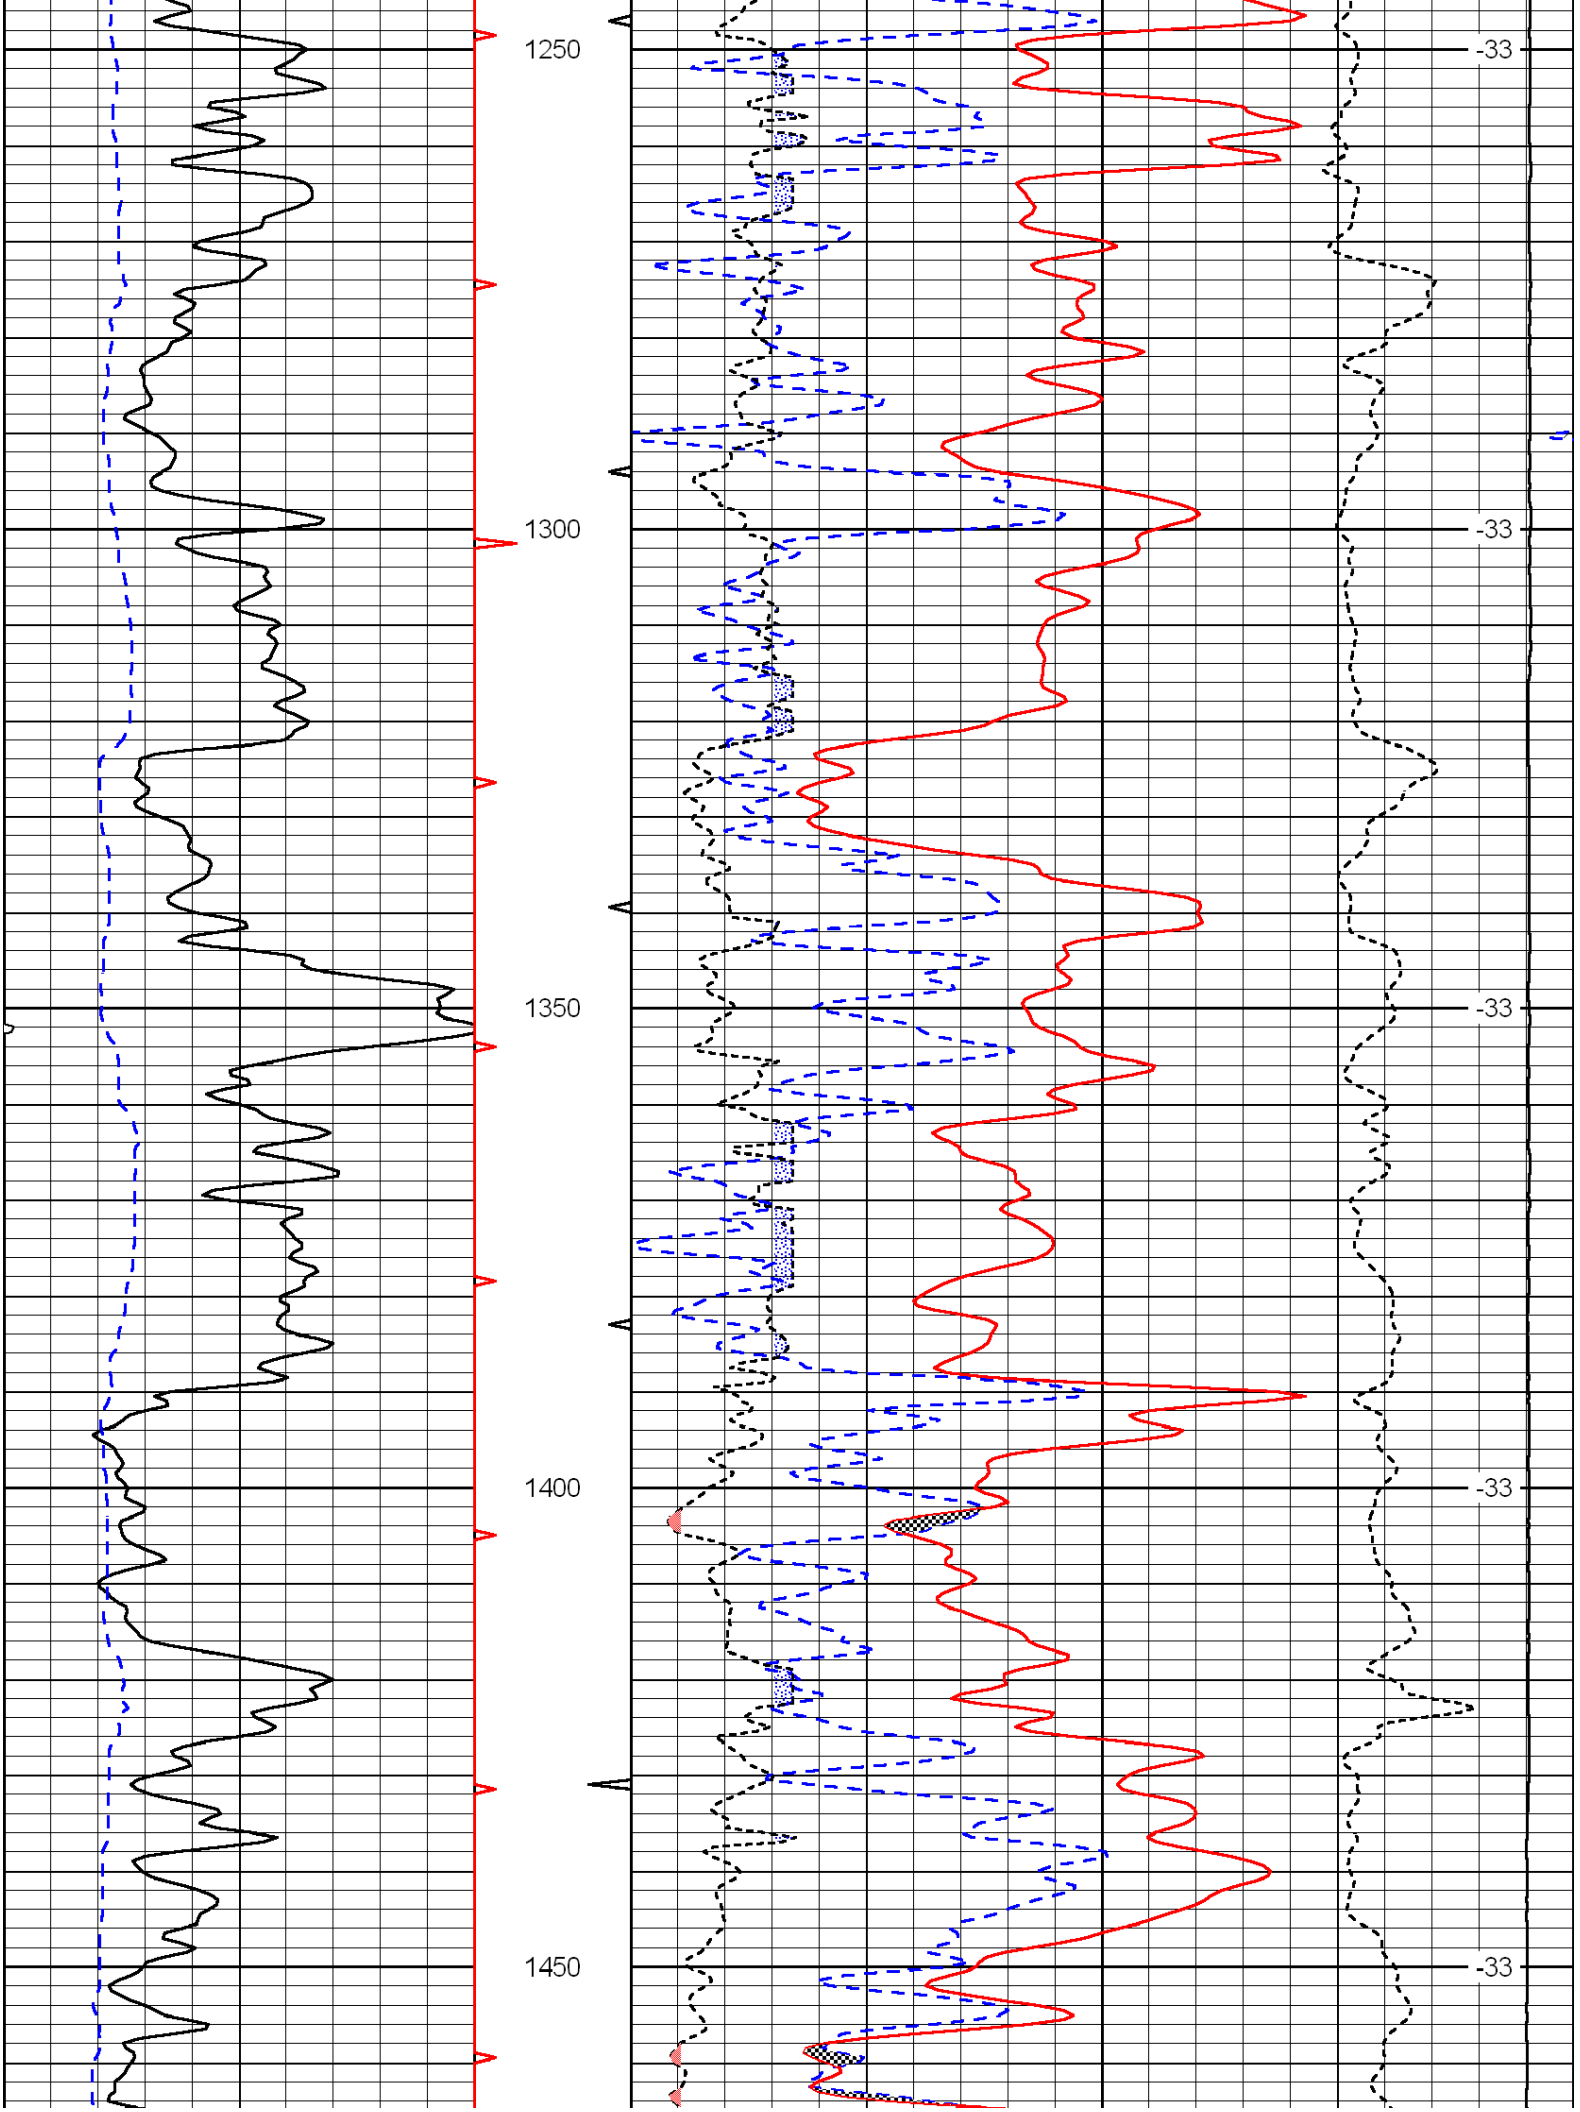
1250
1300
1350
1400
1450
-33
-33
-33
-33
-33

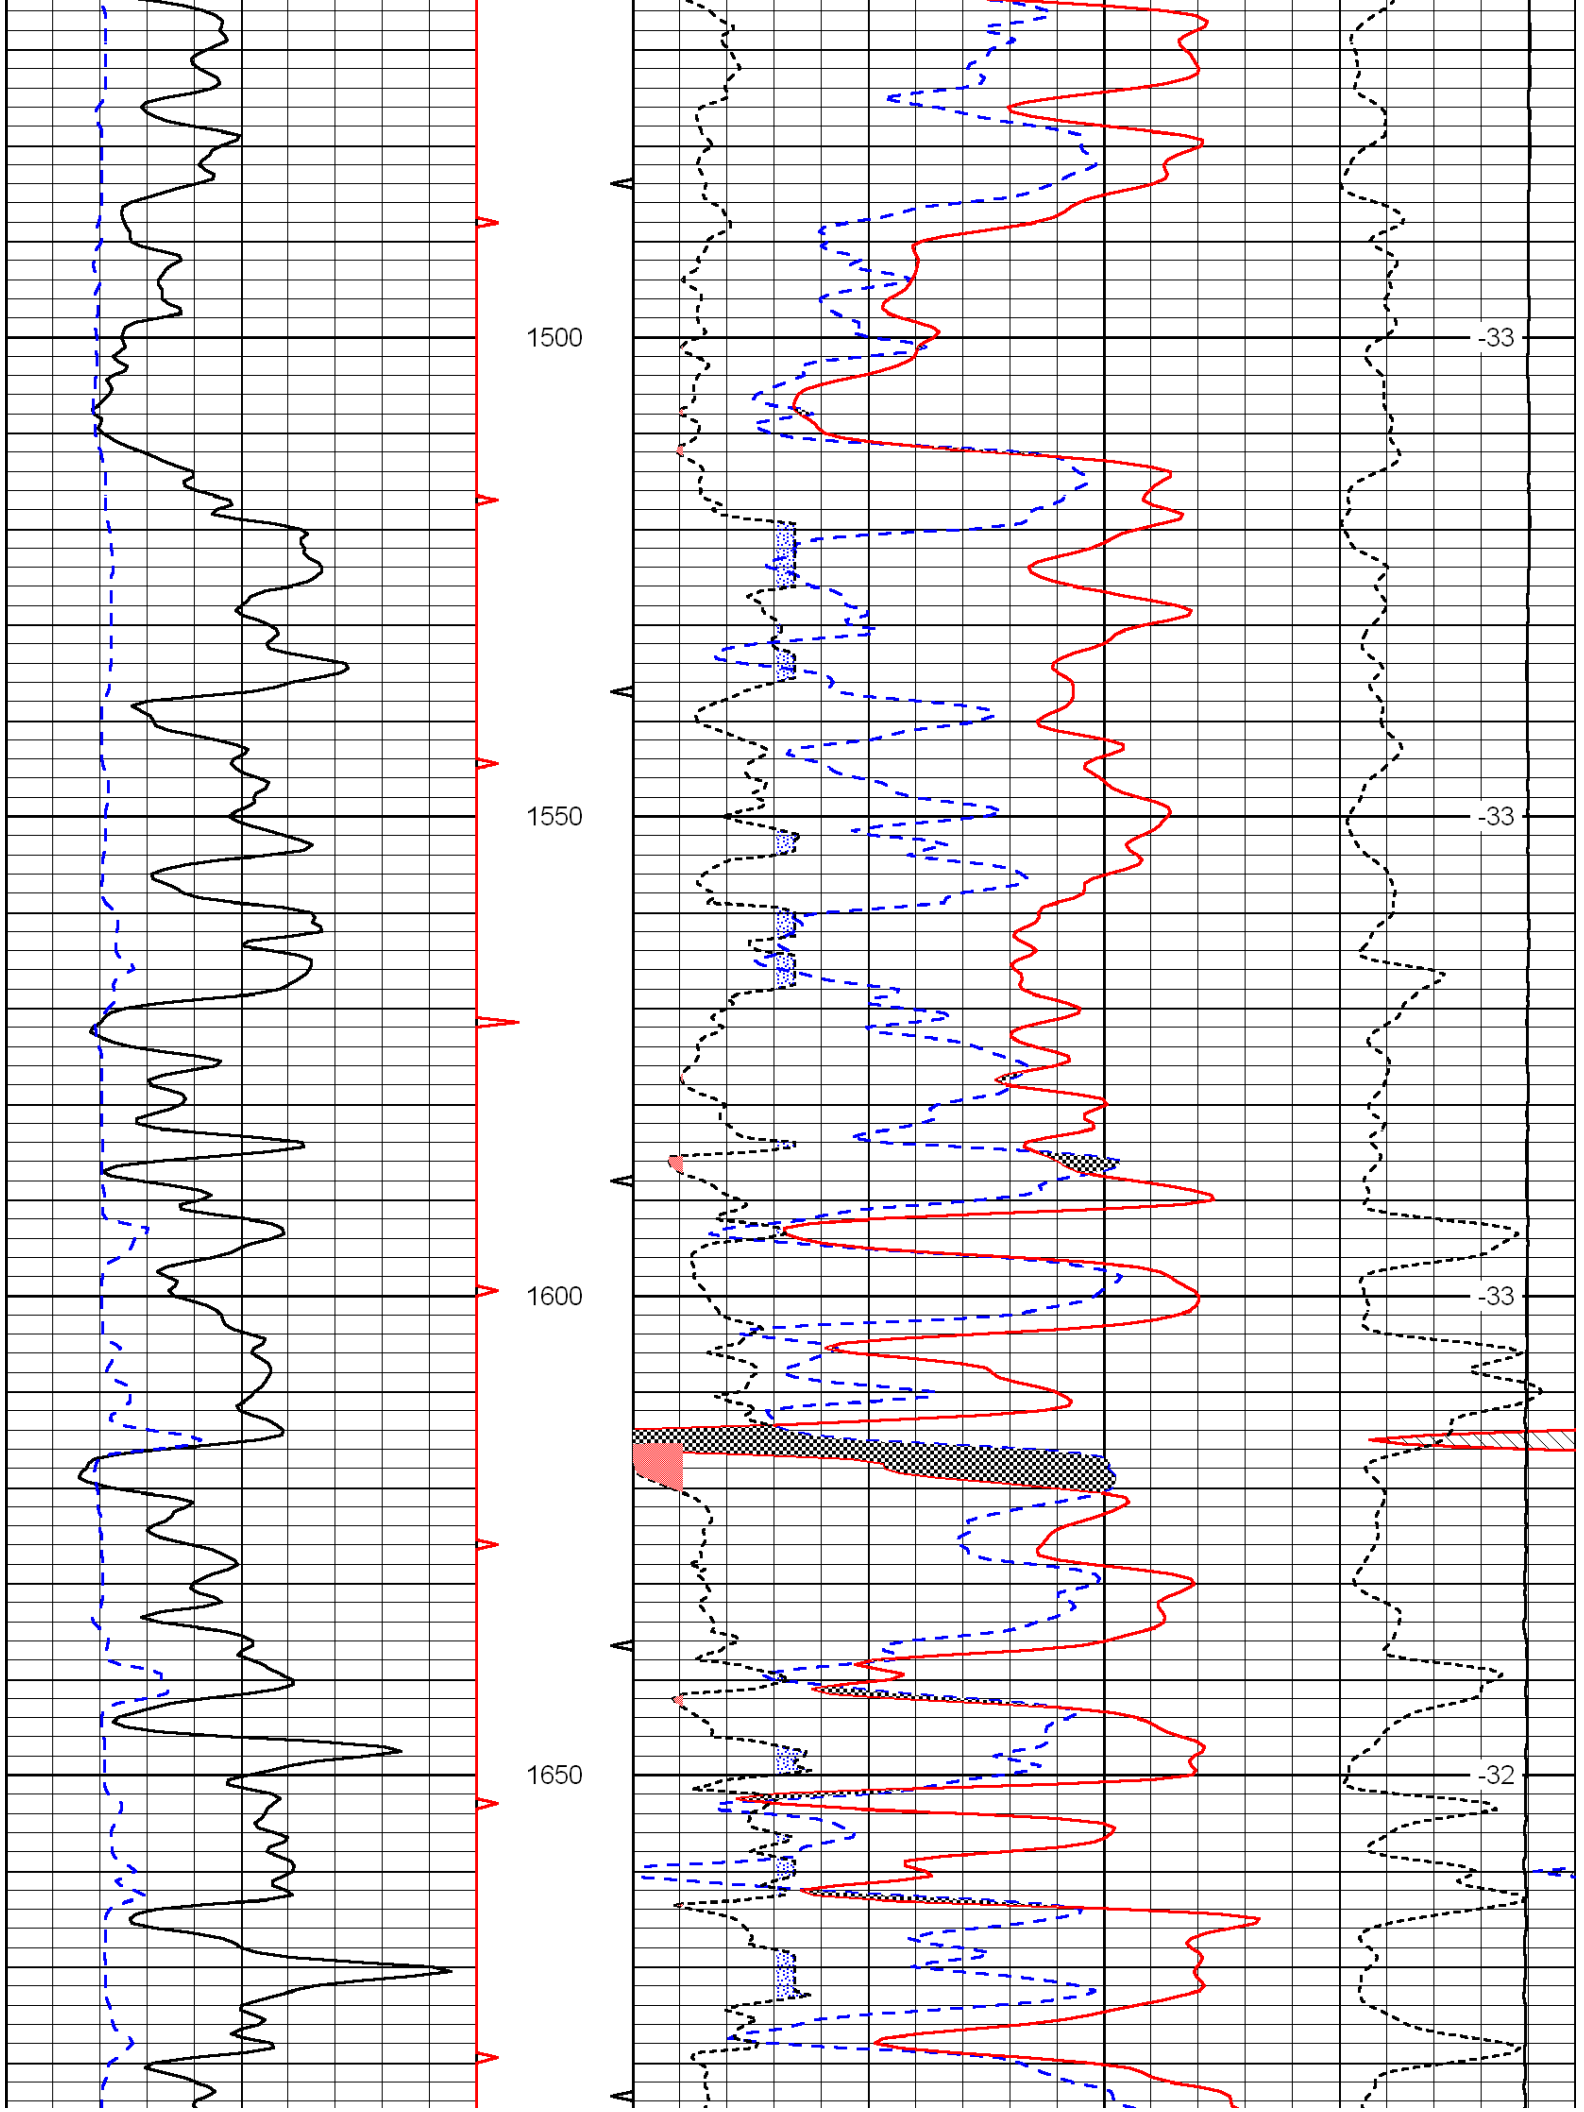
1500
1550
1600
1650
-33
-33
-33
-32

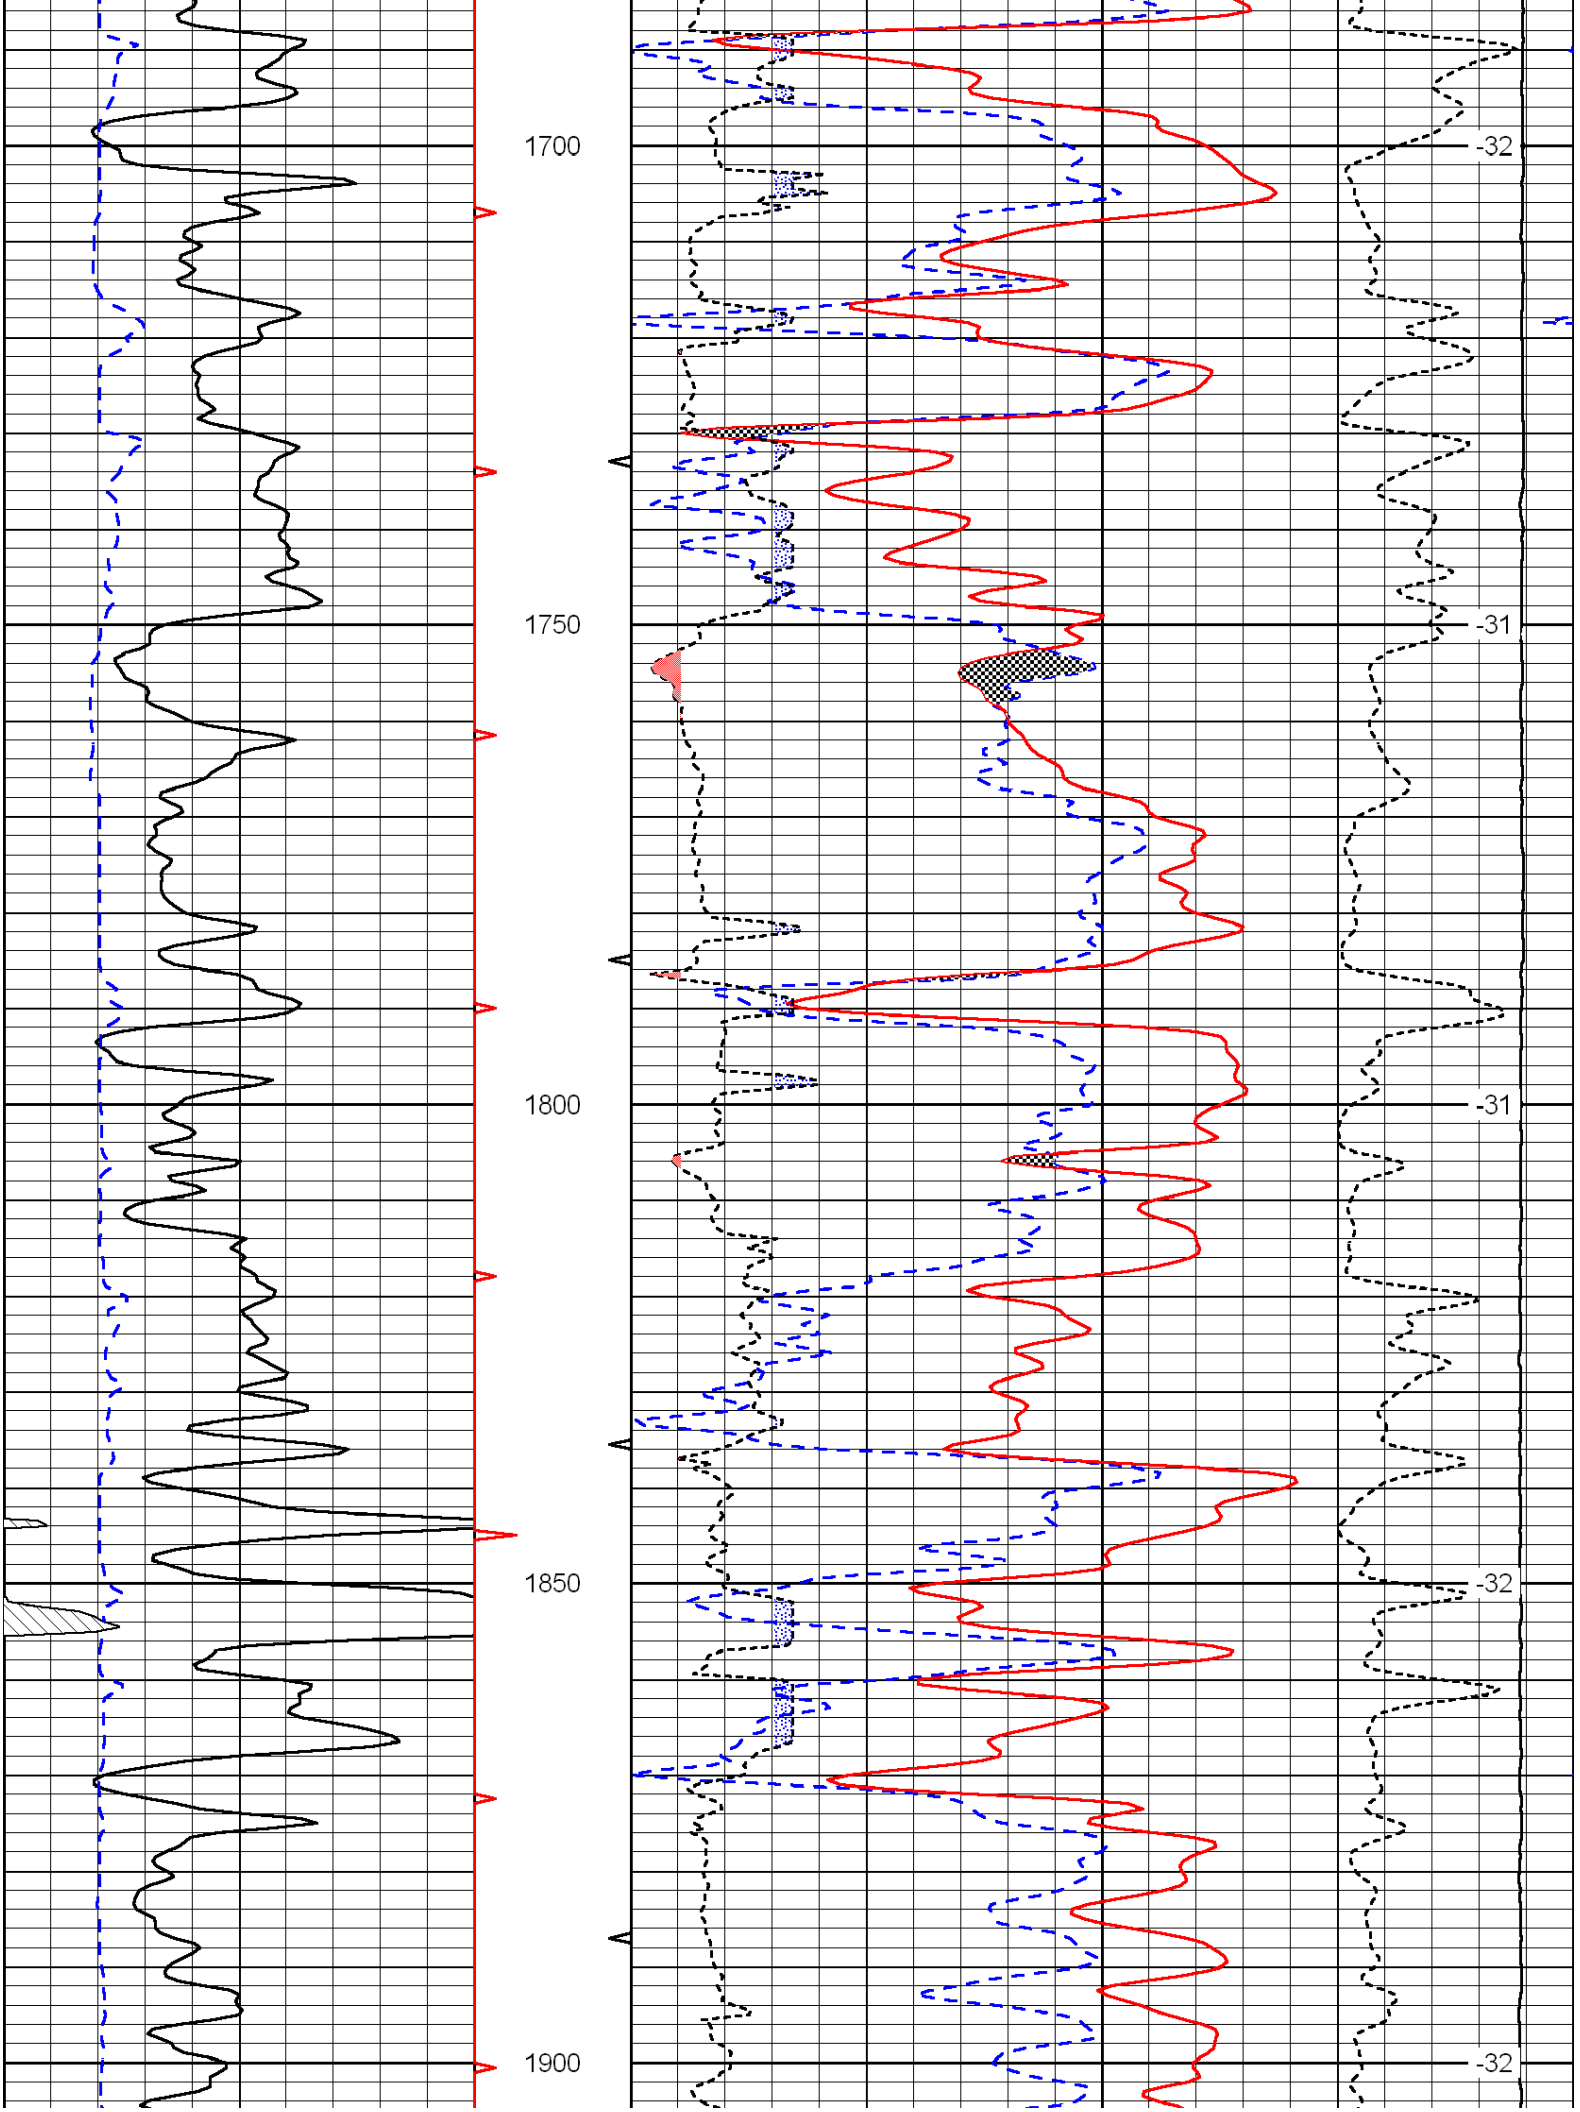
1700
1750
1800
1850
1900
-32
-31
-31
-32
-32

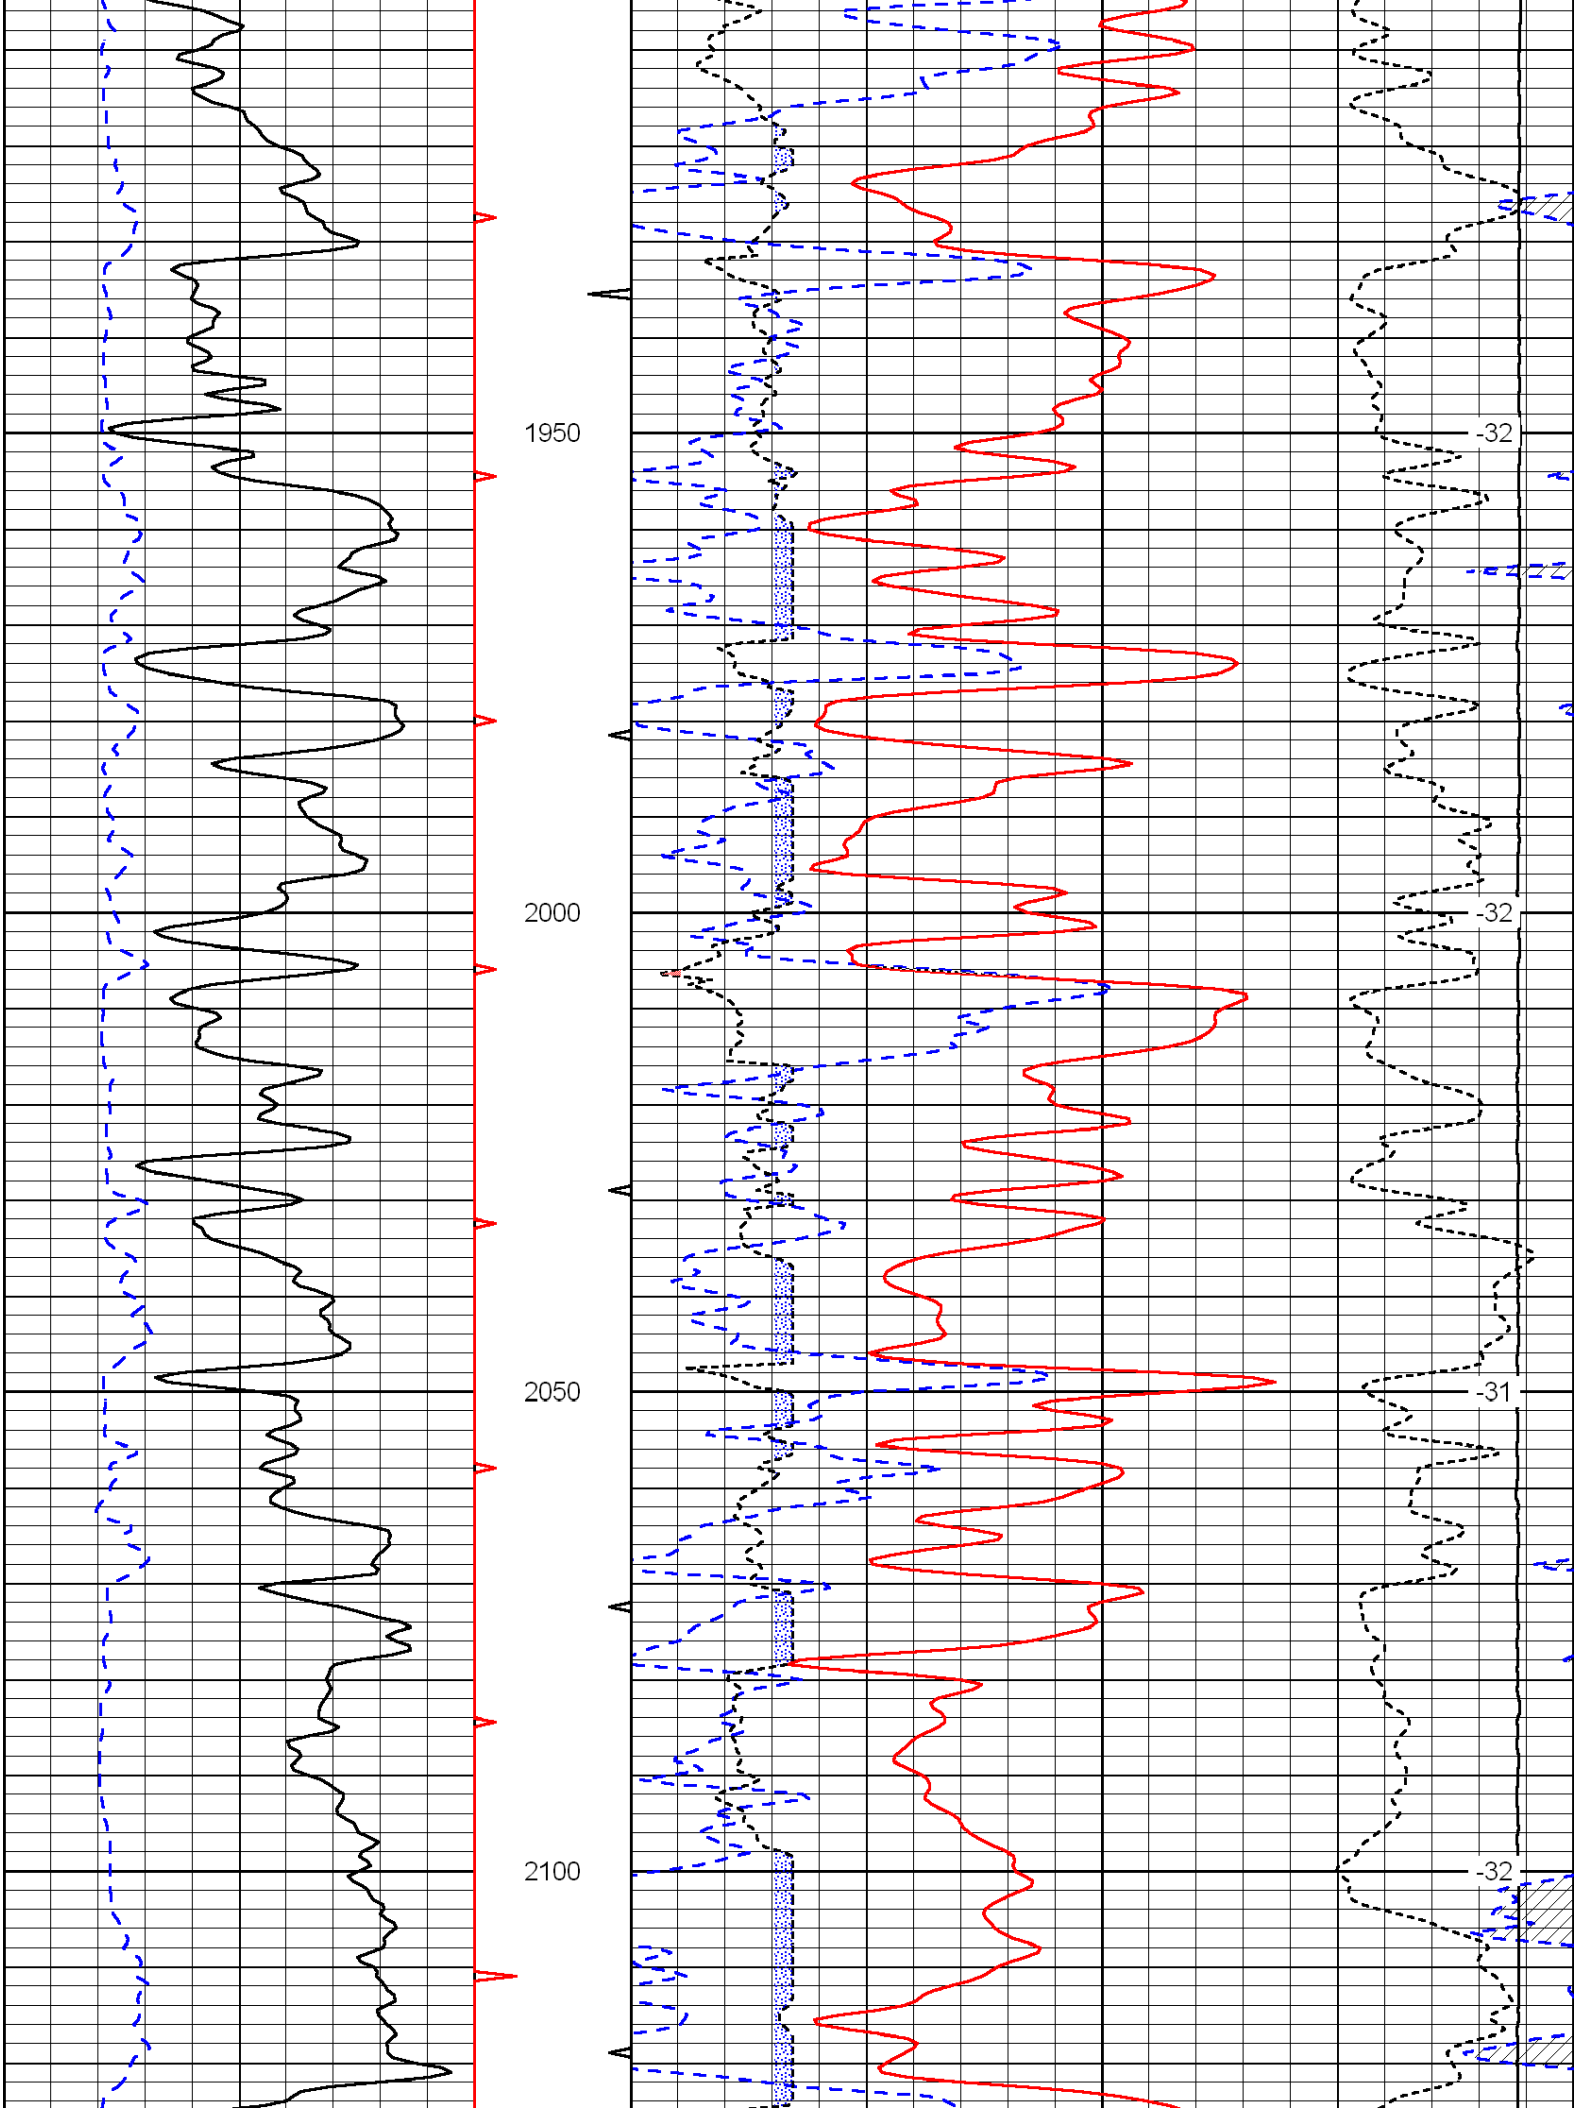
1950
2000
2050
2100
-32
-32
-31
-32

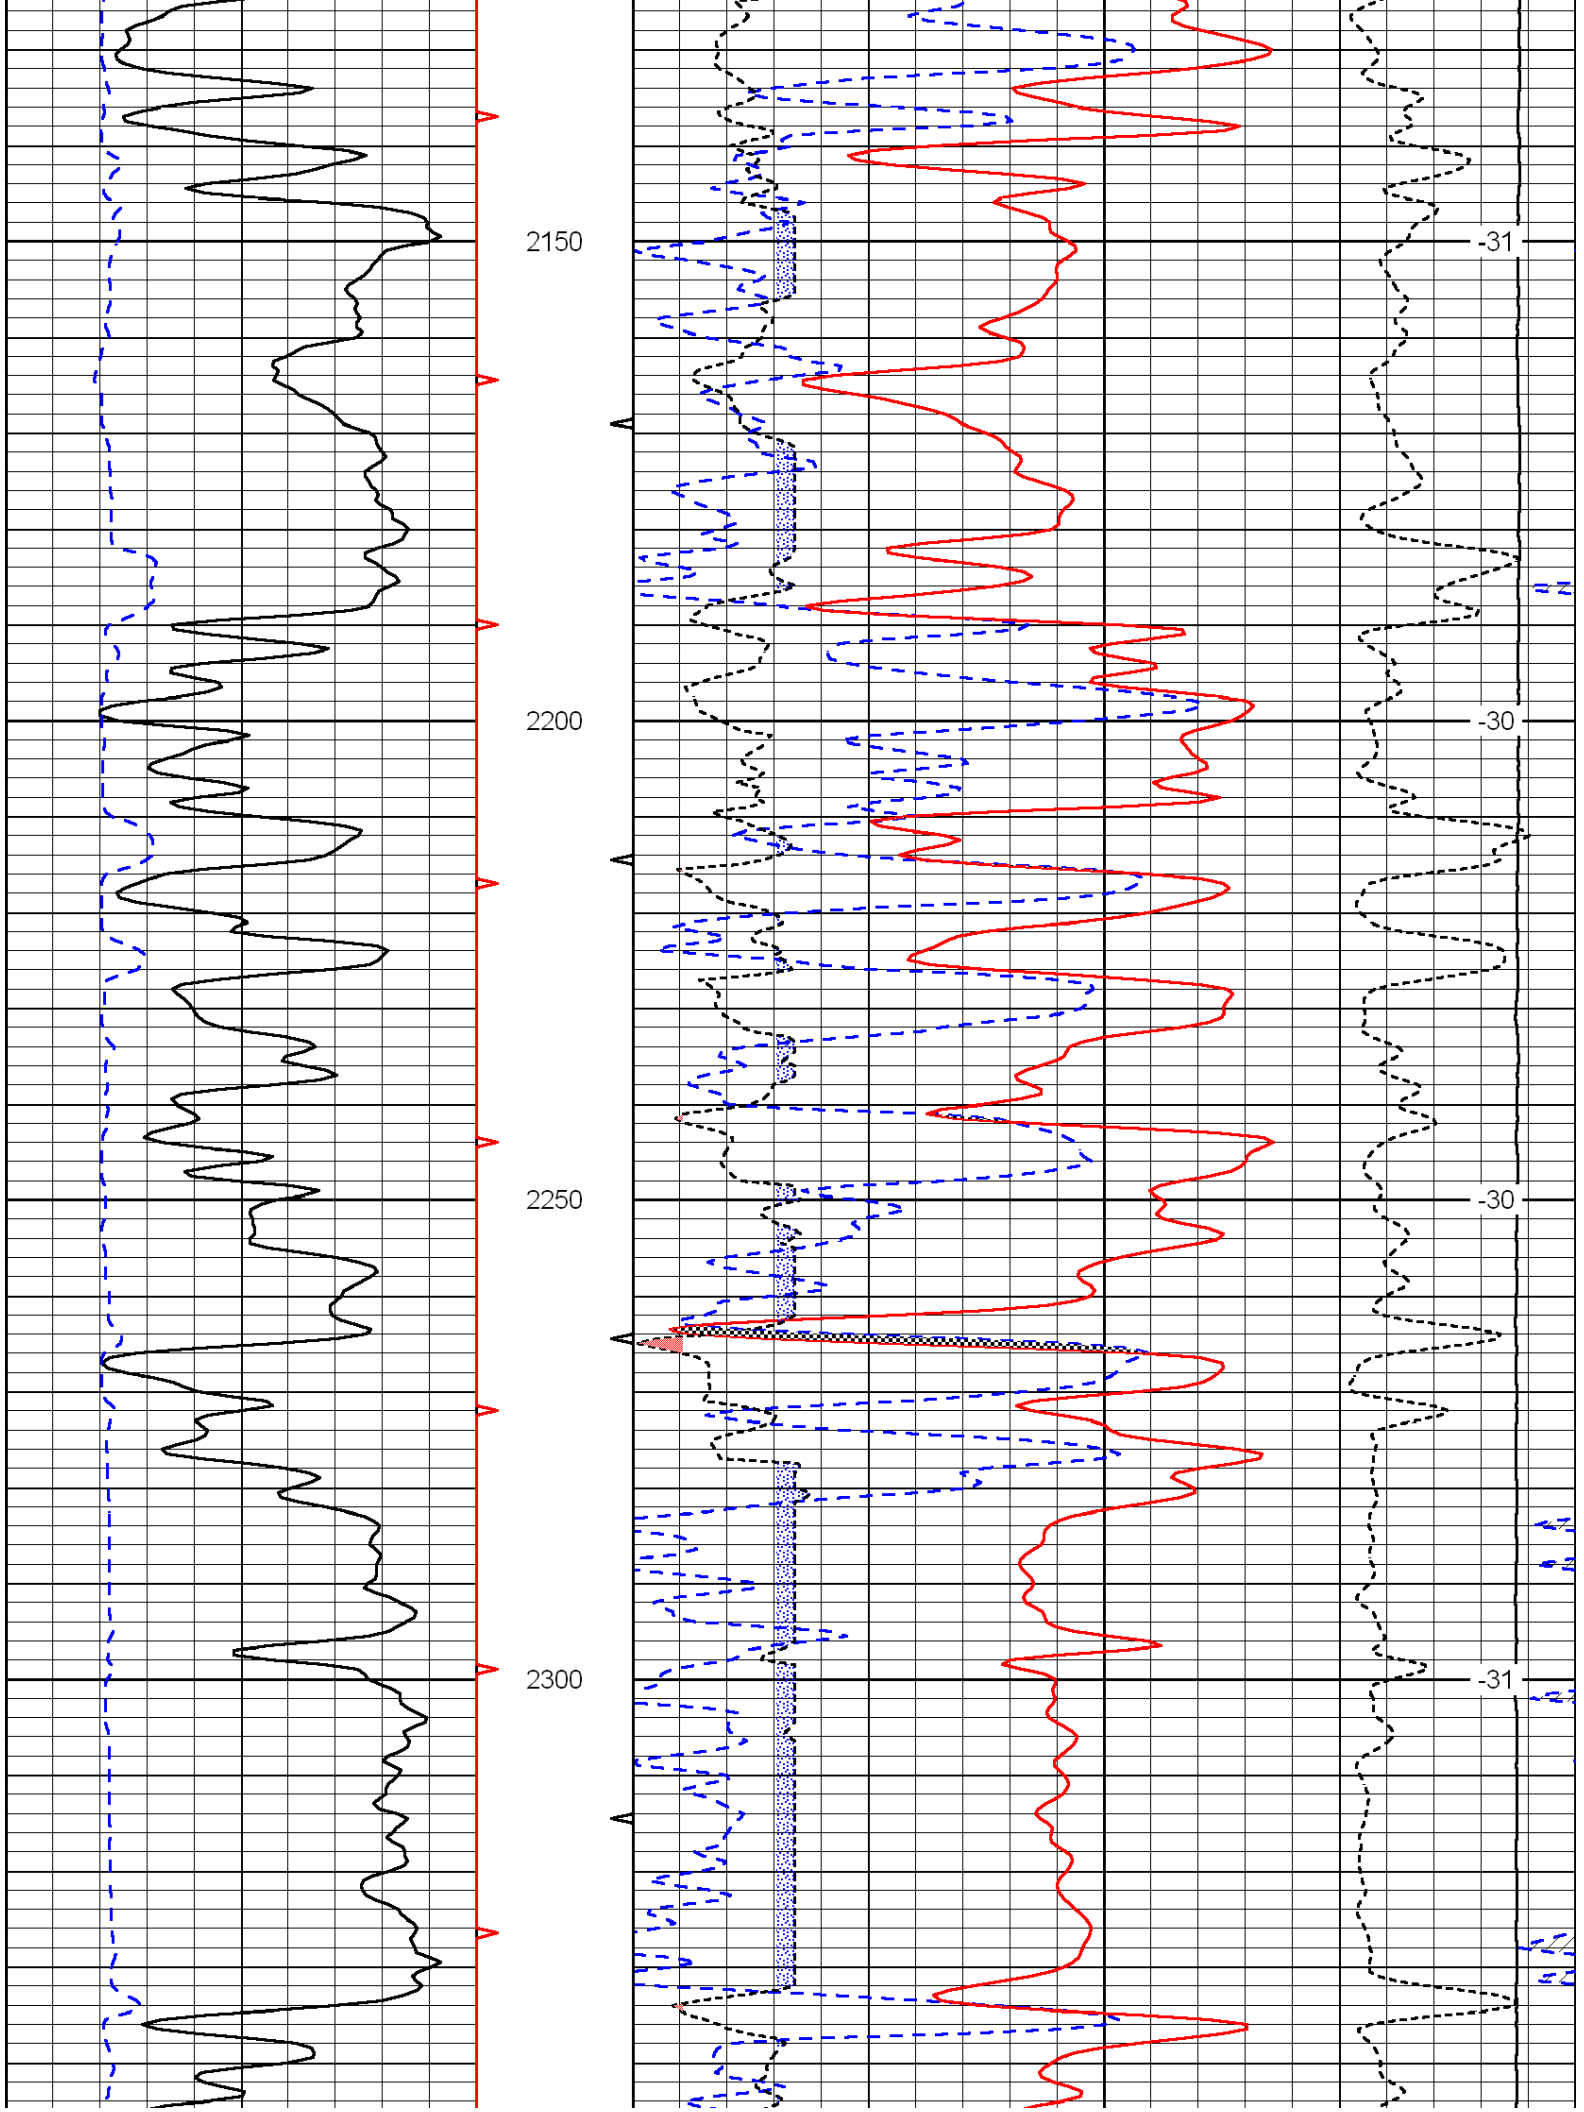
2150
2200
2250
2300
-31
-30
-30
-31

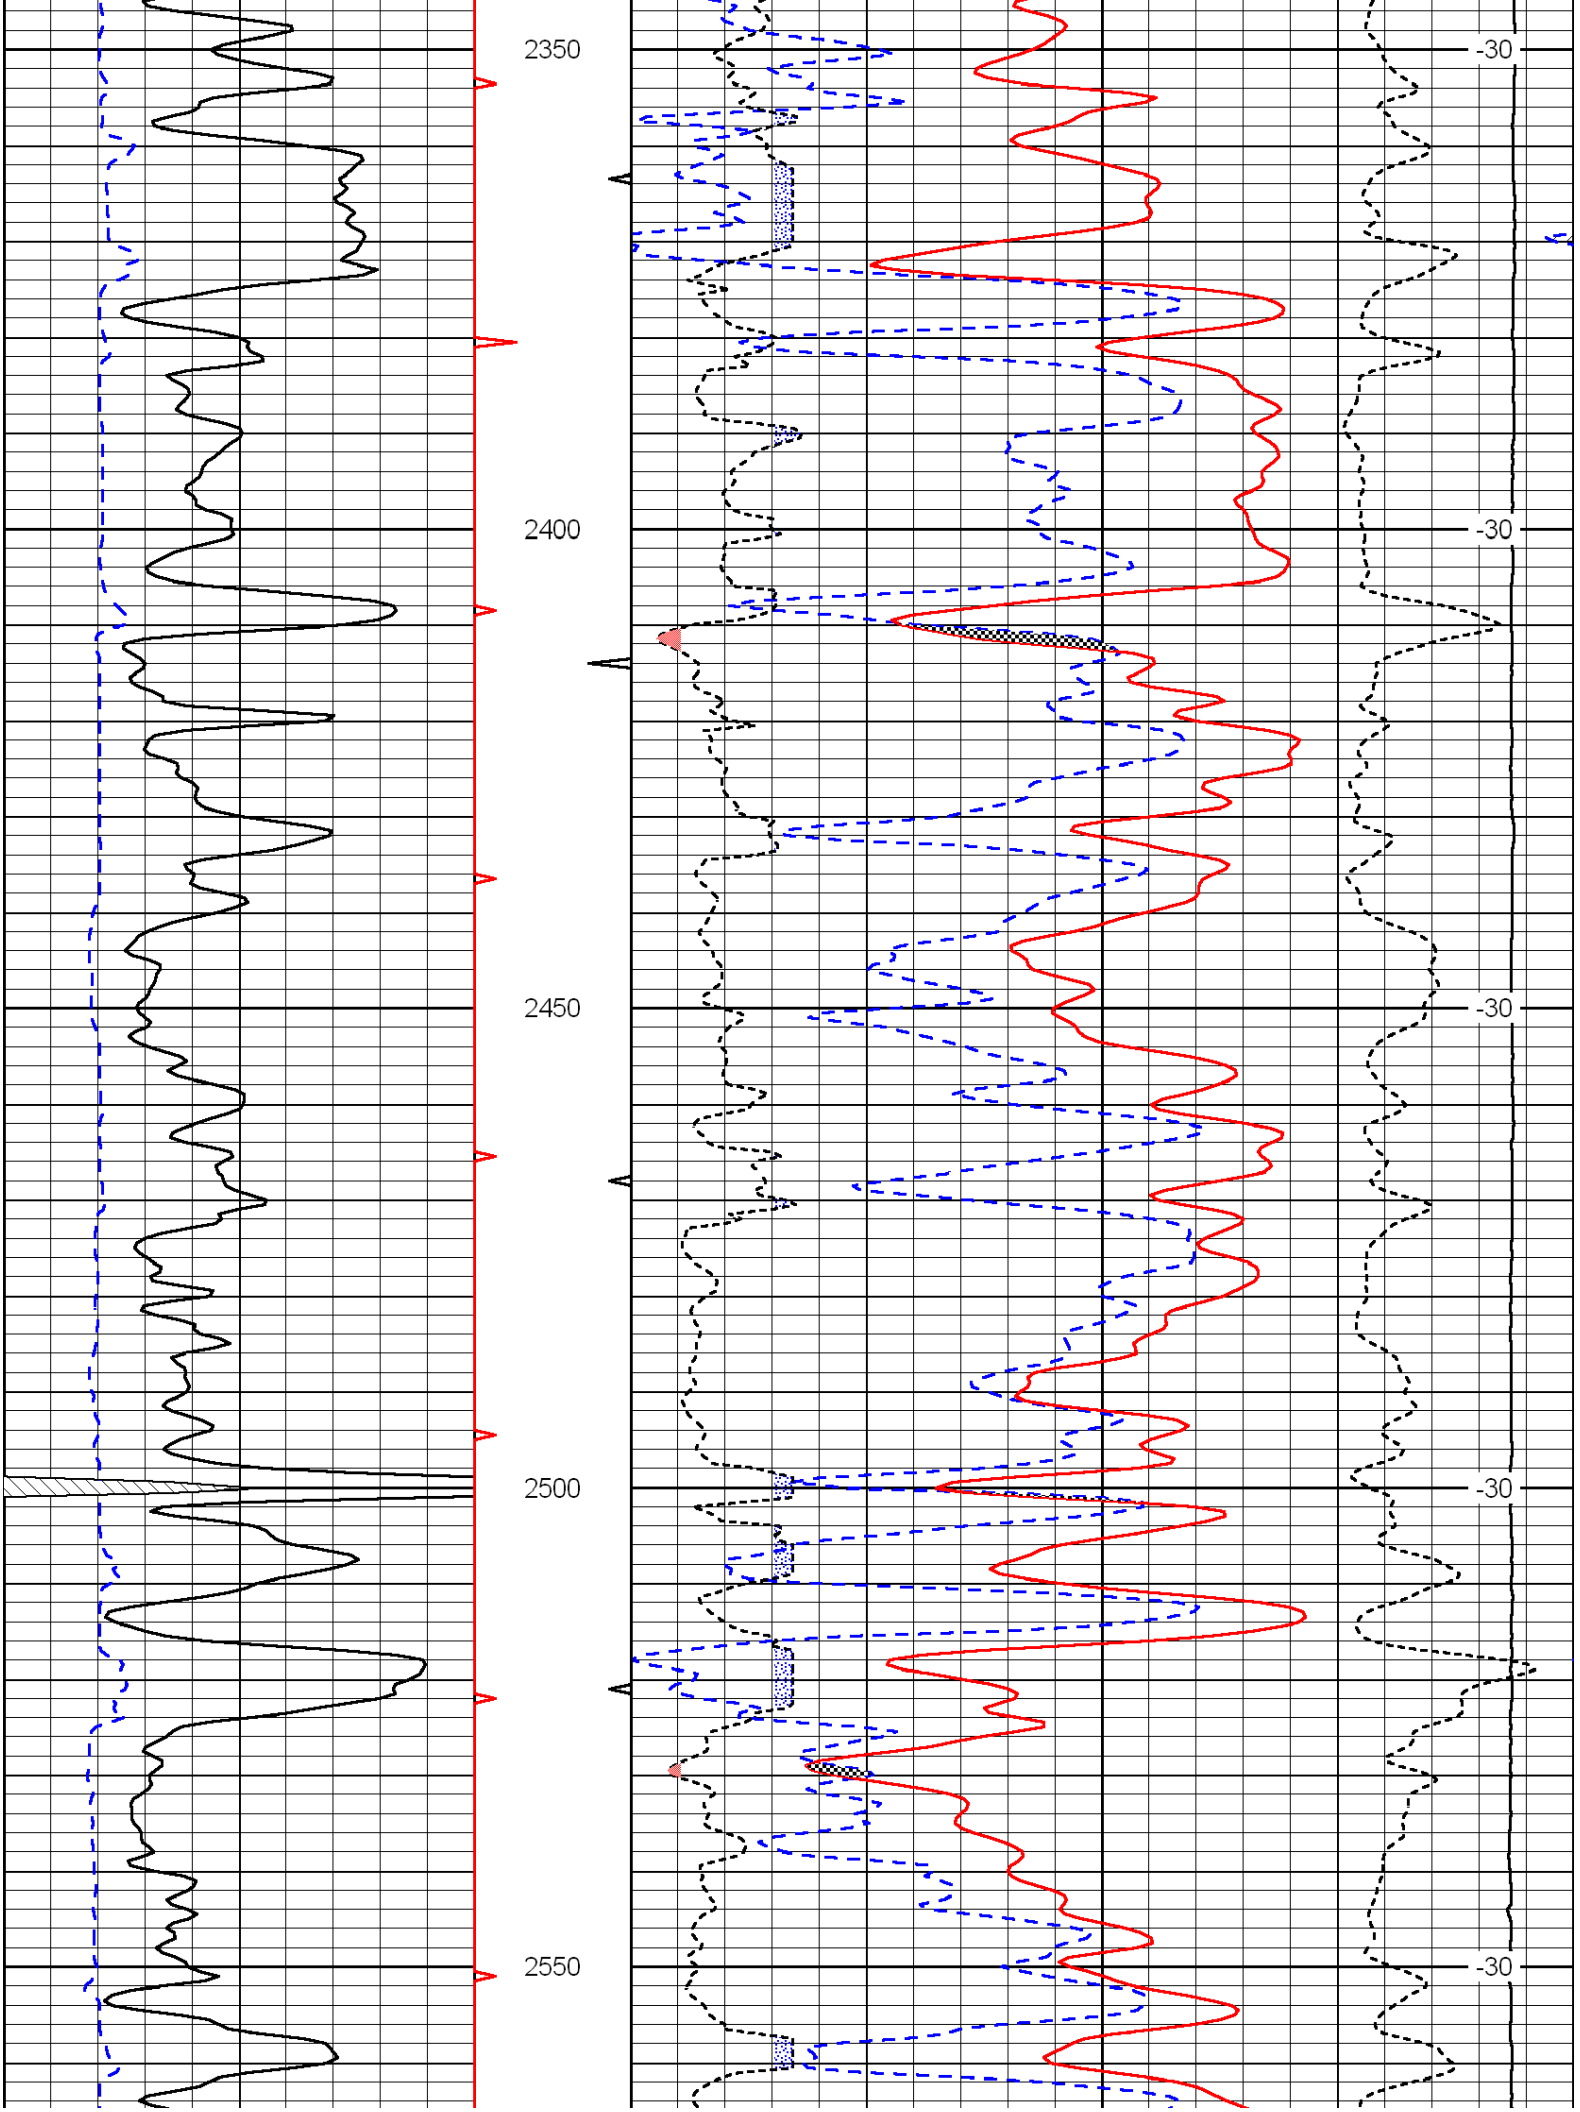
2350
2400
2450
2500
2550
-30
-30
-30
-30
-30

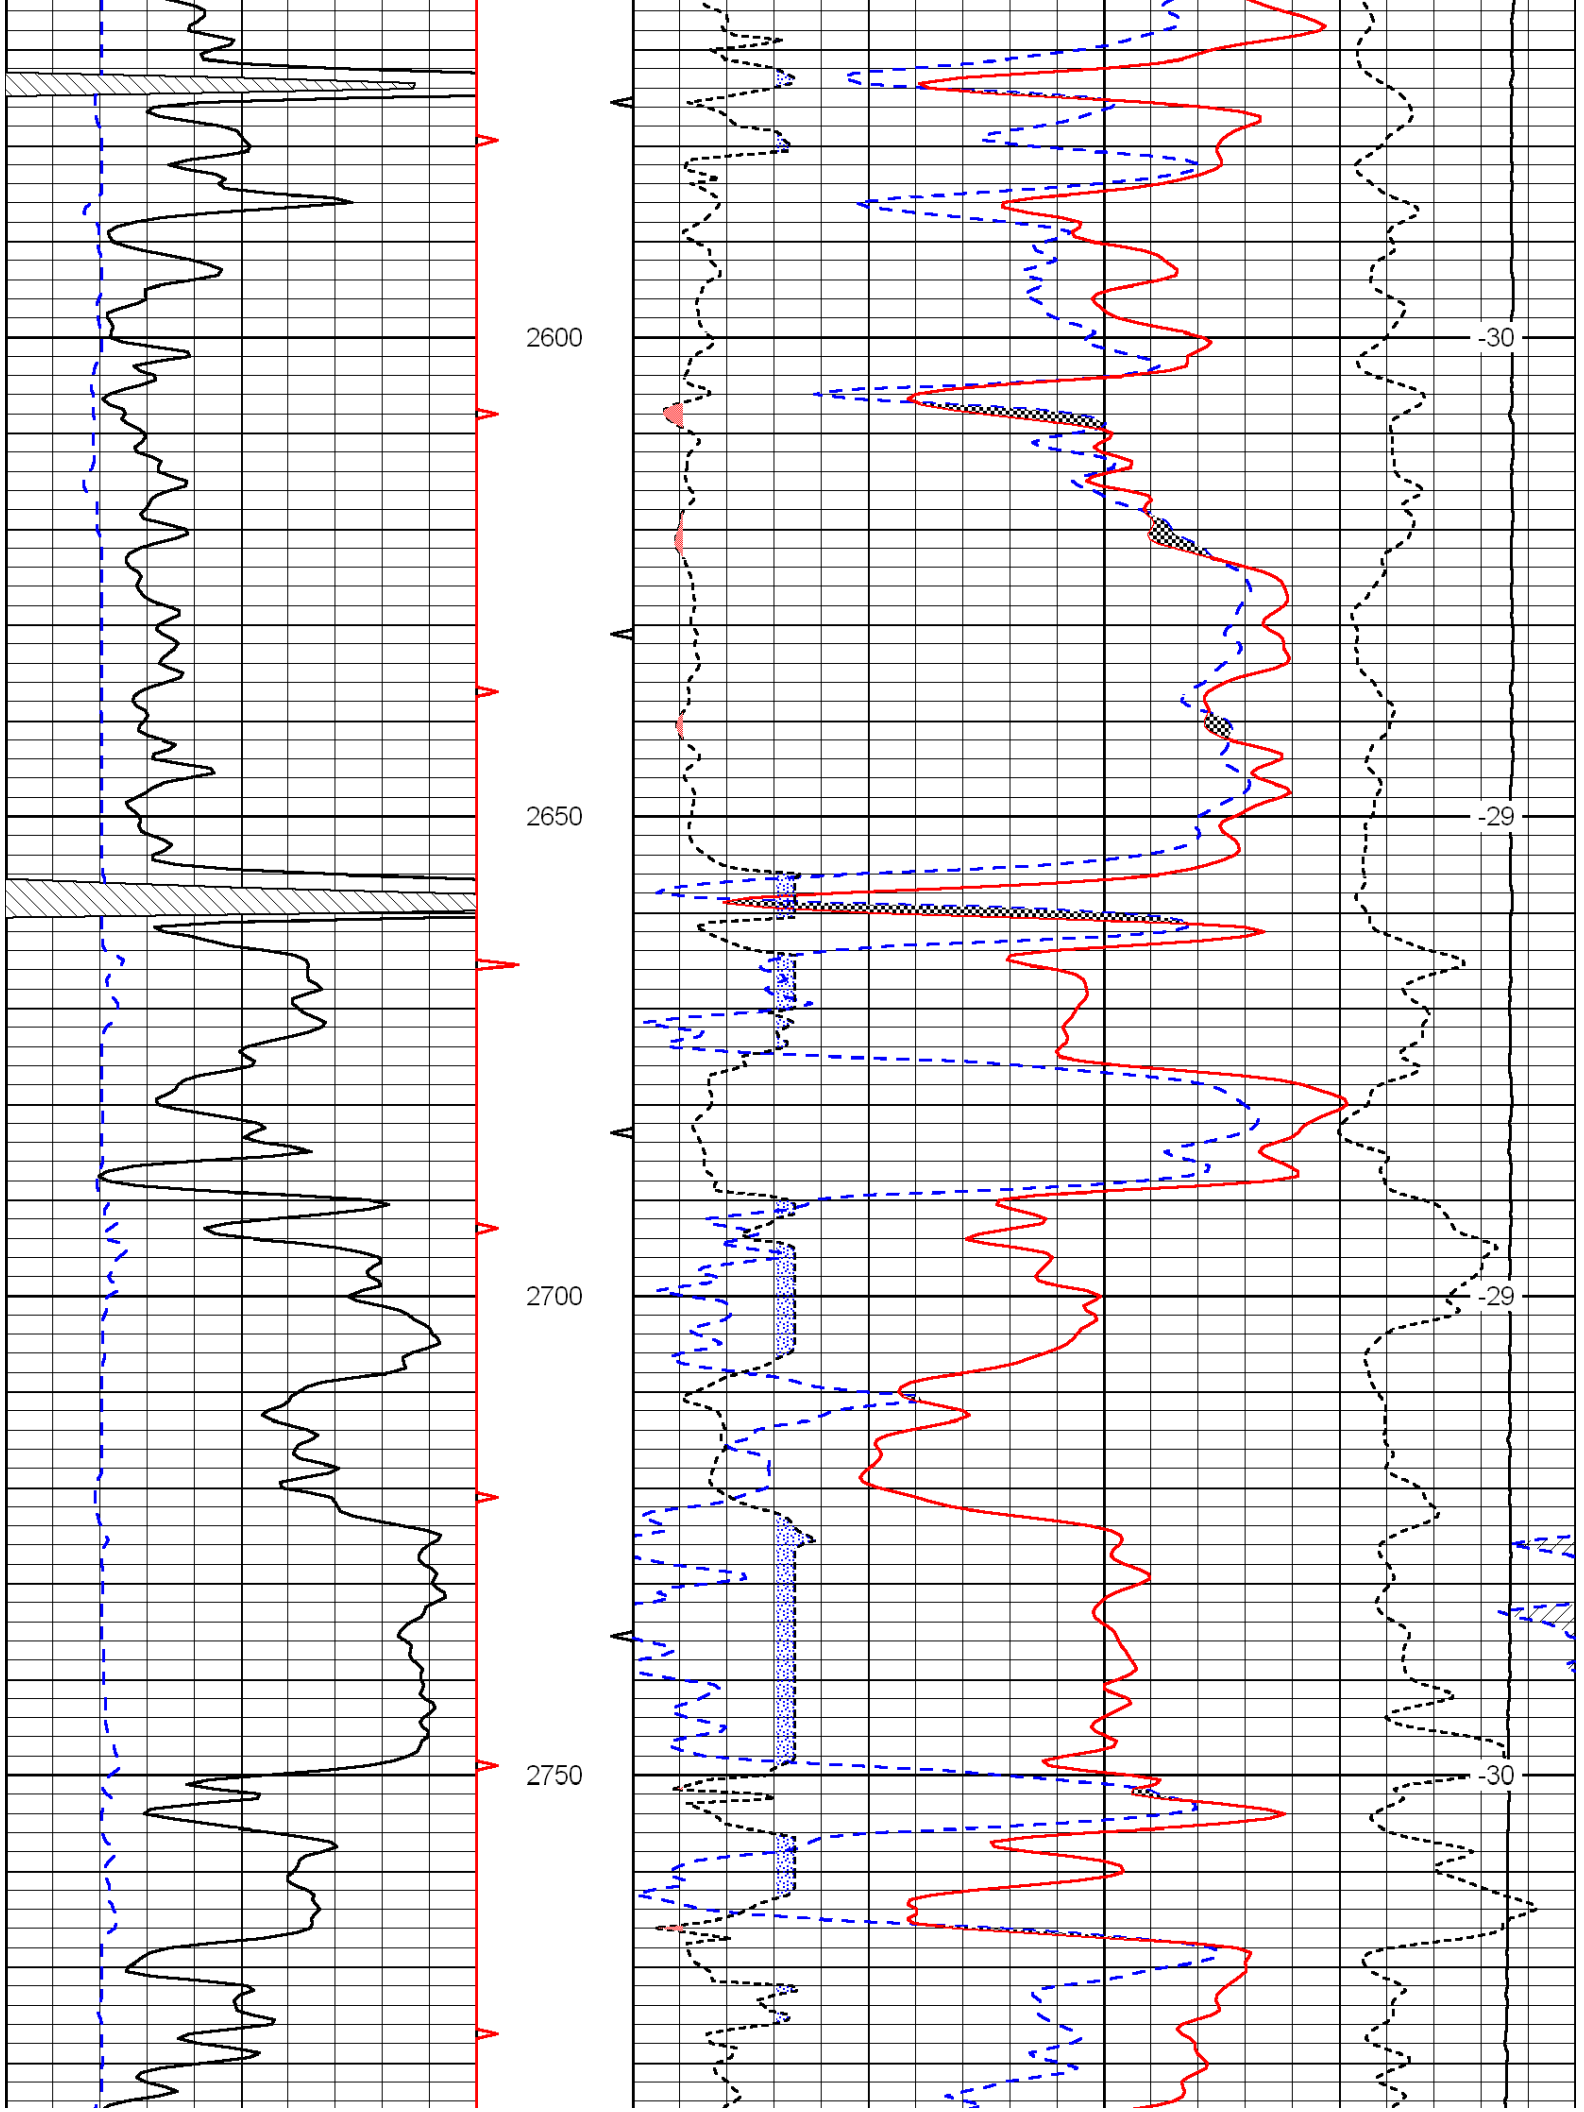
2600
2650
2700
2750
-30
-29
-29
-30

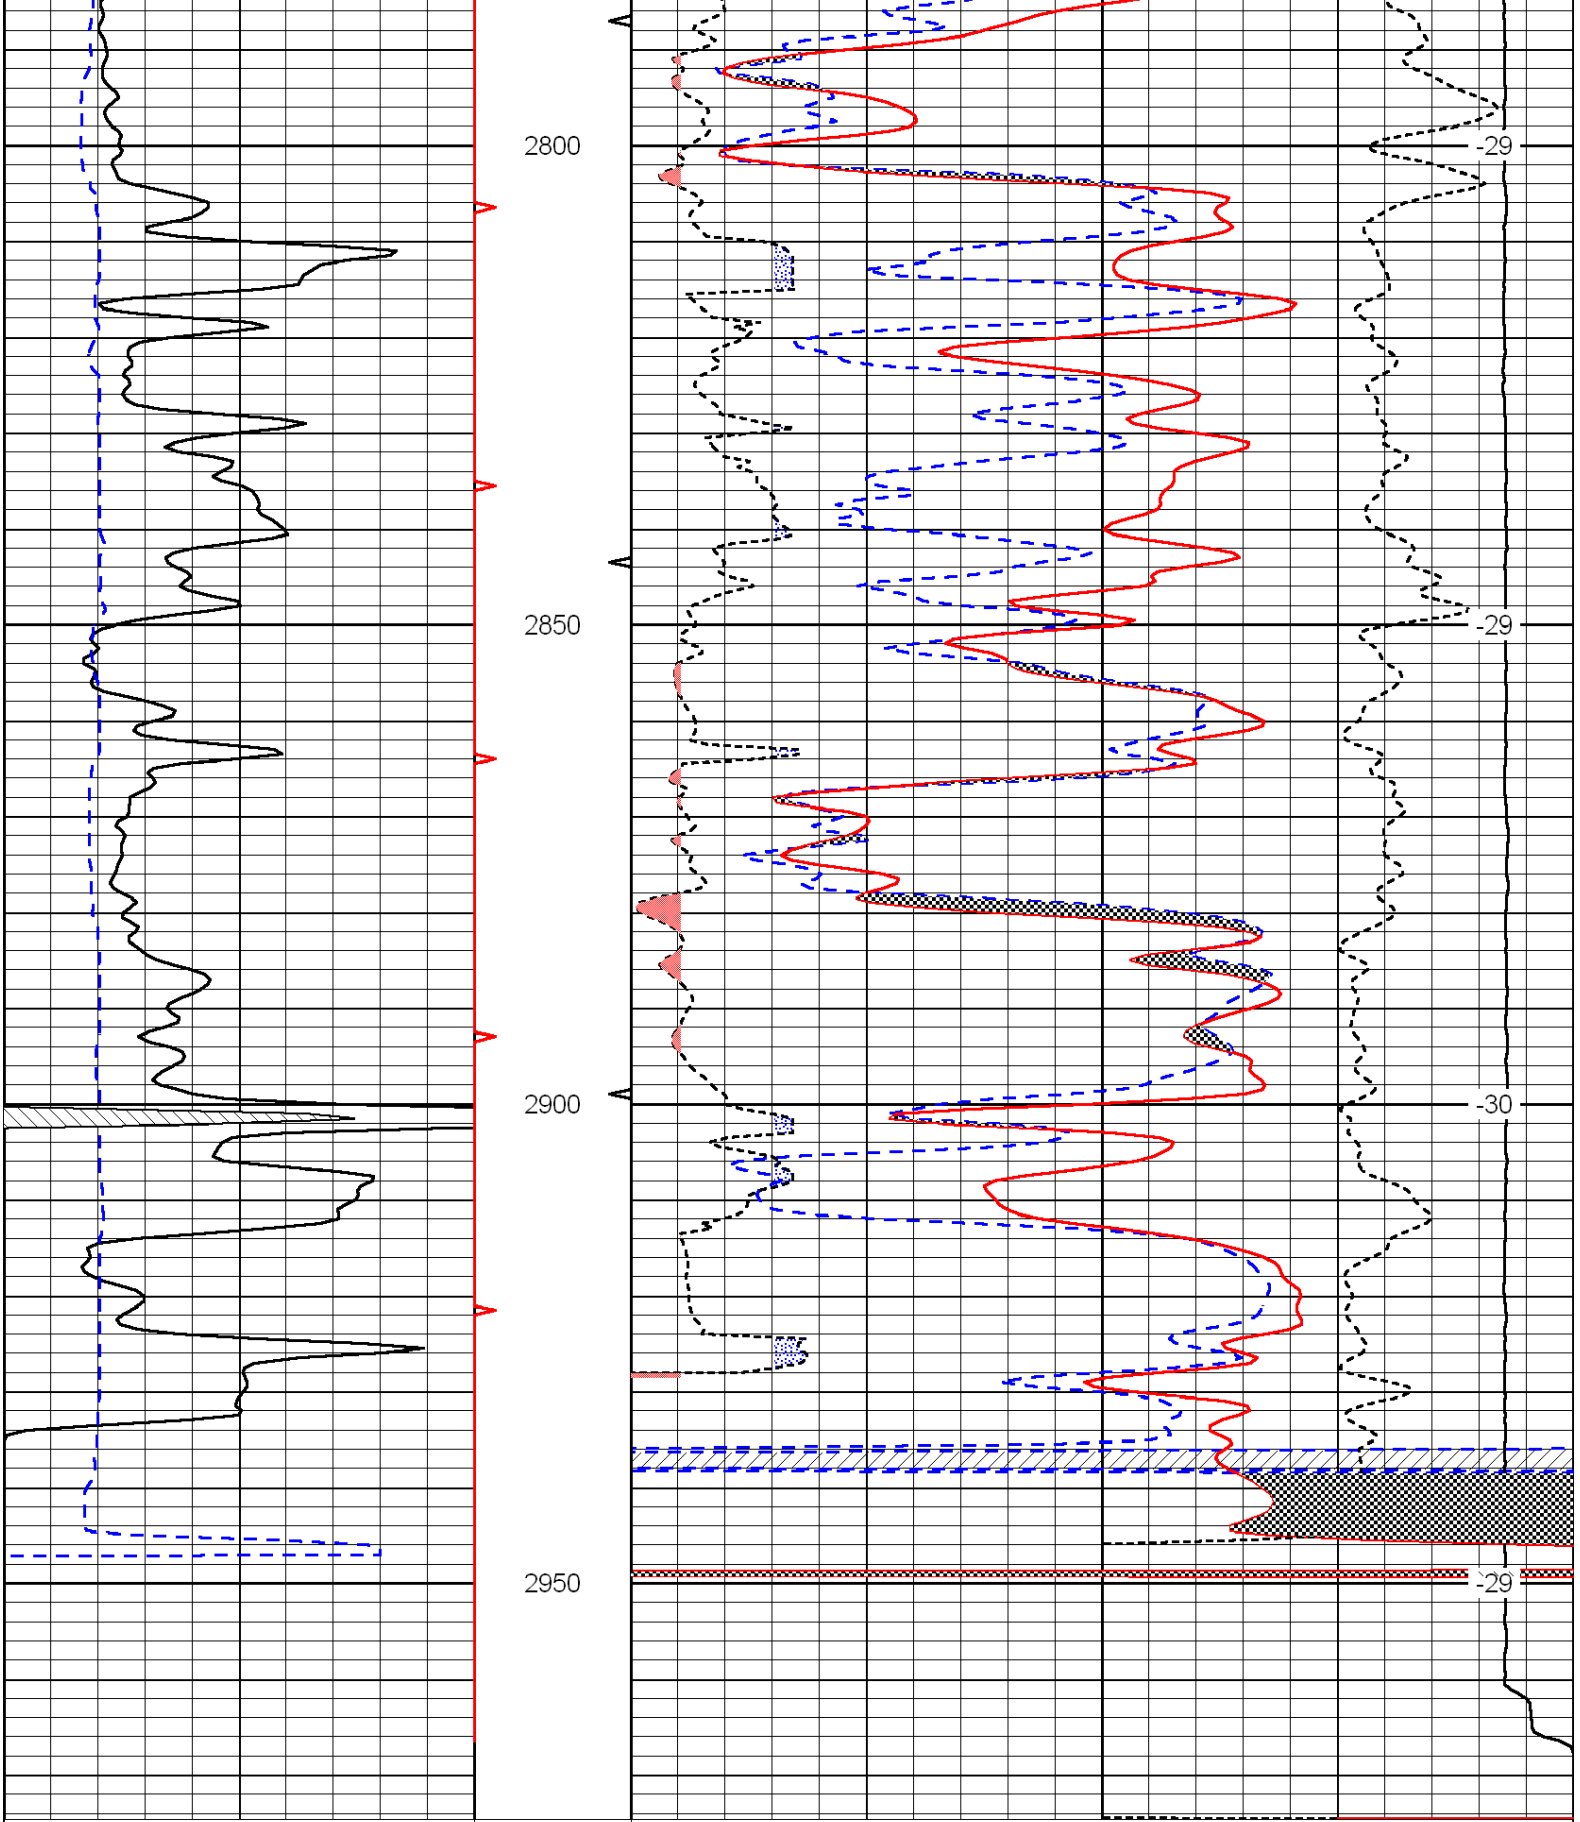

0	Gamma Ray	150
6	Caliper (in)	16

30	Compensated Neutron (Limestone) (pu)	-10
30	Compensated Density (2.71 ma) (pu)	-10
2.625	DGA (g/cc) 3.425 -0.25 Correction (g/cc)	0.25
15000	Line Tension (lb)	0

LSPD (ft/min)