



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-051-25,941-00-00

Company Damar Resources, Inc.

Well Jensen Family #1

Field Jensen

County Ellis

State

Kansas

Location

1880' FSL & 1910' FEL

Sec: 34 Twp: 12S Rge: 18W

Other Services
CNL/CDL
DIL

Elevation

K.B. 2105
D.F.
G.L. 2097

Permanent Datum Ground Level Elevation 2097
Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Date 12/09/2009

Run Number Two

Depth Driller 3685

Depth Logger 3687

Bottom Logged Interval 3686

Top Log Interval 3000

Casing Driller 8.625 @ 266

Casing Logger 263

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 3,200

Density / Viscosity 9.1 49

pH / Fluid Loss 10.0 8.8

Source of Sample Flowline

Rm @ Meas. Temp .7 @ 45

Rmf @ Meas. Temp .53 @ 45

Rmc @ Meas. Temp .95 @ 45

Source of Rmf / Rmc Charts

Rm @ BHT .27 @ 115

Operating Rig Time 4 Hours

Max Rec. Temp. F 115

Equipment Number 17

Location Hays

Recorded By C. McLaughlin

Witnessed By Randy Kilian

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Hays, N on 183 hwy to Feedlot Rd, 1E, 1 1/2N
W into

Database File: c:\warrior\data\damar_jensen family #1\damarhd.db
Dataset Pathname: dil/stack
Presentation Format: micro
Dataset Creation: Wed Dec 09 14:37:42 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

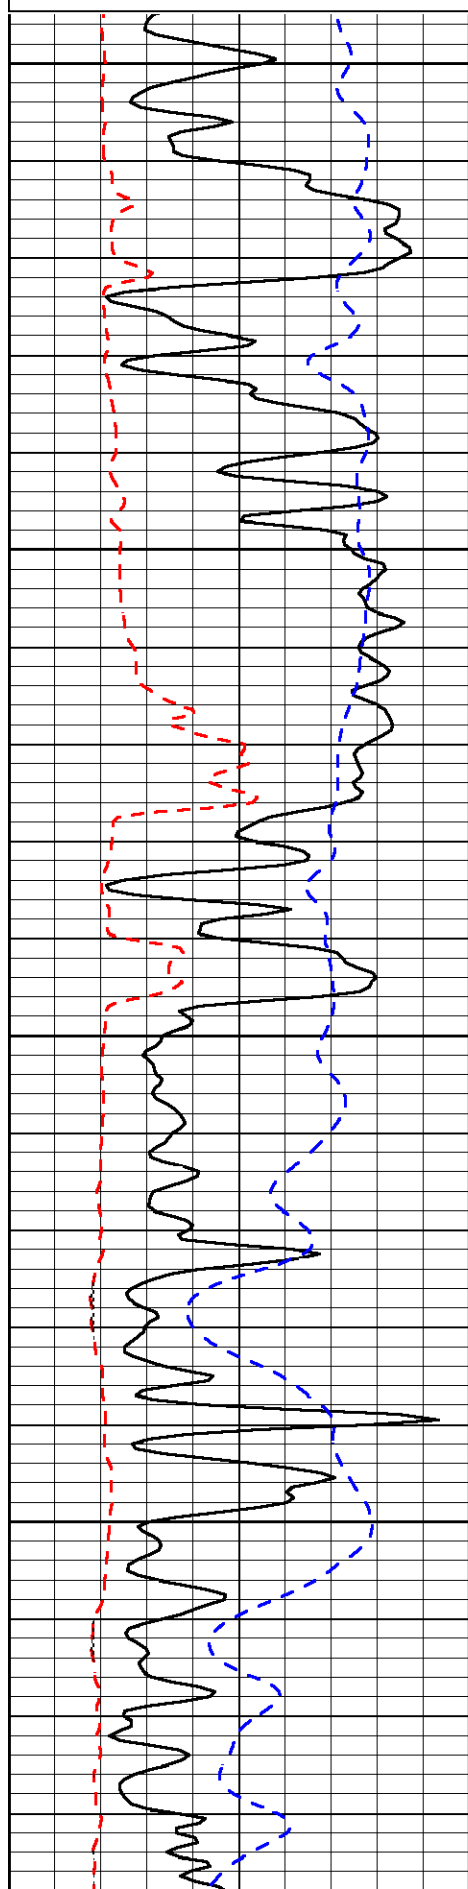


3000

3050

3100

3150

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

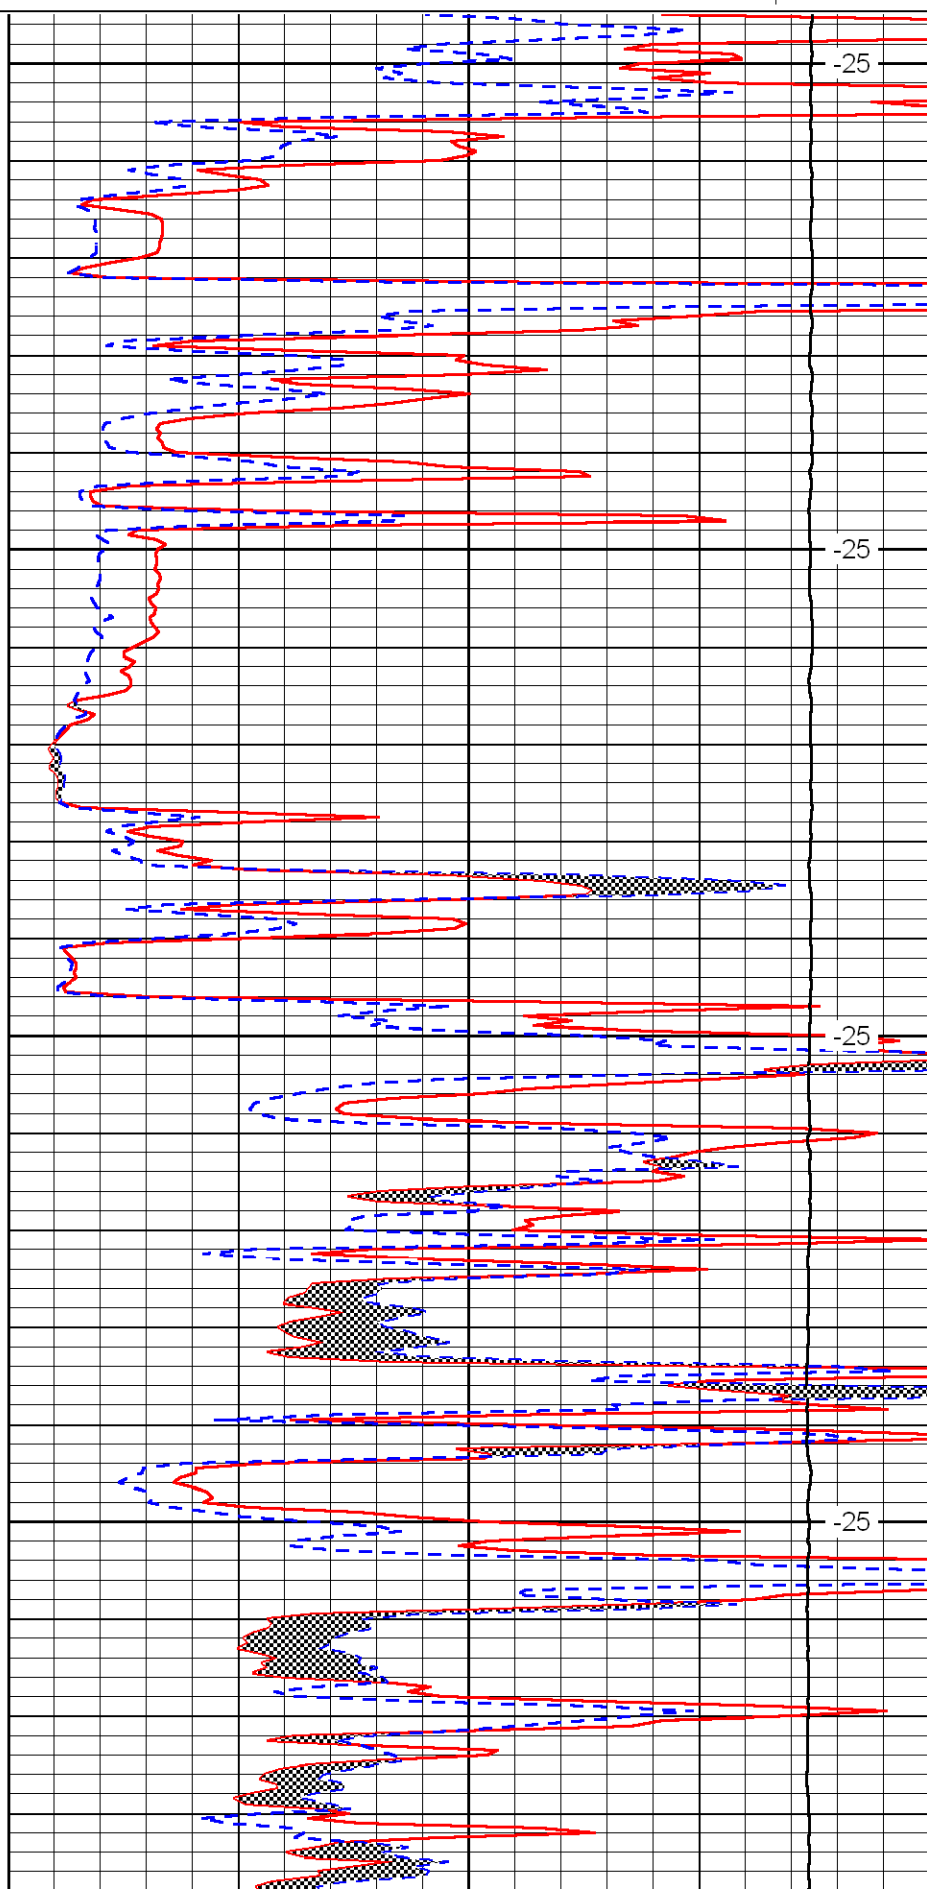


LSPD
(ft/min)

-25

-25

-25

-25

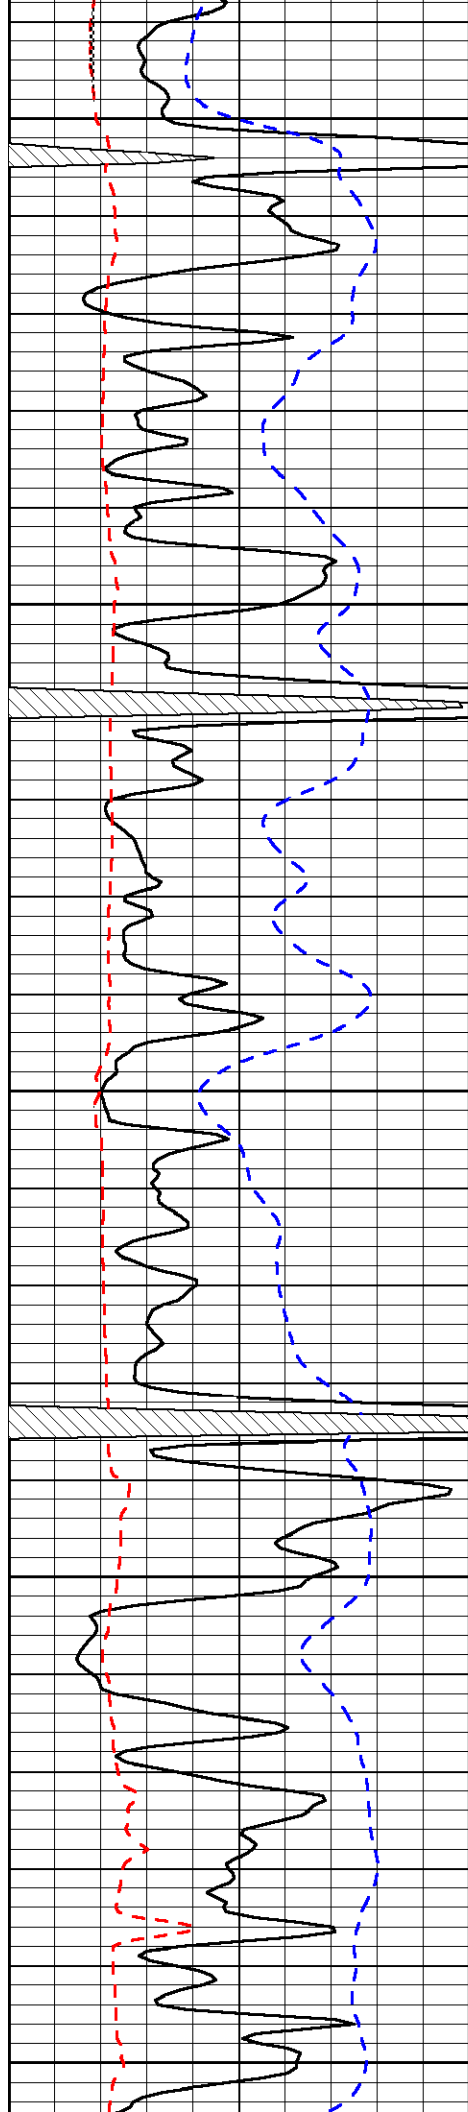


3200

3250

3300

3350

3400

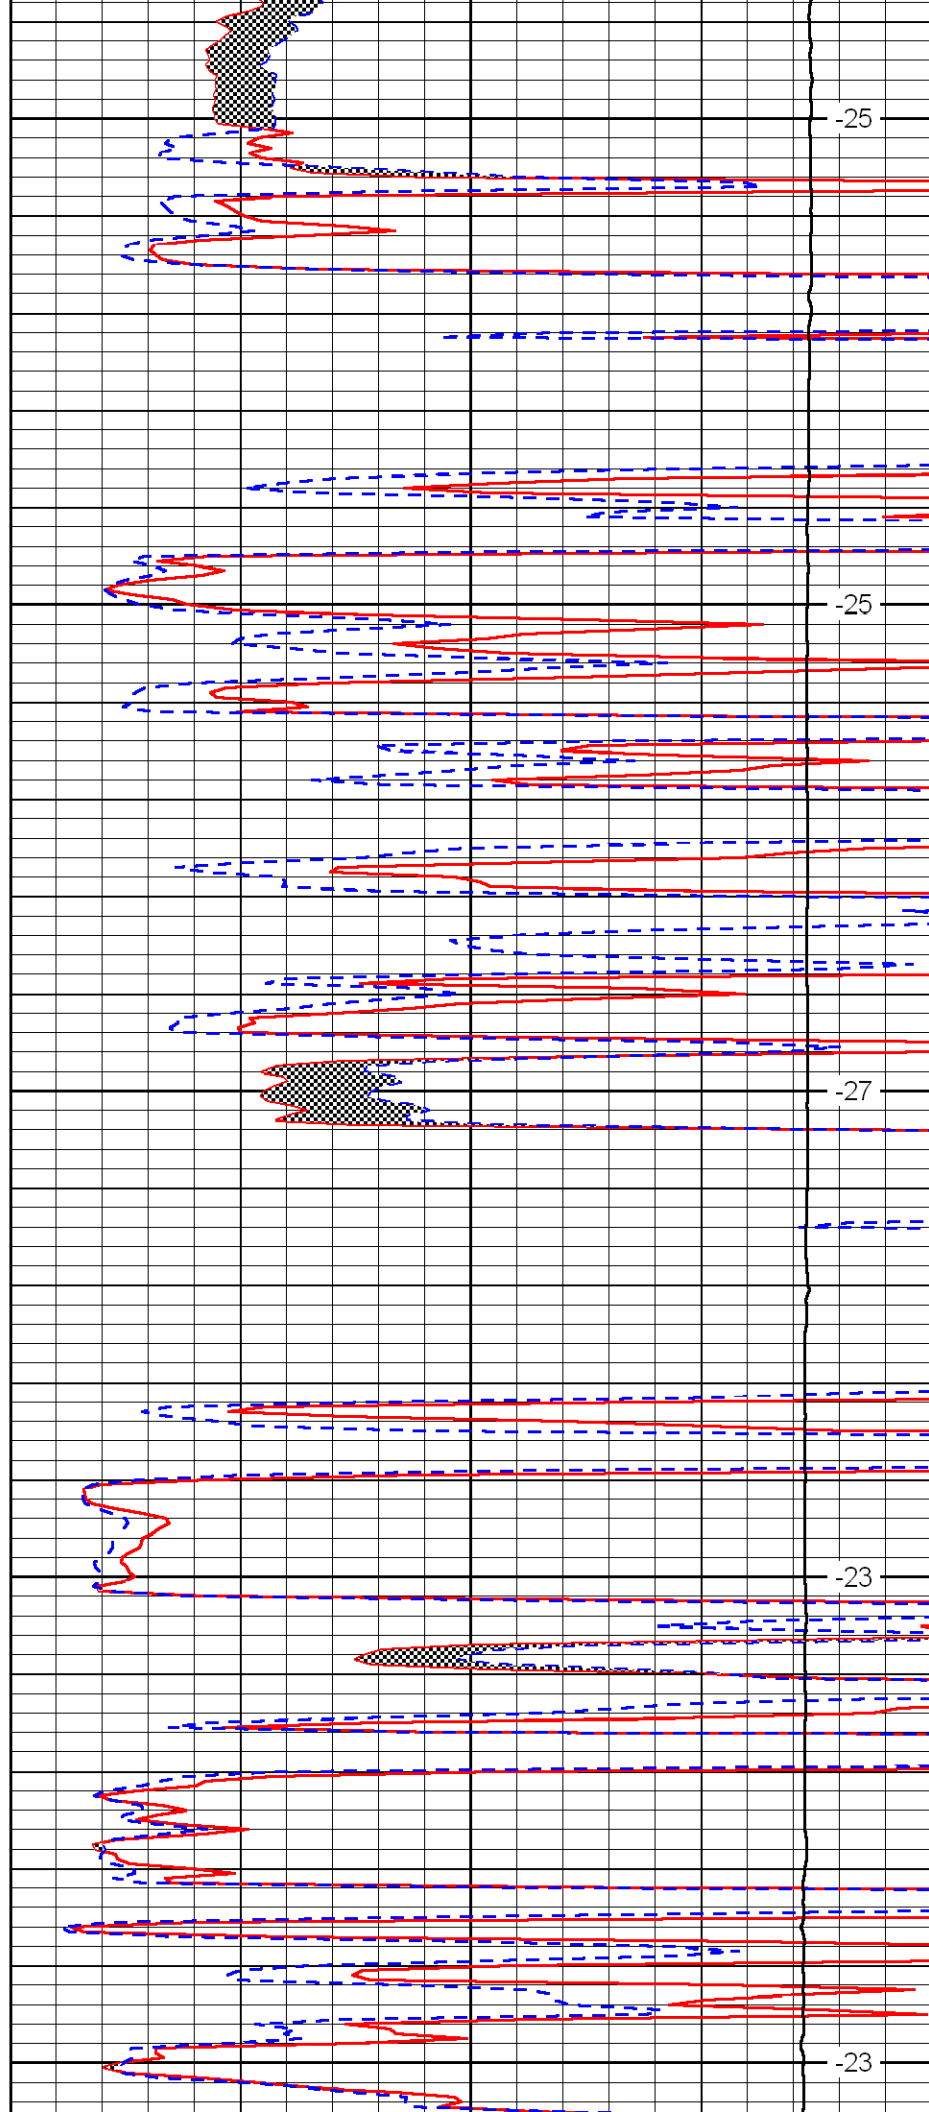


-25

-25

-27

-23

-23

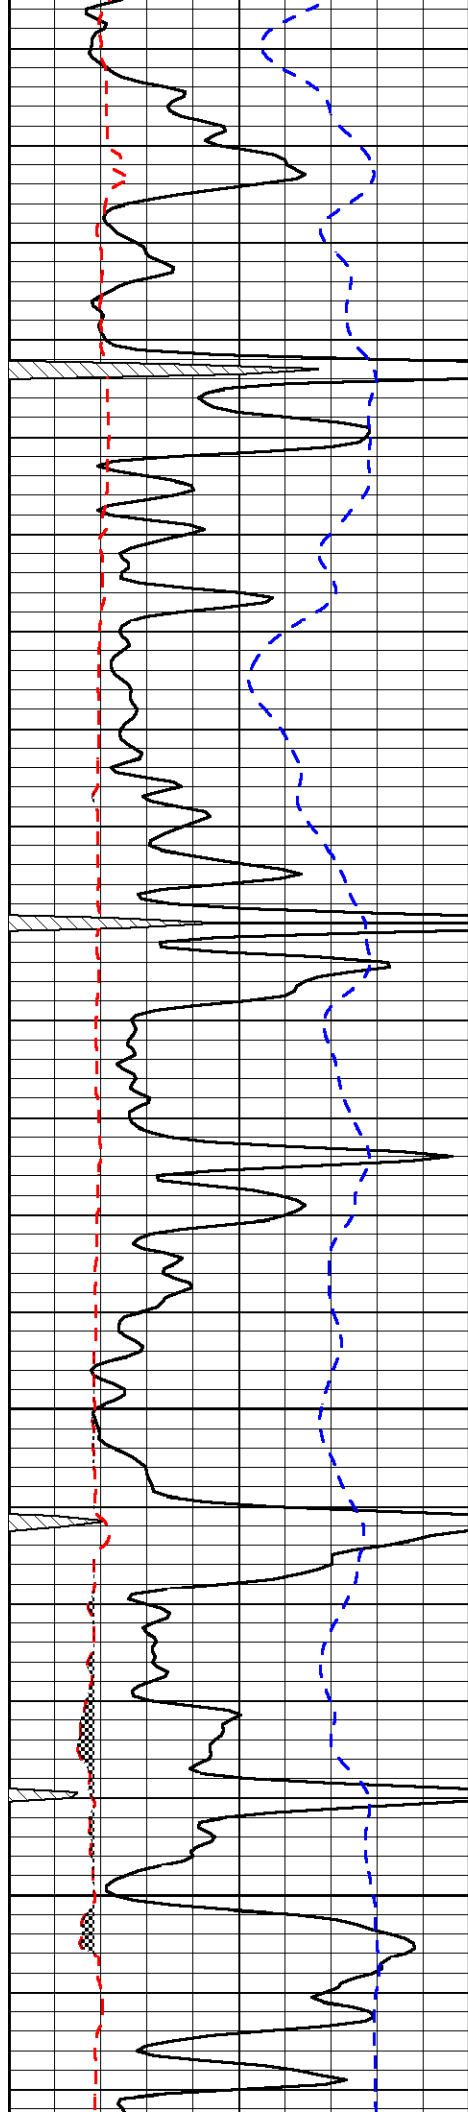



3450

3500

3550


3600

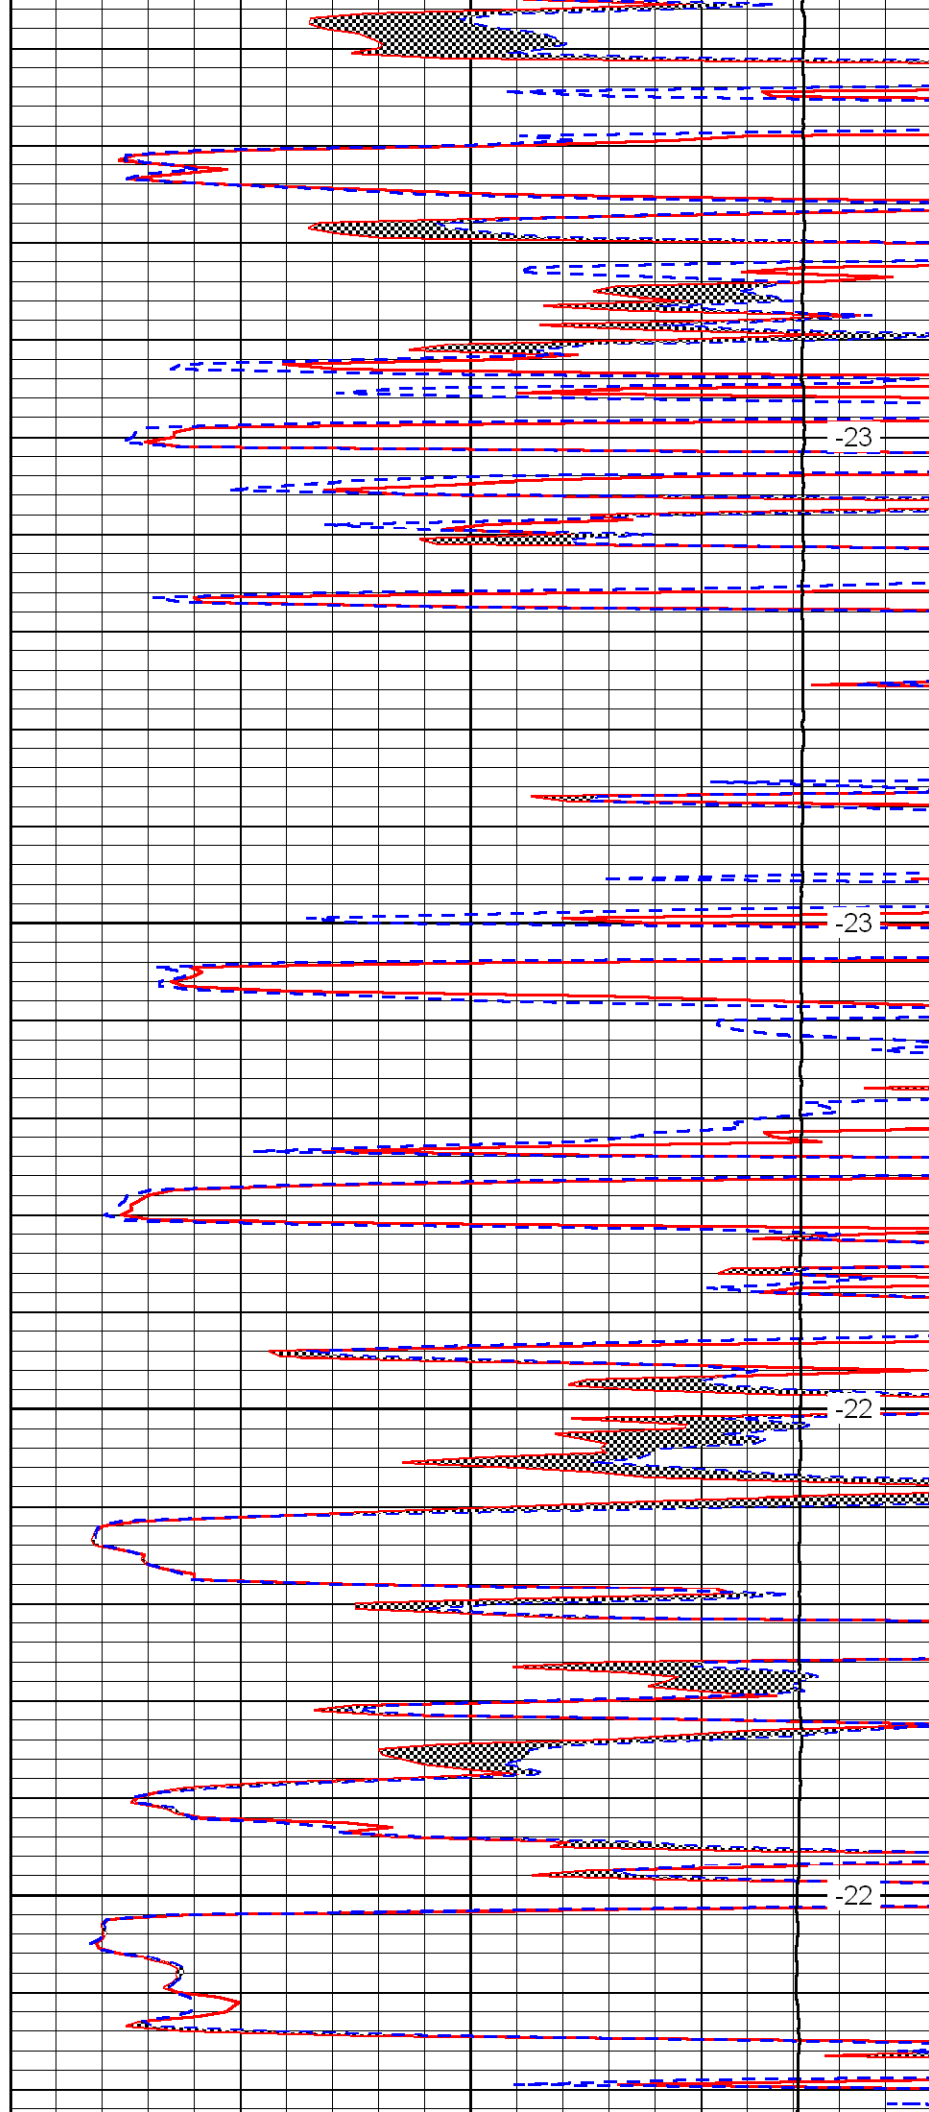

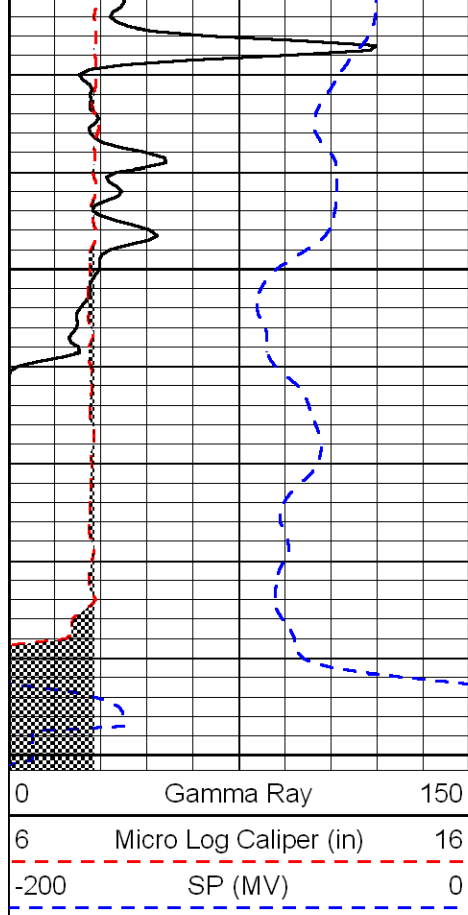

3650

3700

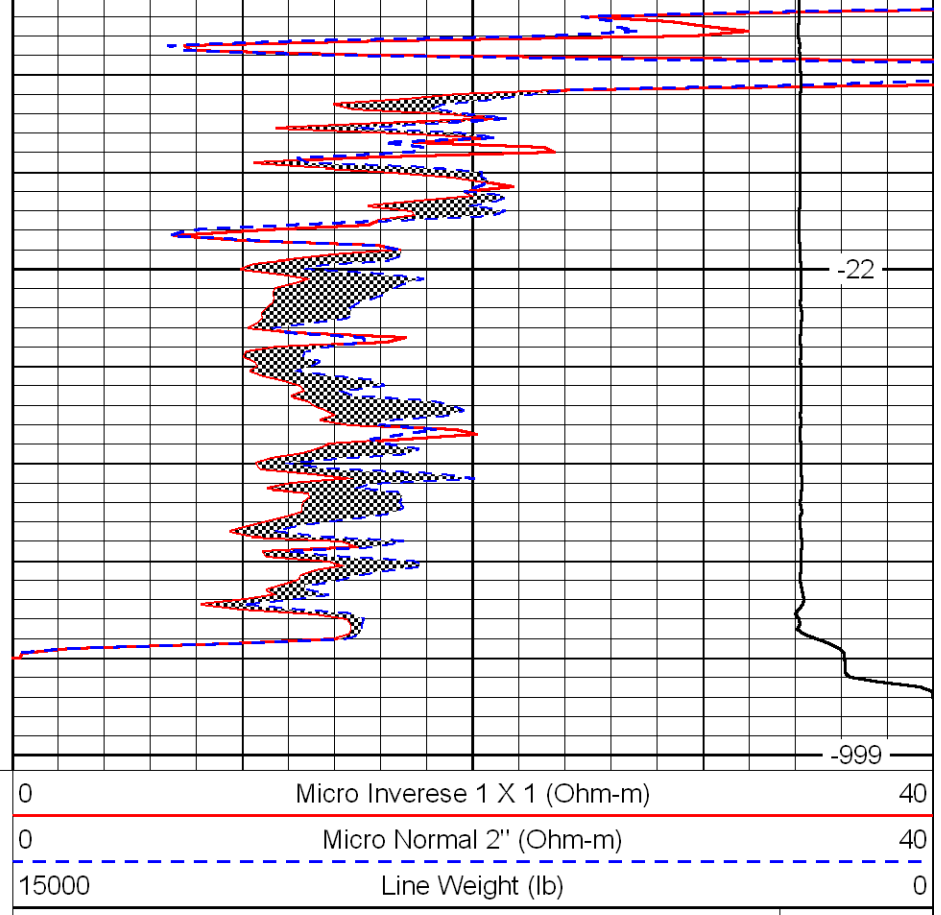

-22

-999

LSPD
(ft/min)