



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-167-23,561-00-00

Company John O. Farmer Inc.

Well Dauber B No. 1

Field Wildcat

County Russell

State

Kansas

Location

SW-SE-NW-NW
1170' FNL & 890' FWL

Other Services
CNL/CDL
DIL

Sec: 12

Twp: 13 S

Rge: 13 W

Elevation

Permanent Datum Ground Level Elevation 1601
Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 1609
D.F.
G.L. 1601

Date

2/10/2009

Run Number

Two

Depth Driller

2980

Depth Logger

2984

Bottom Logged Interval

2983

Top Log Interval

2450

Casing Driller

8.625 @ 556

Casing Logger

554

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

8.000

Density / Viscosity

9.0 50

pH / Fluid Loss

8.0 .11

Source of Sample

Flowline

Rm @ Meas. Temp

0.95 @ 65

Rmf @ Meas. Temp

0.71 @ 65

Rmc @ Meas. Temp

1.28 @ 65

Source of Rmf / Rmc

Charts

Rm @ BHT

0.57 @ 108

Operating Rig Time

4 Hours

Max Rec. Temp. F

108

Equipment Number

10

Location

Hays

Recorded By

J. Wellbrock

B. Reiners

Witnessed By

Brad Hutchison

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

I-70 Bunker Hill, 5 N,
3/4 W, S Into

Database File: c:\warrior\data\farmer_dauber b no. 1\farmhd.db
Dataset Pathname: dil/farm2in
Presentation Format: micro
Dataset Creation: Tue Feb 10 15:39:09 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

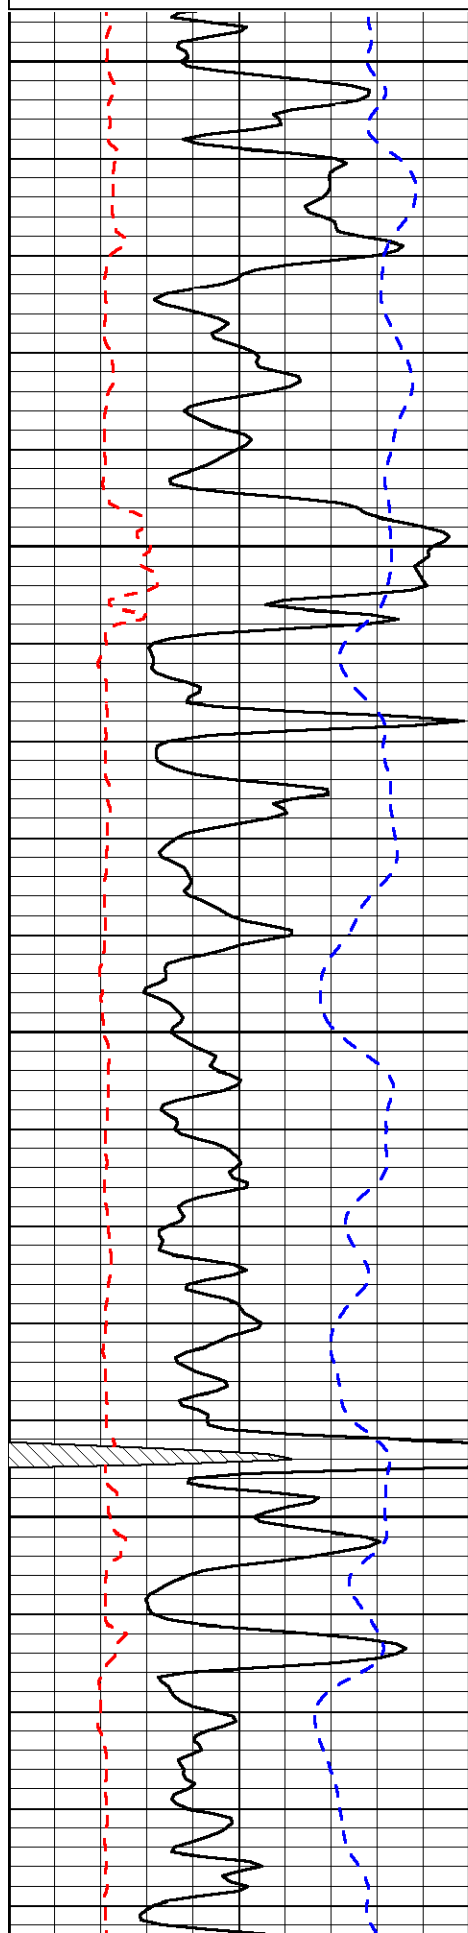

2450


2500


2550

2600

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

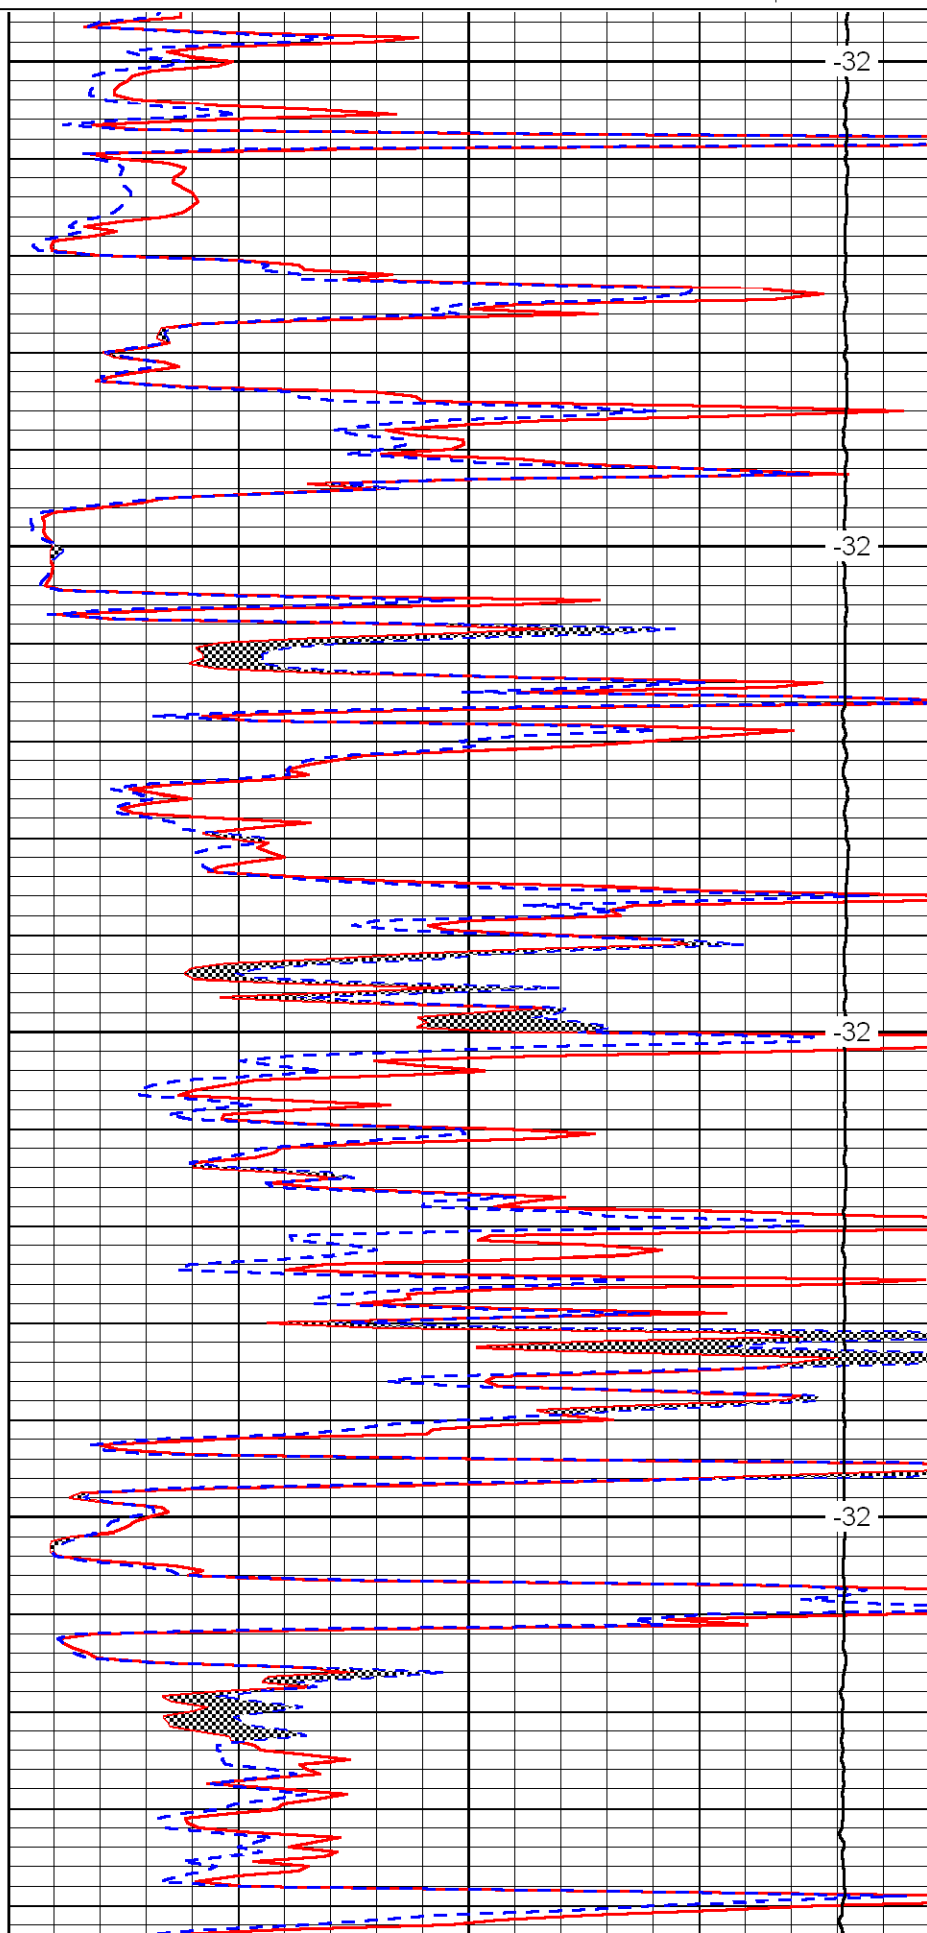

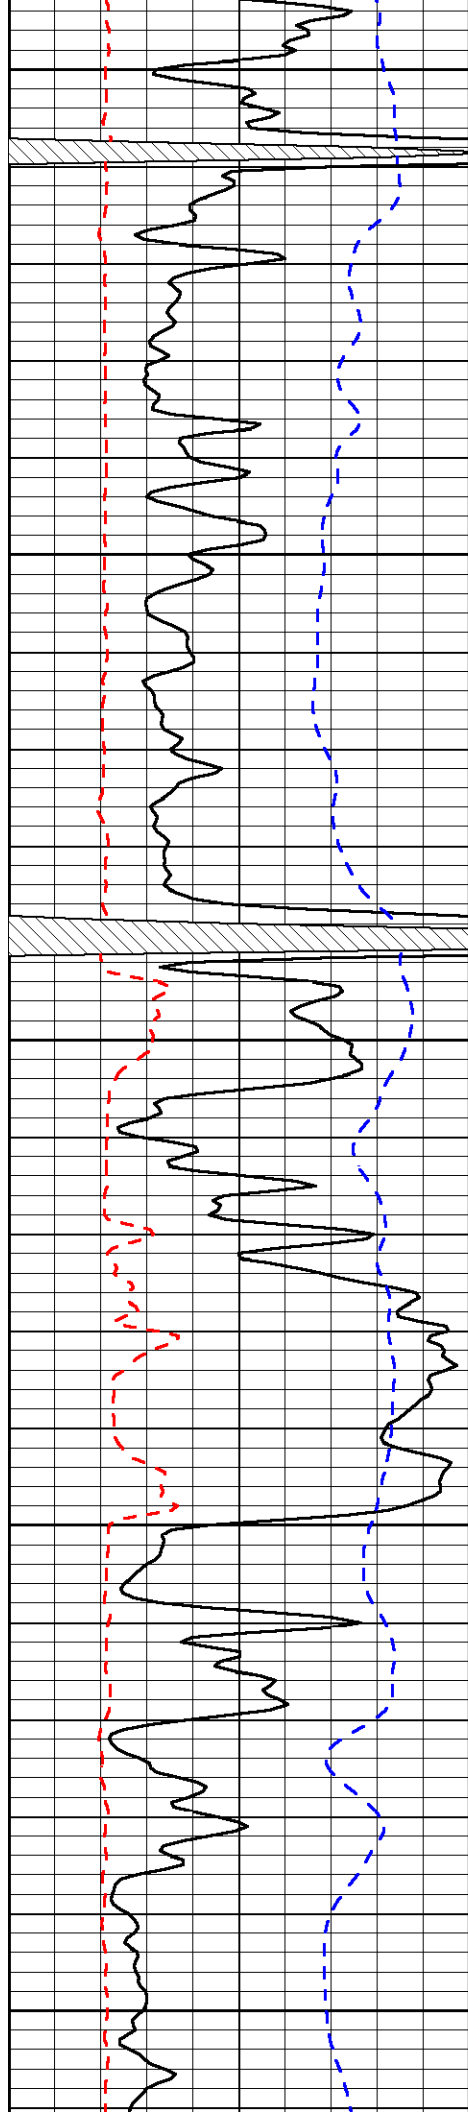


2650

2700

2750

2800

2850

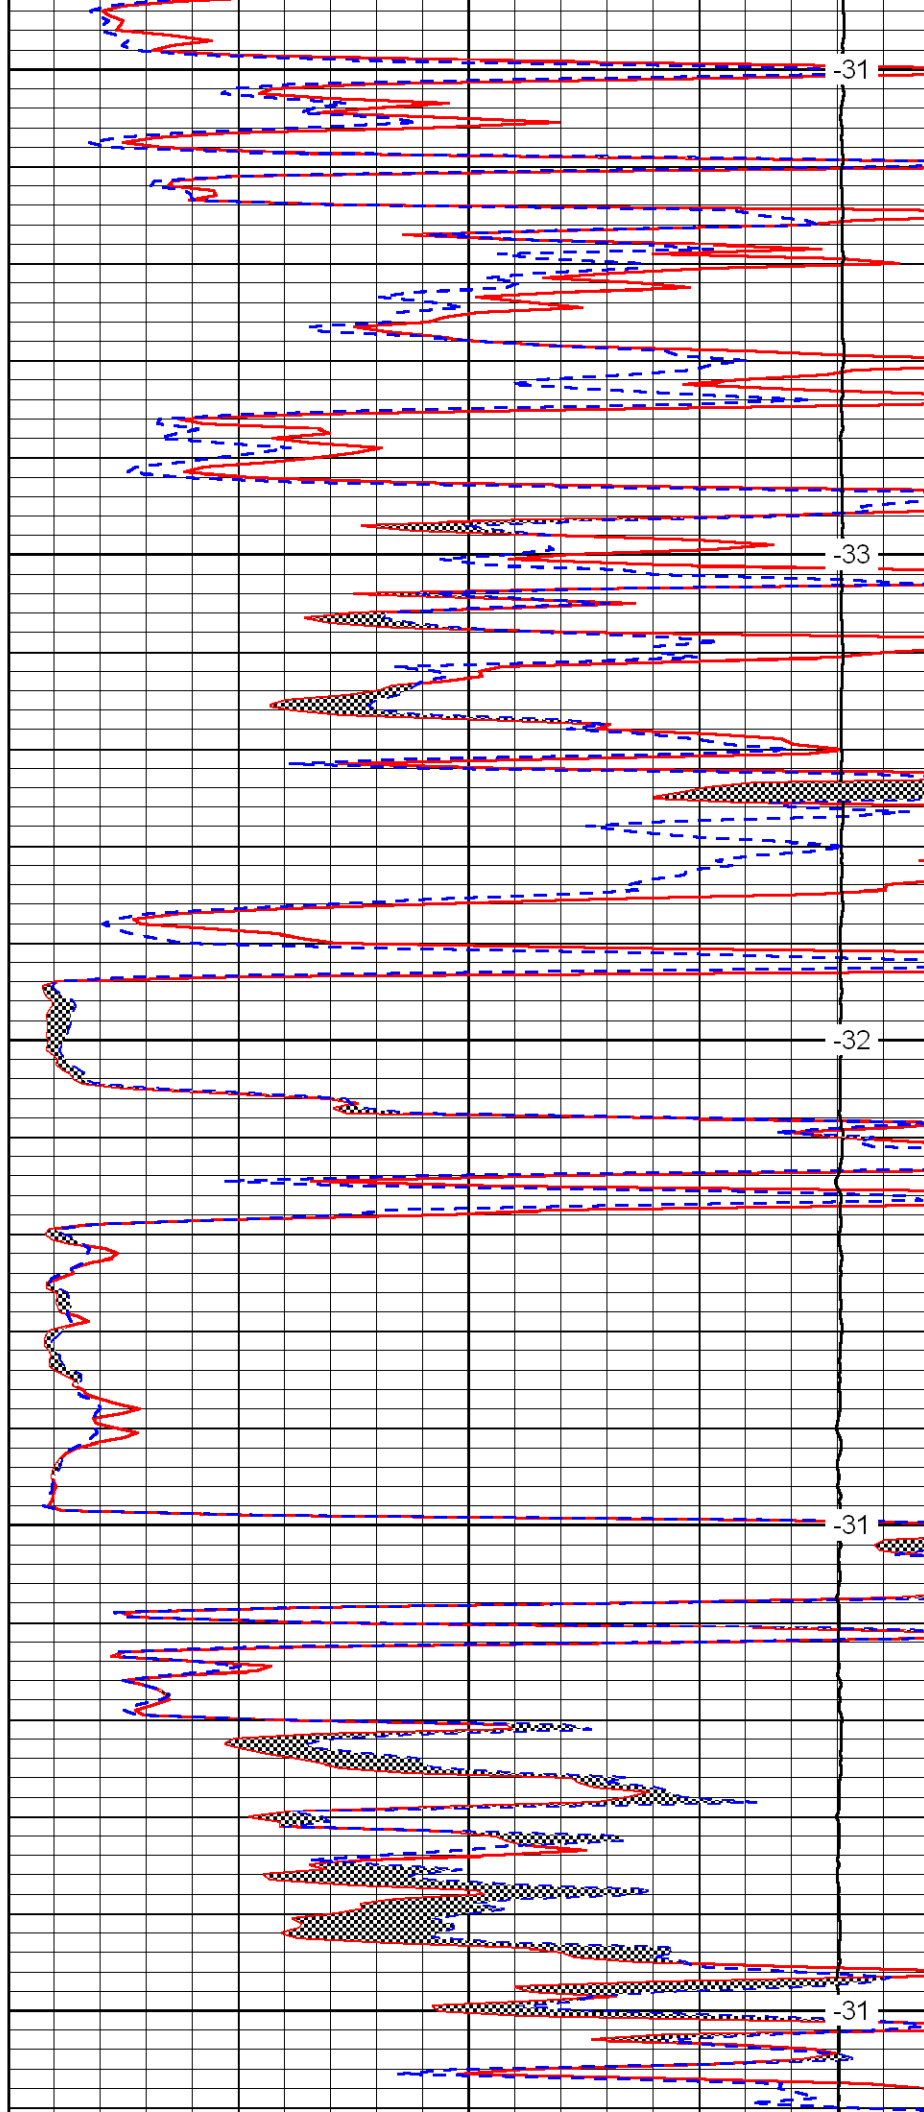

-31

-33

-32

-31

-31

