LOG-TECH

DIGITAL LOG (785) 625-3858

Microresistivity Log

API No. 15-069-20,314-00-00

Company Falcon Exploration, Inc.

Well Goossen No. 1-14

Field Wildcat

County Gray State Kansas

Location NE NW SE SE
1310' FSL & 880' FEL
Sec: 14 Twp: 28S Rge: 30W

Other Services
CNL/CDL
DIL/BHCS

Elevation
K.B. 2806
D.F.
G.L. 2796

Permanent Datum Ground Level Elevation 2796
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Date	01/30/2009			
Run Number	Two			
Depth Driller	6380			
Depth Logger	6379			
Bottom Logged Interval	6378			
Top Log Interval	1140			
Casing Driller	8.625 @ 524			
Casing Logger	521			
Bit Size	7.875			
Type Fluid in Hole	Chemical			
Salinity,ppm CL	3900			
Density / Viscosity	8.8 | 49			
pH / Fluid Loss	10.0 | 9.2			
Source of Sample	Flowline			
Rm @ Meas. Temp	.6 @ 66			
Rmf @ Meas. Temp	.45 @ 66			
Rmc @ Meas. Temp	.81 @ 66			
Source of Rmf / Rmc	Charts			
Rm @ BHT	.28 @ 141			
Operating Rig Time	6 1/2 Hours			
Max Rec. Temp. F	141			
Equipment Number	17			
Location	Hays			
Recorded By	C. Desaire			
Witnessed By	Keith Reavis			

<<< Fold Here >>>

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Montezuma, 6.7 West on Hwy 56 to 6th Rd, 3.2 North West Into

Database File:	c:\warrior\data\falcon_goossen no. 1-14-2\ficnhd2.db
Dataset Pathname:	stach/dil/flcnstk
Presentation Format:	micro
Dataset Creation:	Fri Jan 30 17:48:00 2009
Charted by:	Depth in Feet scaled 1:240

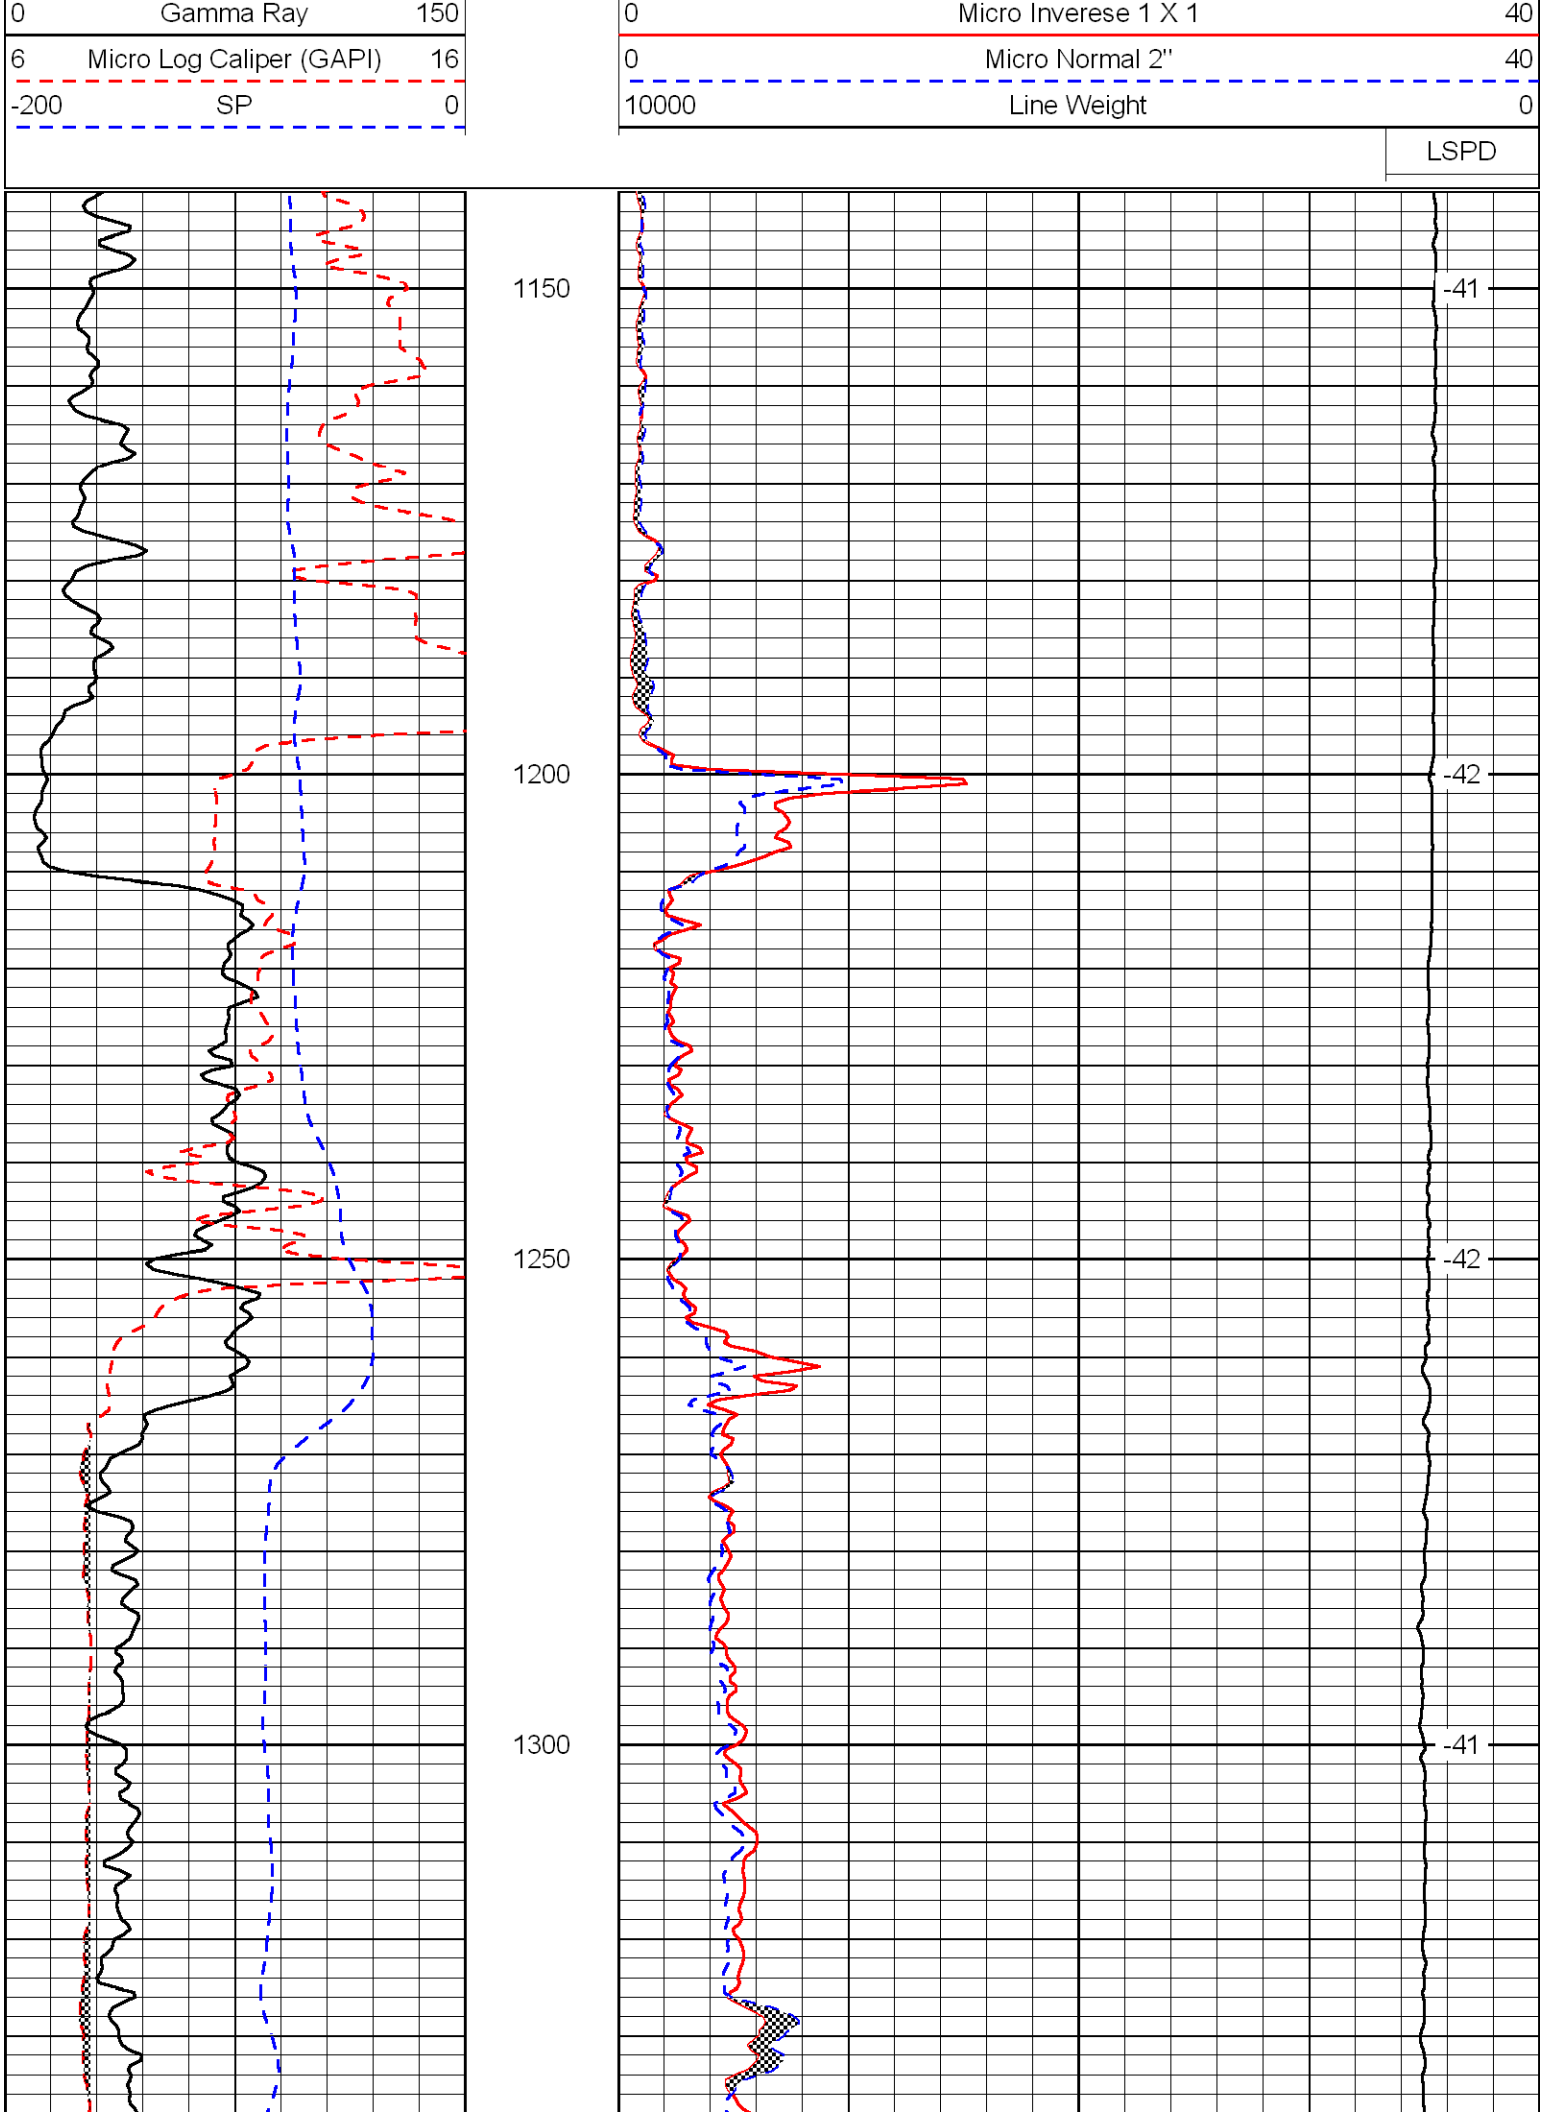
0 Gamma Ray 150
6 Micro Log Caliper (GAPI) 16
-200 SP 0
0 Micro Inverese 1 X 1 40
0 Micro Normal 2'' 40
10000 Line Weight 0
LSPD
1150
1200
1250
1300
-41
-42
-42
-41

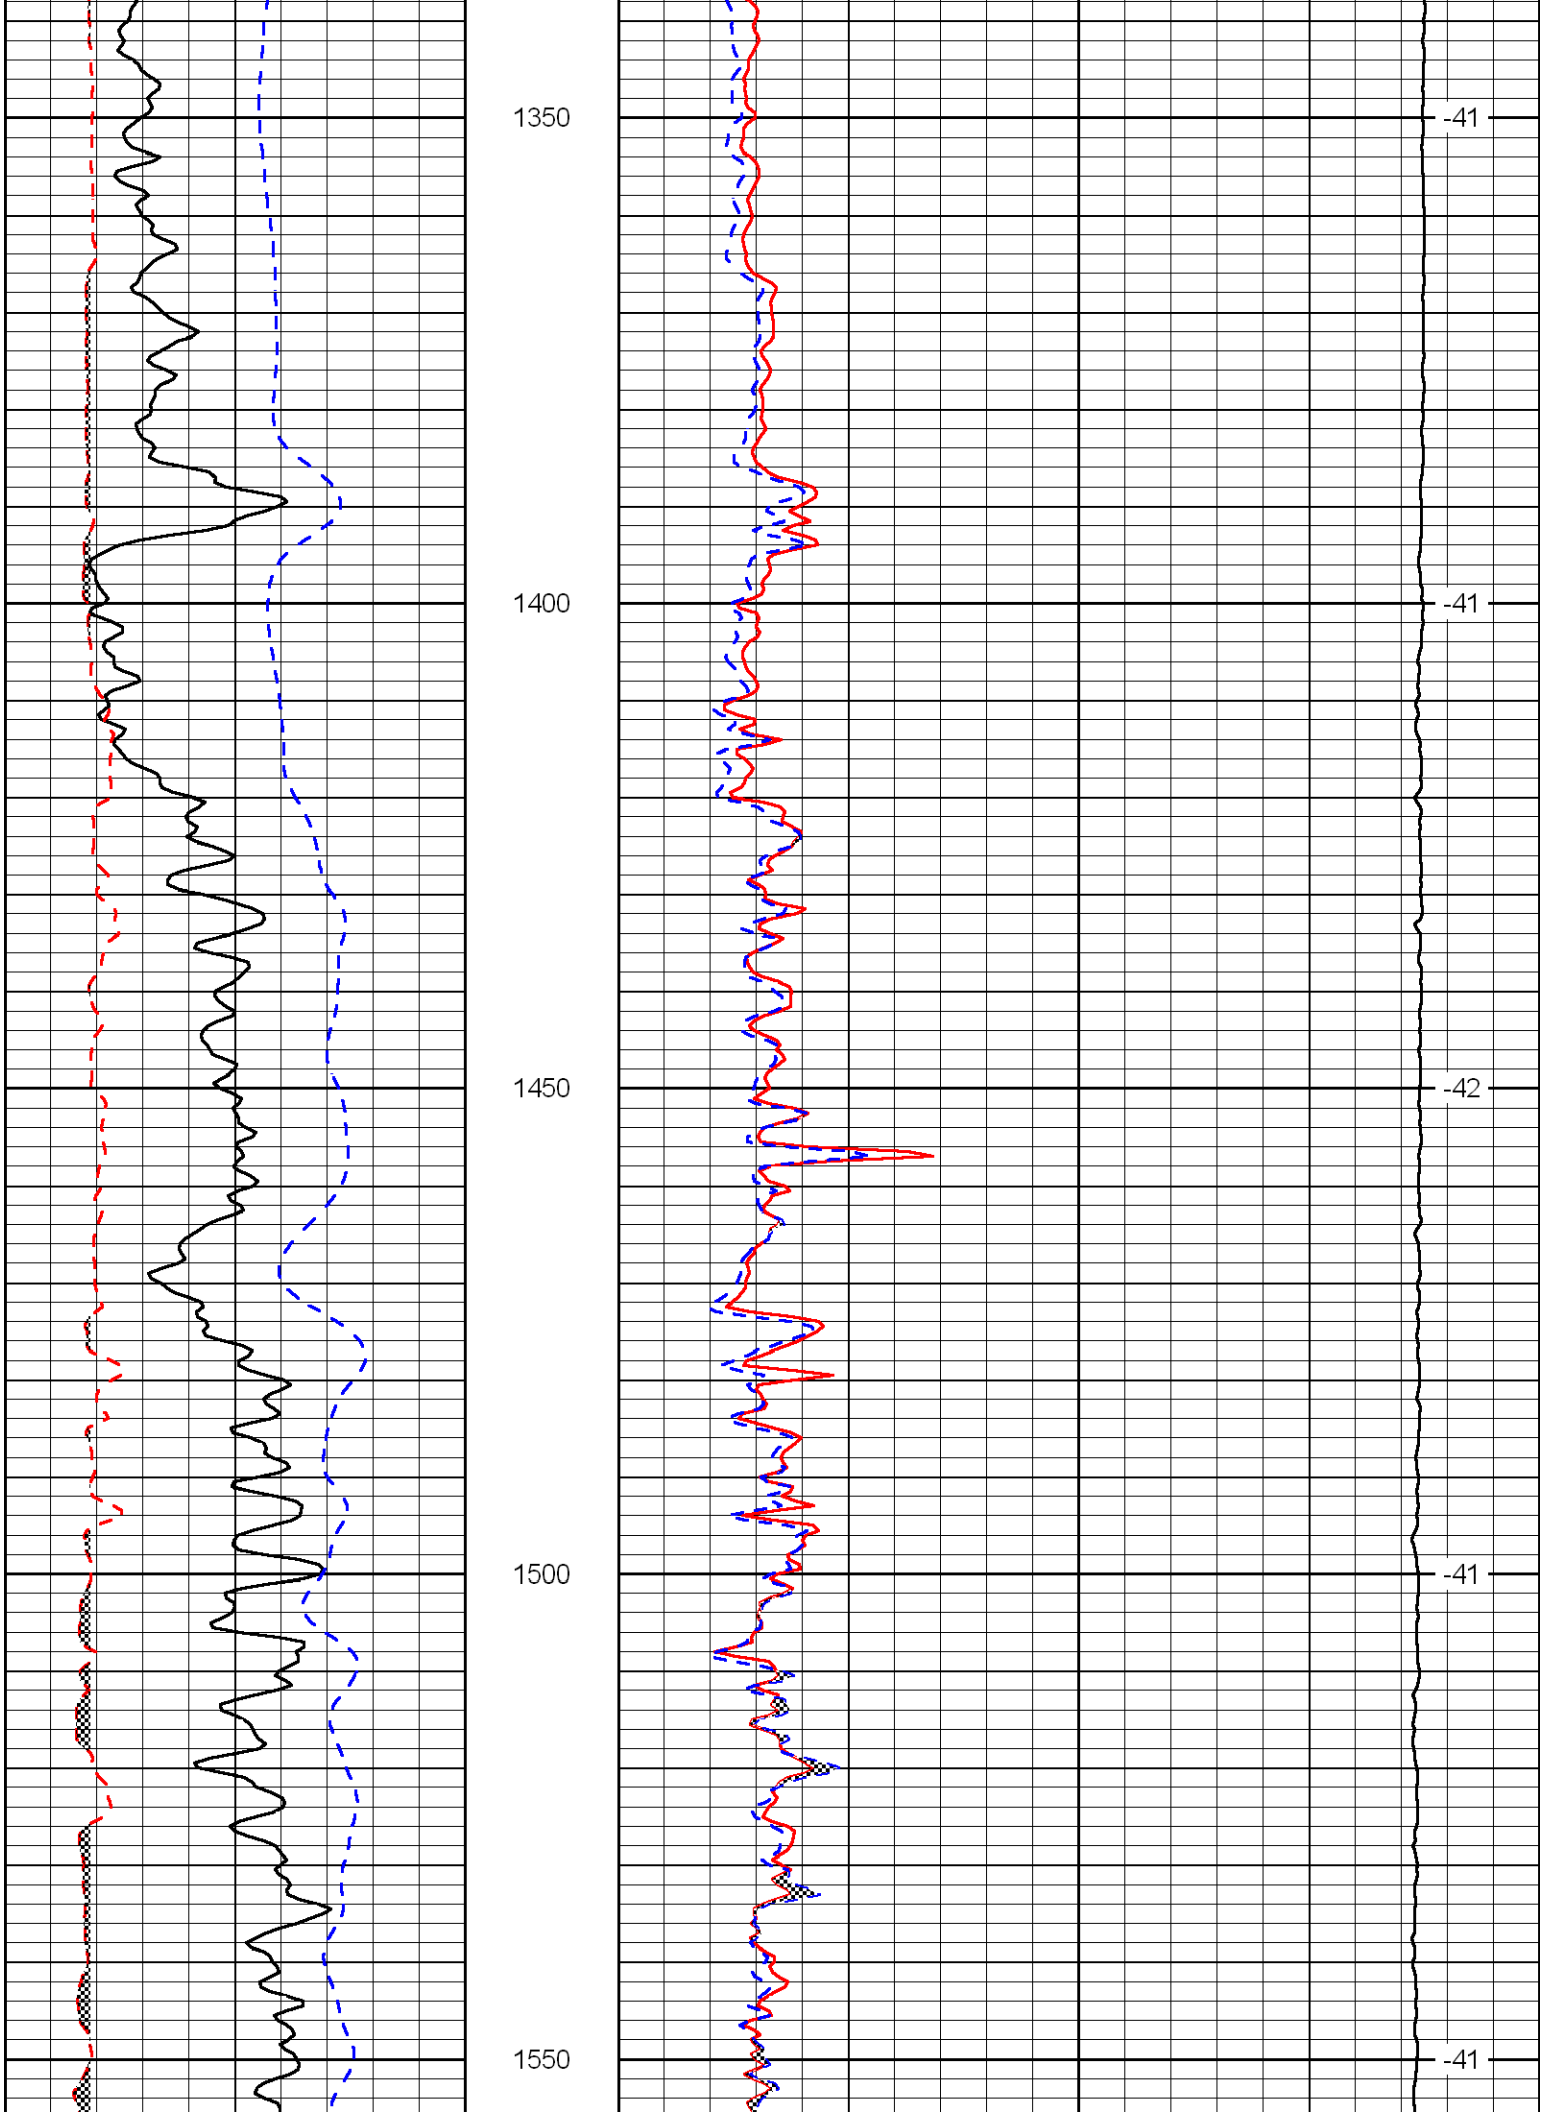
1350
1400
1450
1500
1550
-41
-41
-42
-41
-41

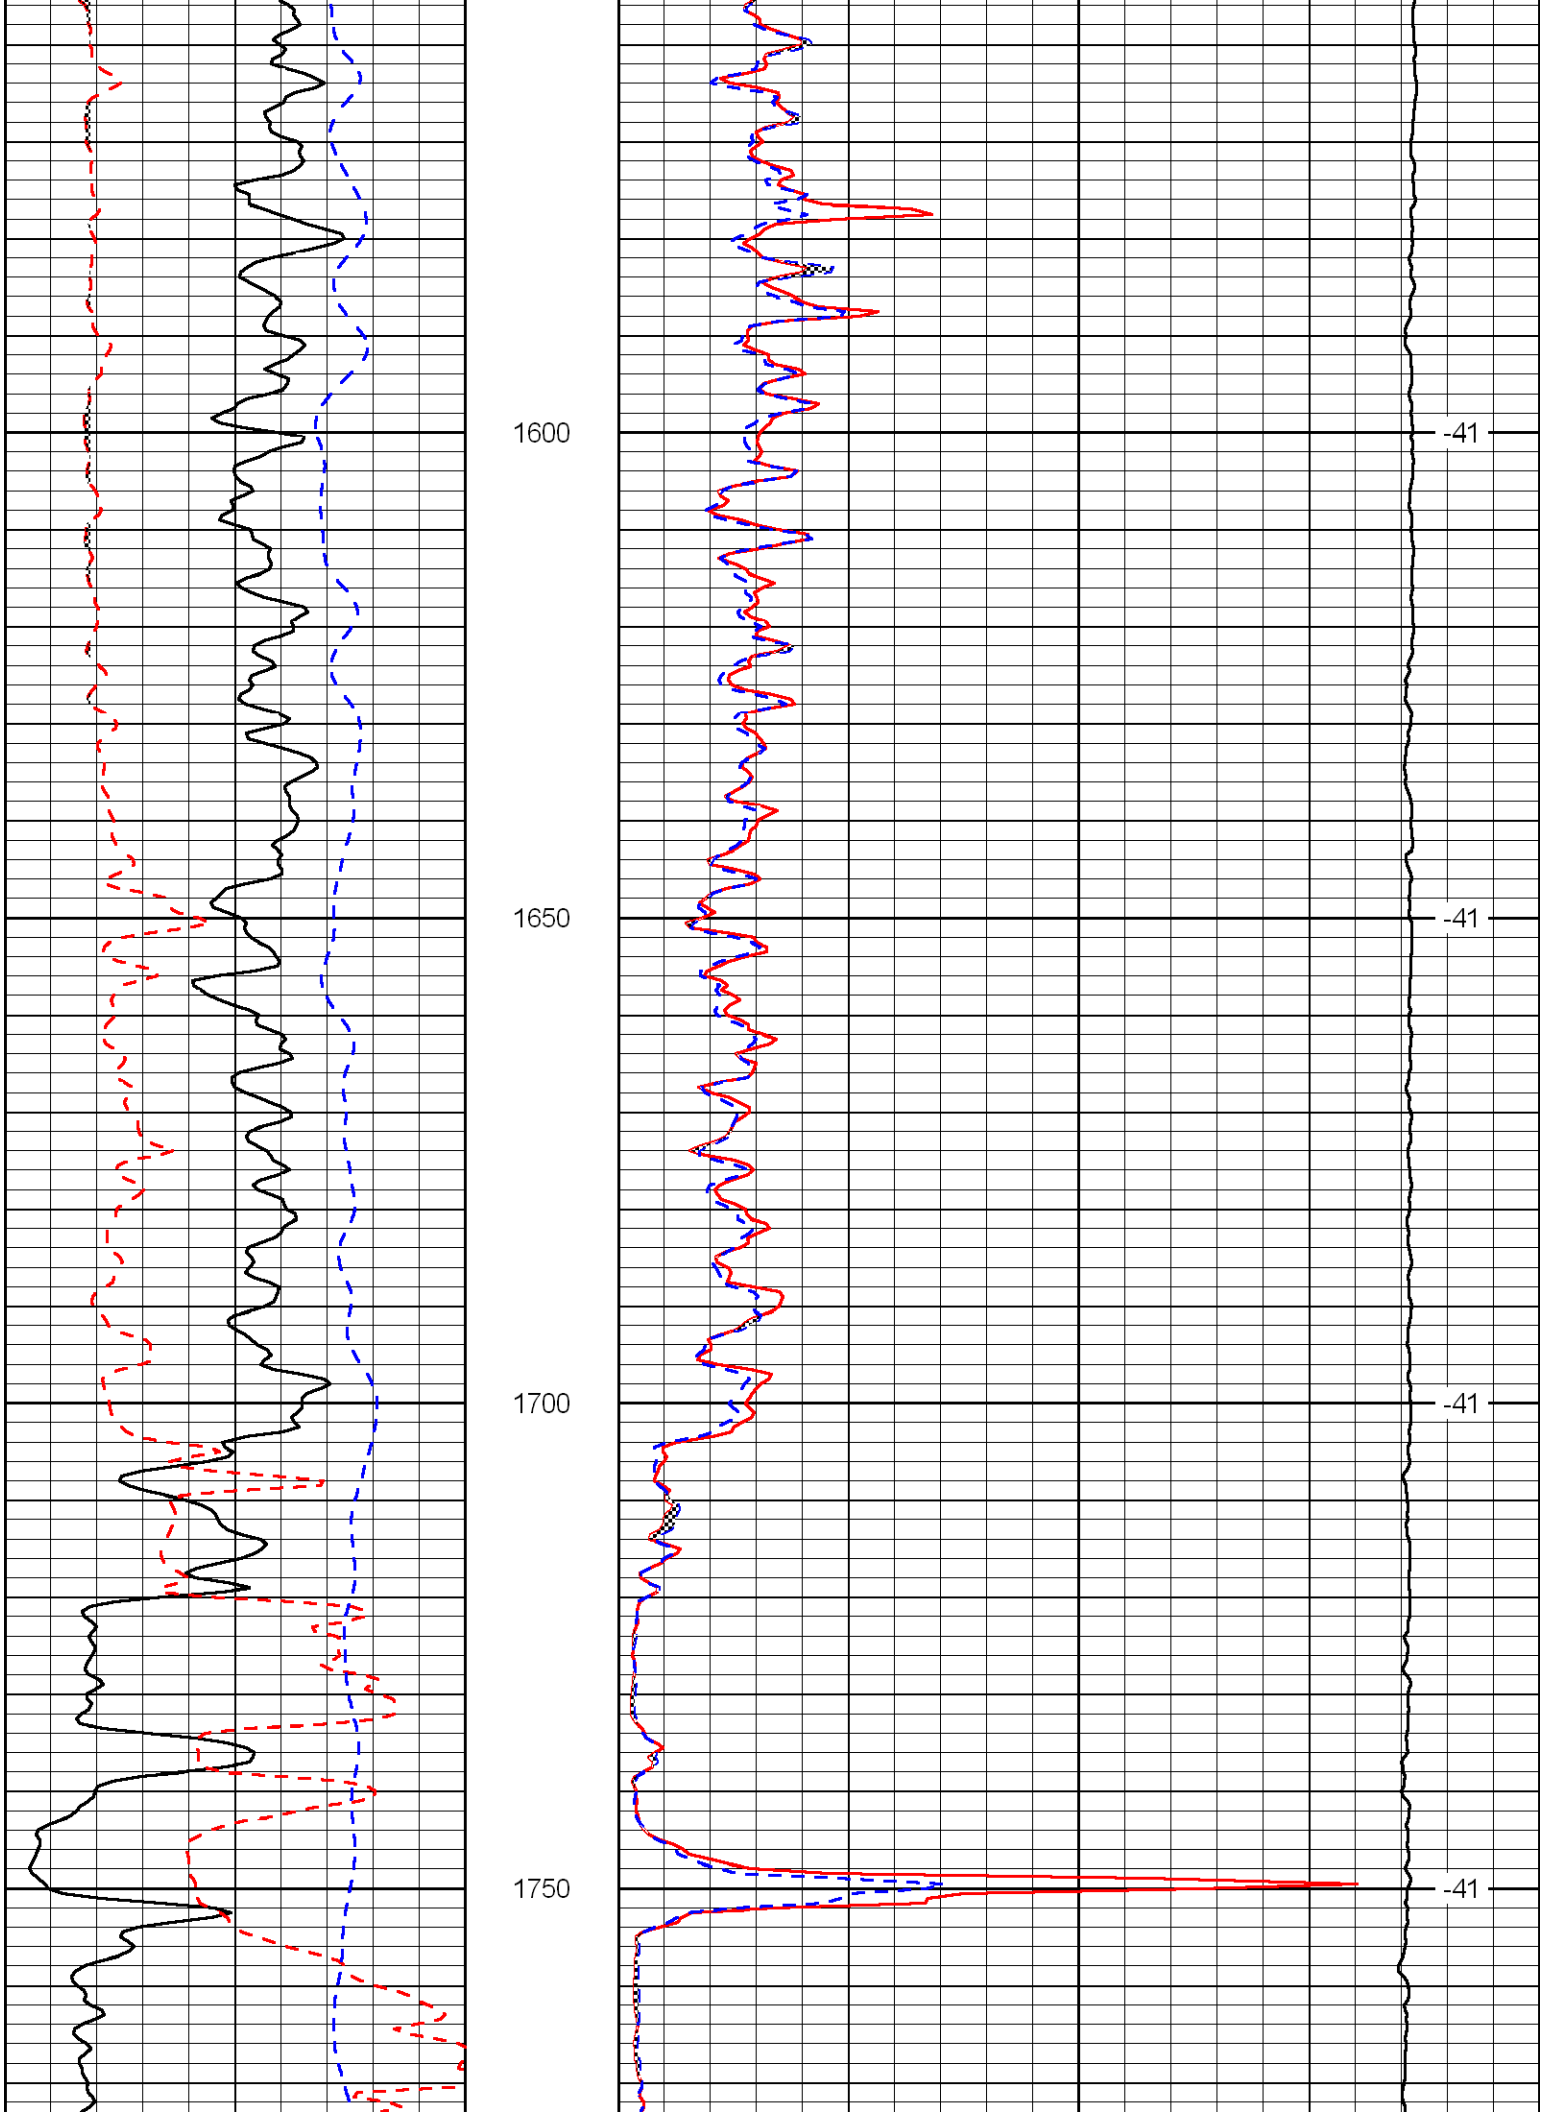
1600
1650
1700
1750
-41
-41
-41
-41

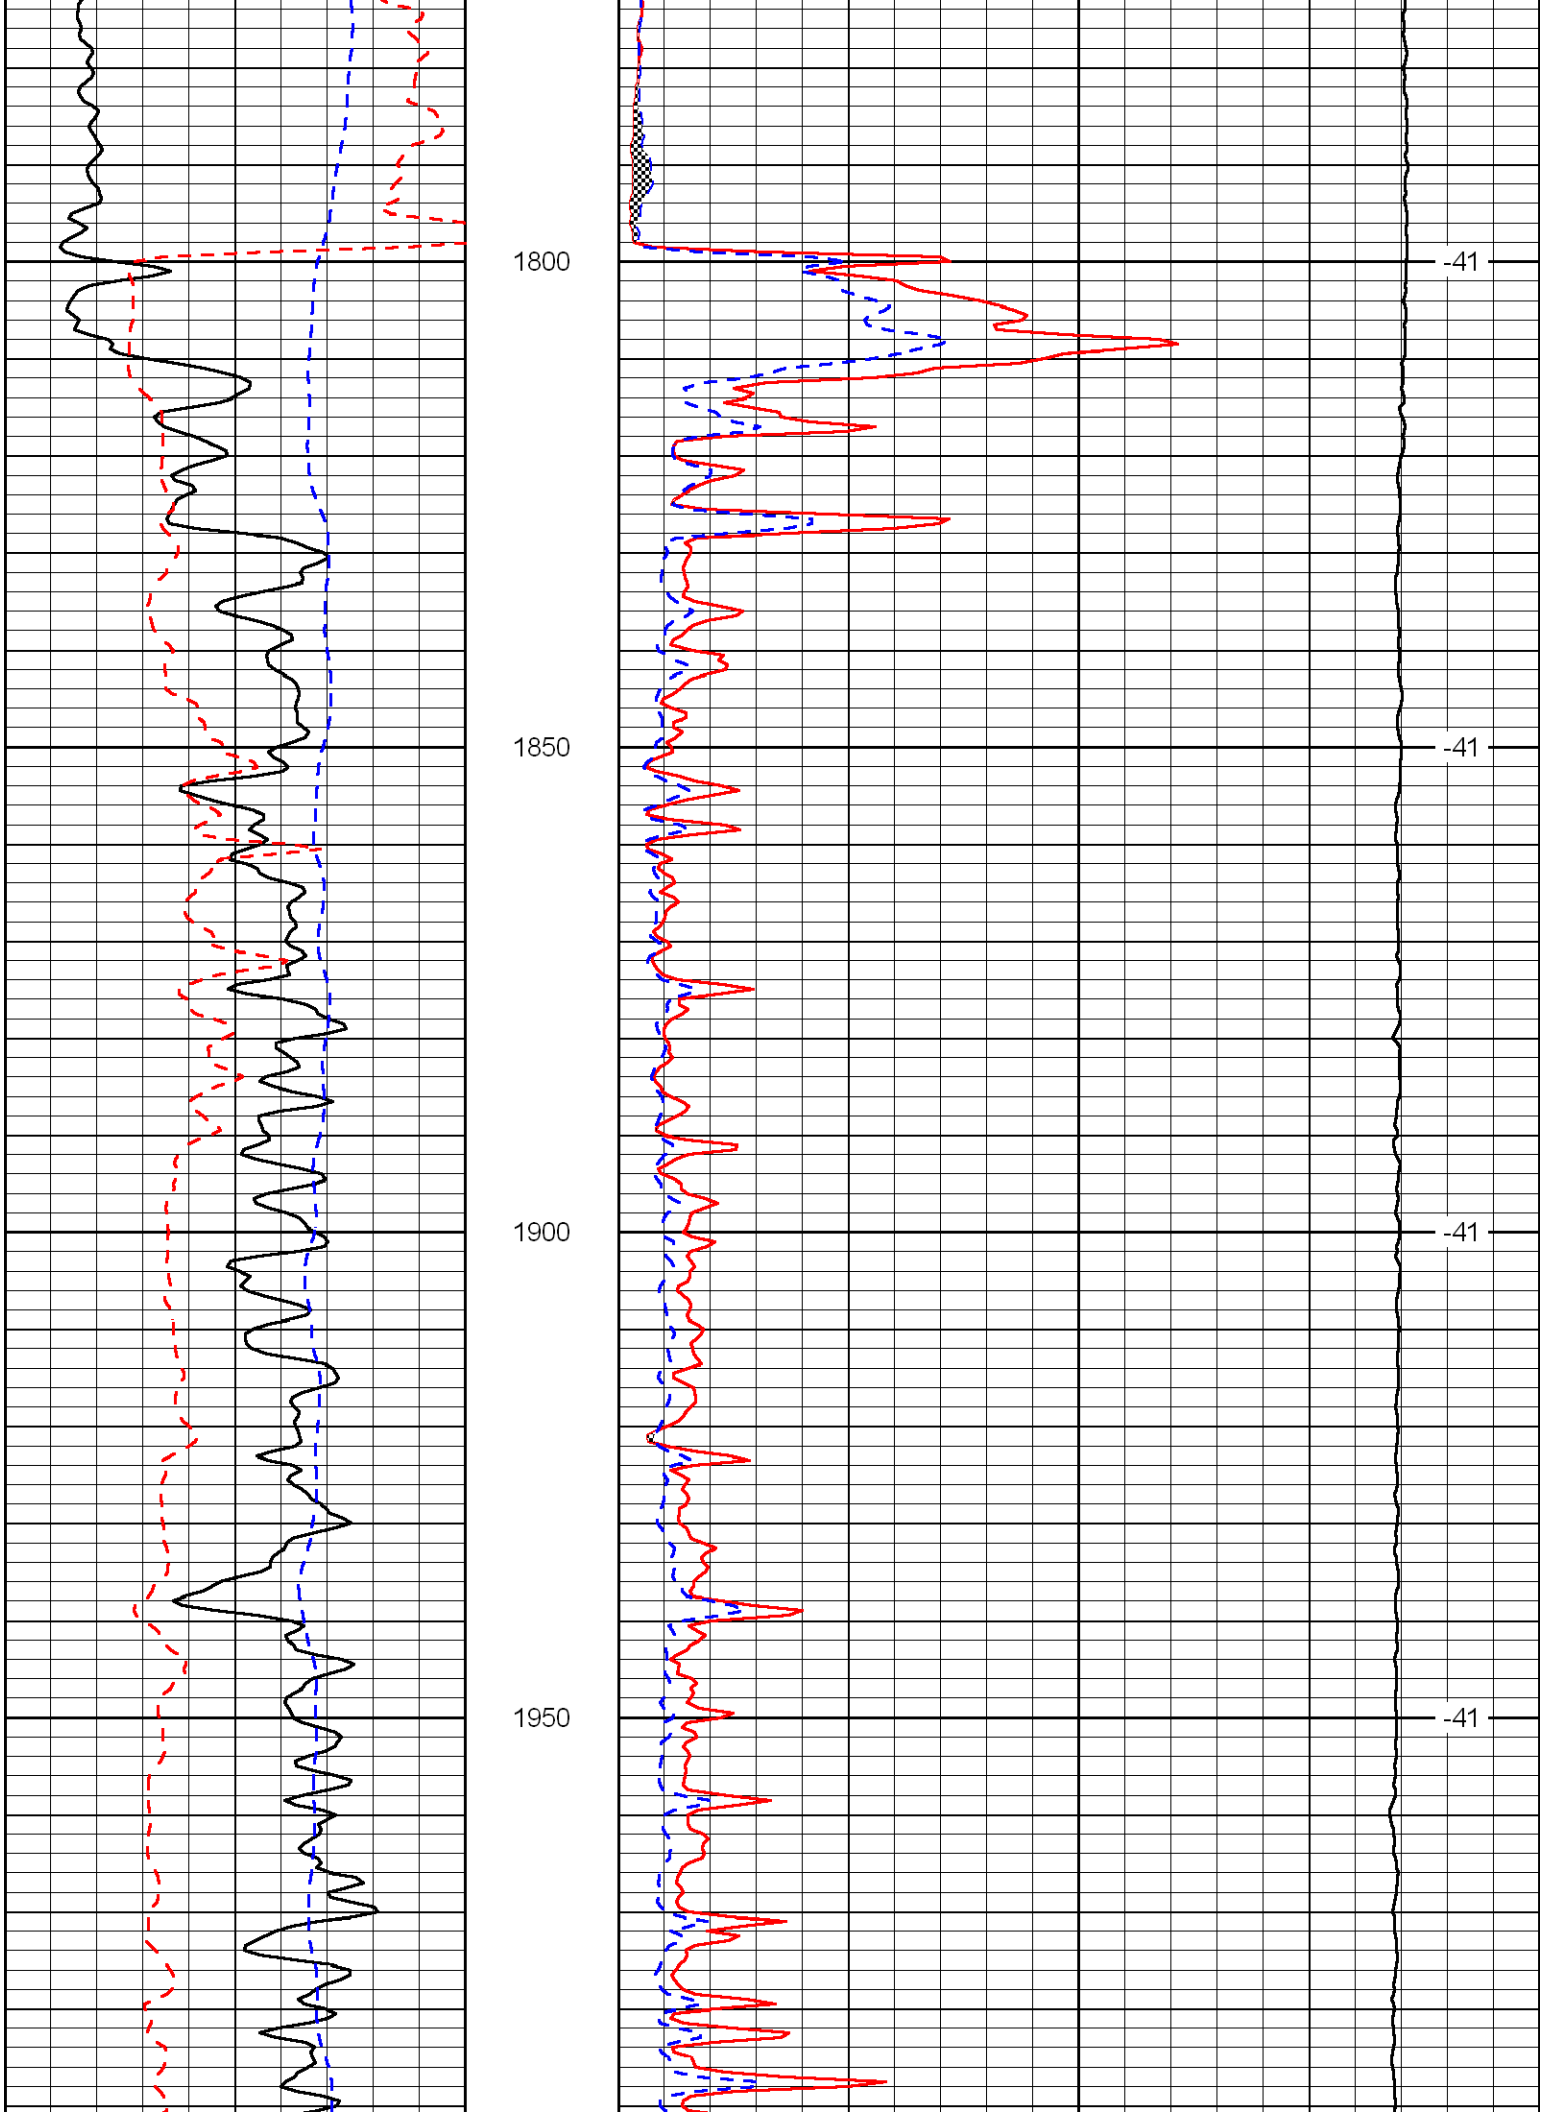
1800
1850
1900
1950
-41
-41
-41
-41

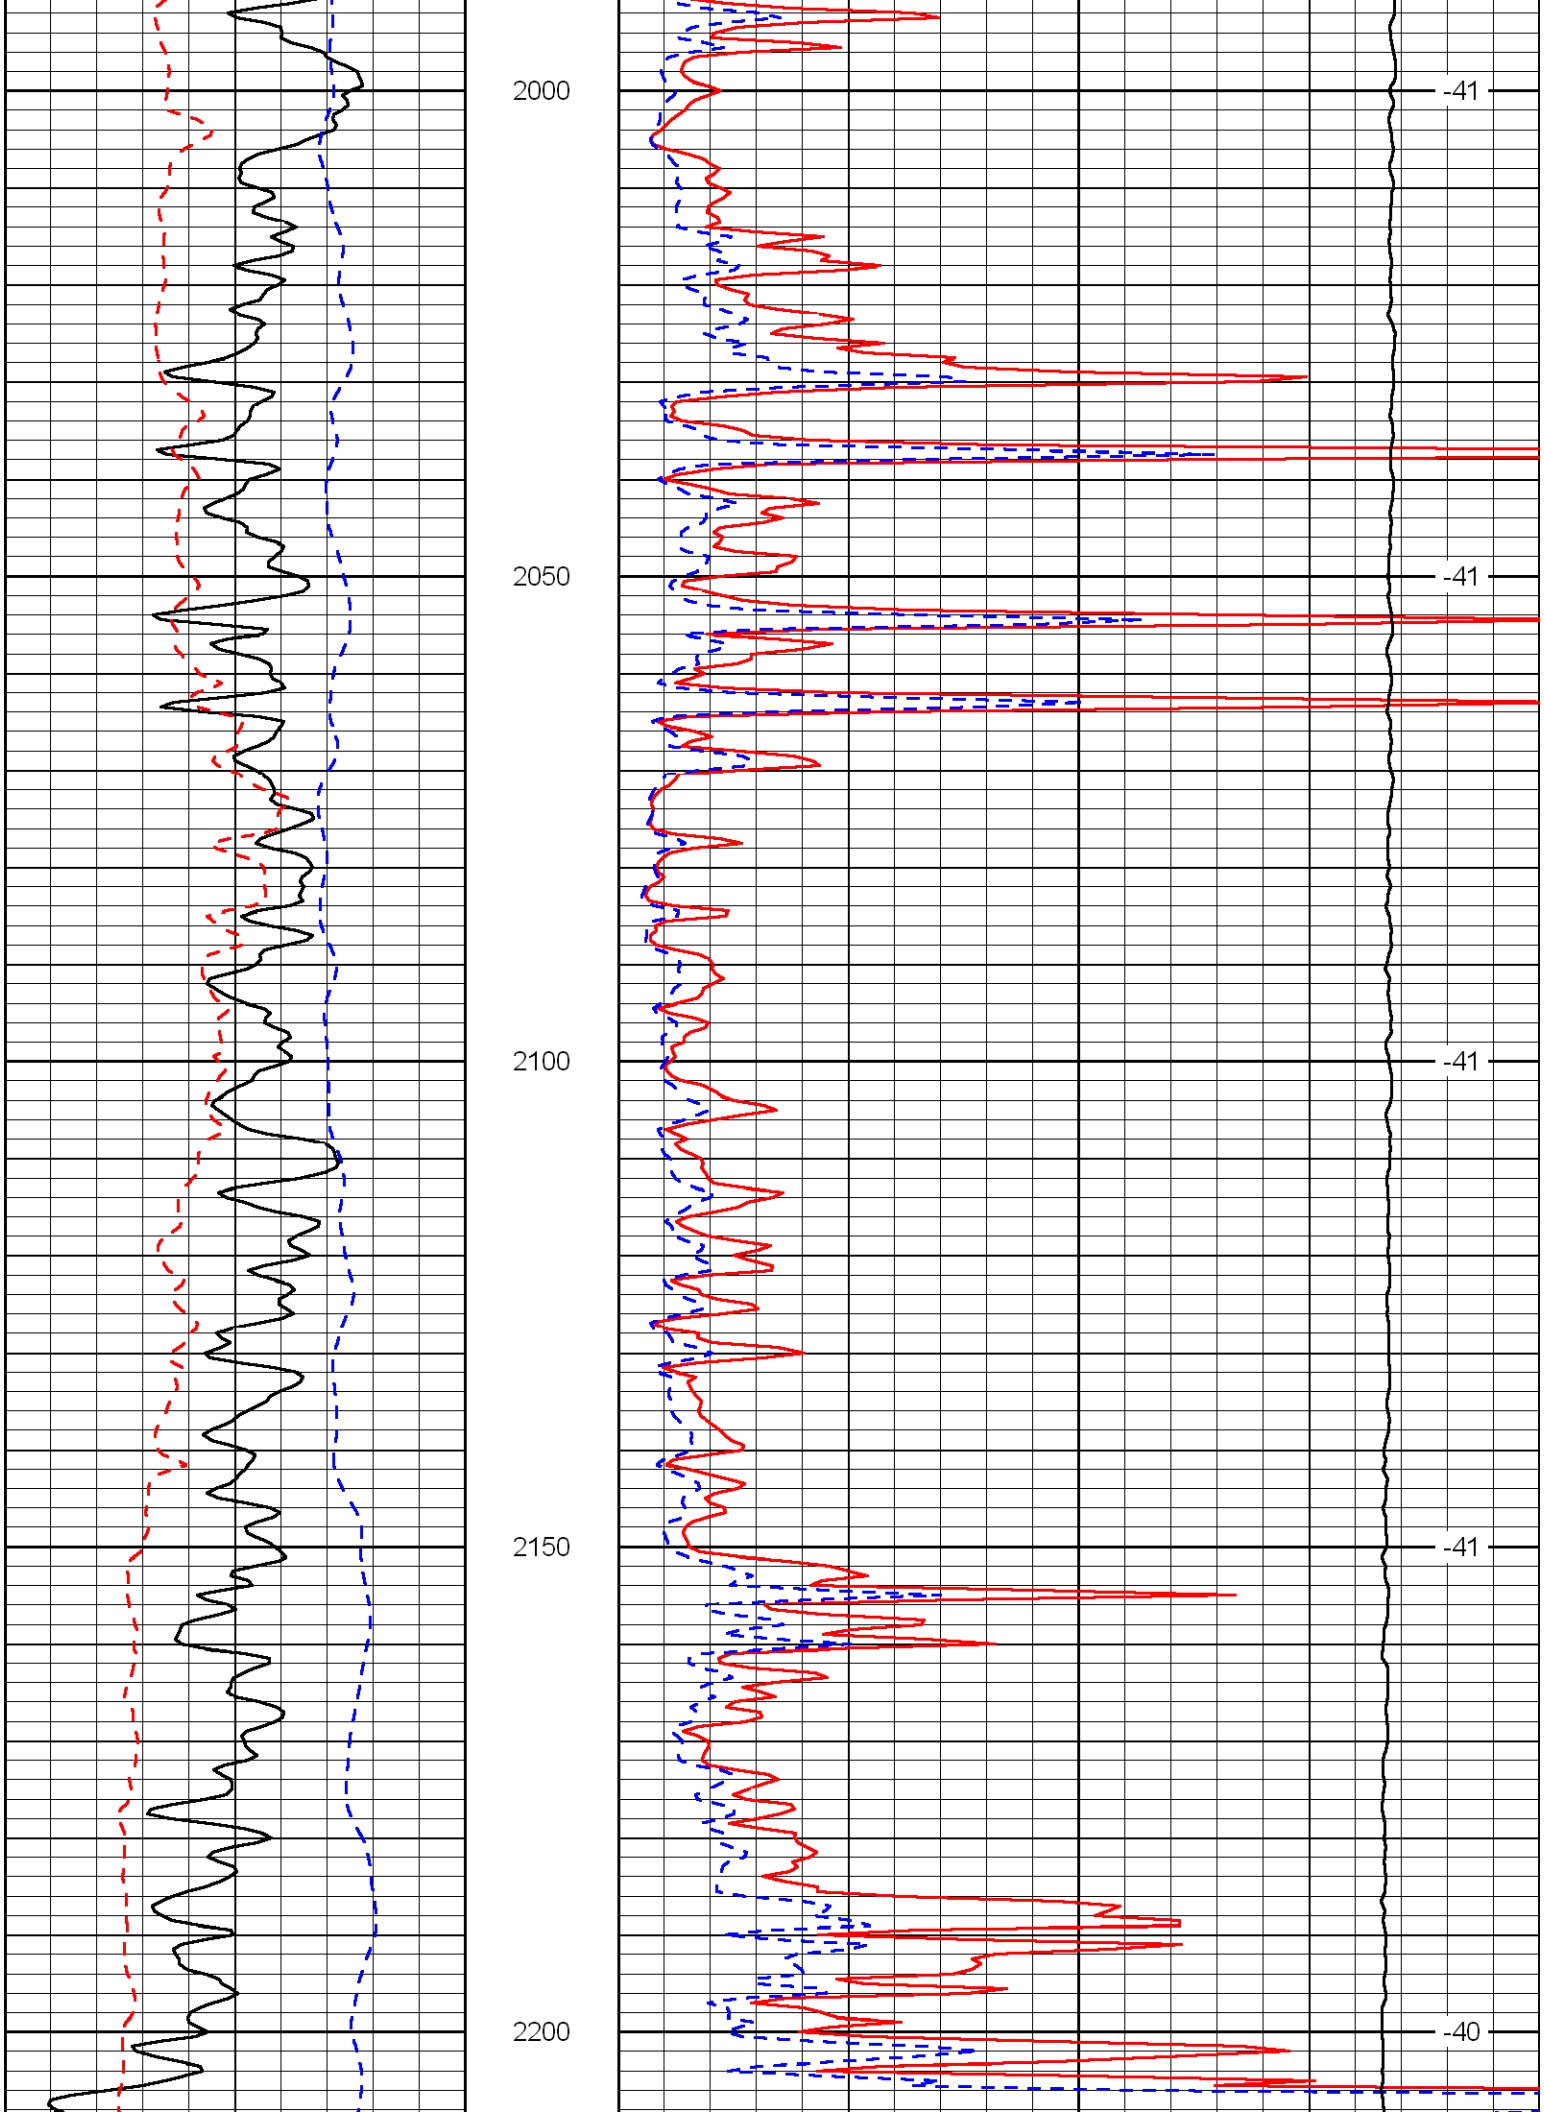
2000
2050
2100
2150
2200
-41
-41
-41
-41
-40

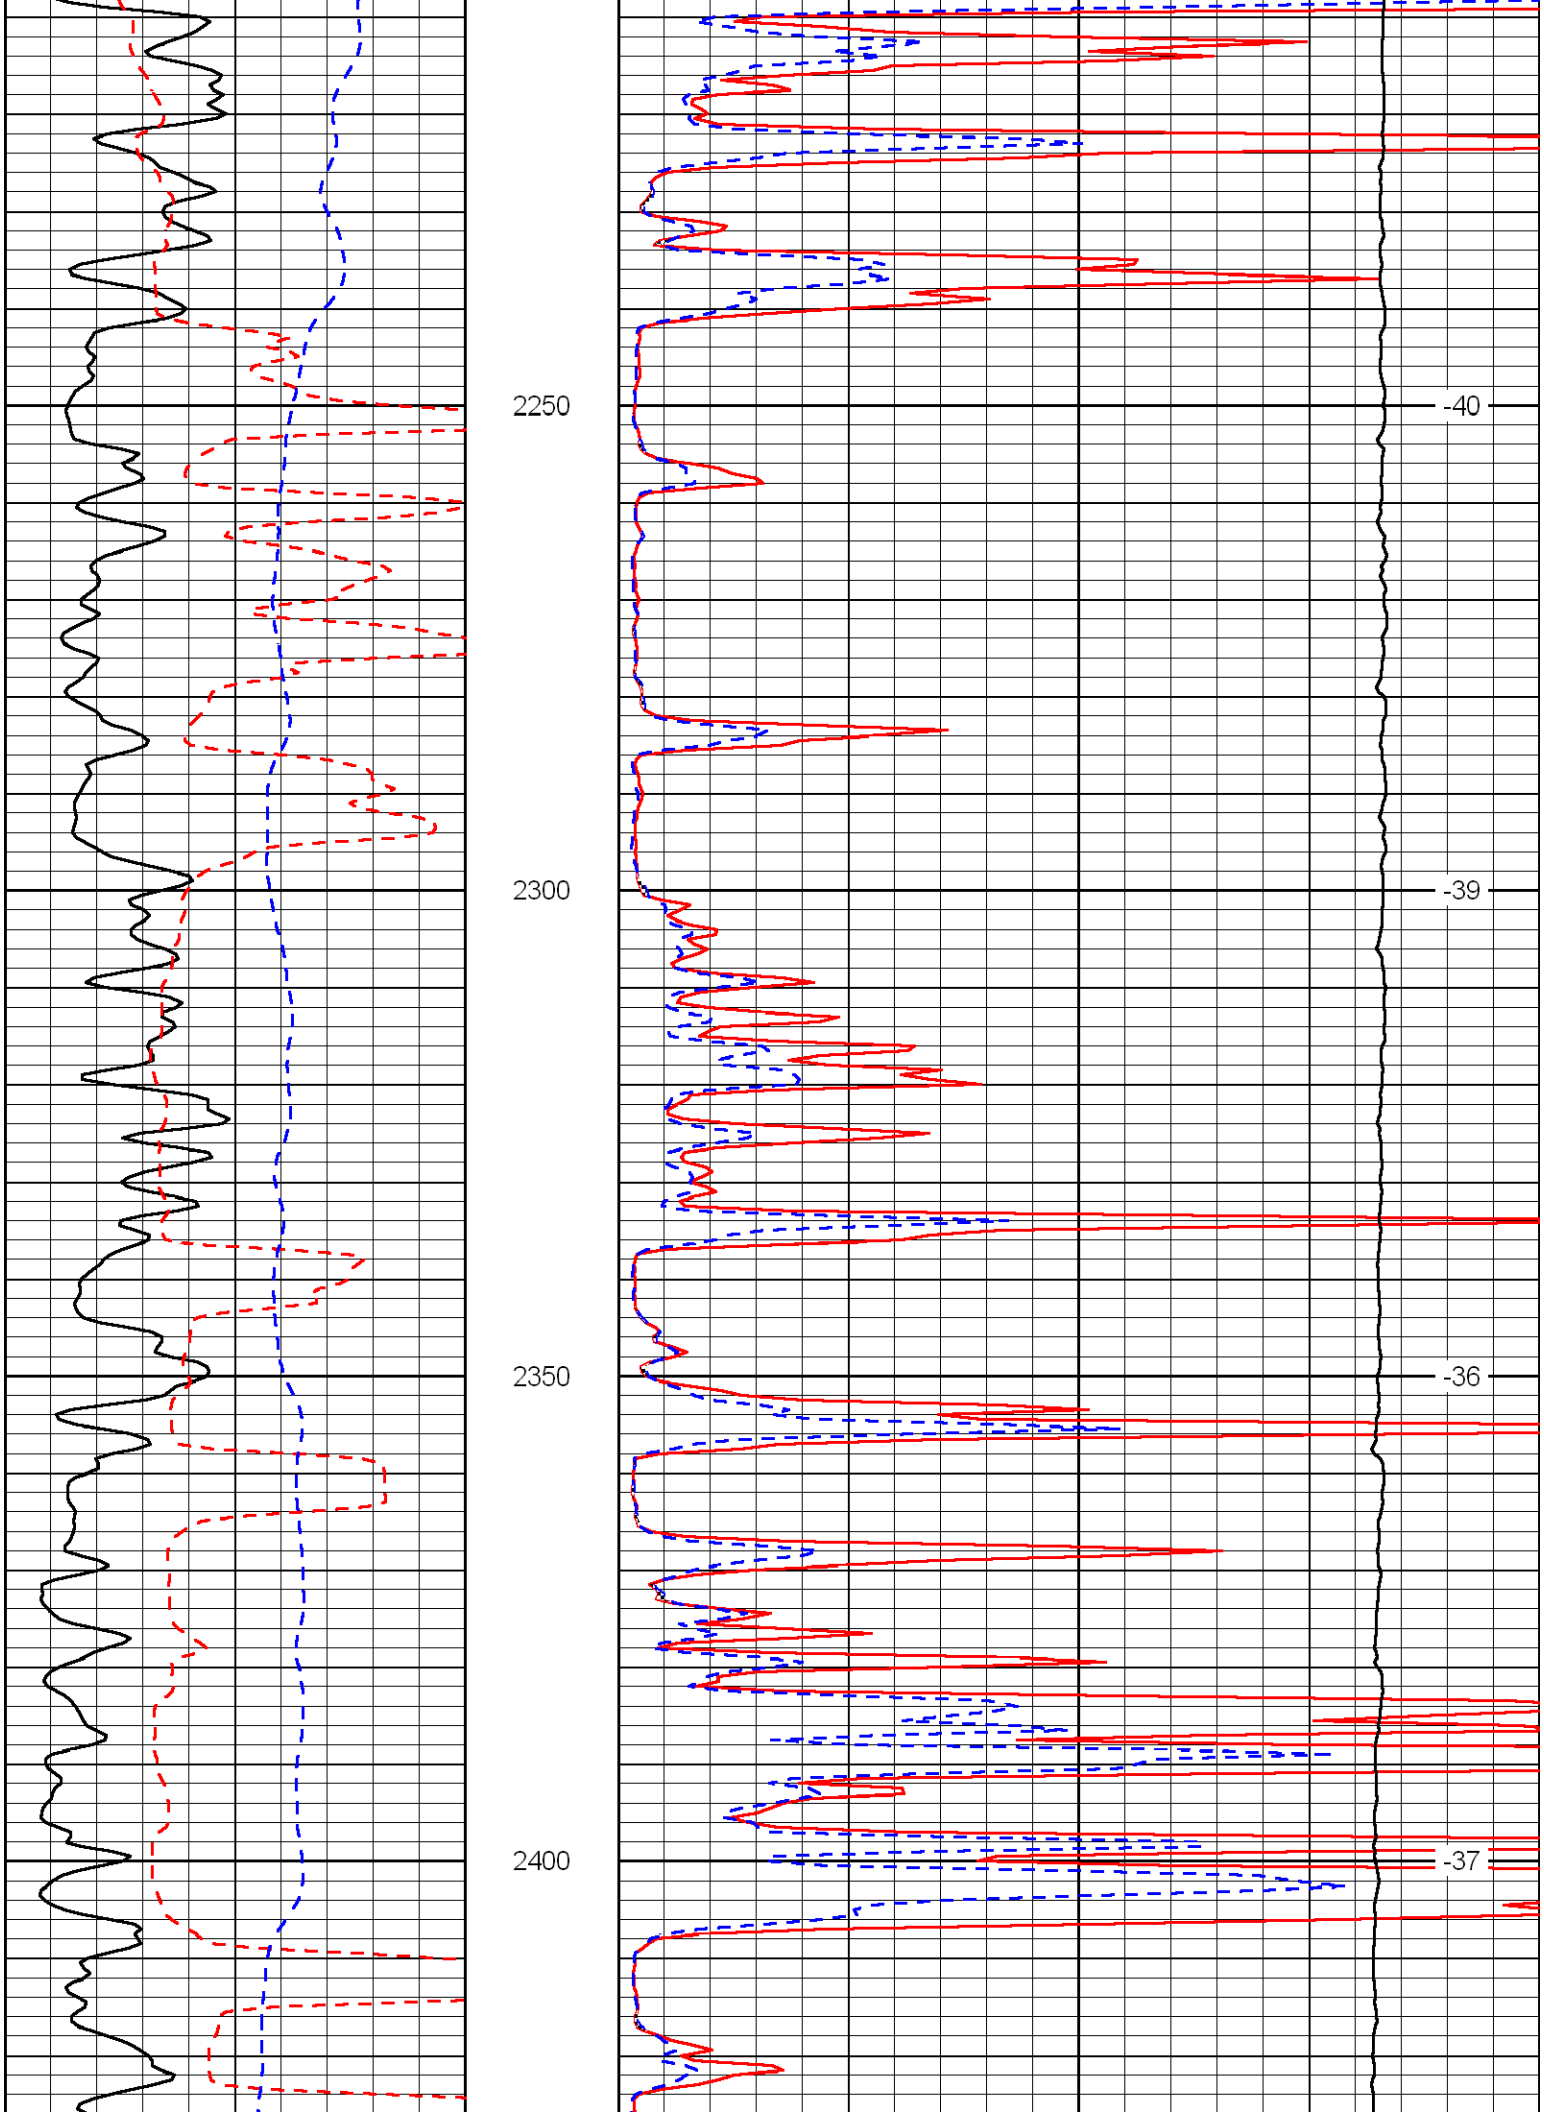
2250
2300
2350
2400
-40
-39
-36
-37

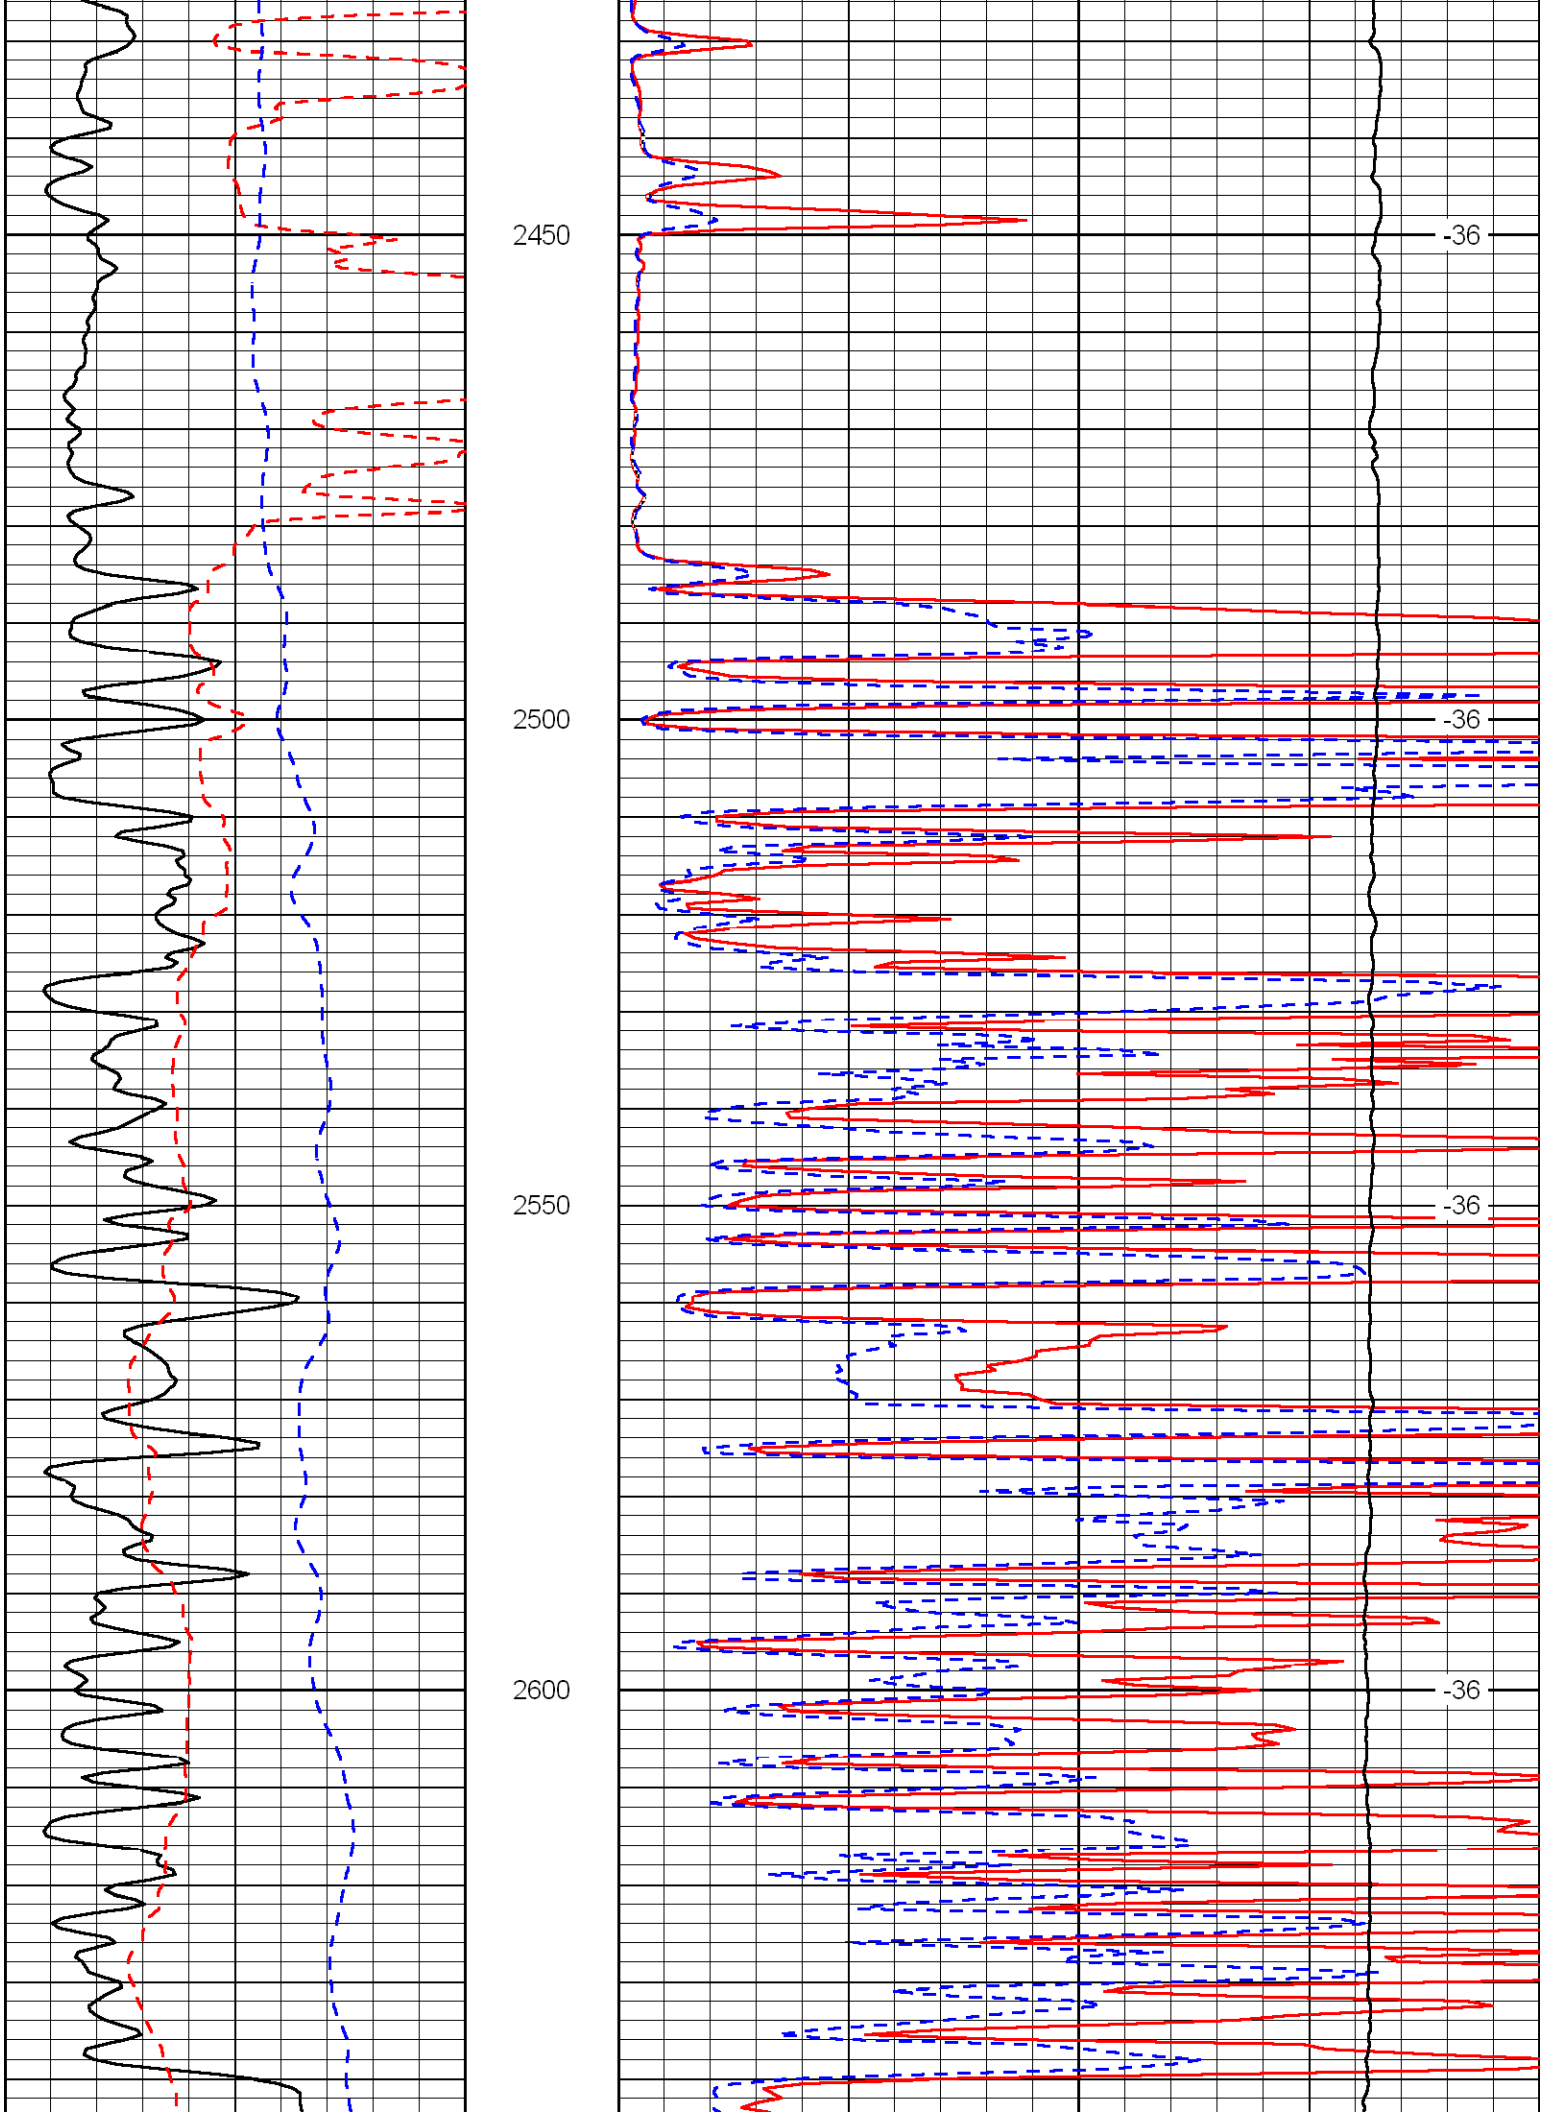
2450
2500
2550
2600
-36
-36
-36
-36

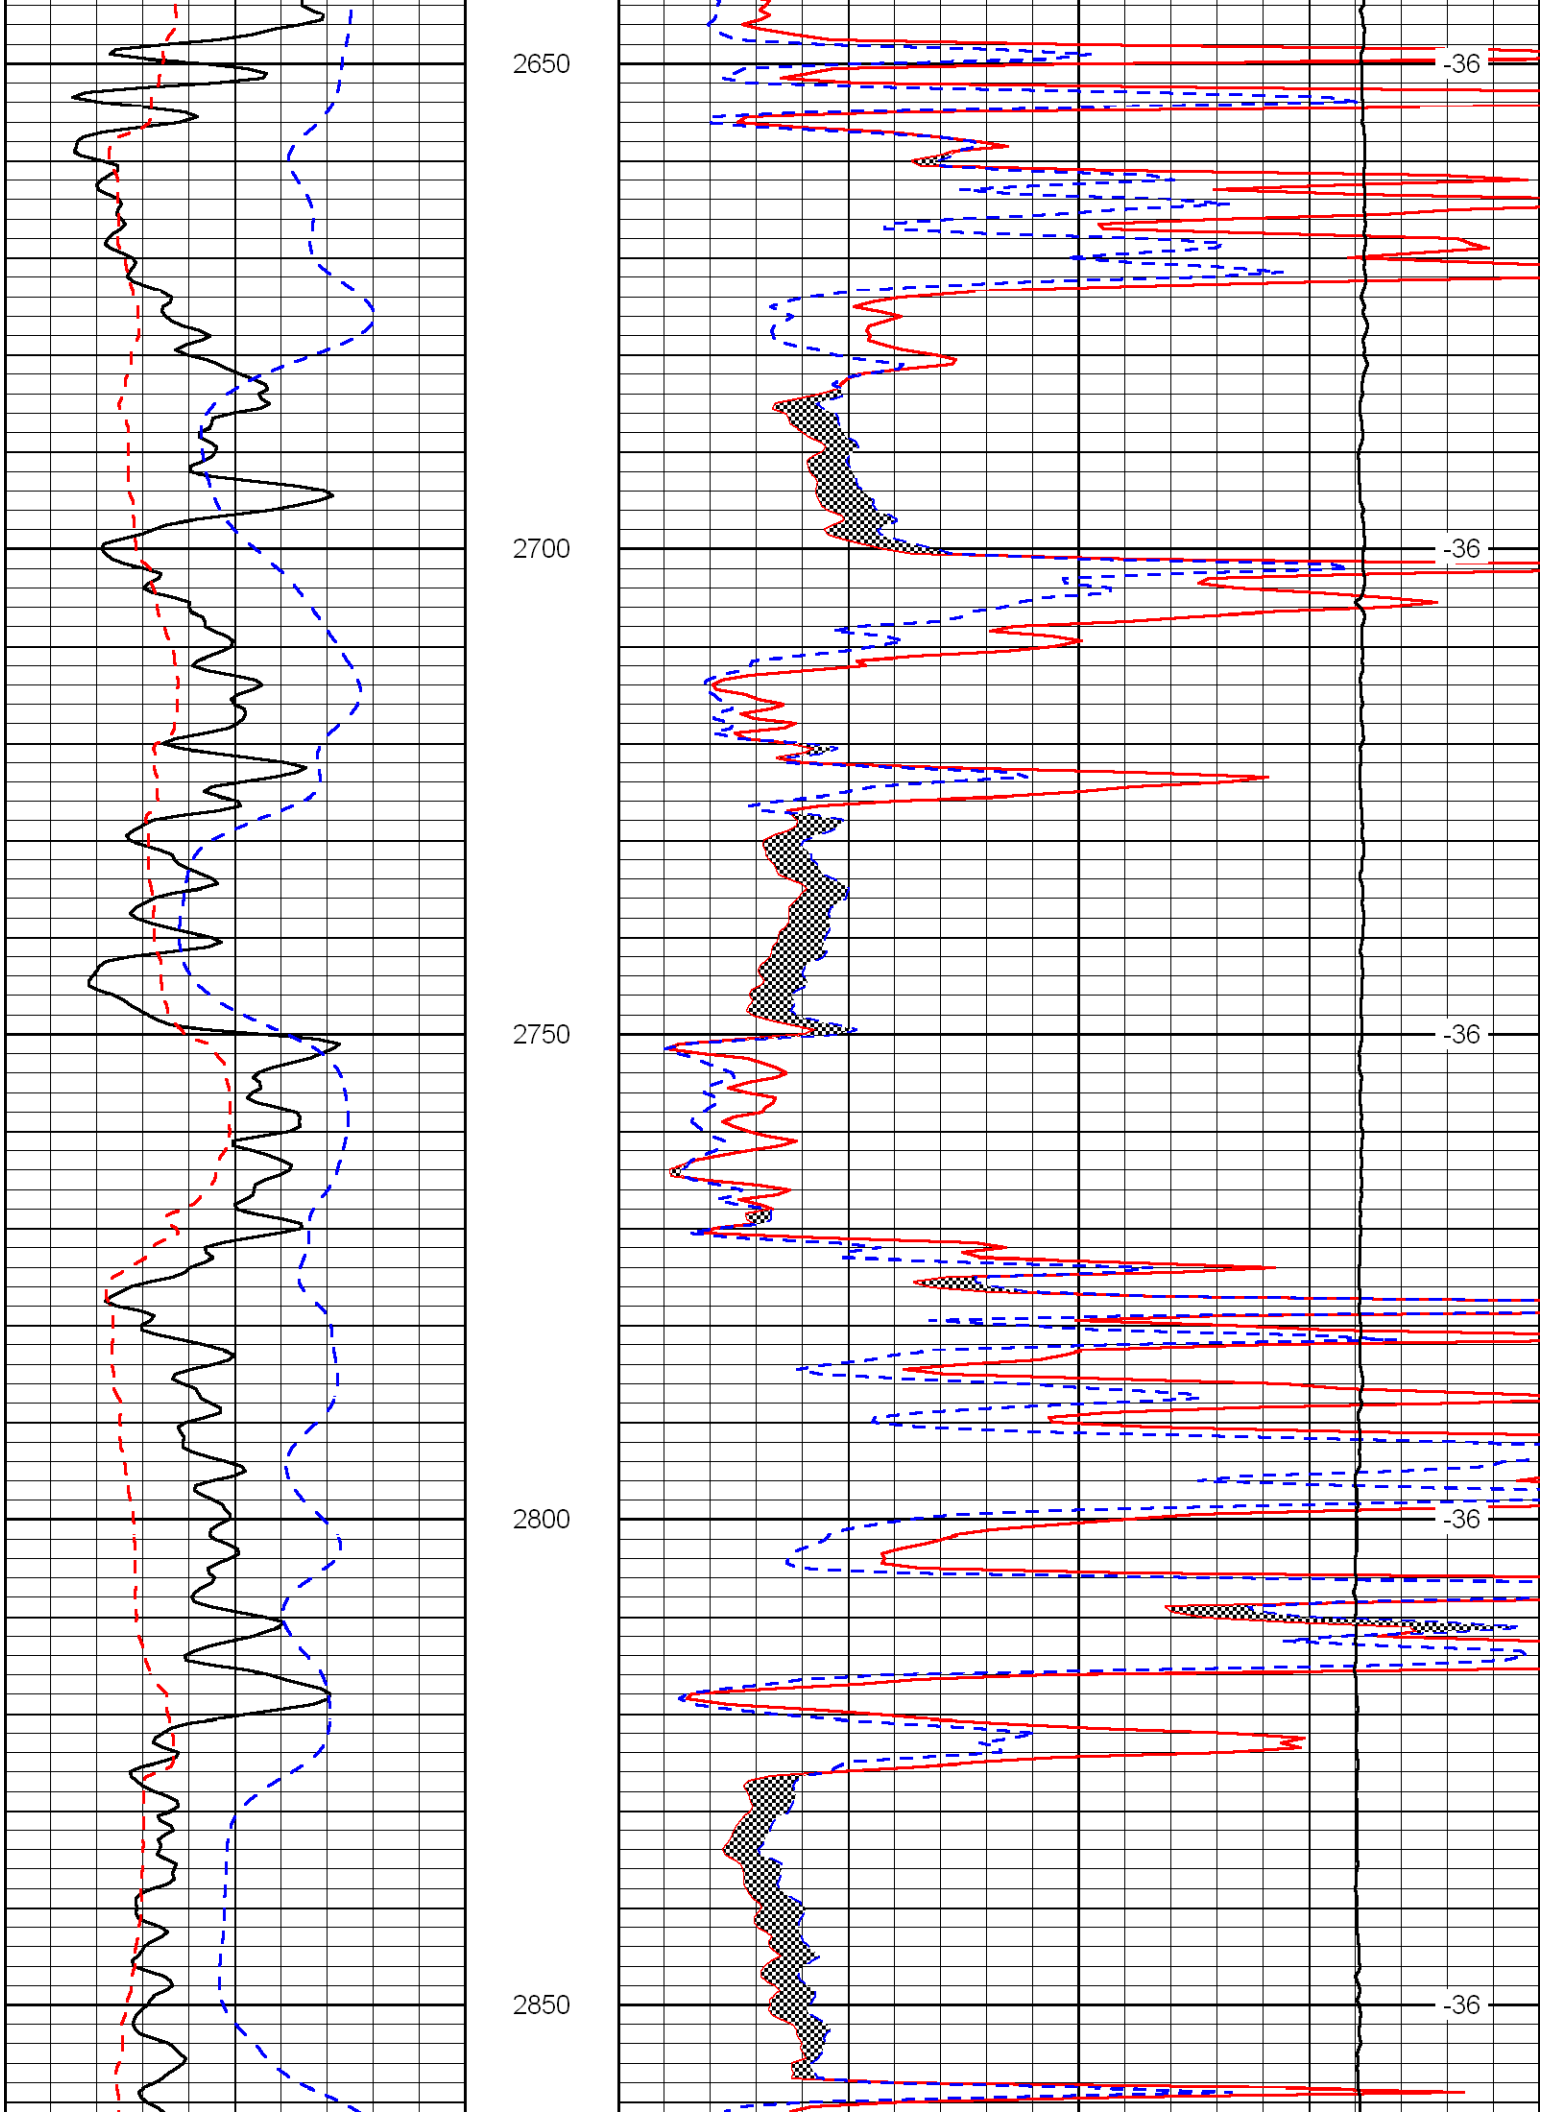
2650
2700
2750
2800
2850
-36
-36
-36
-36
-36

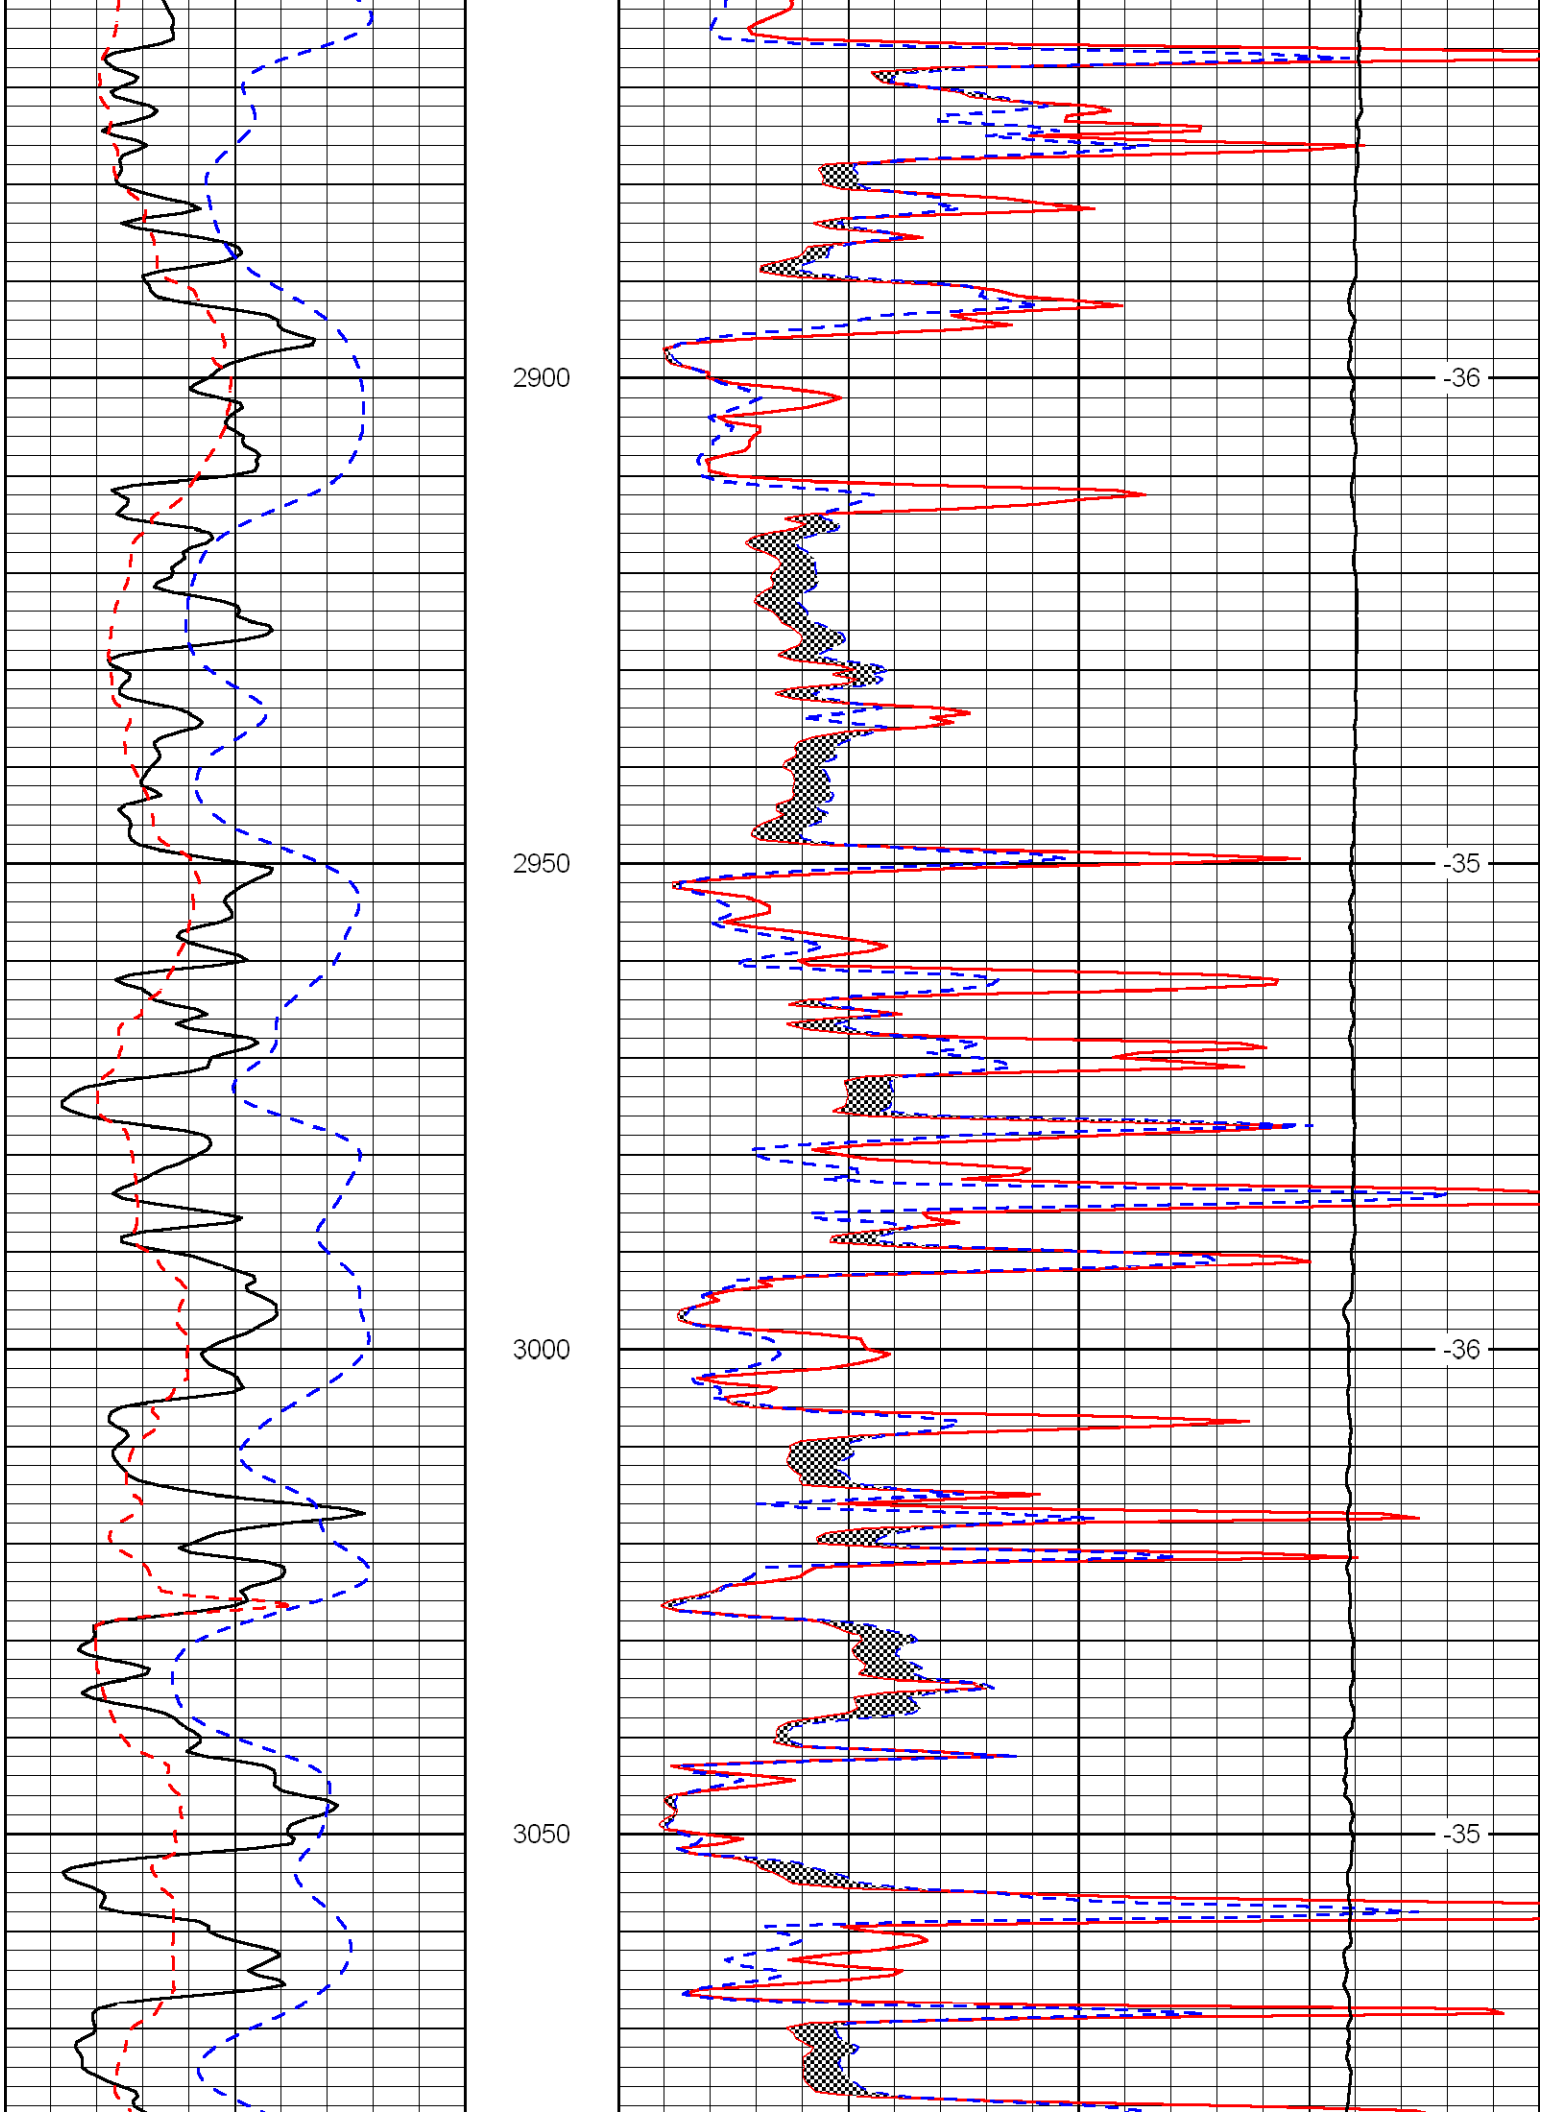
2900
2950
3000
3050
-36
-35
-36
-35

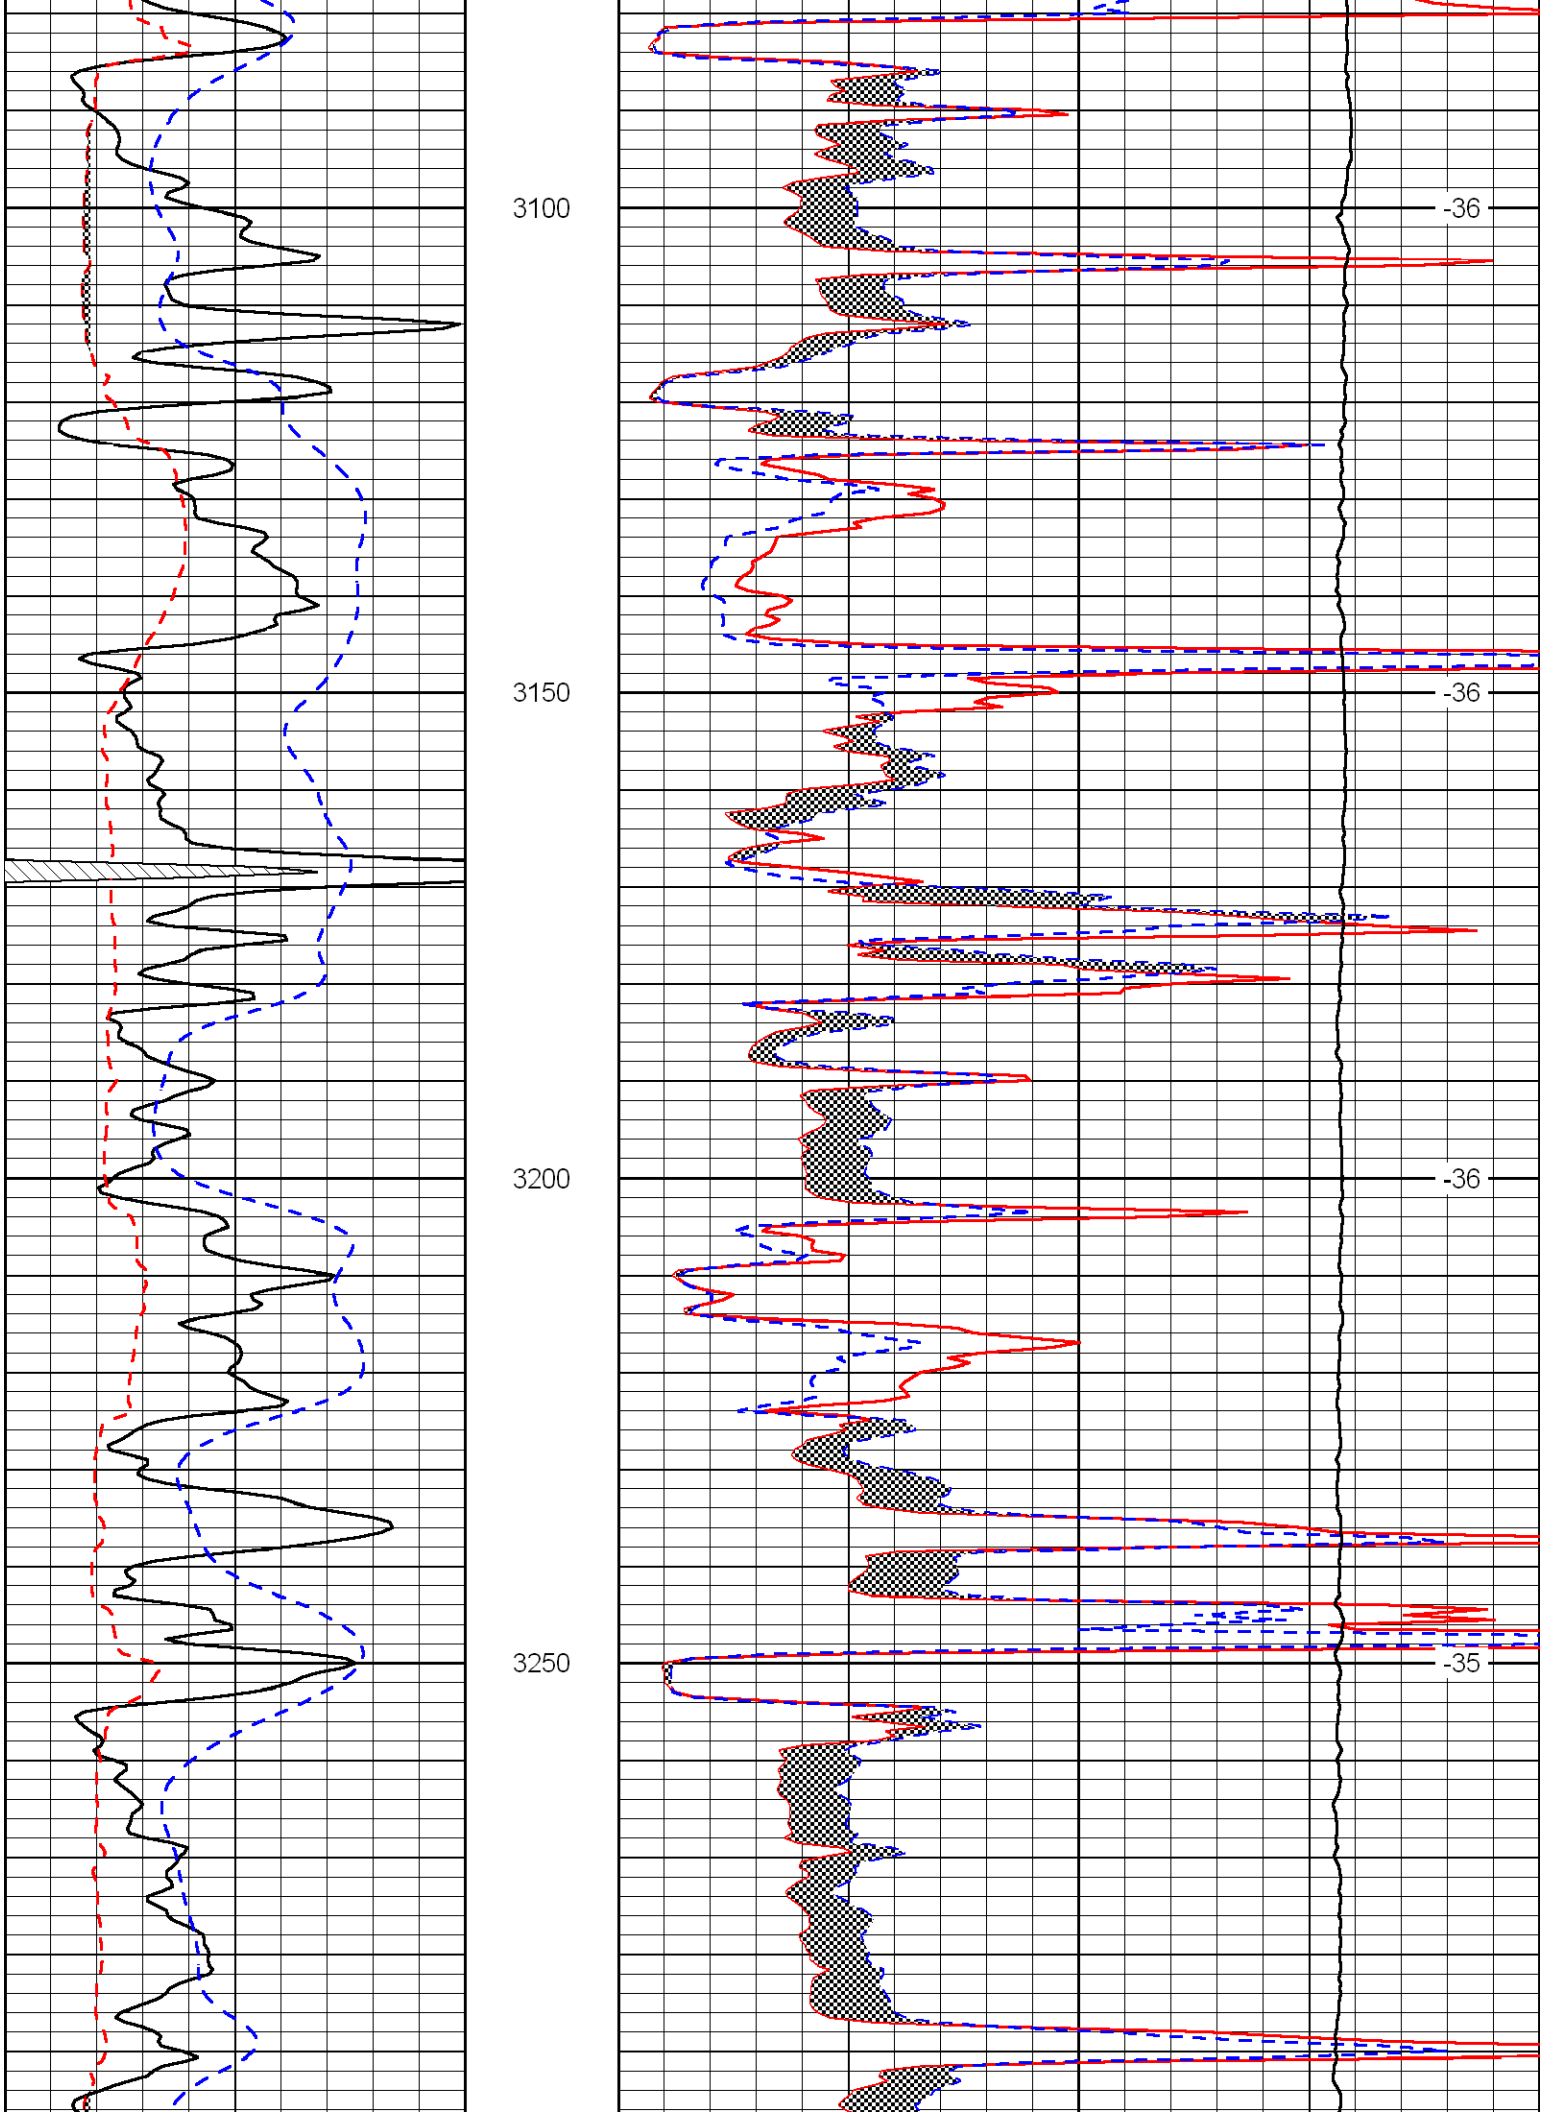
3100
3150
3200
3250
-36
-36
-36
-35

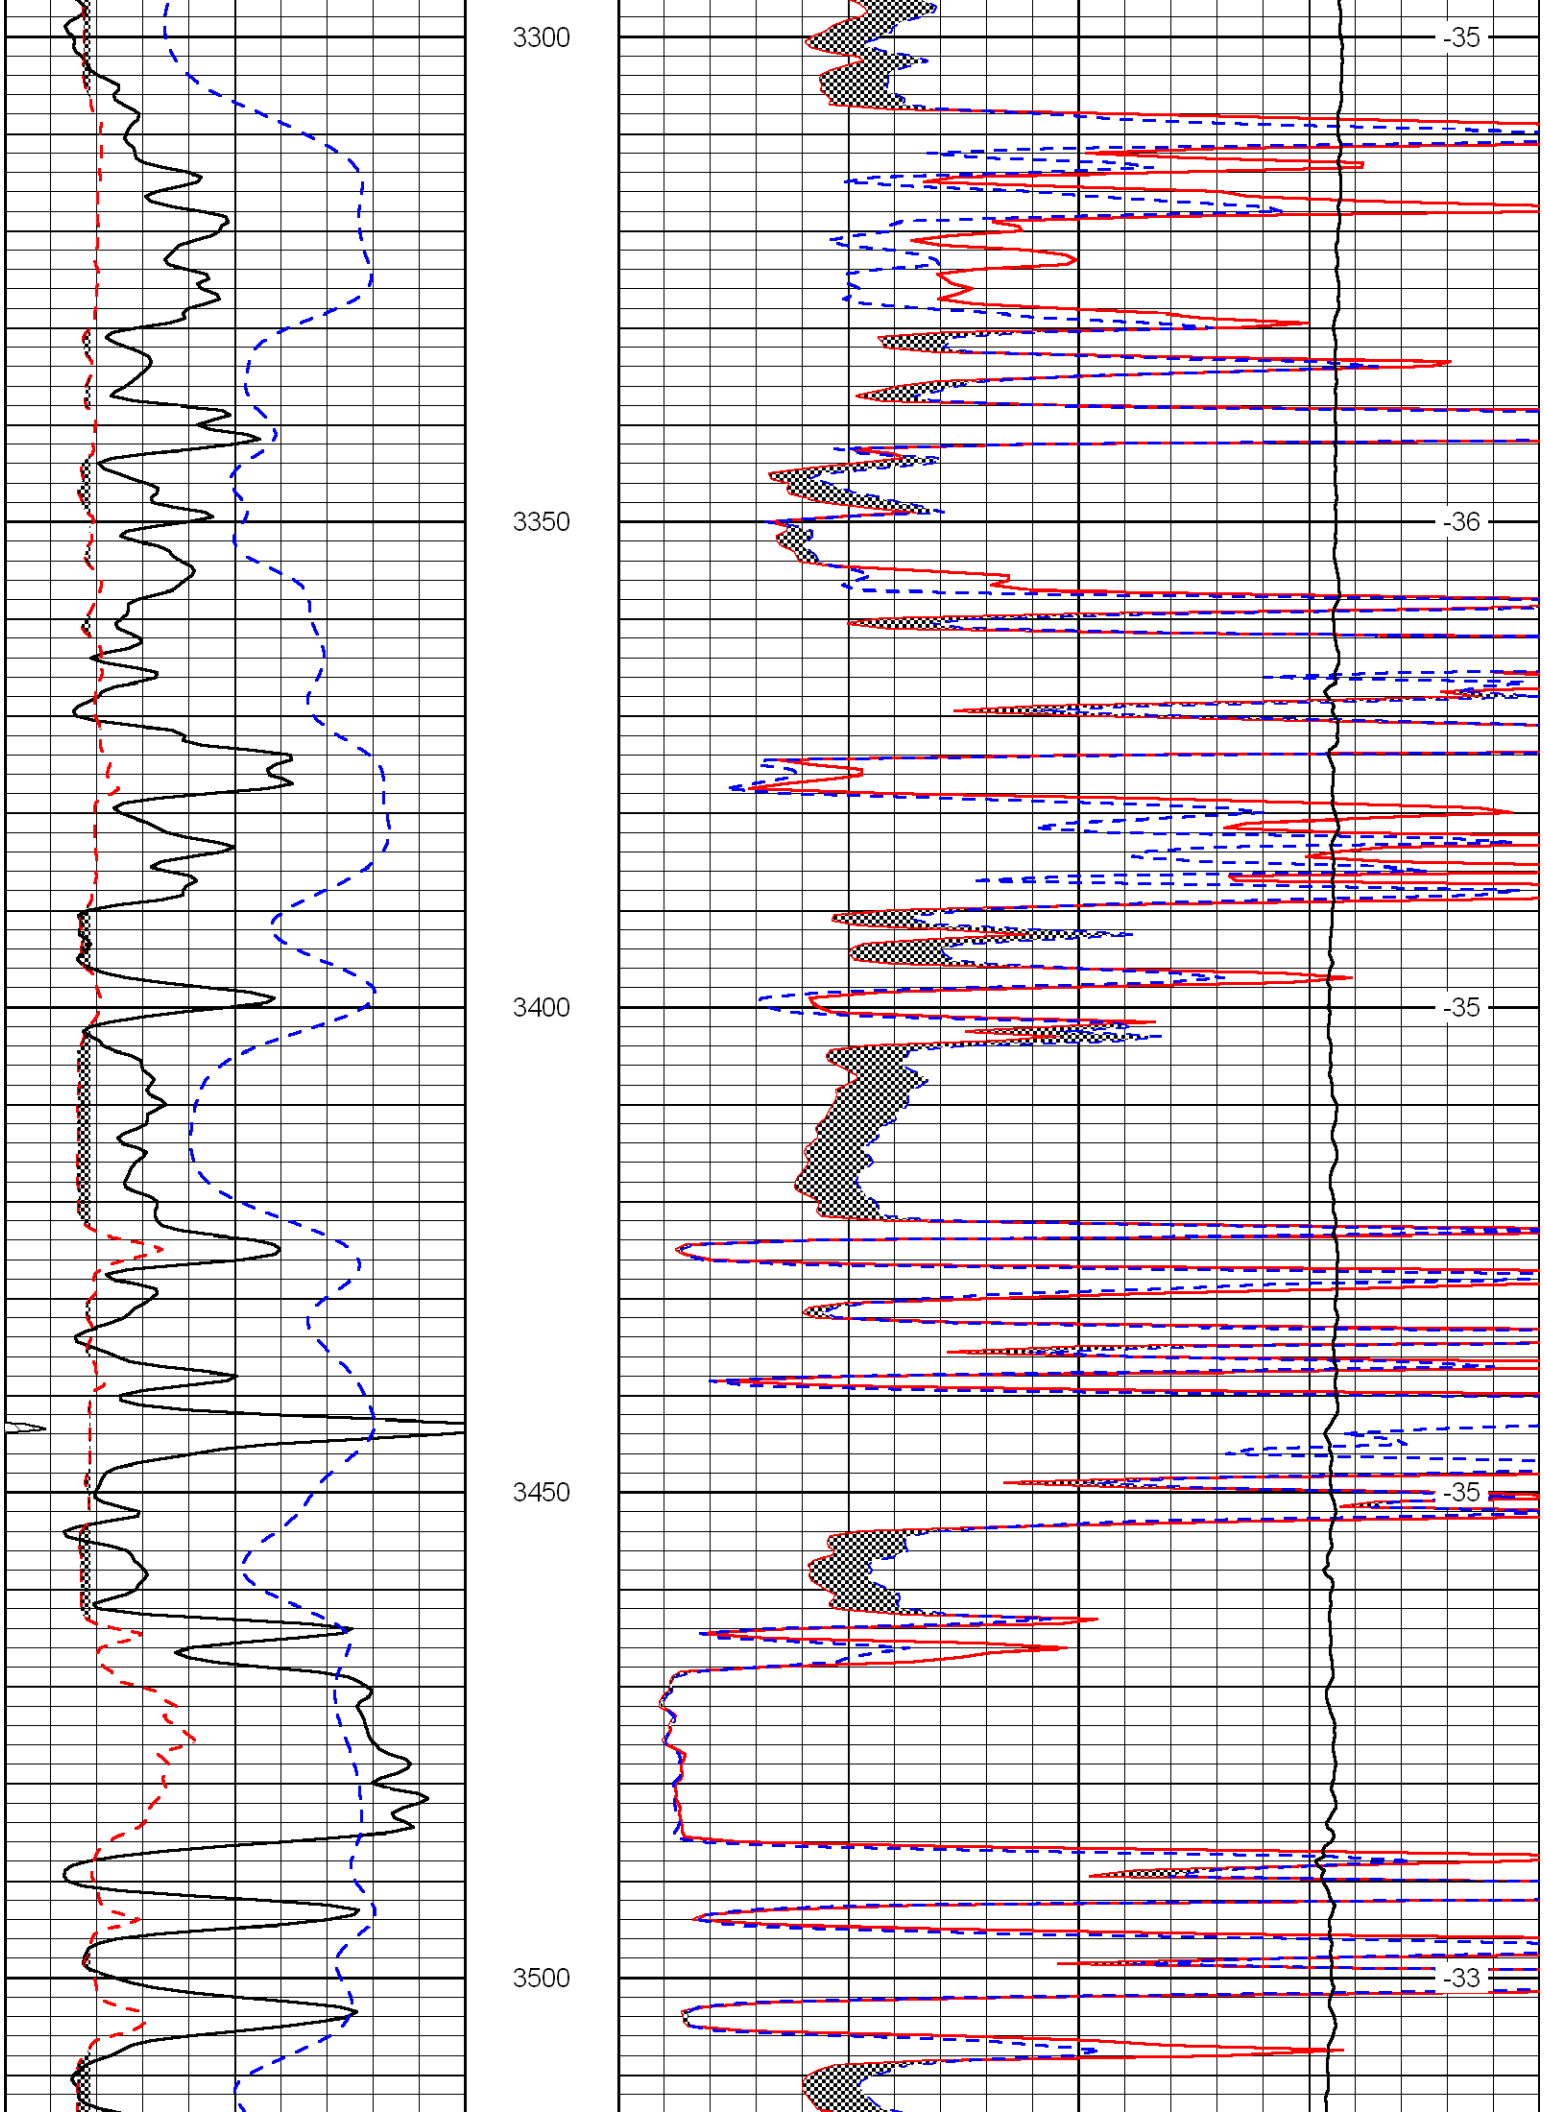
3300
3350
3400
3450
3500
-35
-36
-35
-35
-33

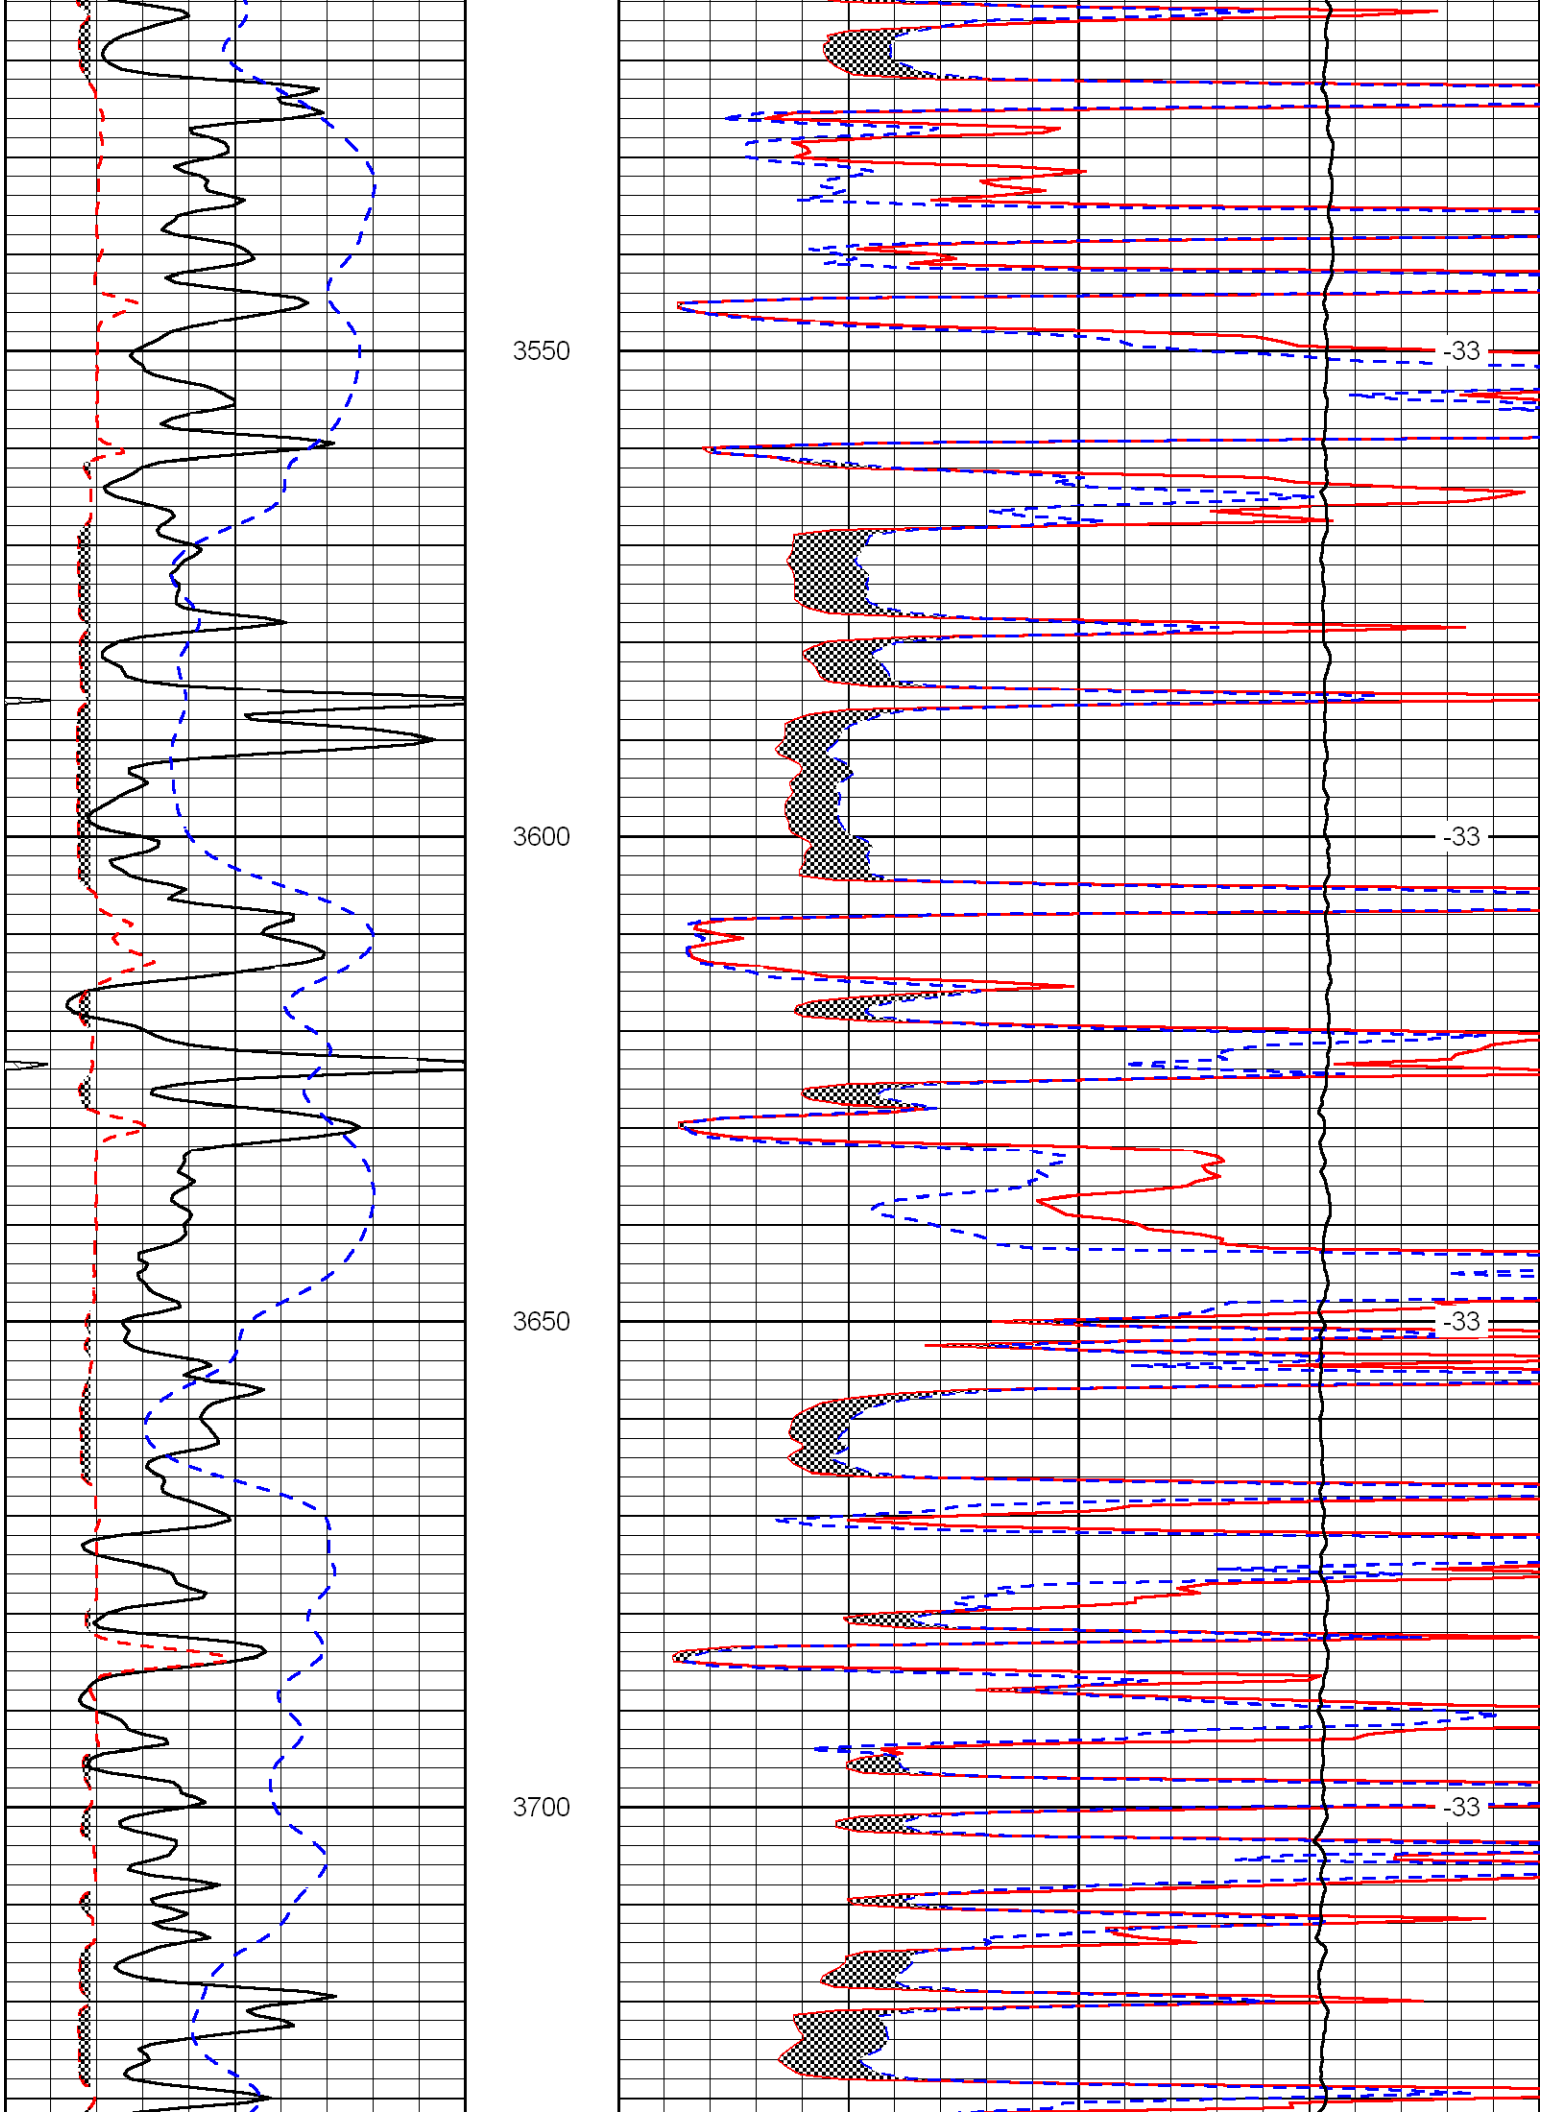
3550
3600
3650
3700
-33
-33
-33
-33

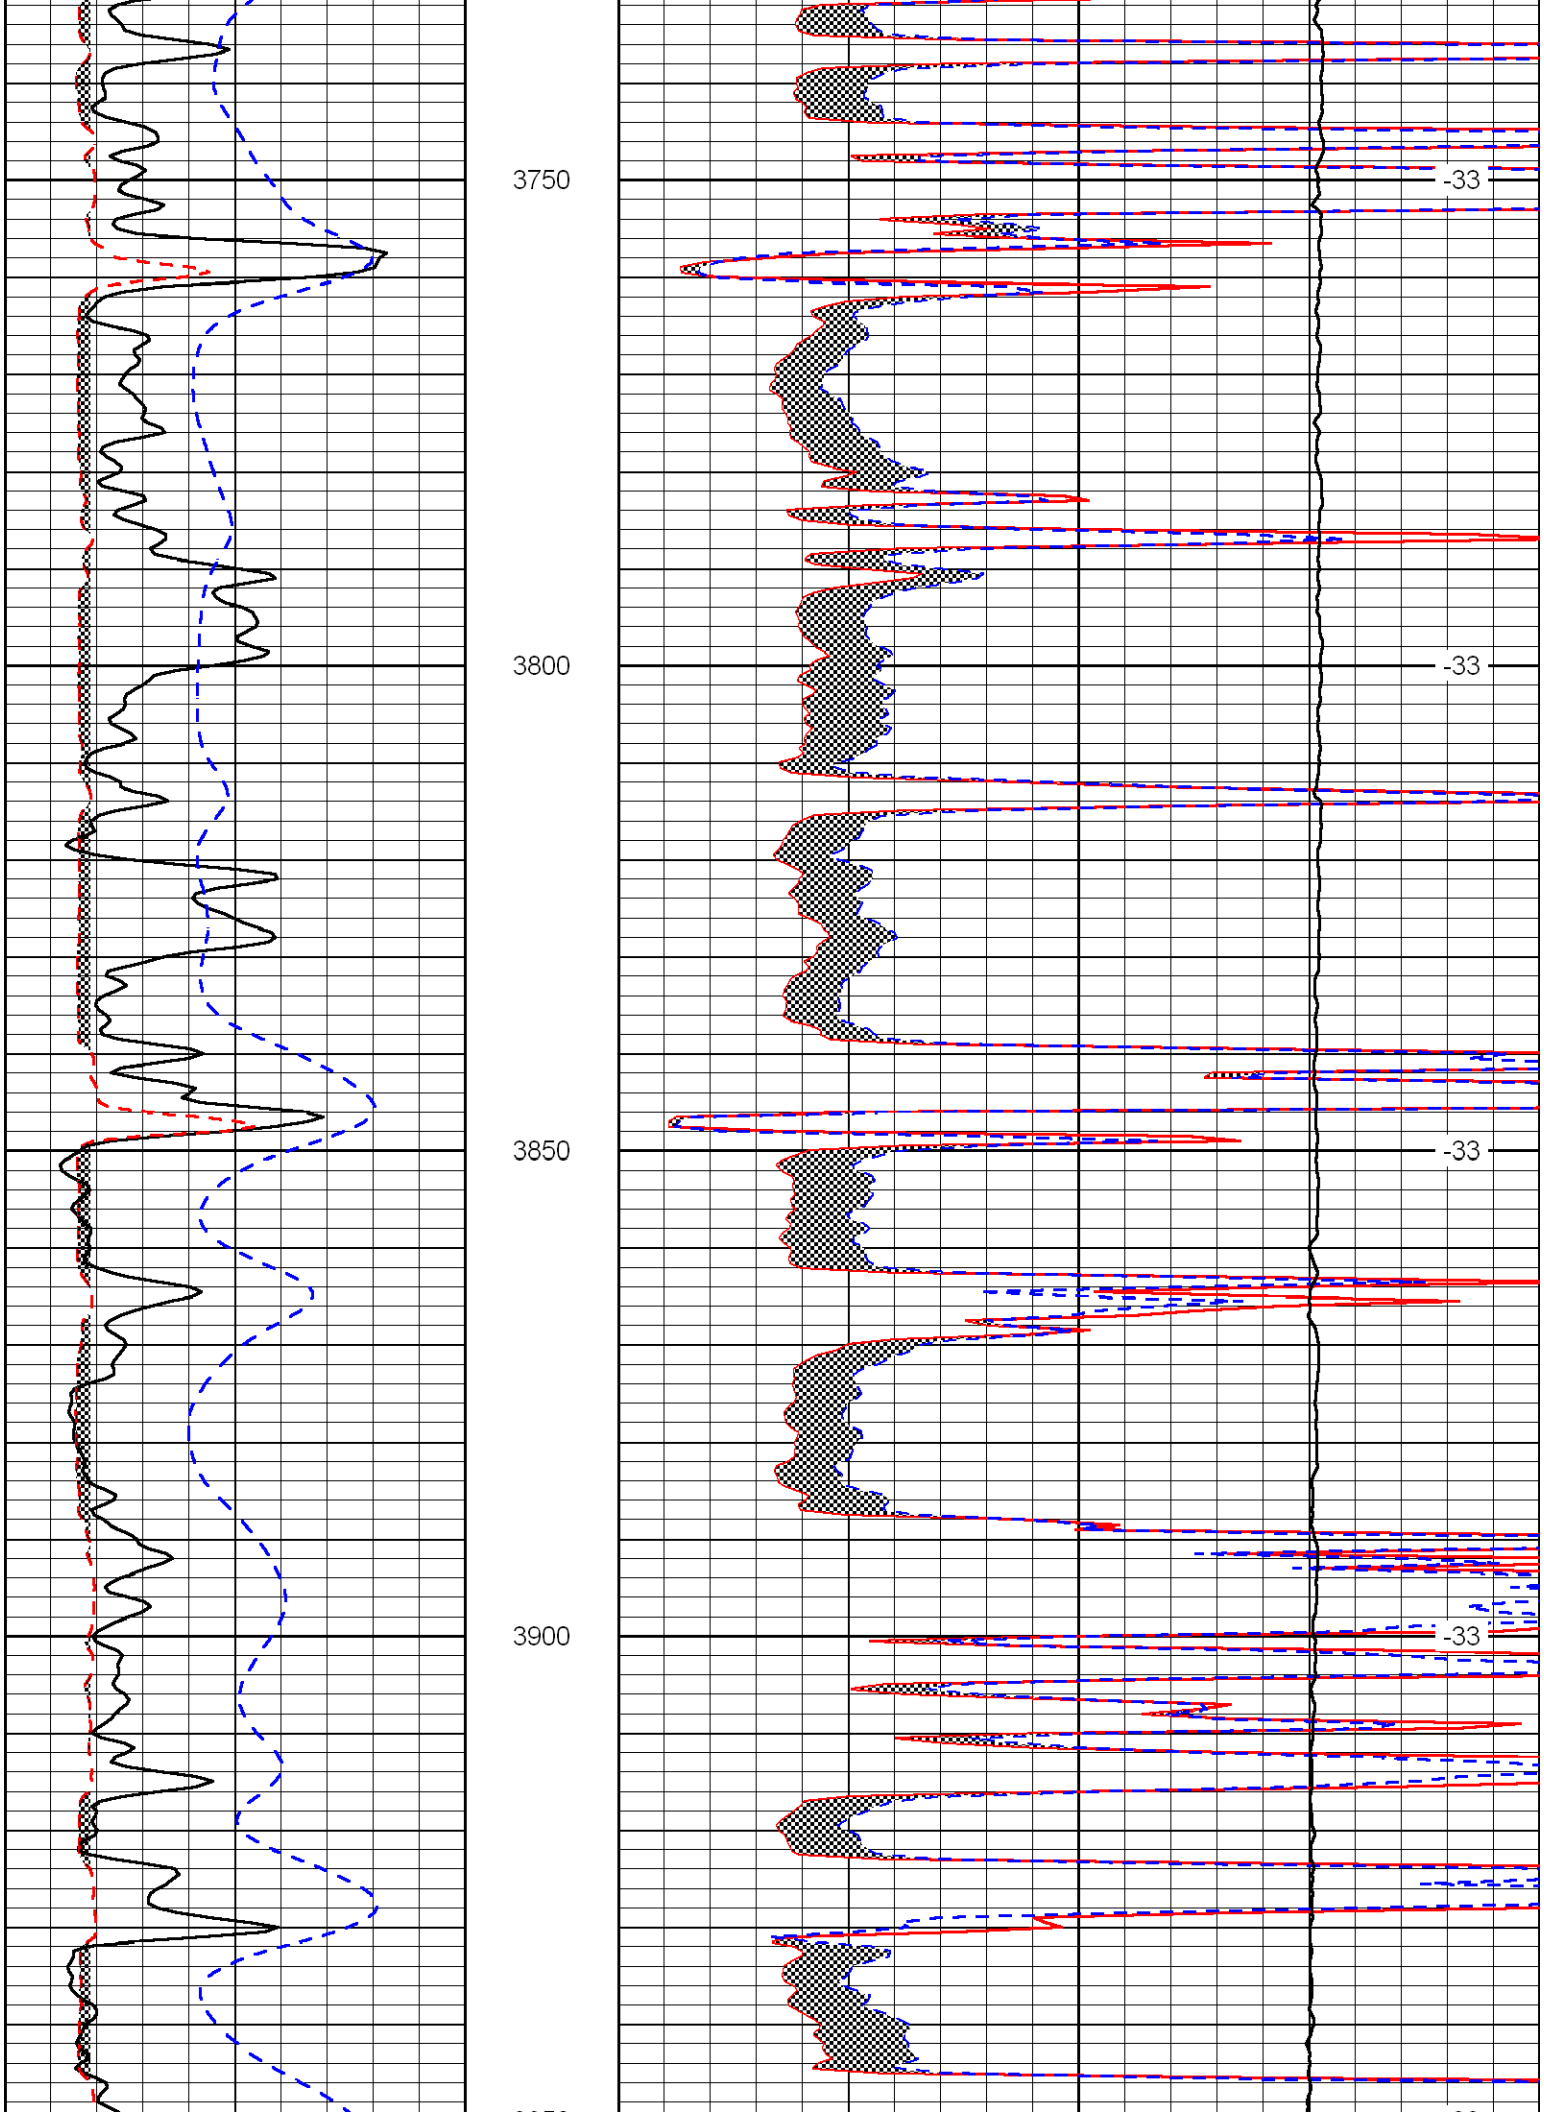
3750
-33
3800
-33
3850
-33
3900
-33

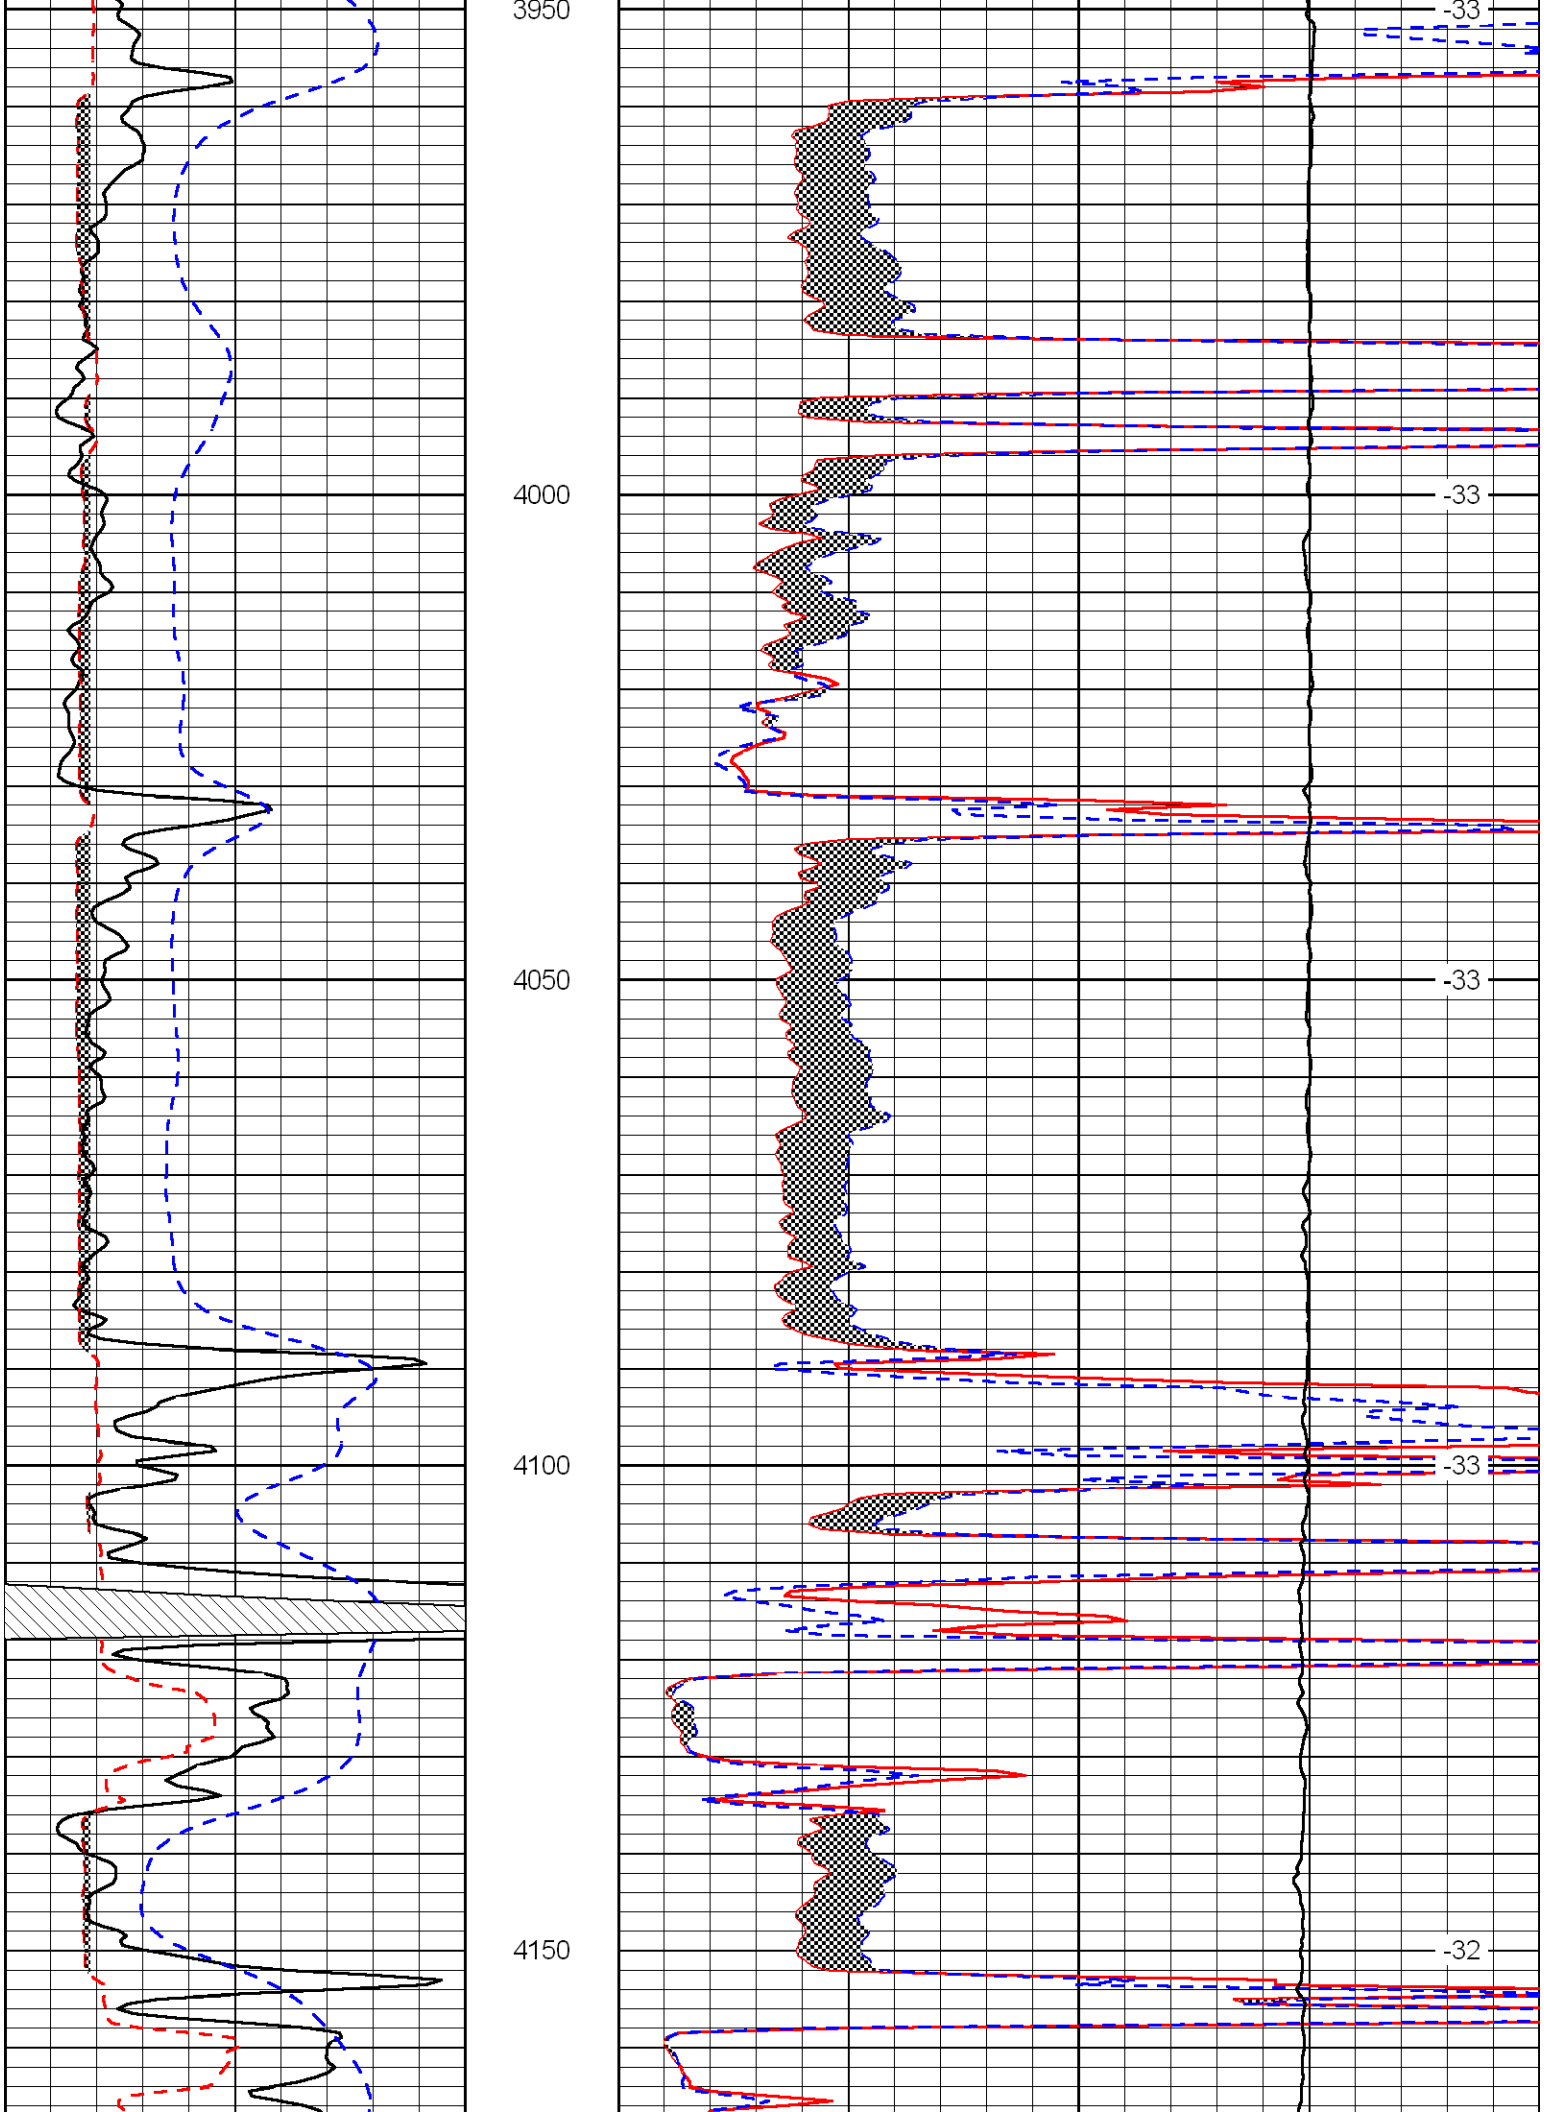
3950
4000
4050
4100
4150
-33
-33
-33
-33
-32

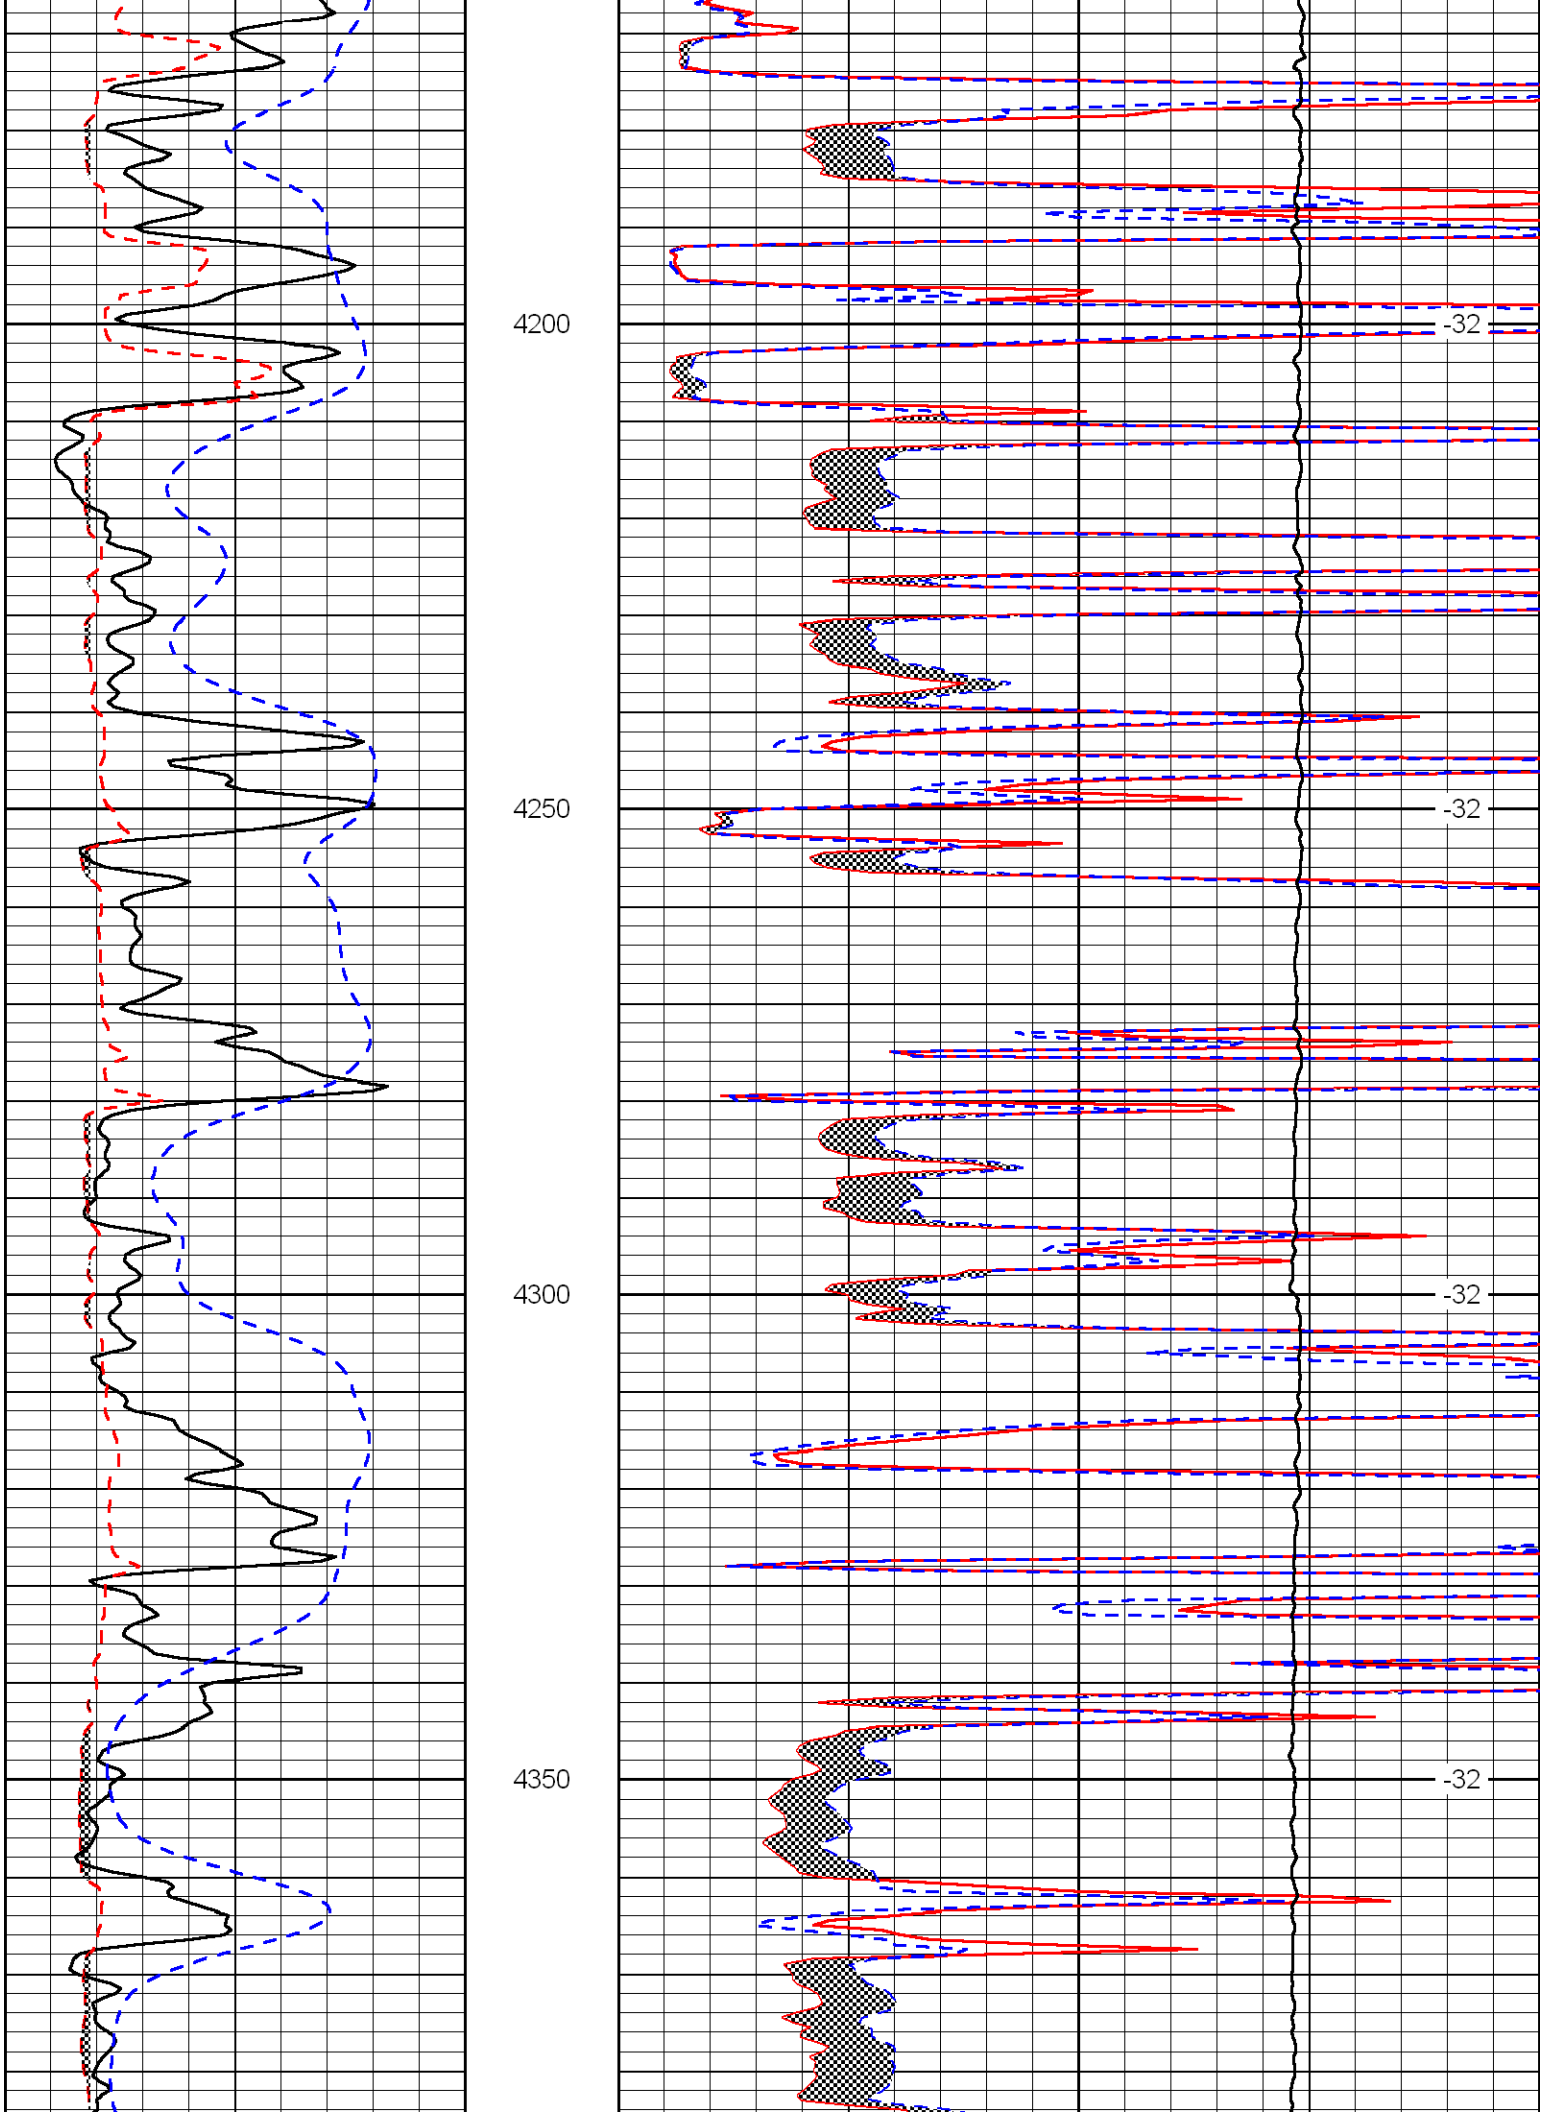
4200
4250
4300
4350
-32
-32
-32

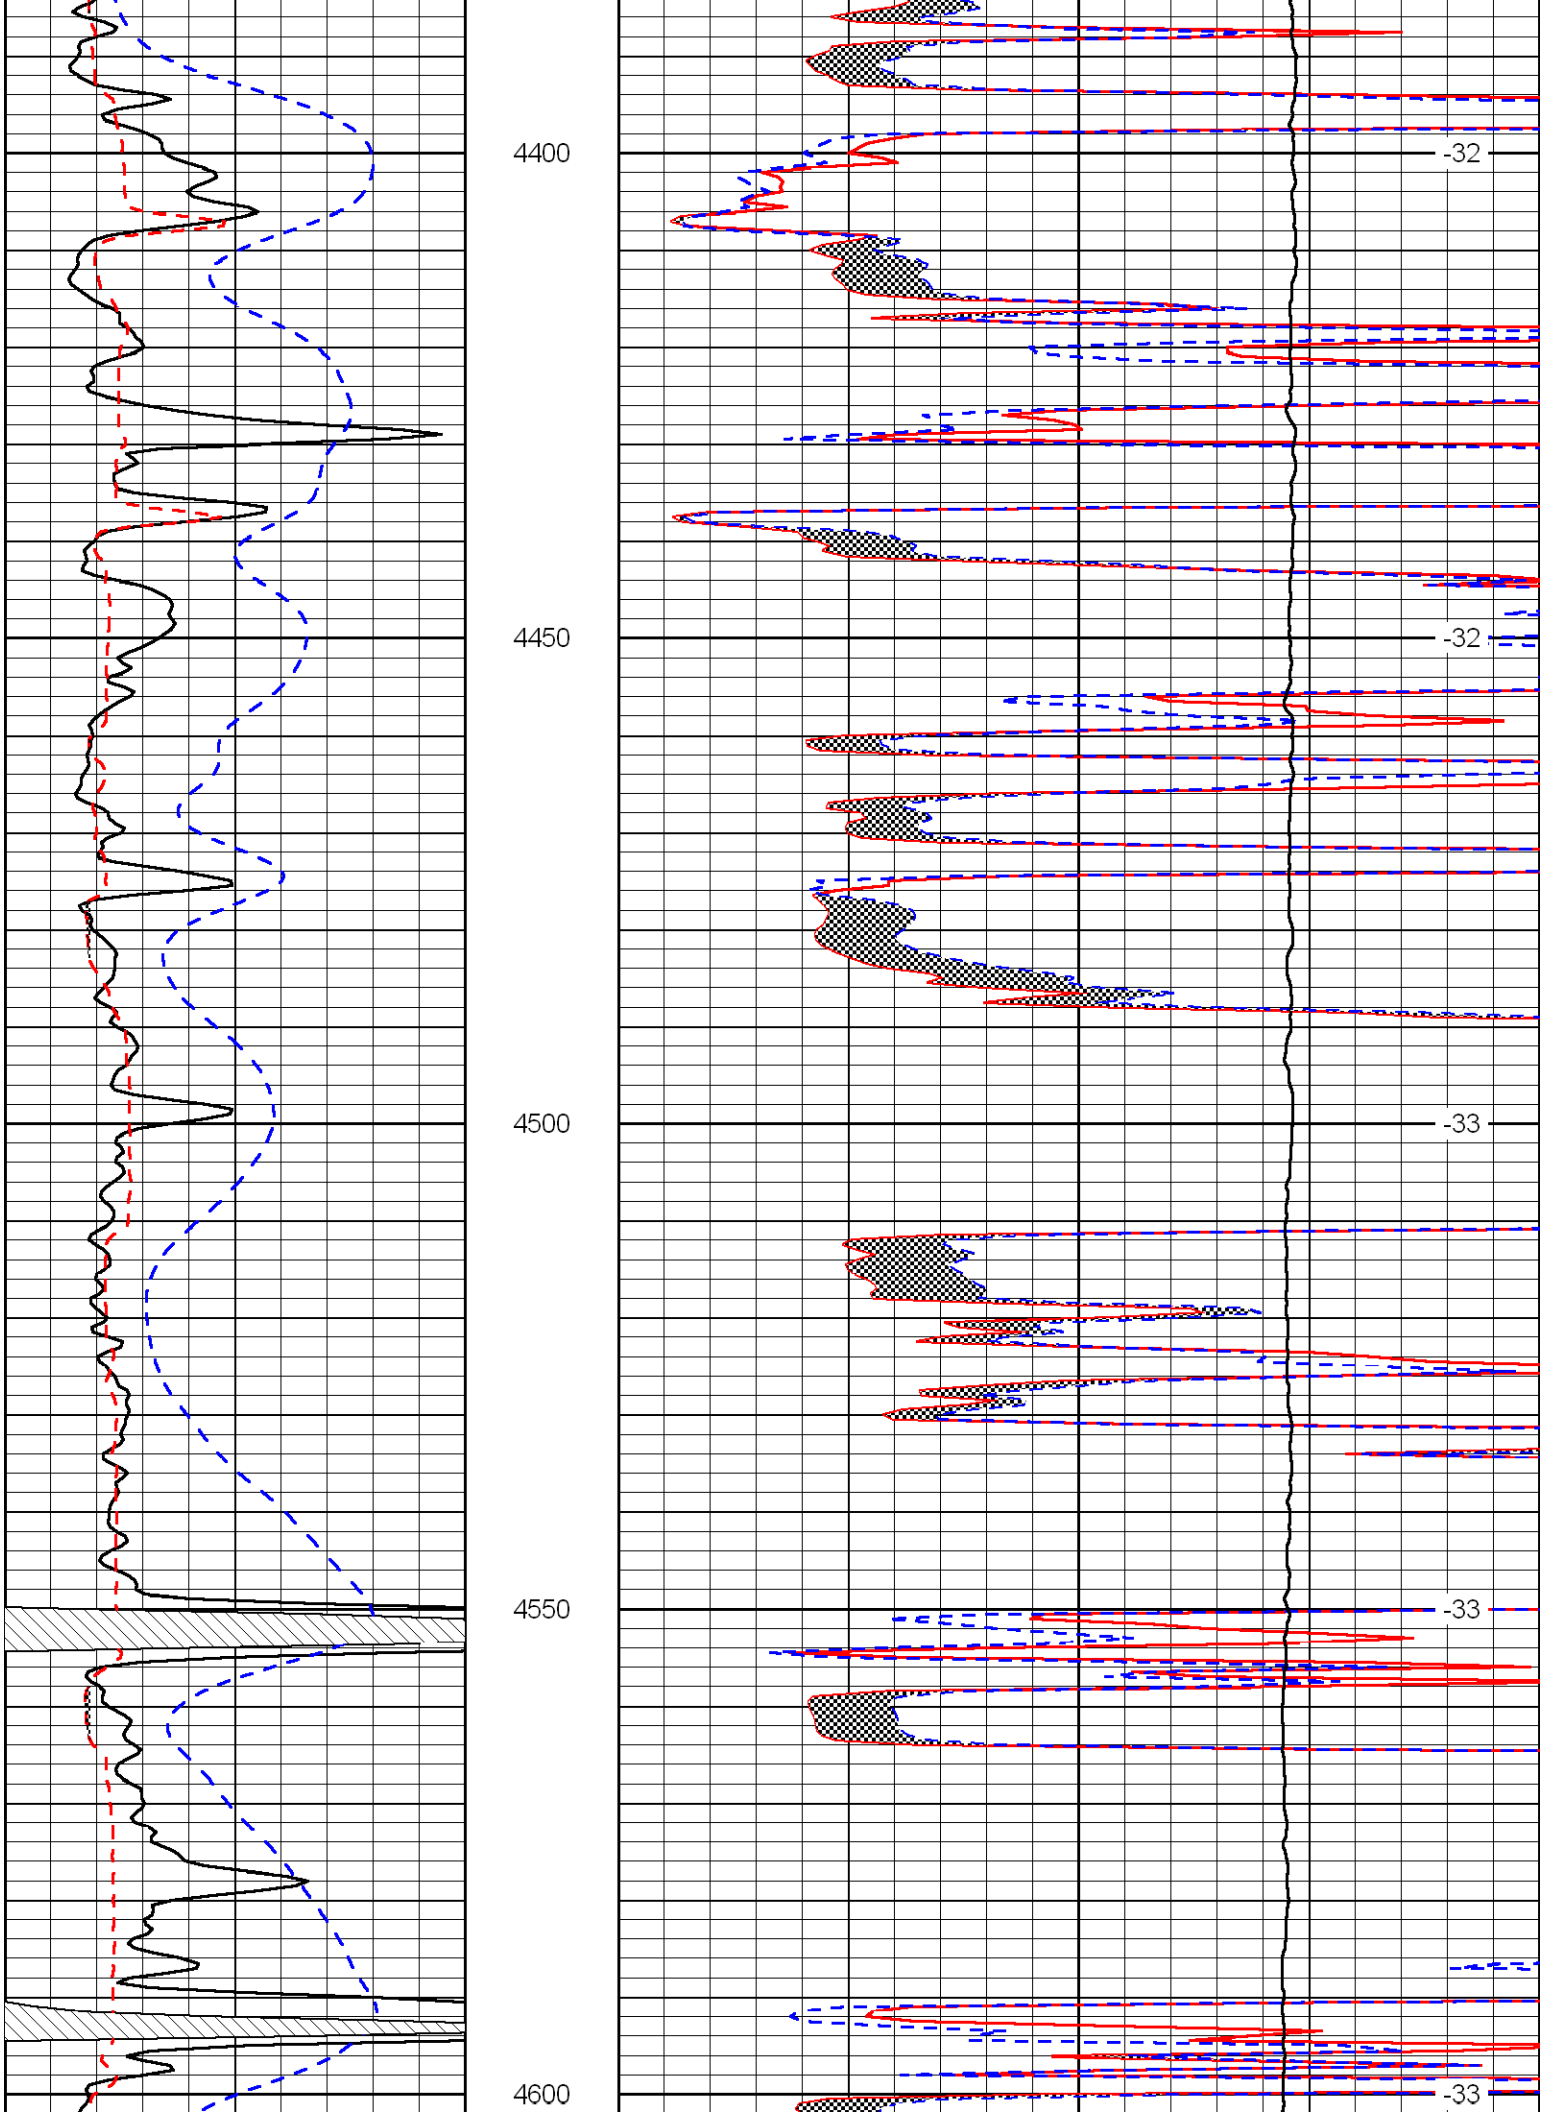
4400
4450
4500
4550
4600
-32
-32
-33
-33
-33

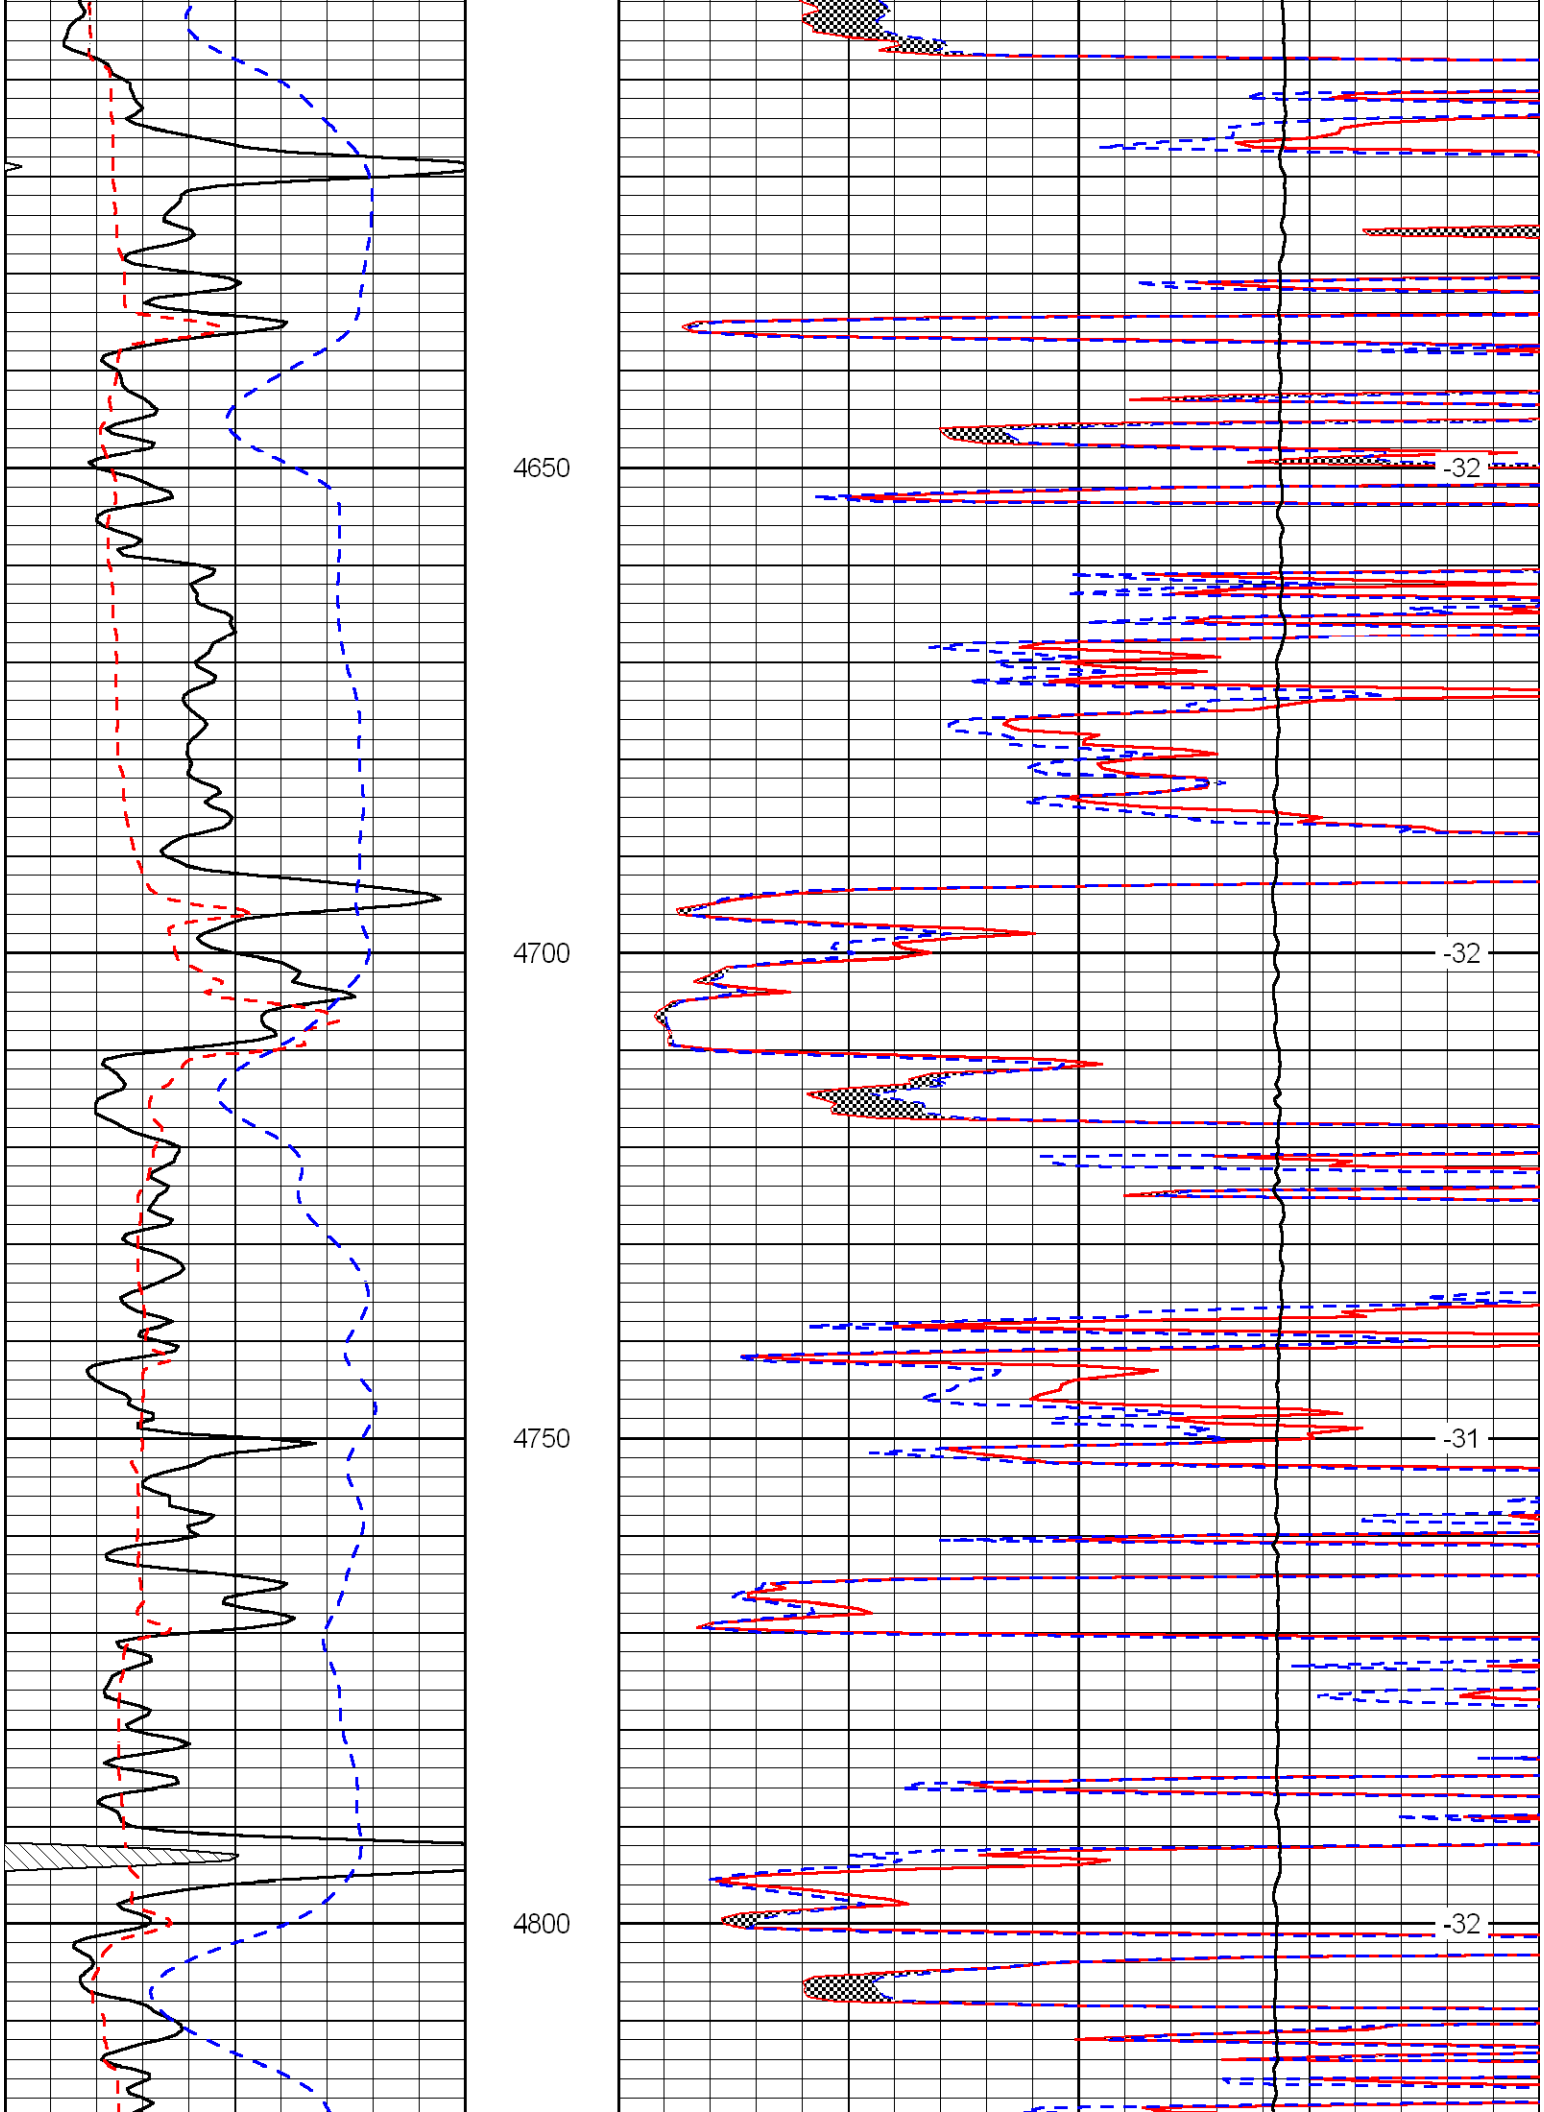
4650
-32
4700
-32
4750
-31
4800
-32

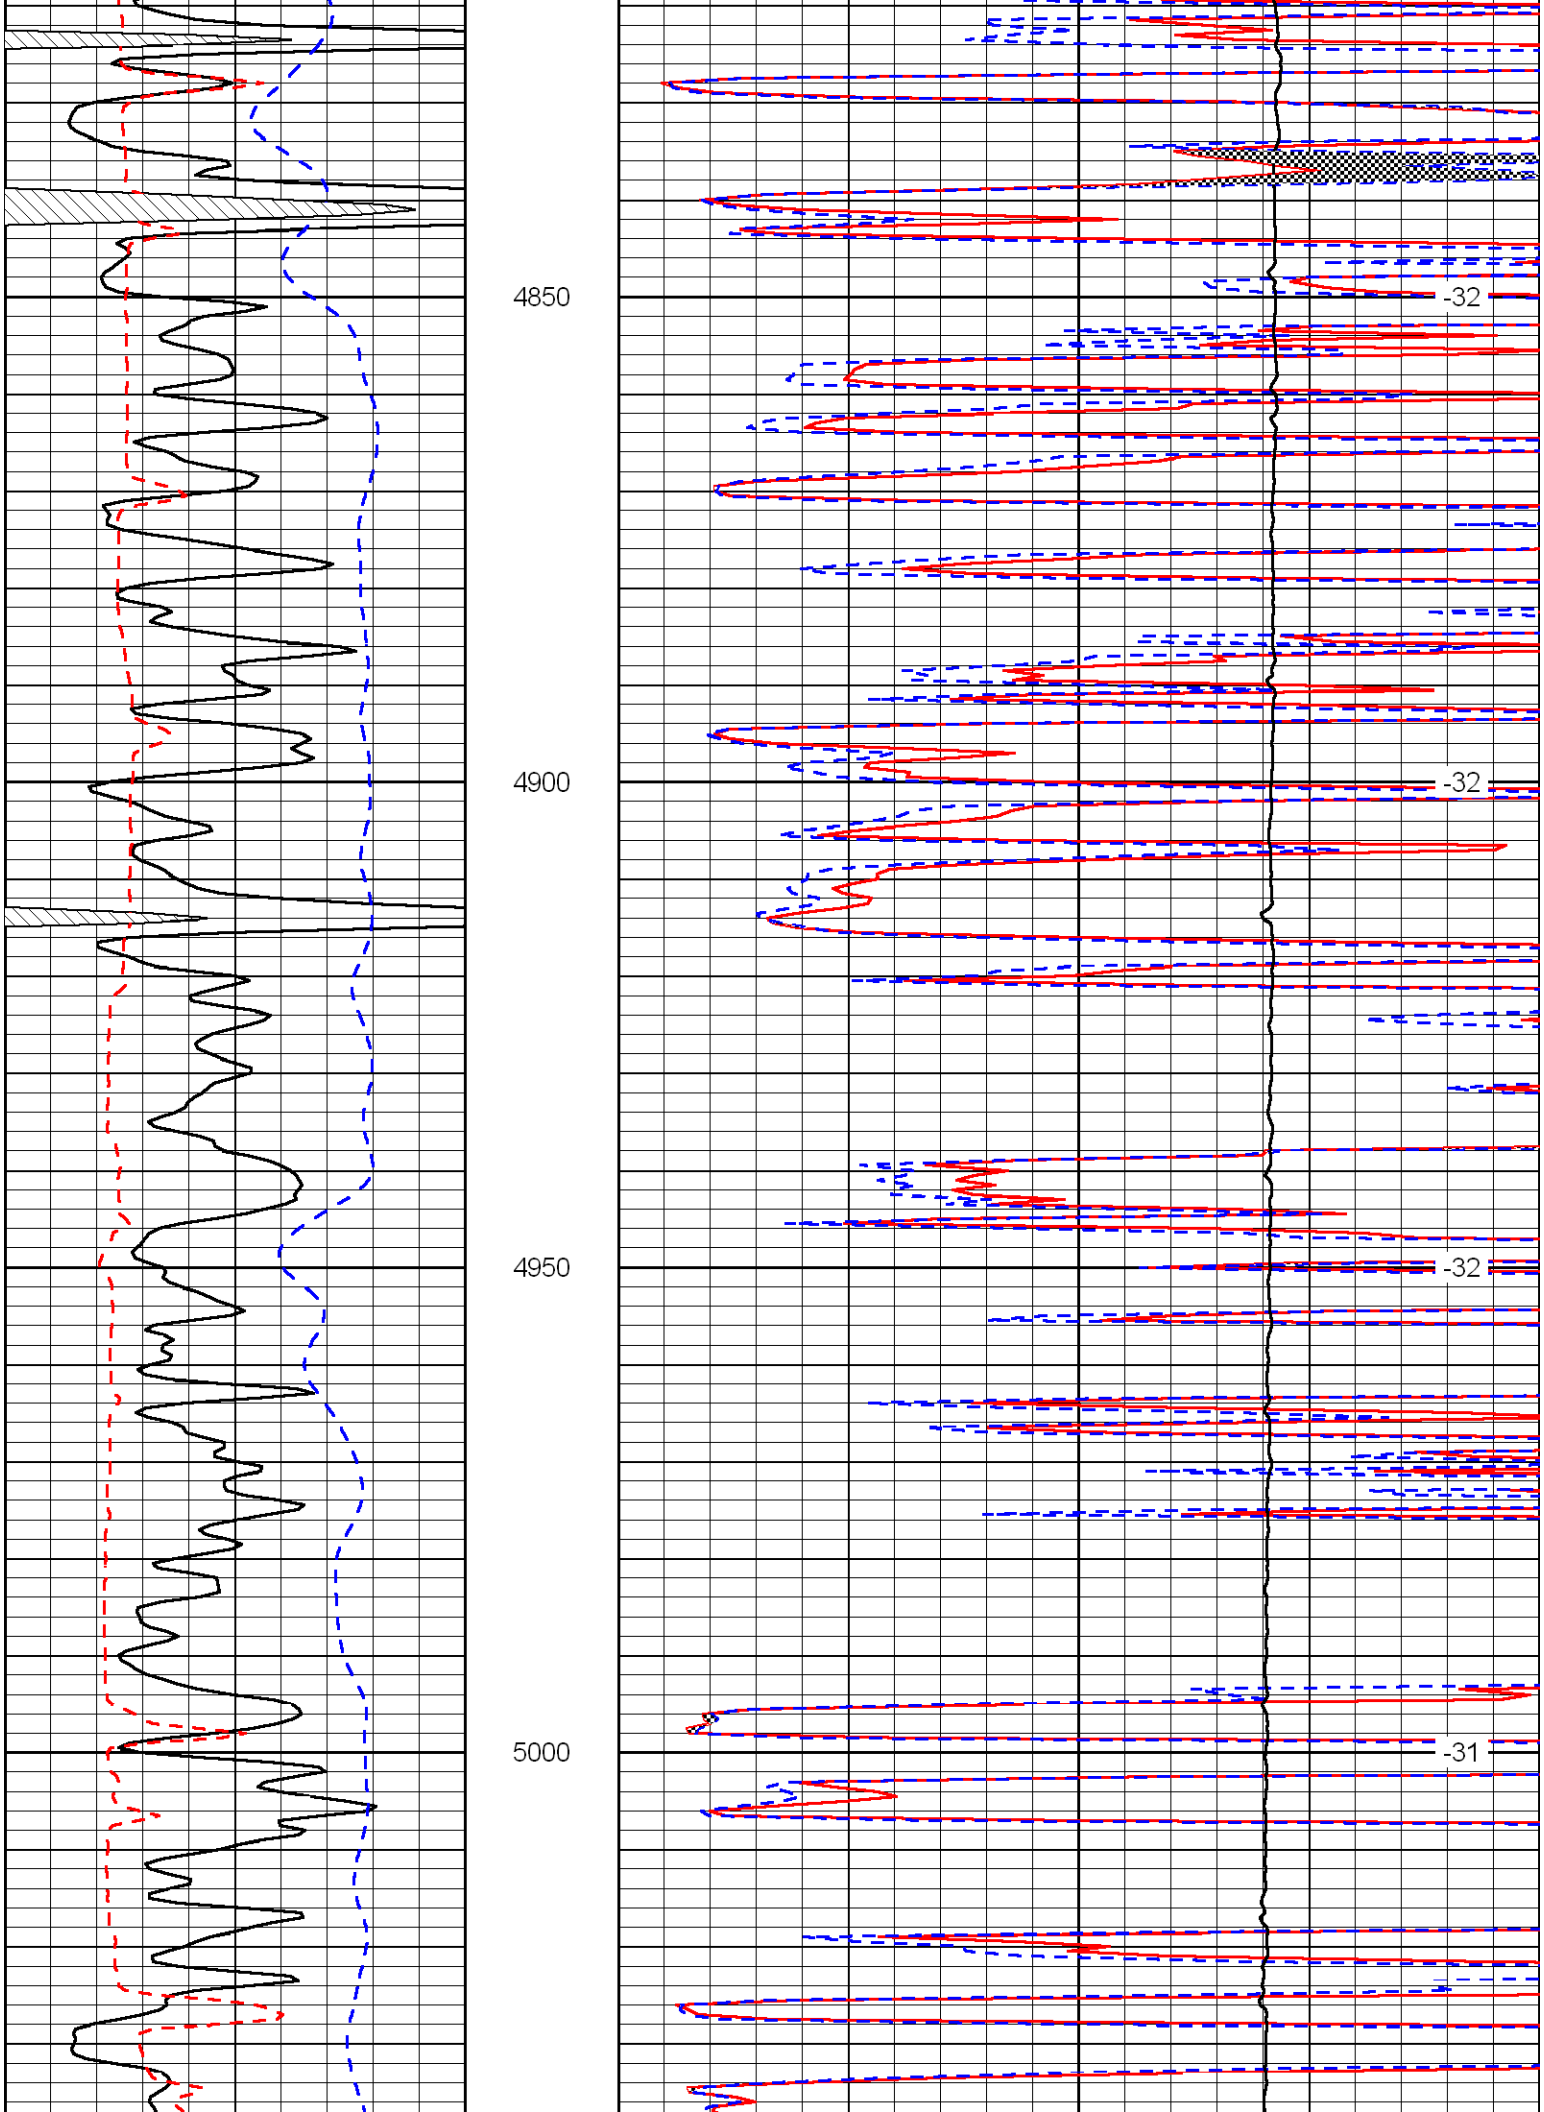
4850
-32
4900
-32
4950
-32
5000
-31

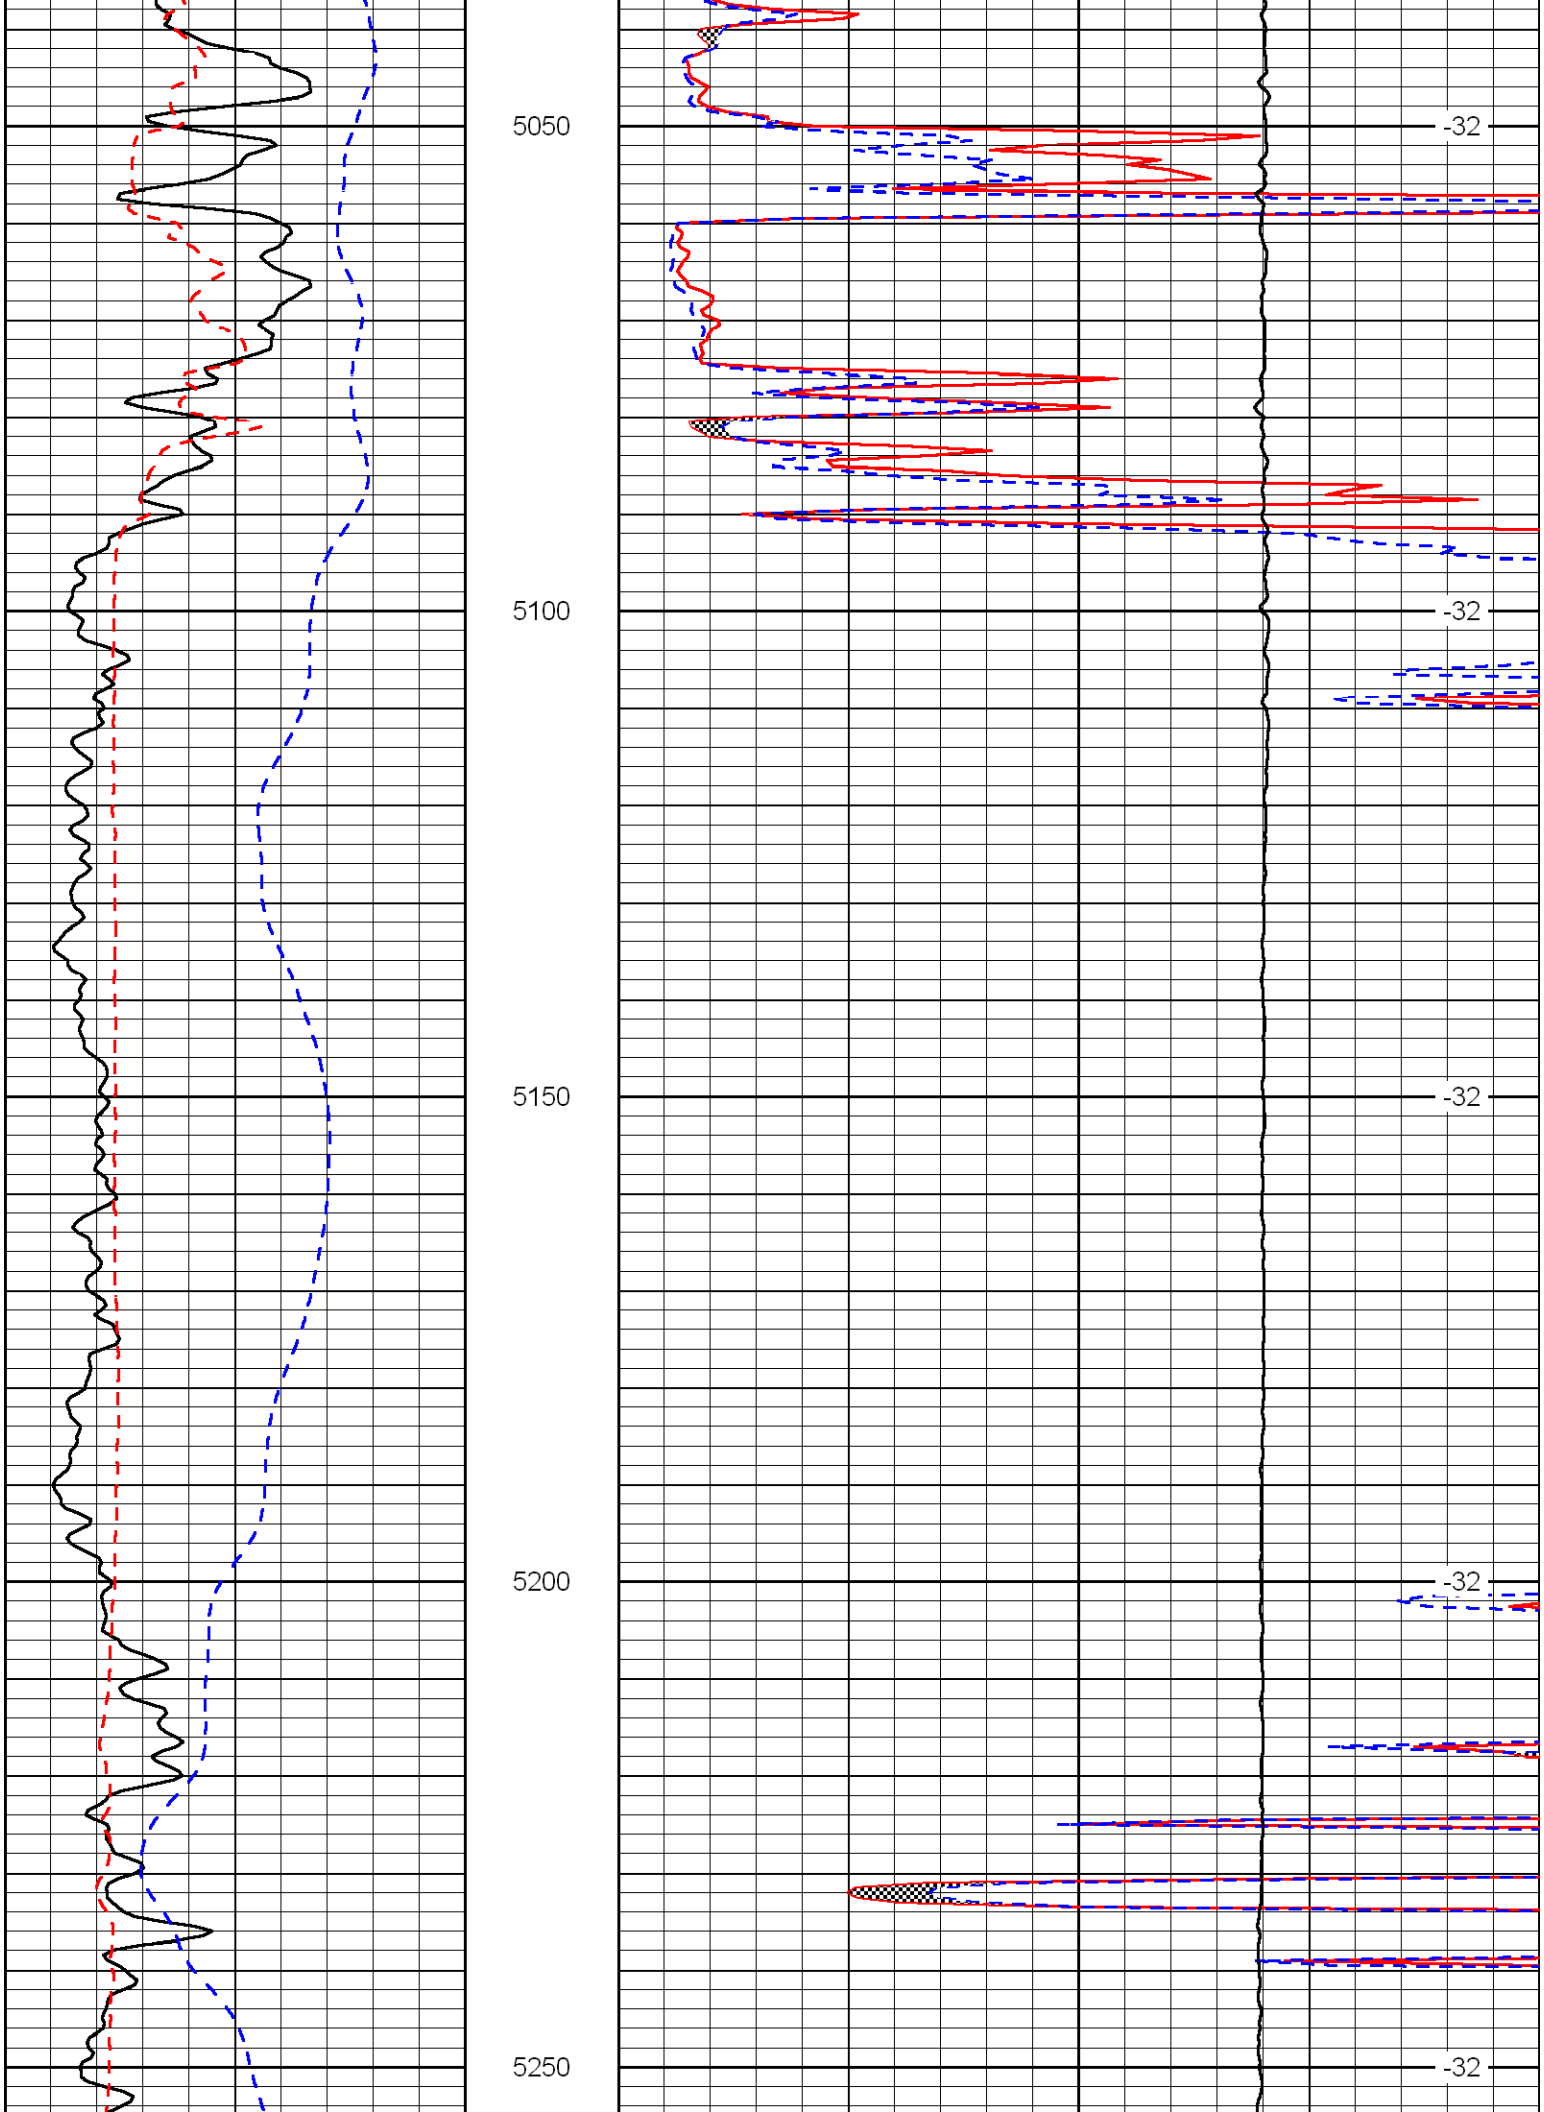
5050
-32
5100
-32
5150
-32
5200
-32
5250
-32

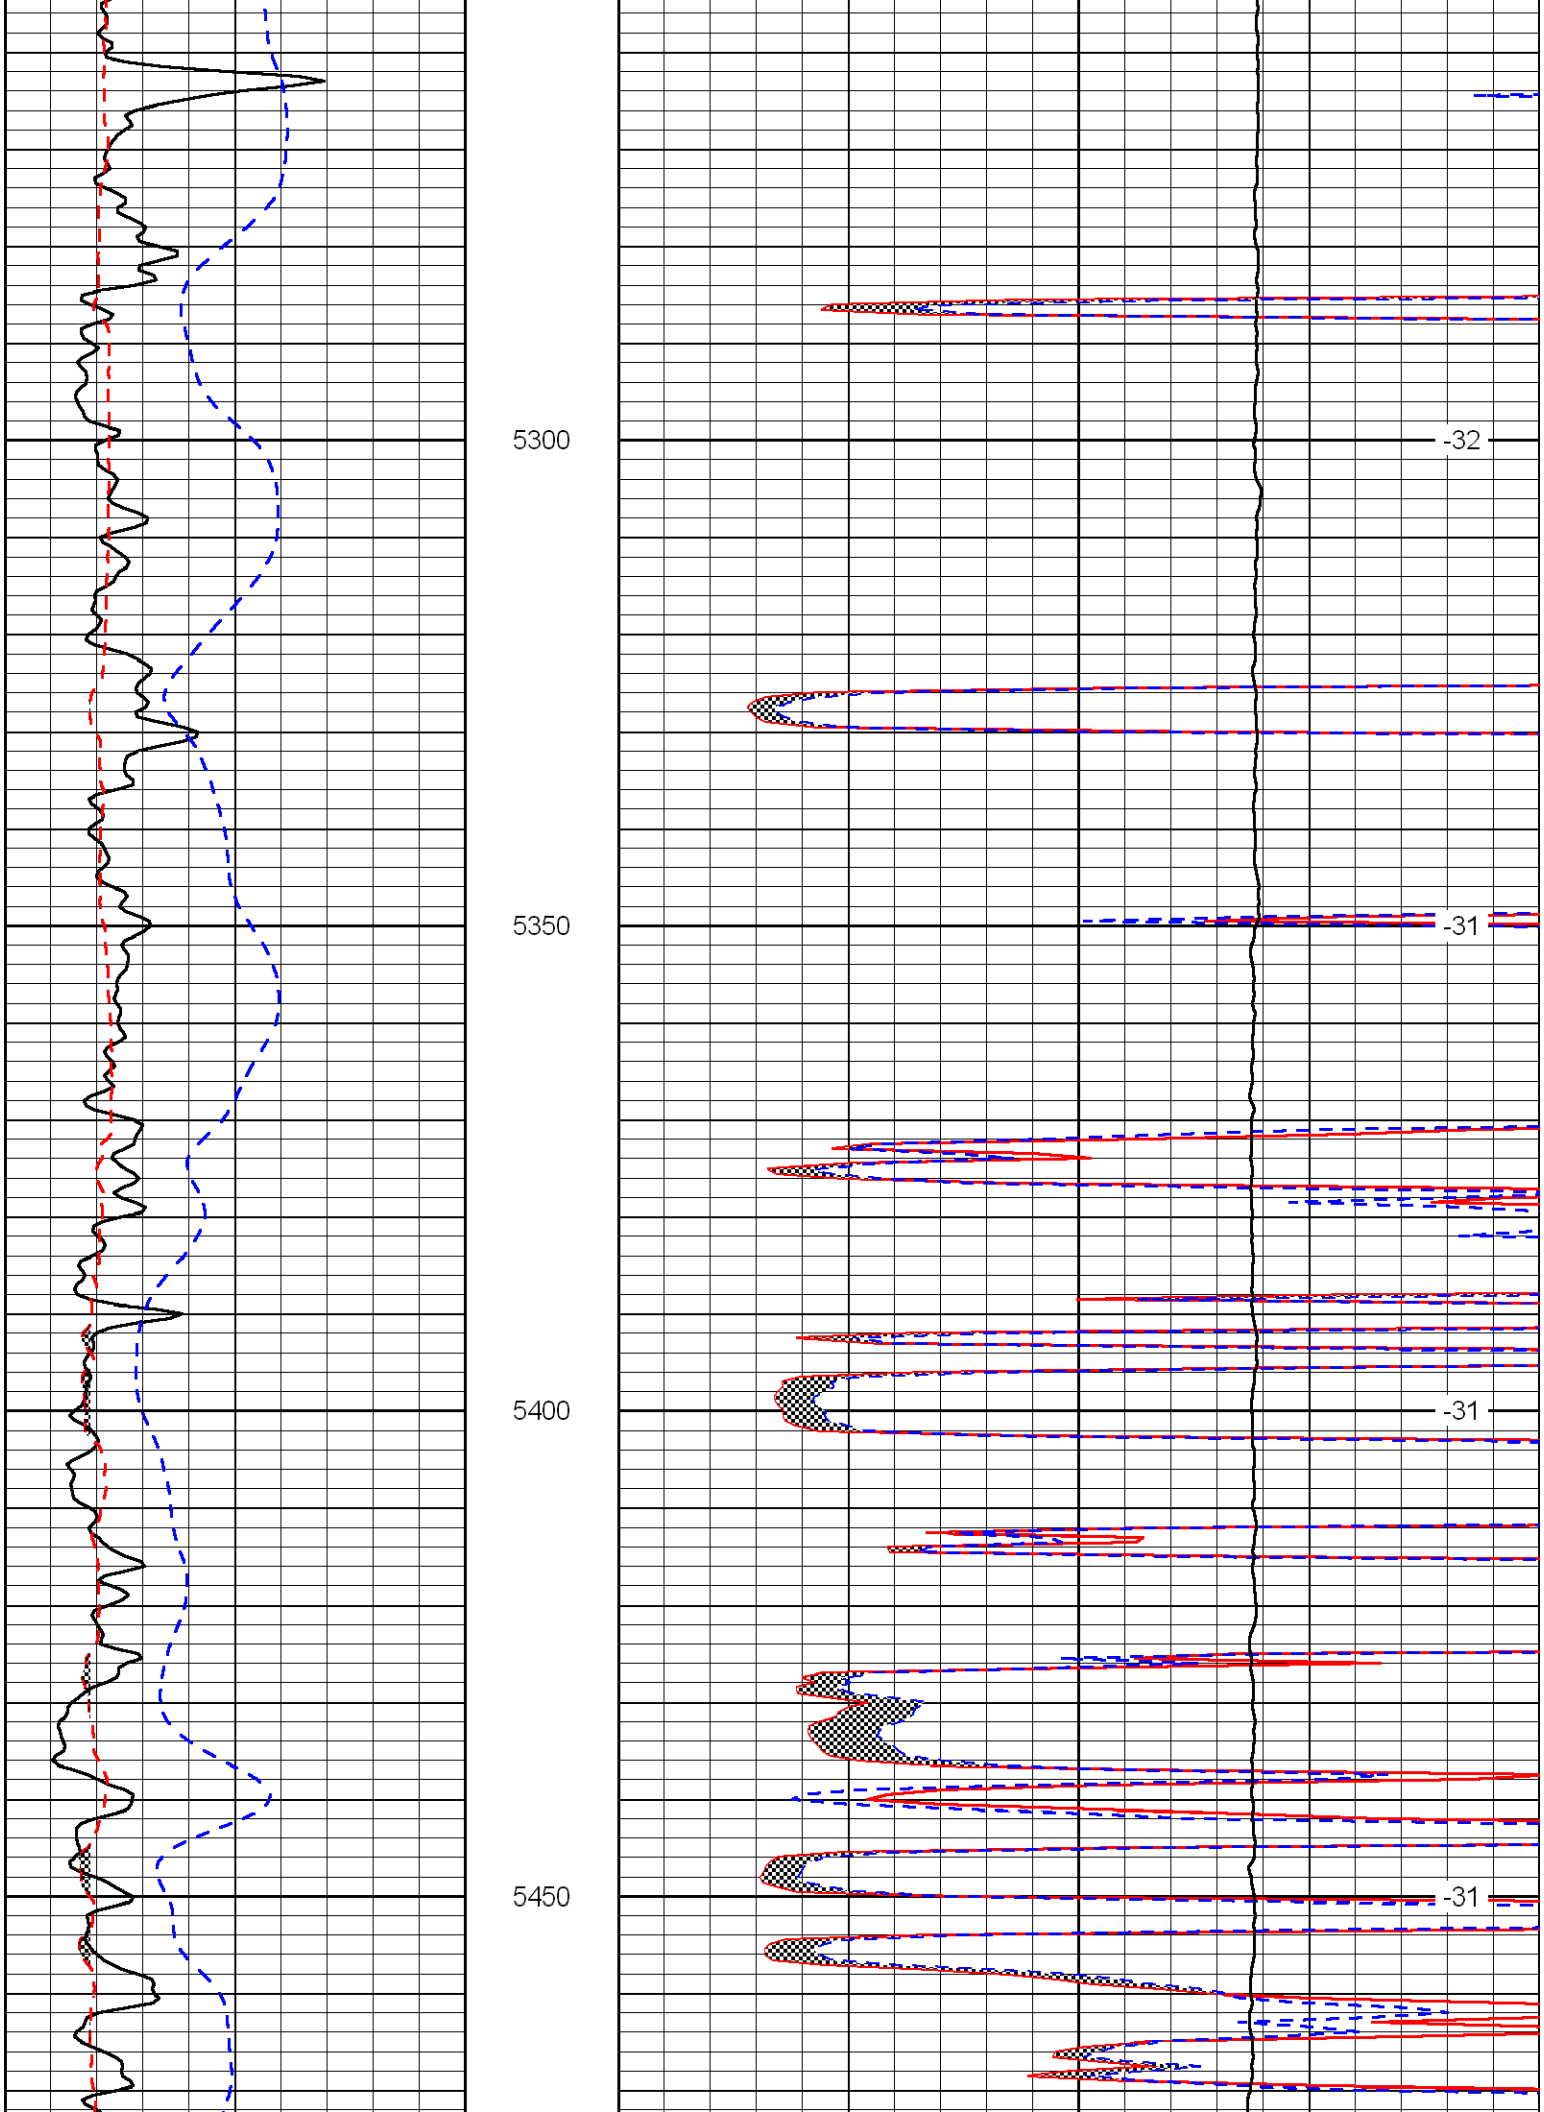
5300
-32
5350
-31
5400
-31
5450
-31

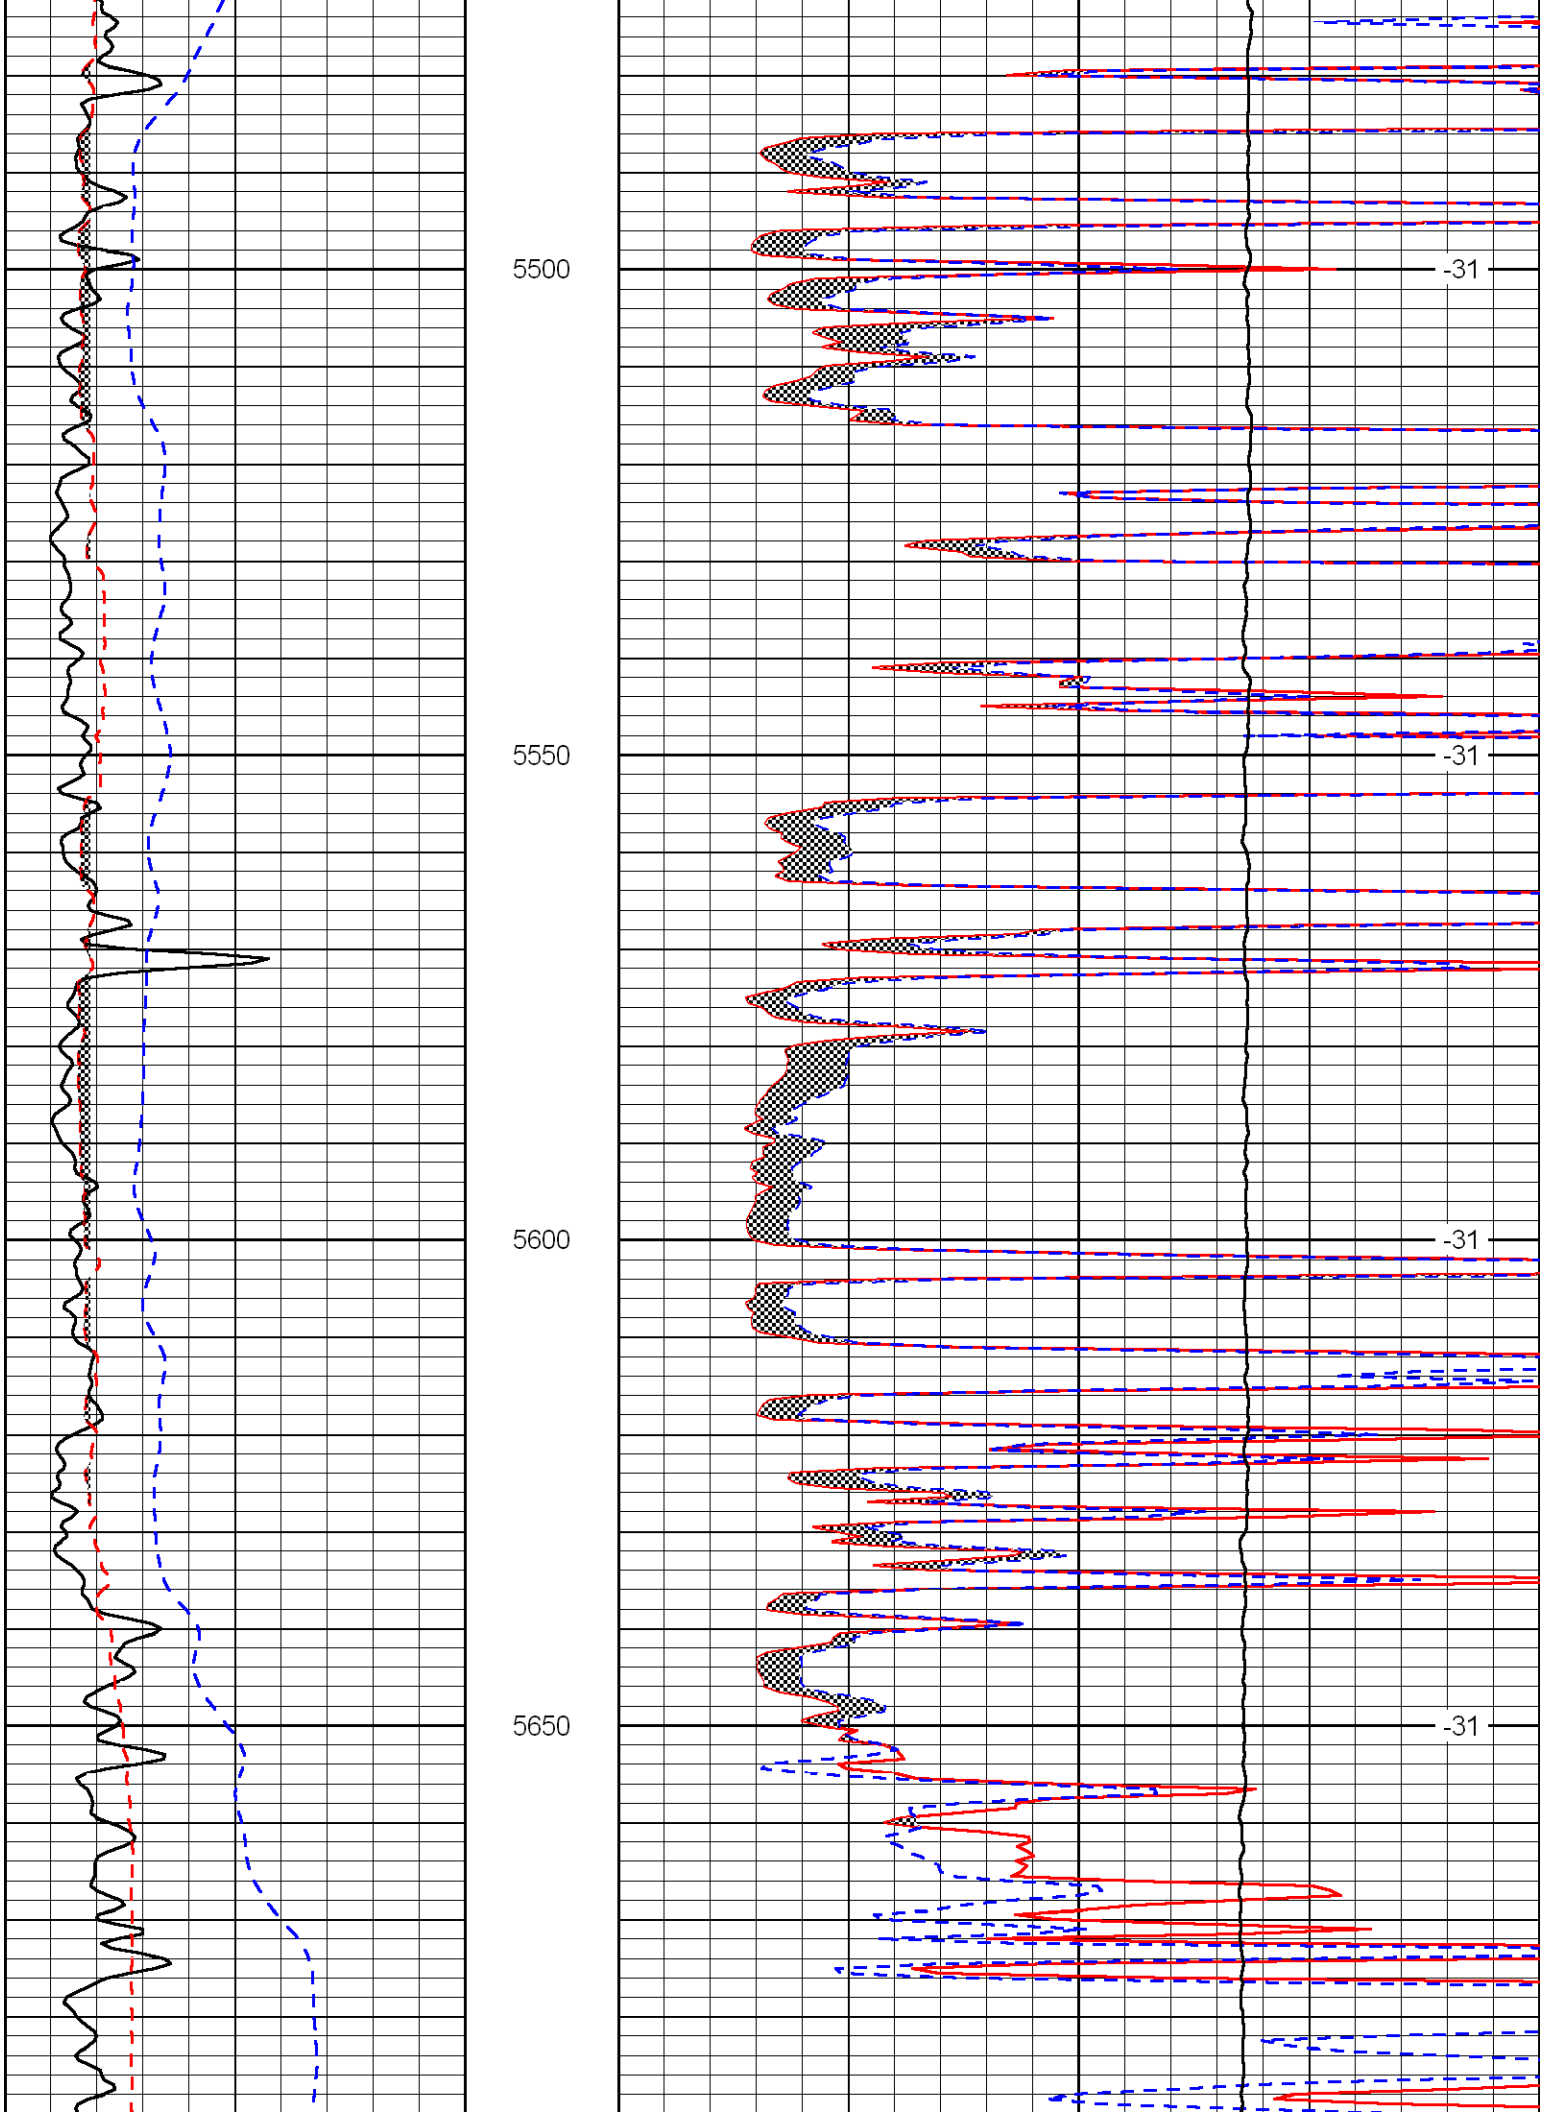
5500
5550
5600
5650
-31
-31
-31
-31

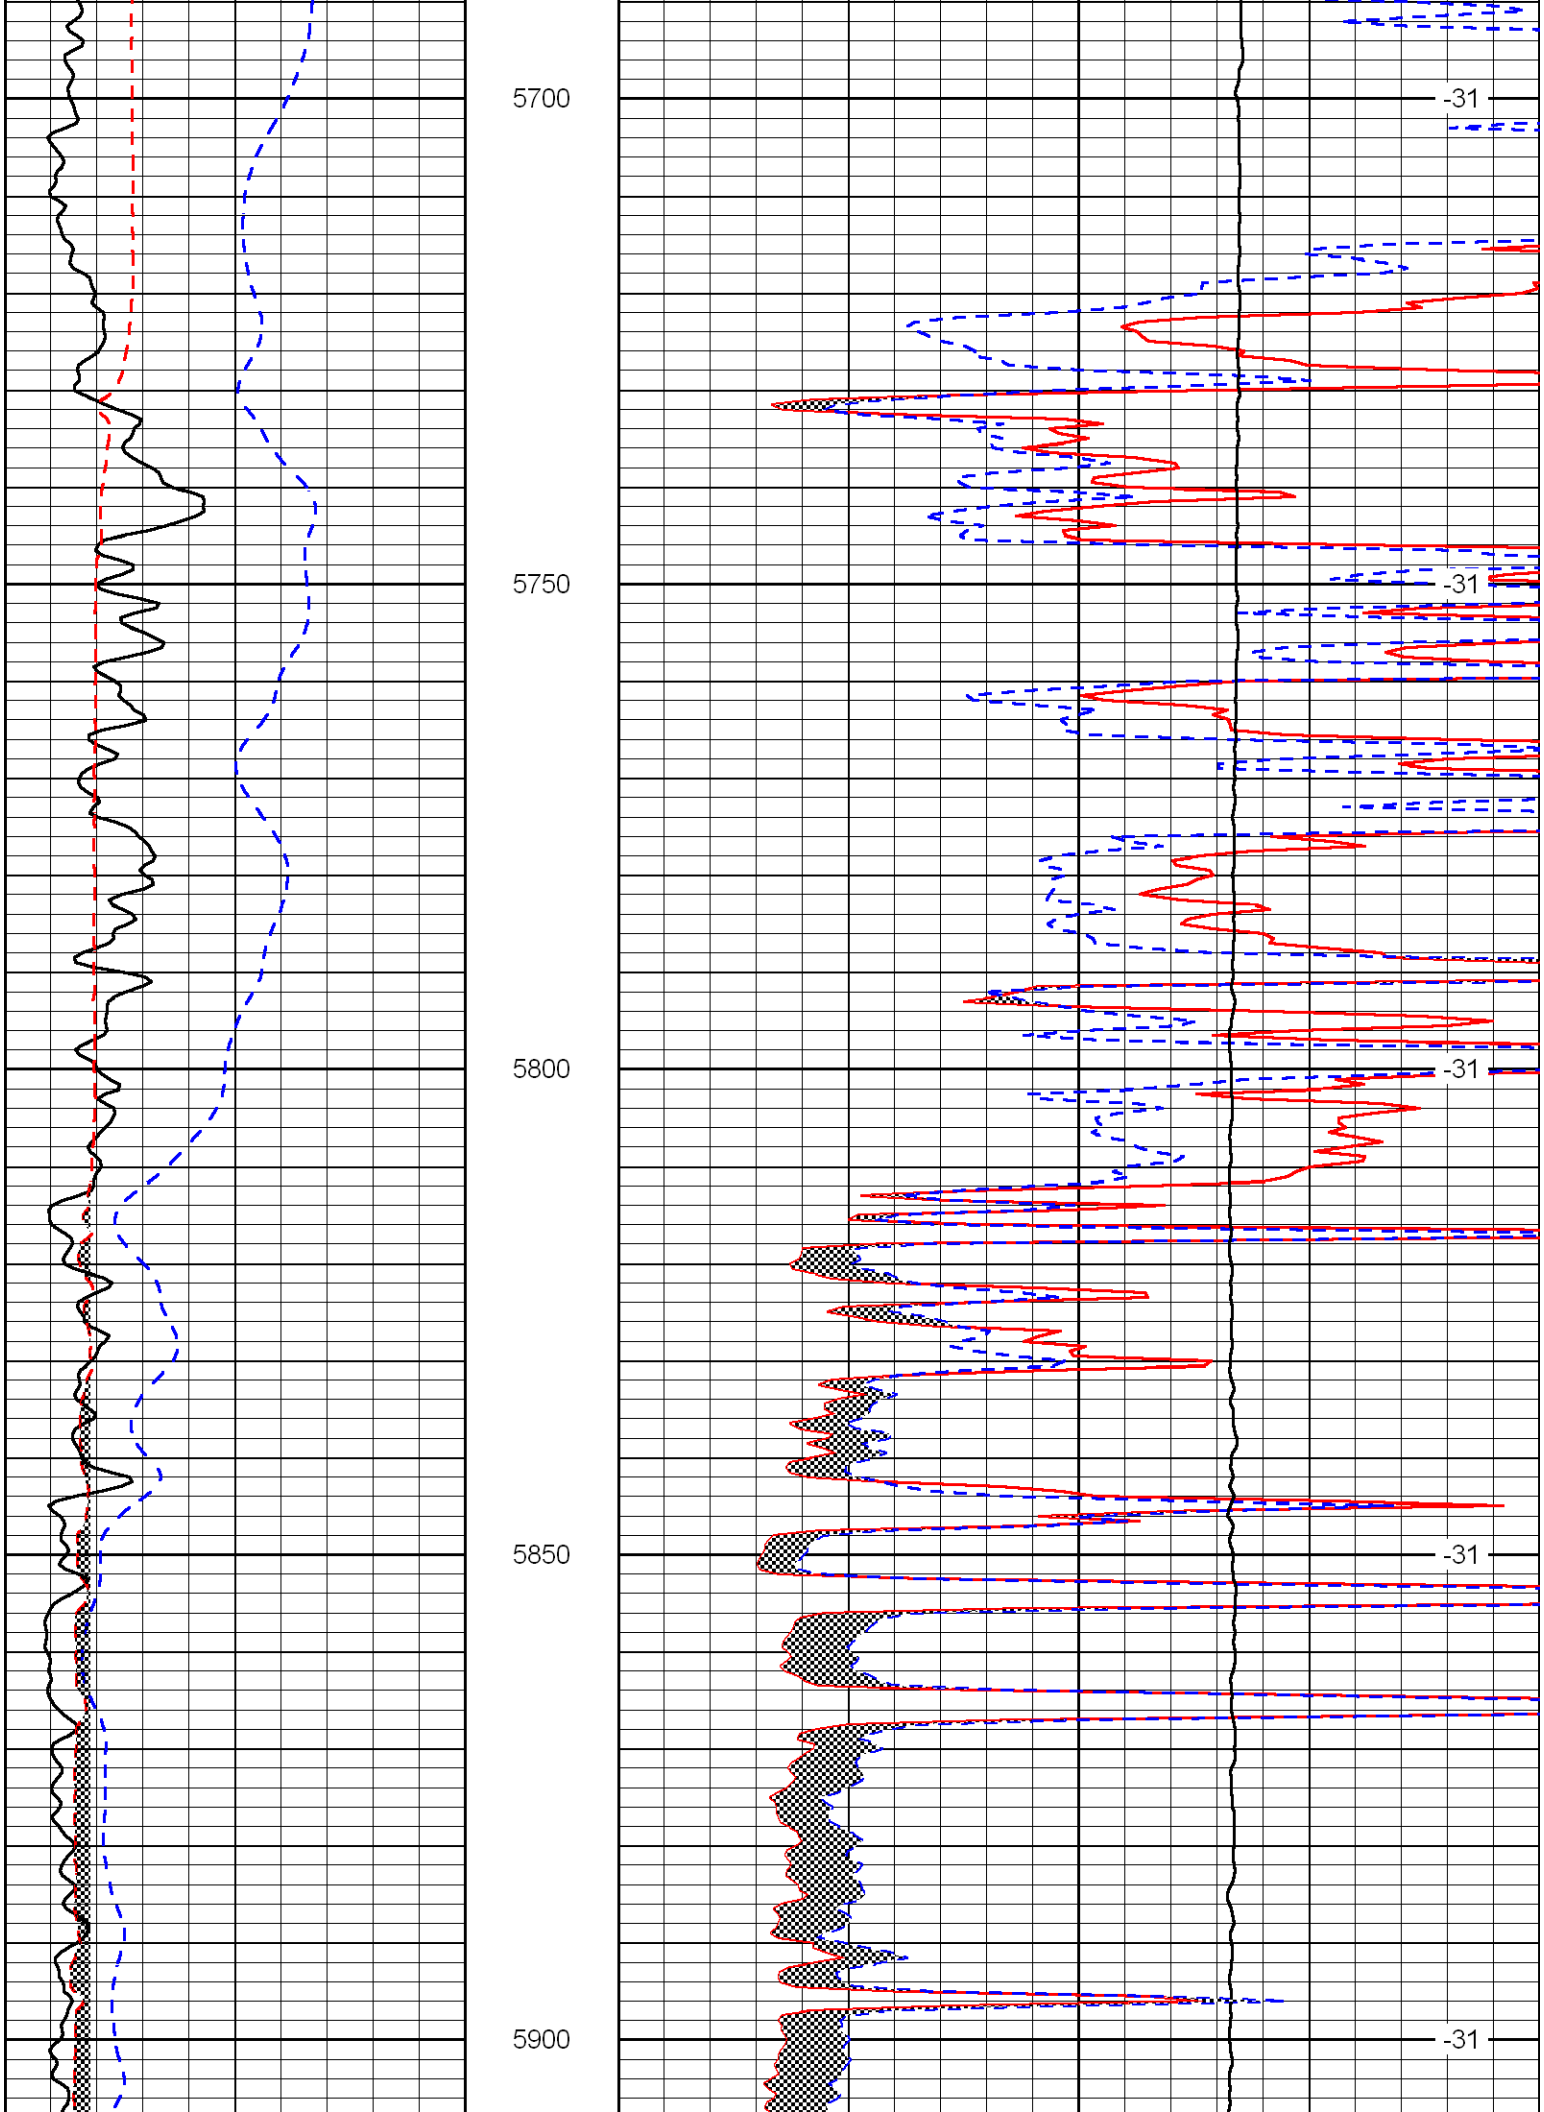
5700
5750
5800
5850
5900
-31
-31
-31
-31
-31

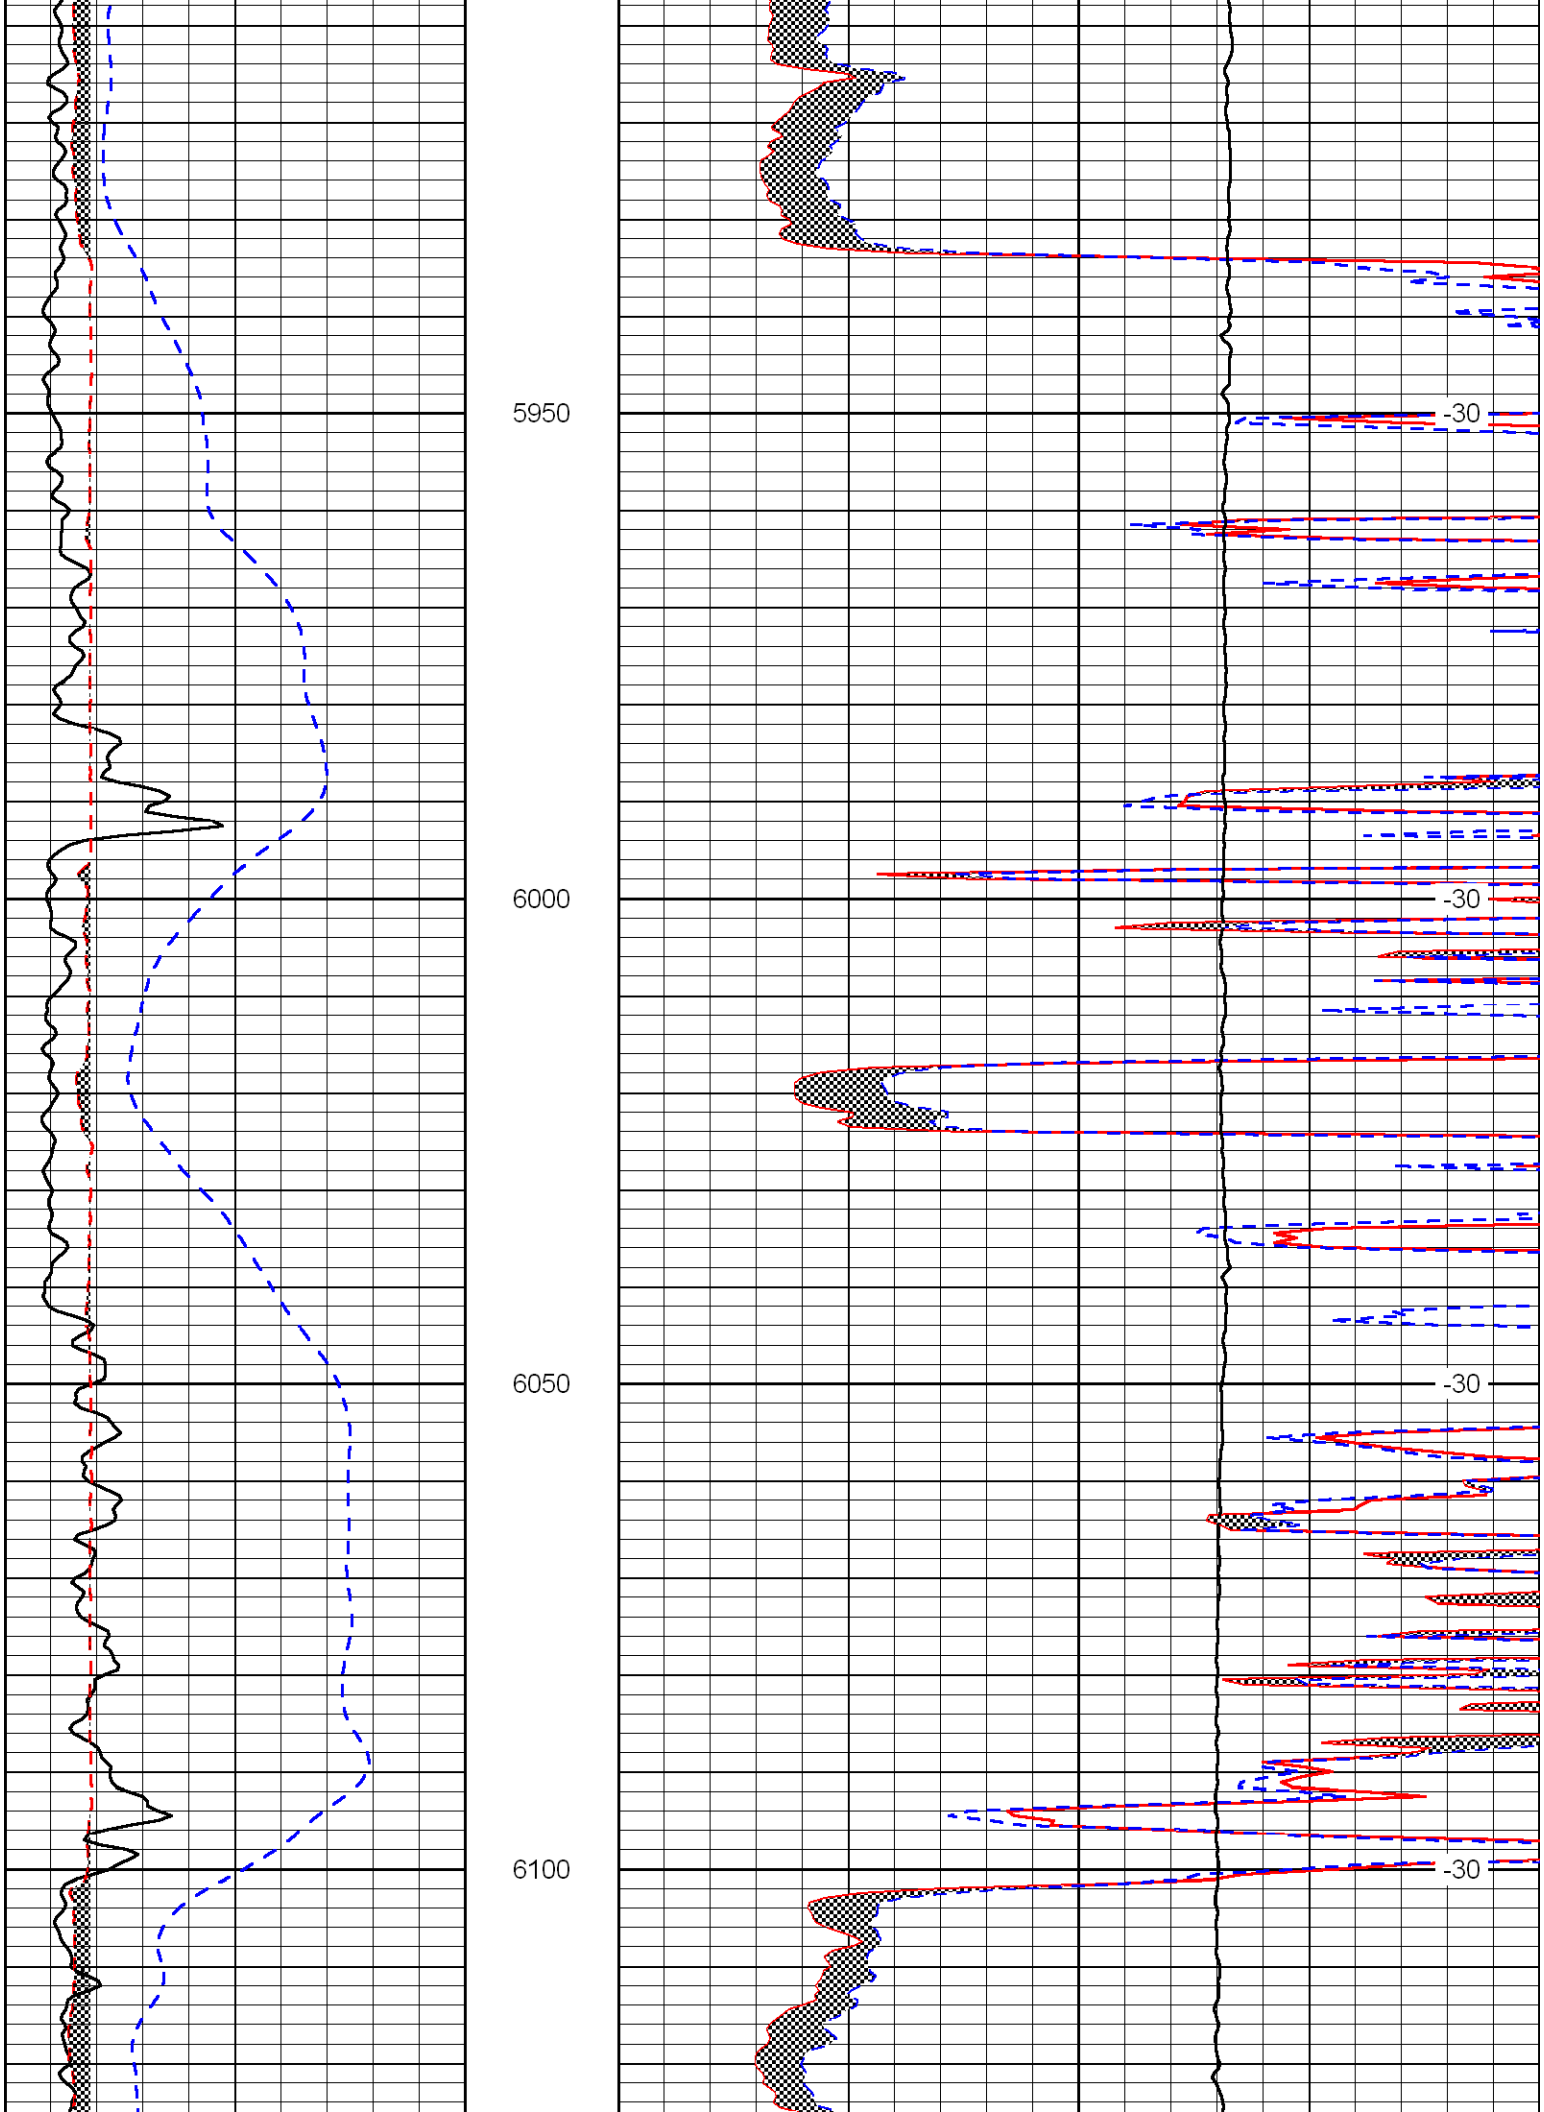
5950
-30
6000
-30
6050
-30
6100
-30

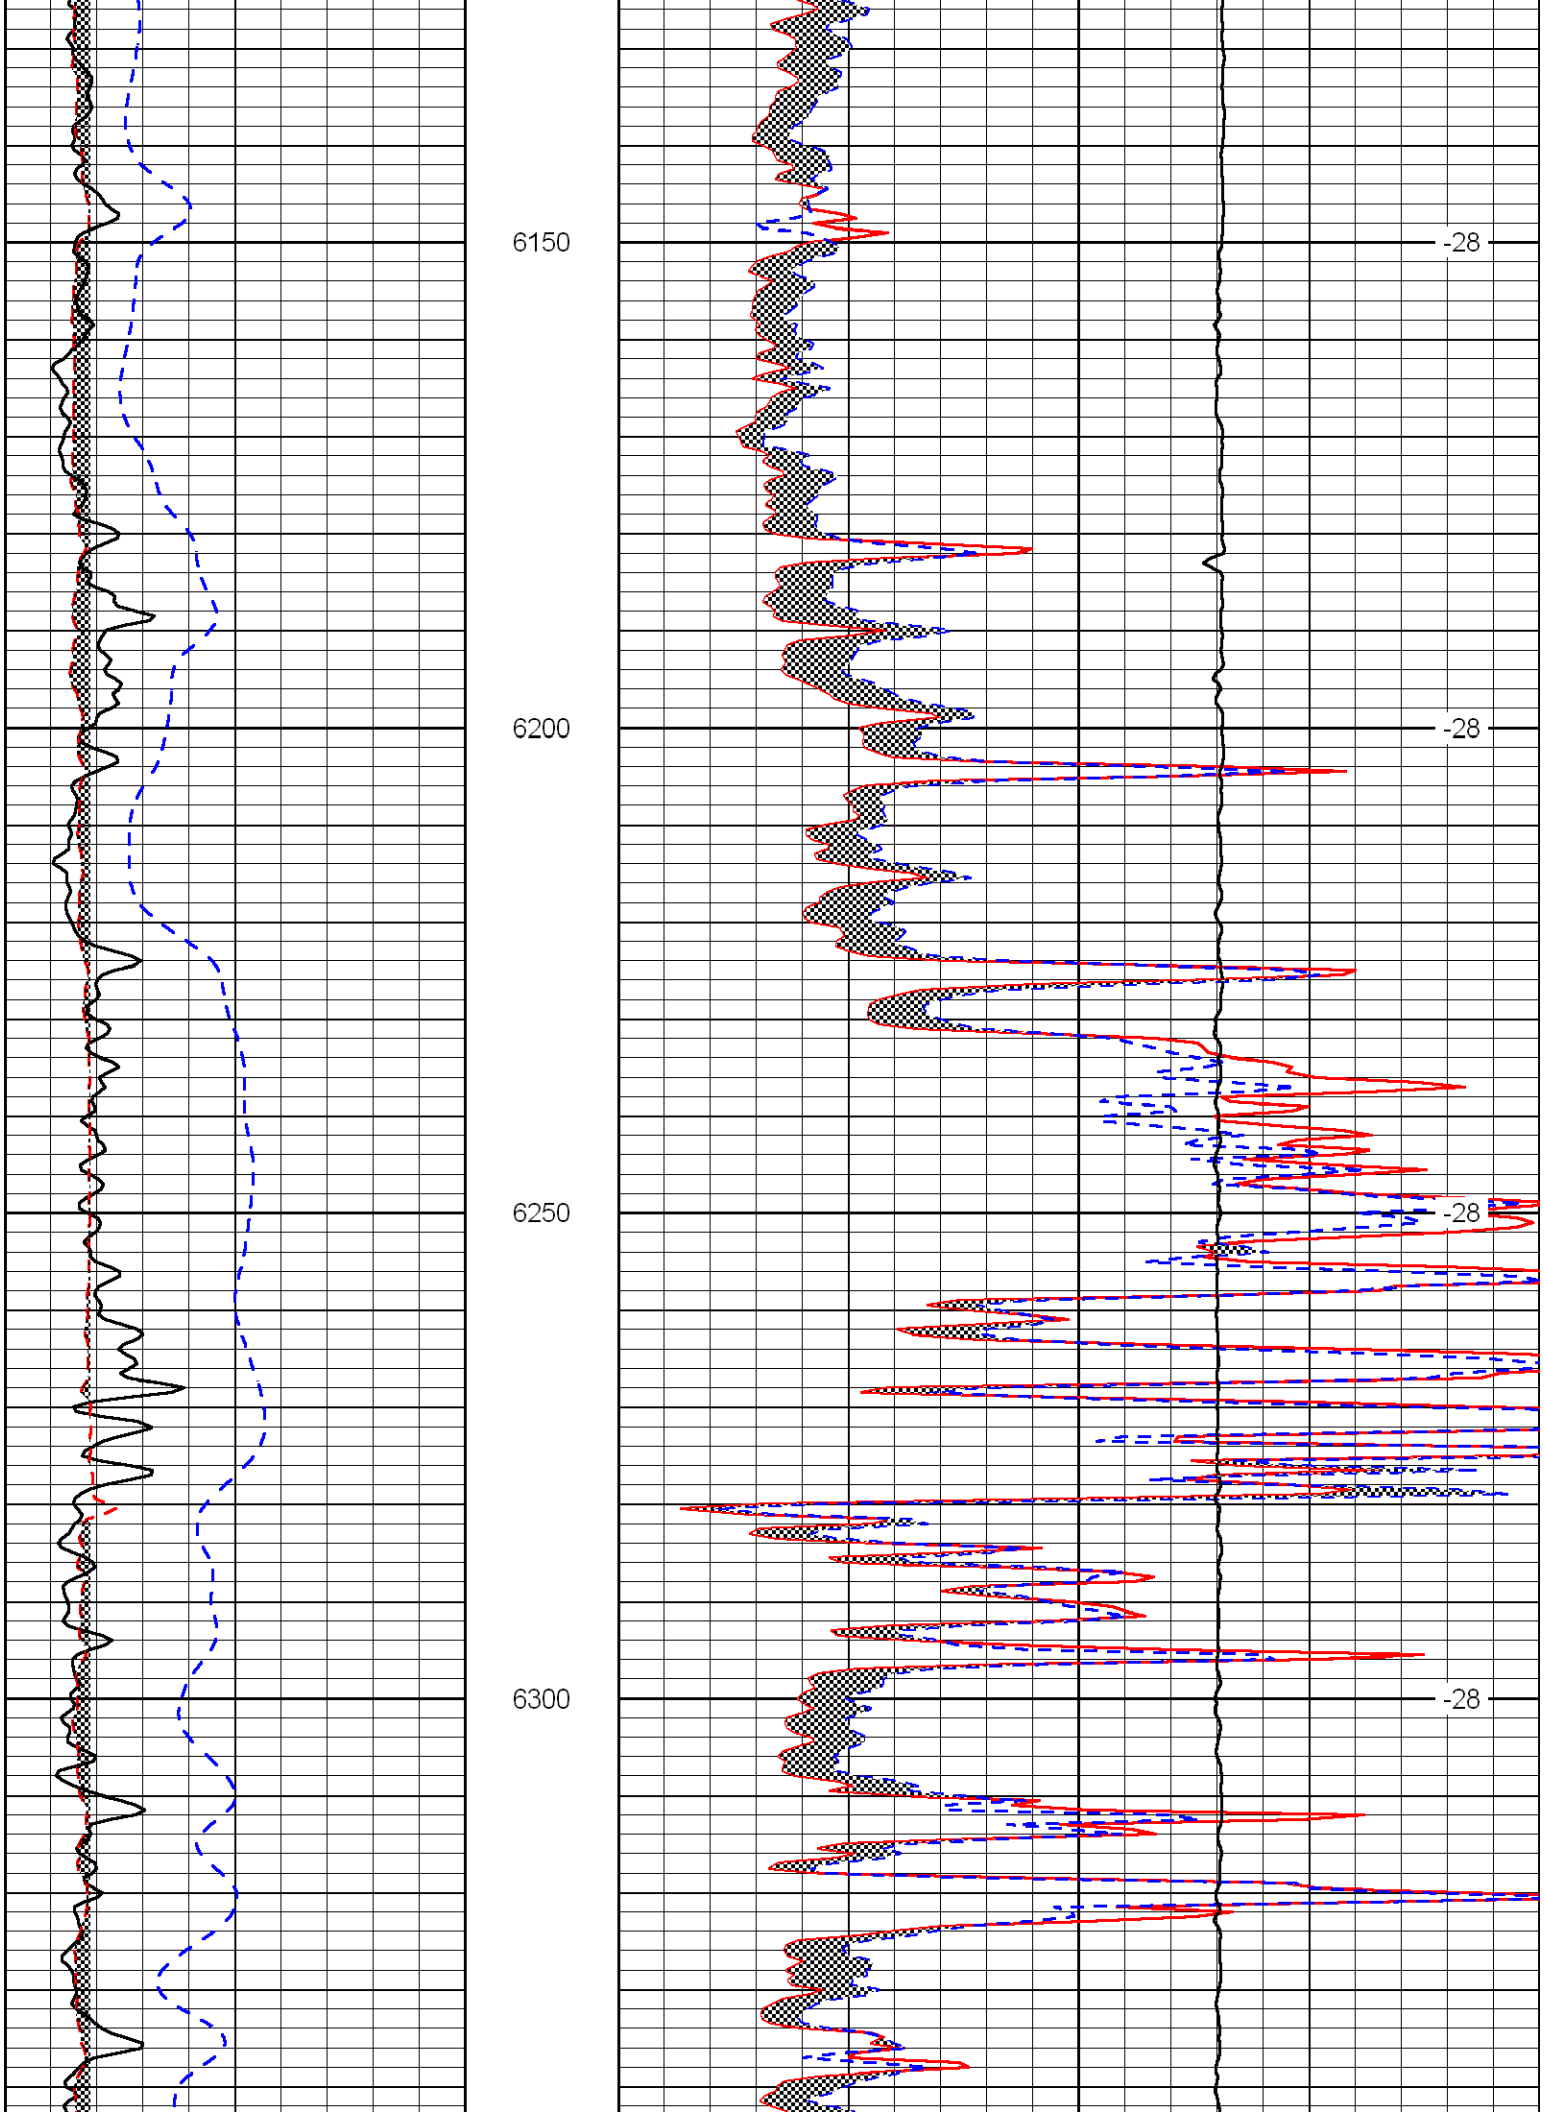
6150
6200
6250
6300
-28
-28
-28
-28

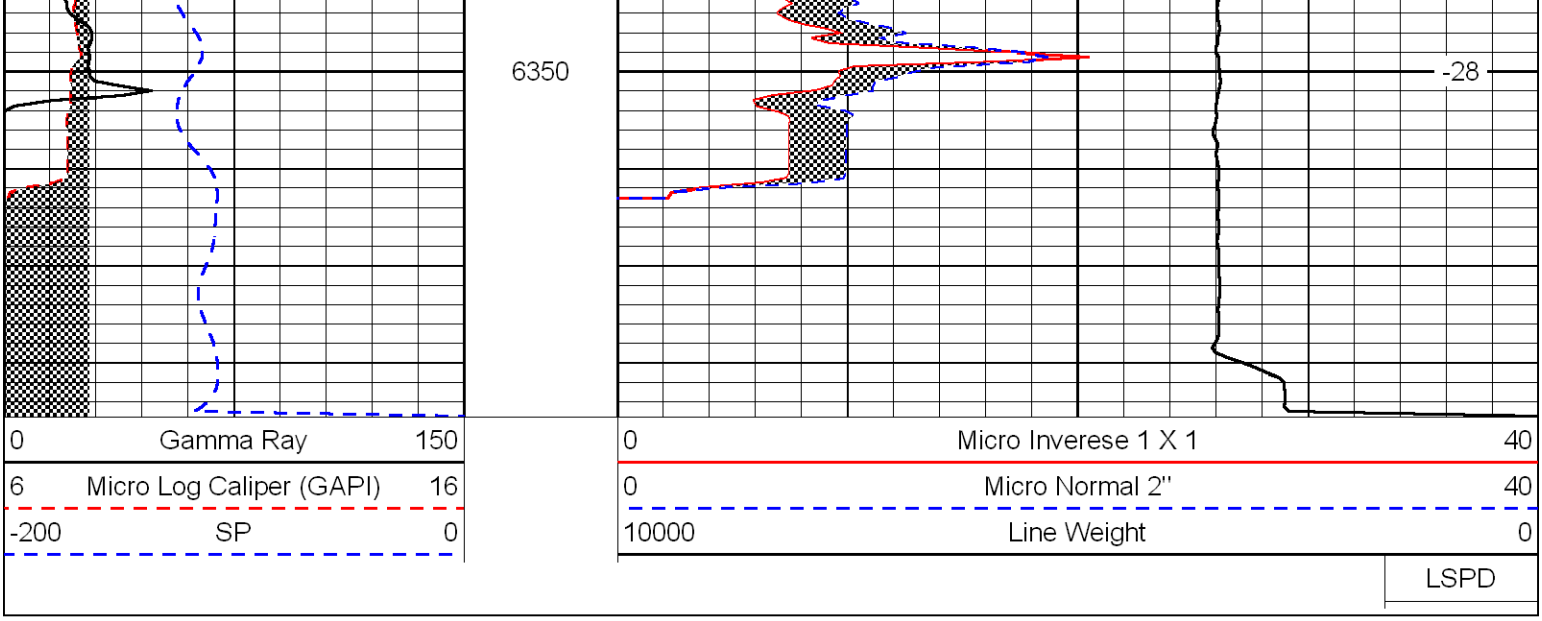
6350
-28
0 Gamma Ray 150
6 Micro Log Caliper (GAPI) 16
-200 SP 0
0 Micro Inverese 1 X 1 40
0 Micro Normal 2'' 40
10000 Line Weight 0
LSPD