



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-101-22,149-00-00

Company Larson Engineering, Inc.

Well Neeley No. 1-8

Field Wildcat

County Lane State

Kansas

Location

747' FSL & 1099' FEL

Sec: 8

Twp: 19S

Rge: 30W

Elevation

Permament Datum Ground Level
Log Measured From Kelly Bushing
Drilling Measured From Kelly Bushing

Elevation
K.B. 2904
D.F. 2899
G.L. 2899

Date 01/23/2009

Run Number Two

Depth Driller 4665

Depth Logger 4666

Bottom Logged Interval 4665

Top Log Interval 3600

Casing Driller 8.625 @ 240

Casing Logger 250

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 2.100

Density / Viscosity 9.5 42

pH / Fluid Loss 9.5 8.0

Source of Sample Flowline

Rm @ Meas. Temp 2.0 @ 65

Rmf @ Meas. Temp 1.5 @ 65

Rmc @ Meas. Temp 2.7 @ 65

Source of Rmf / Rmc Charts

Rm @ BHT .96 @ 125

Operating Rig Time 3 Hours

Max Rec. Temp. F 125

Equipment Number 10

Location Hays

Recorded By Jason Wellbrock

Witnessed By Bob Lewellyn

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton 10 W, to Bison Rd, 4 1/2 S, W Into

Database File: c:\warrior\data\larson_neeley no. 1-8\larshd.db
Dataset Pathname: dil/dil2
Presentation Format: micro
Dataset Creation: Fri Jan 23 08:41:34 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

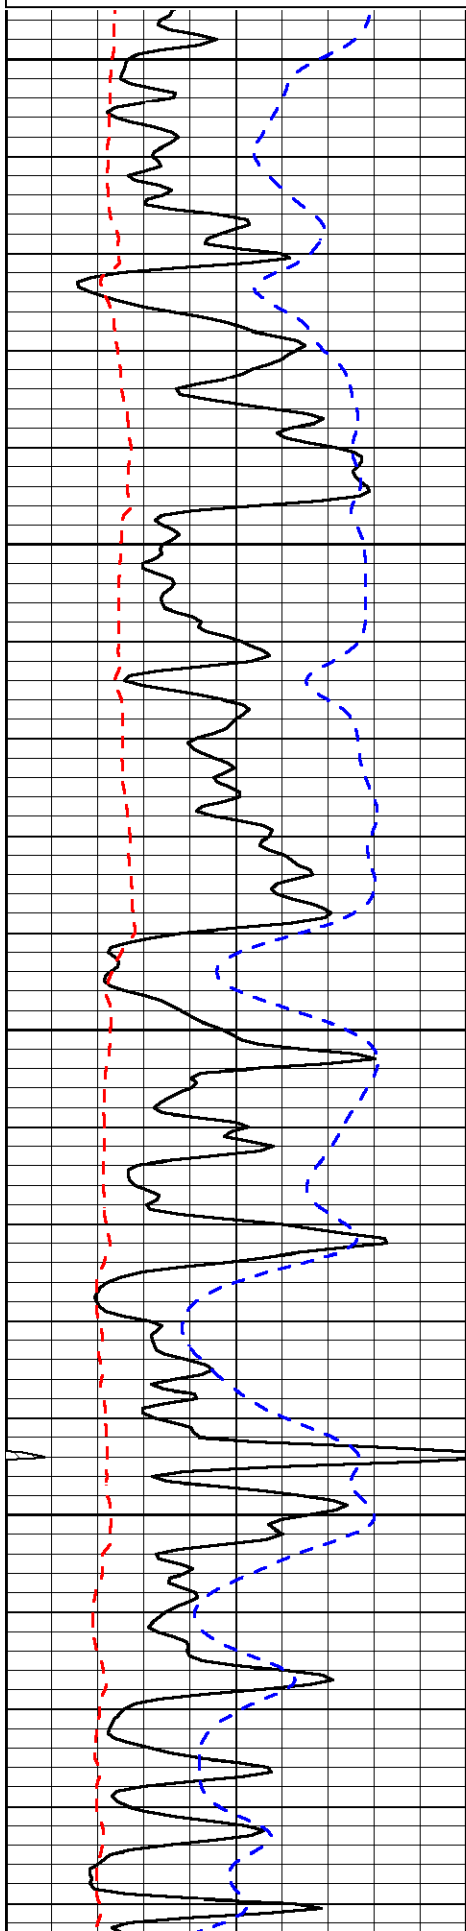

3600


3650

3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

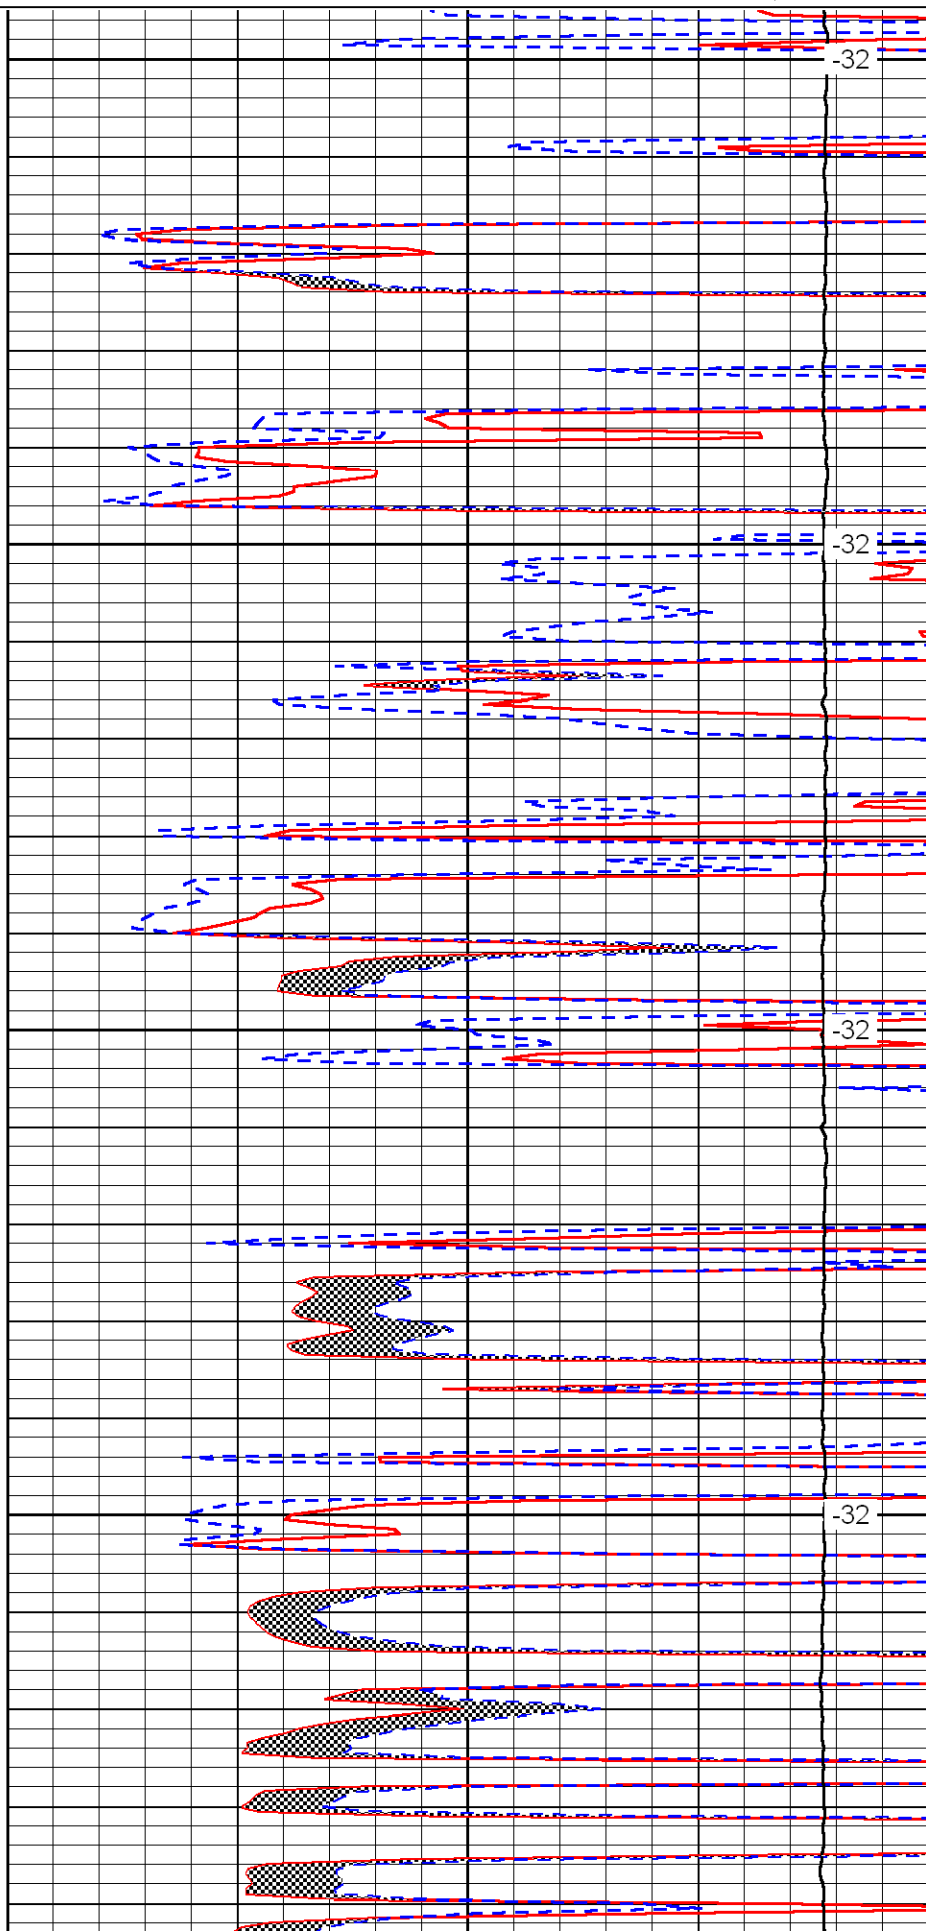


-32

-32

-32

-32

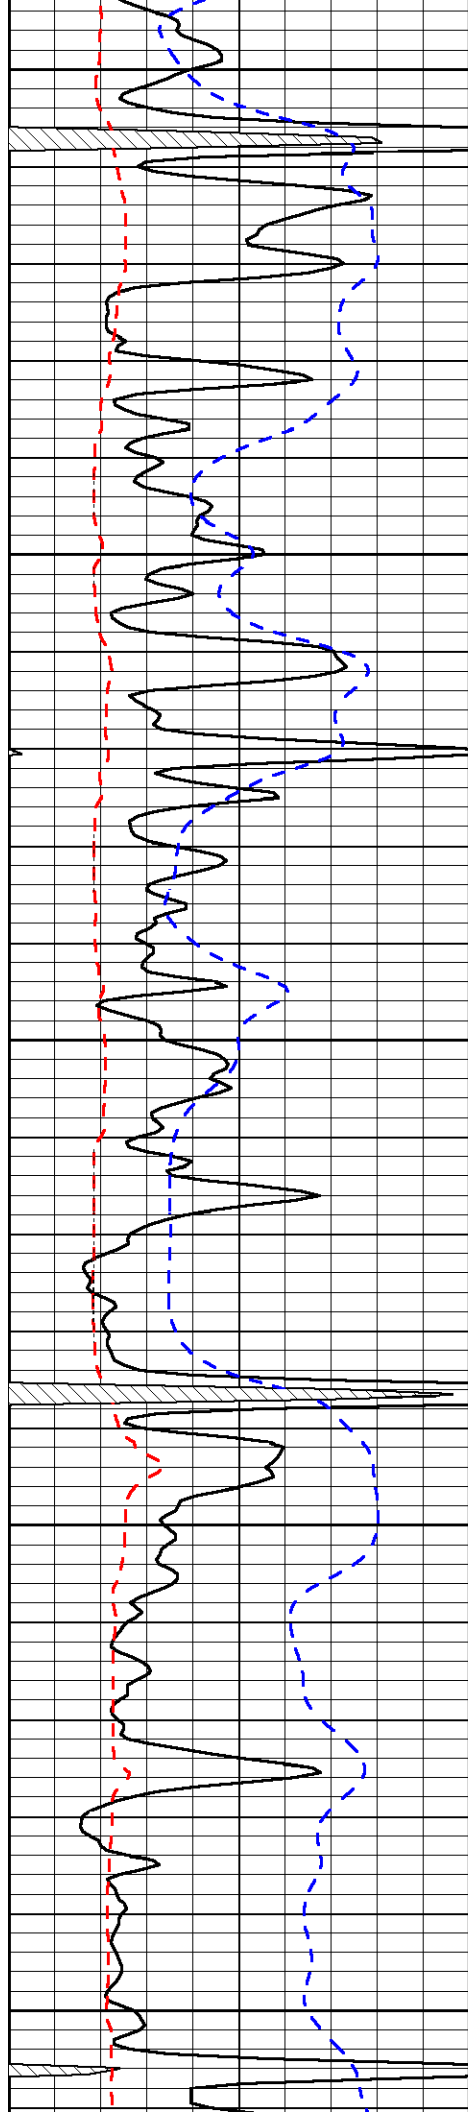


3800

3850

3900

3950

4000

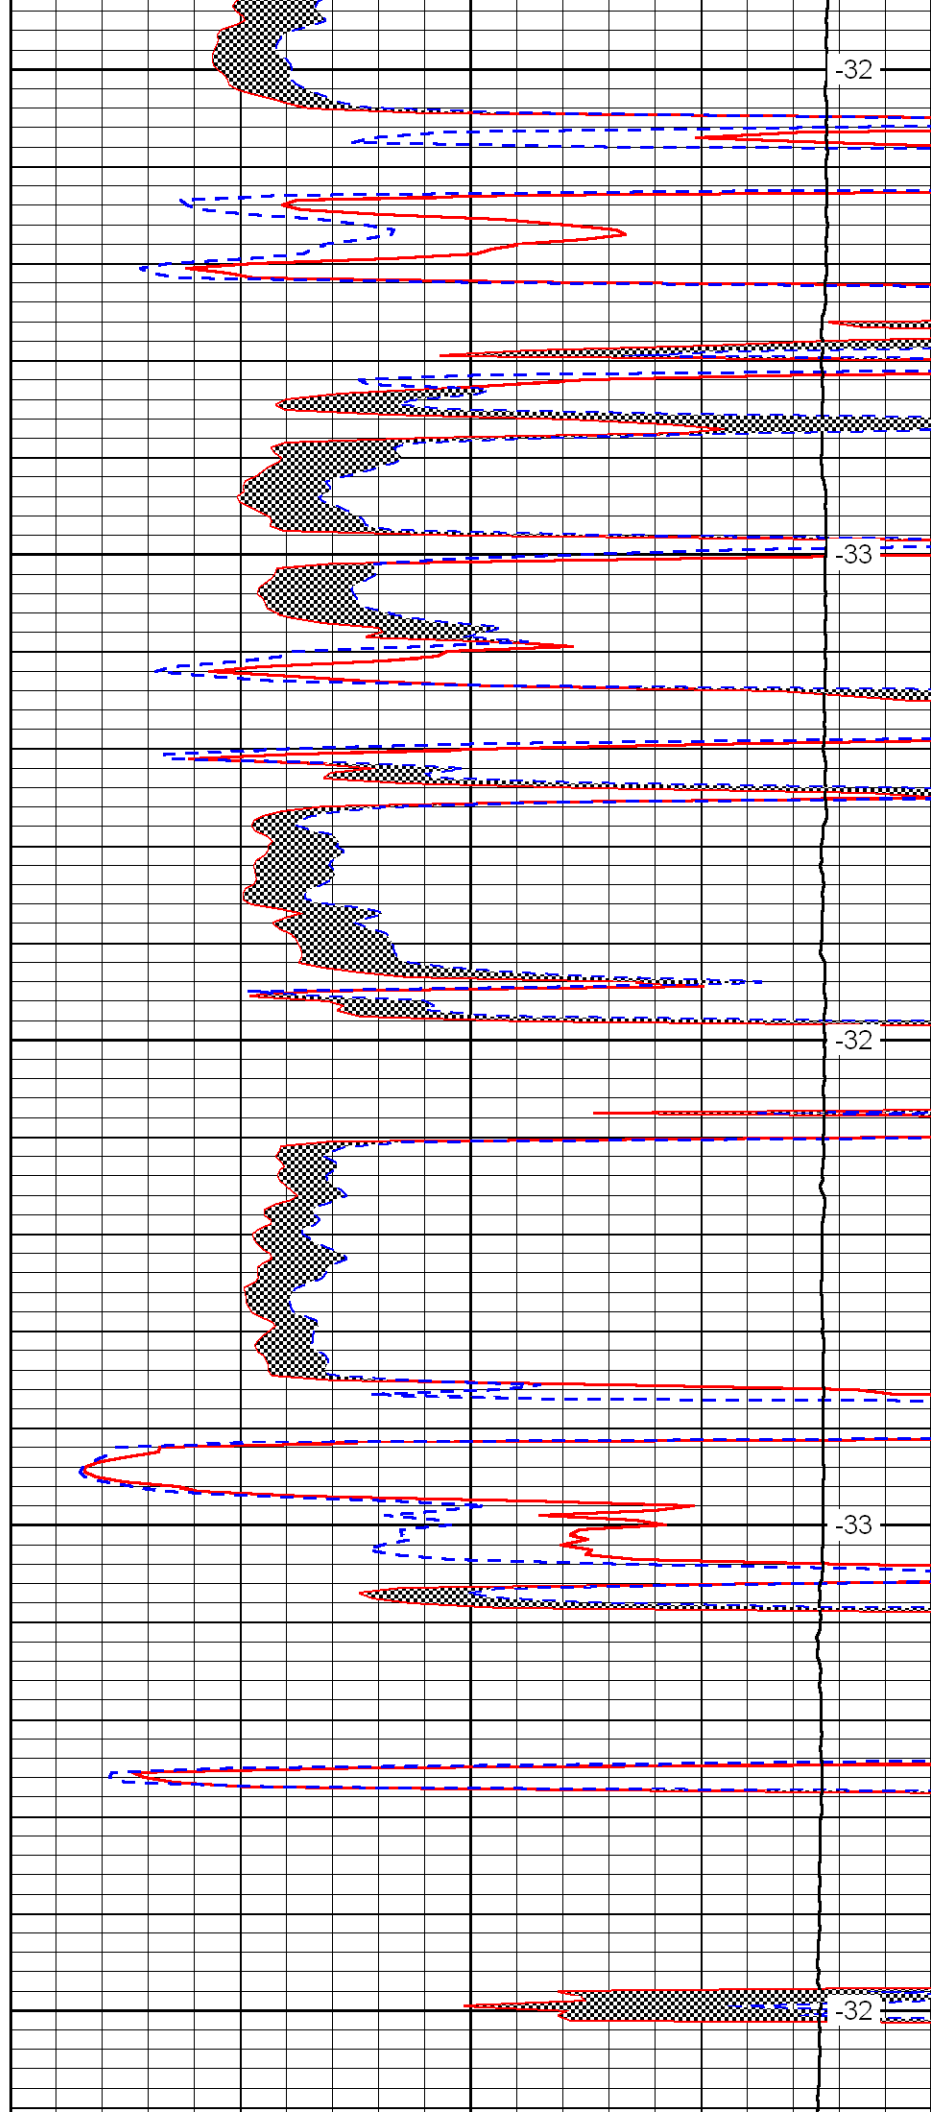


-32

-33

-32

-33

-32

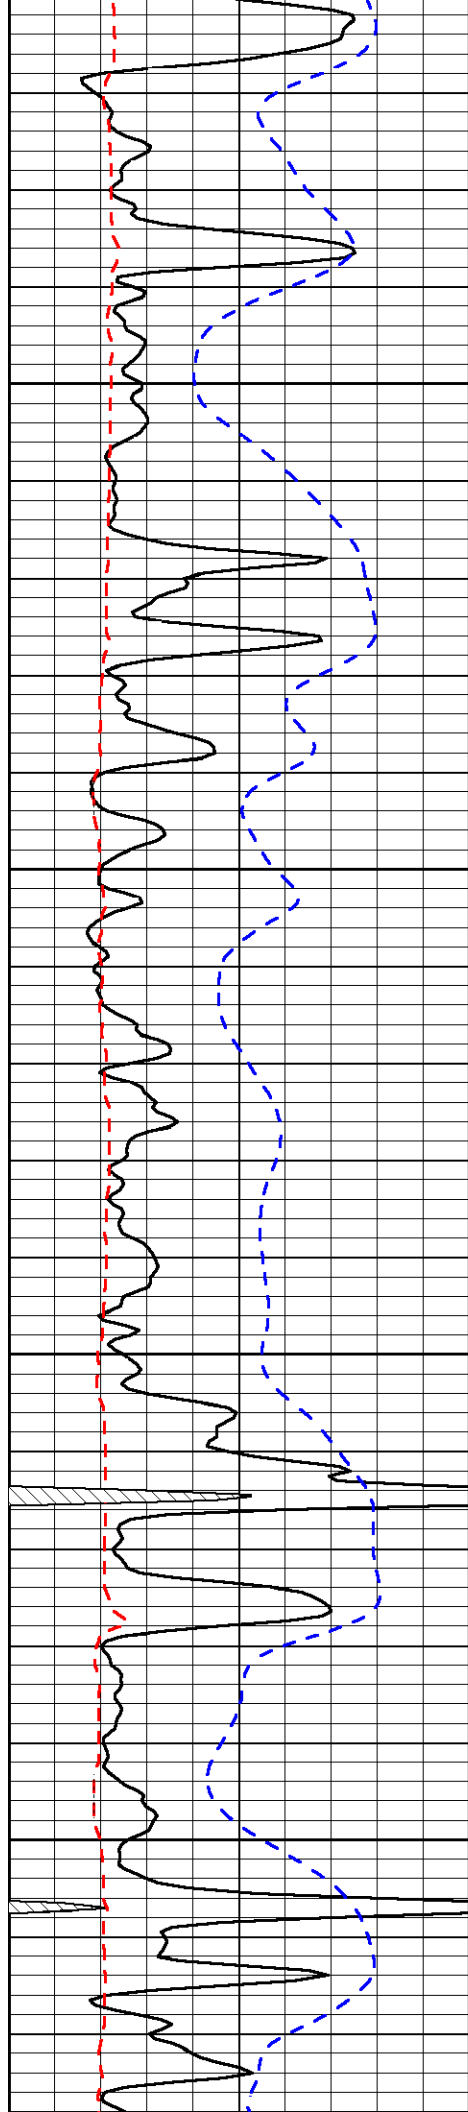



4050

4100

4150

4200

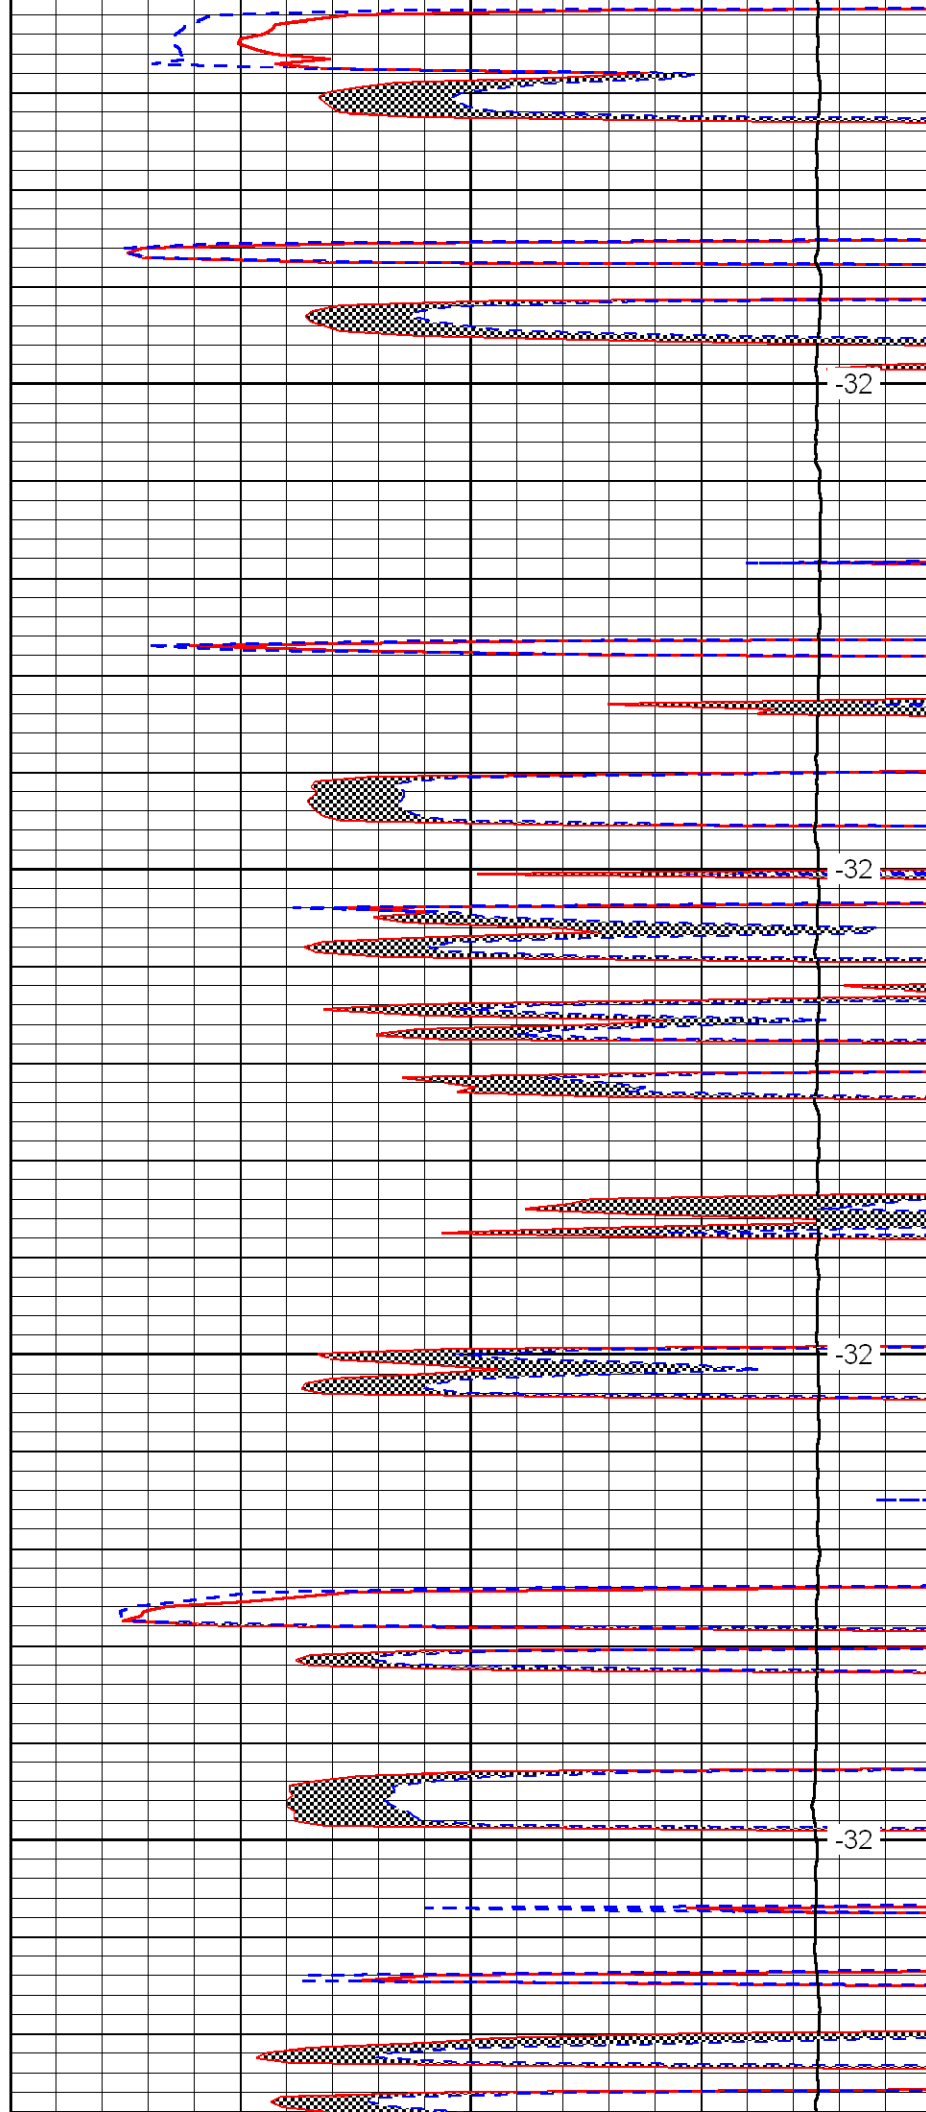

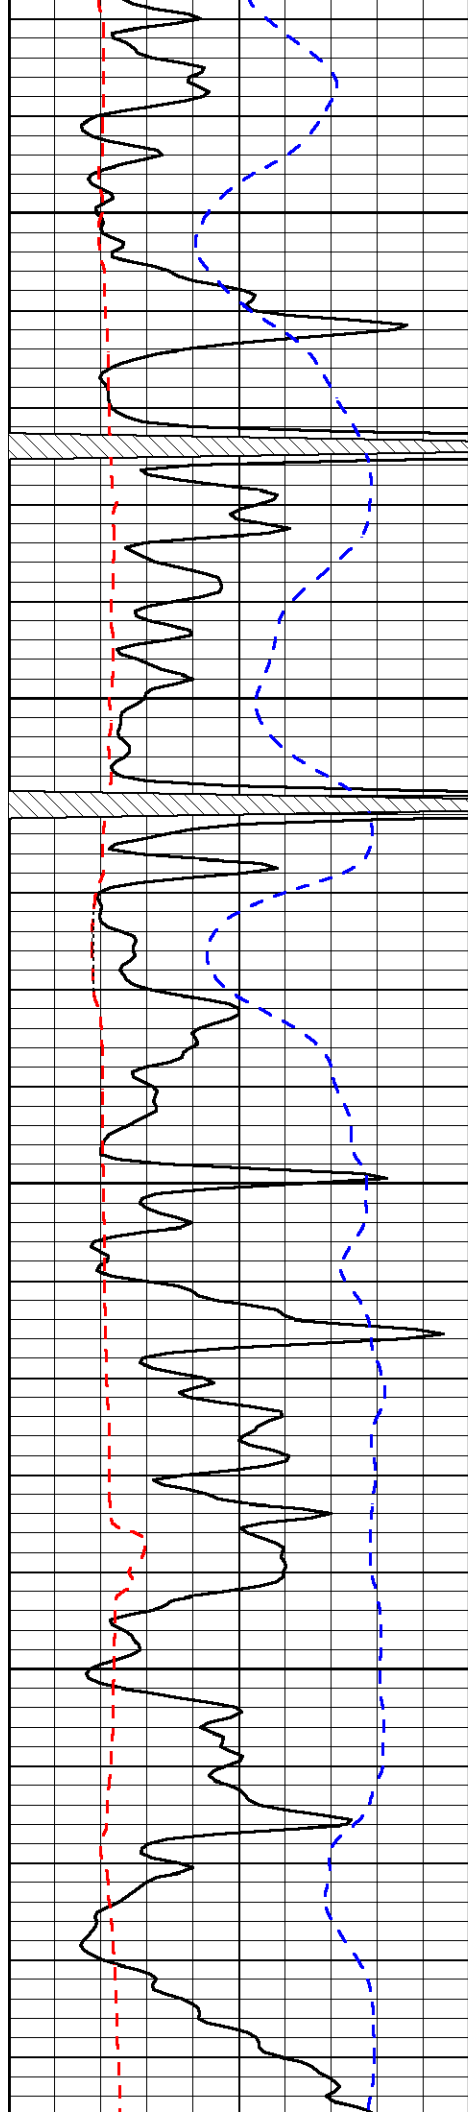



4250

4300

4350

4400

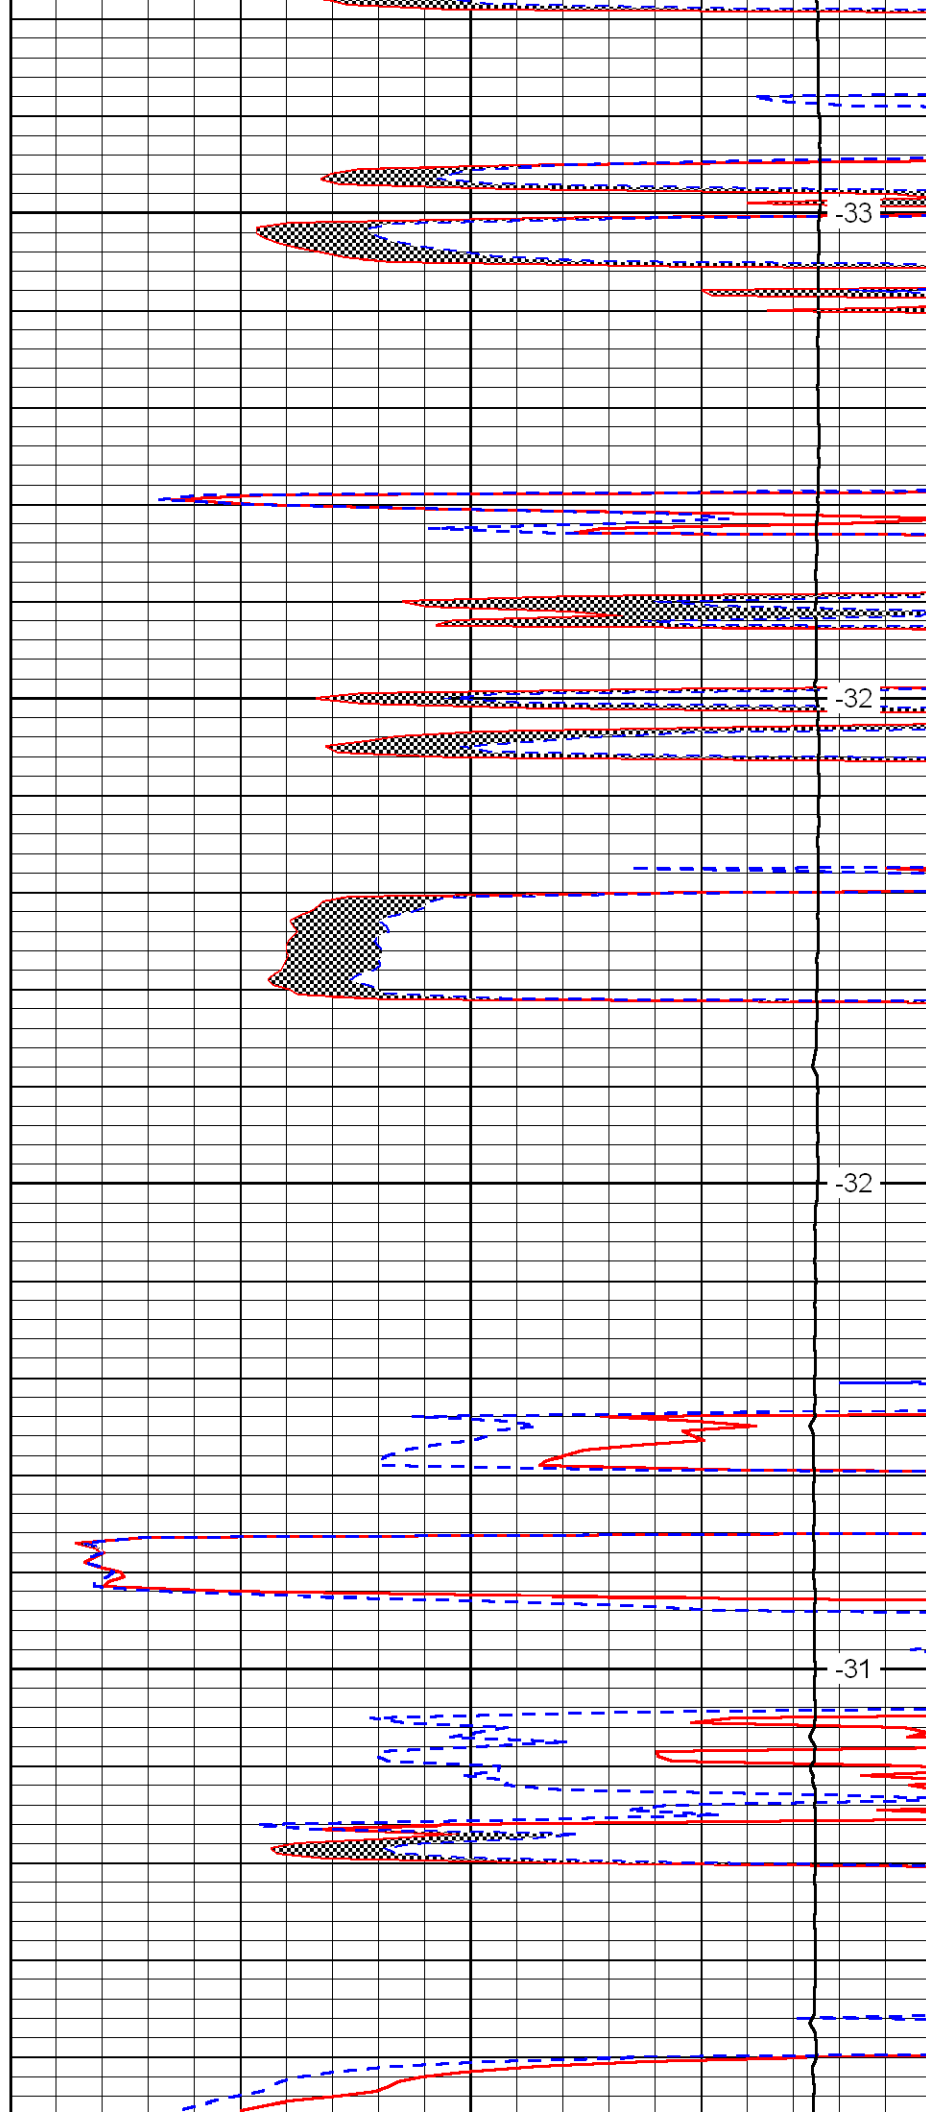

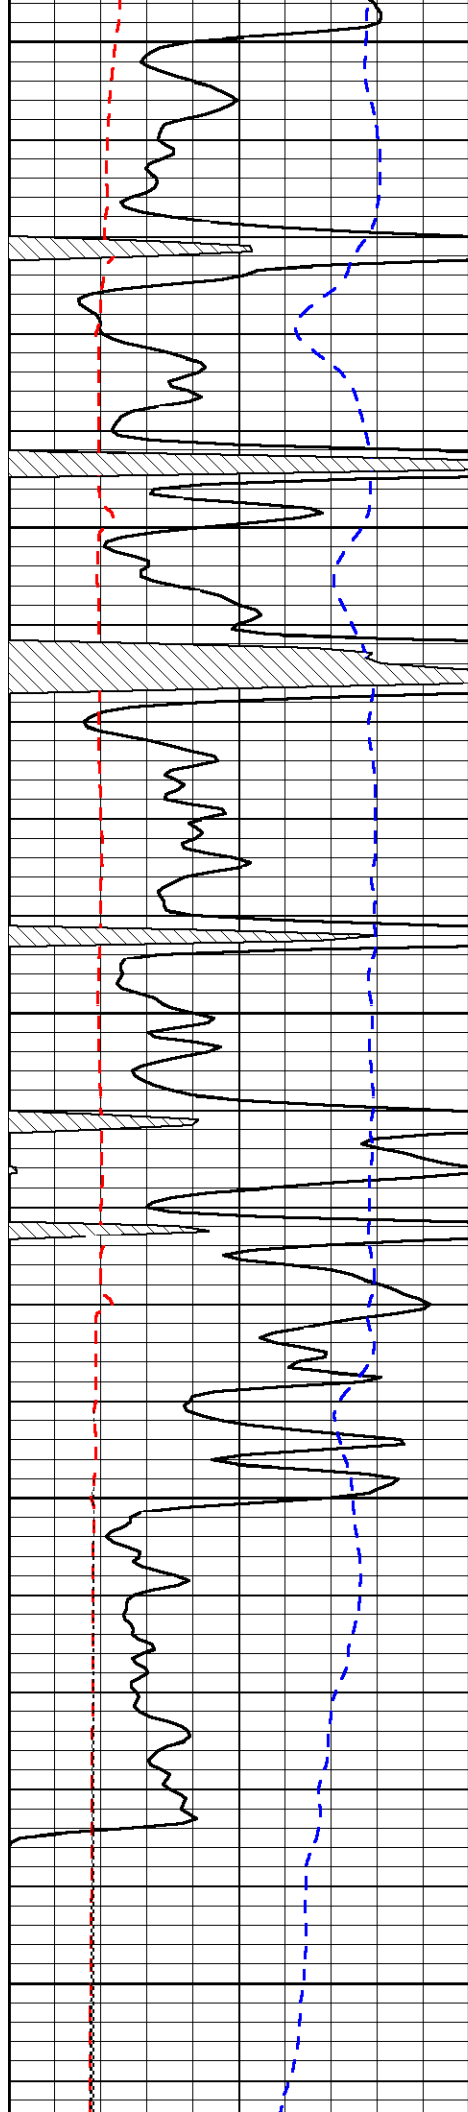


4450

4500

4550

4600

4650

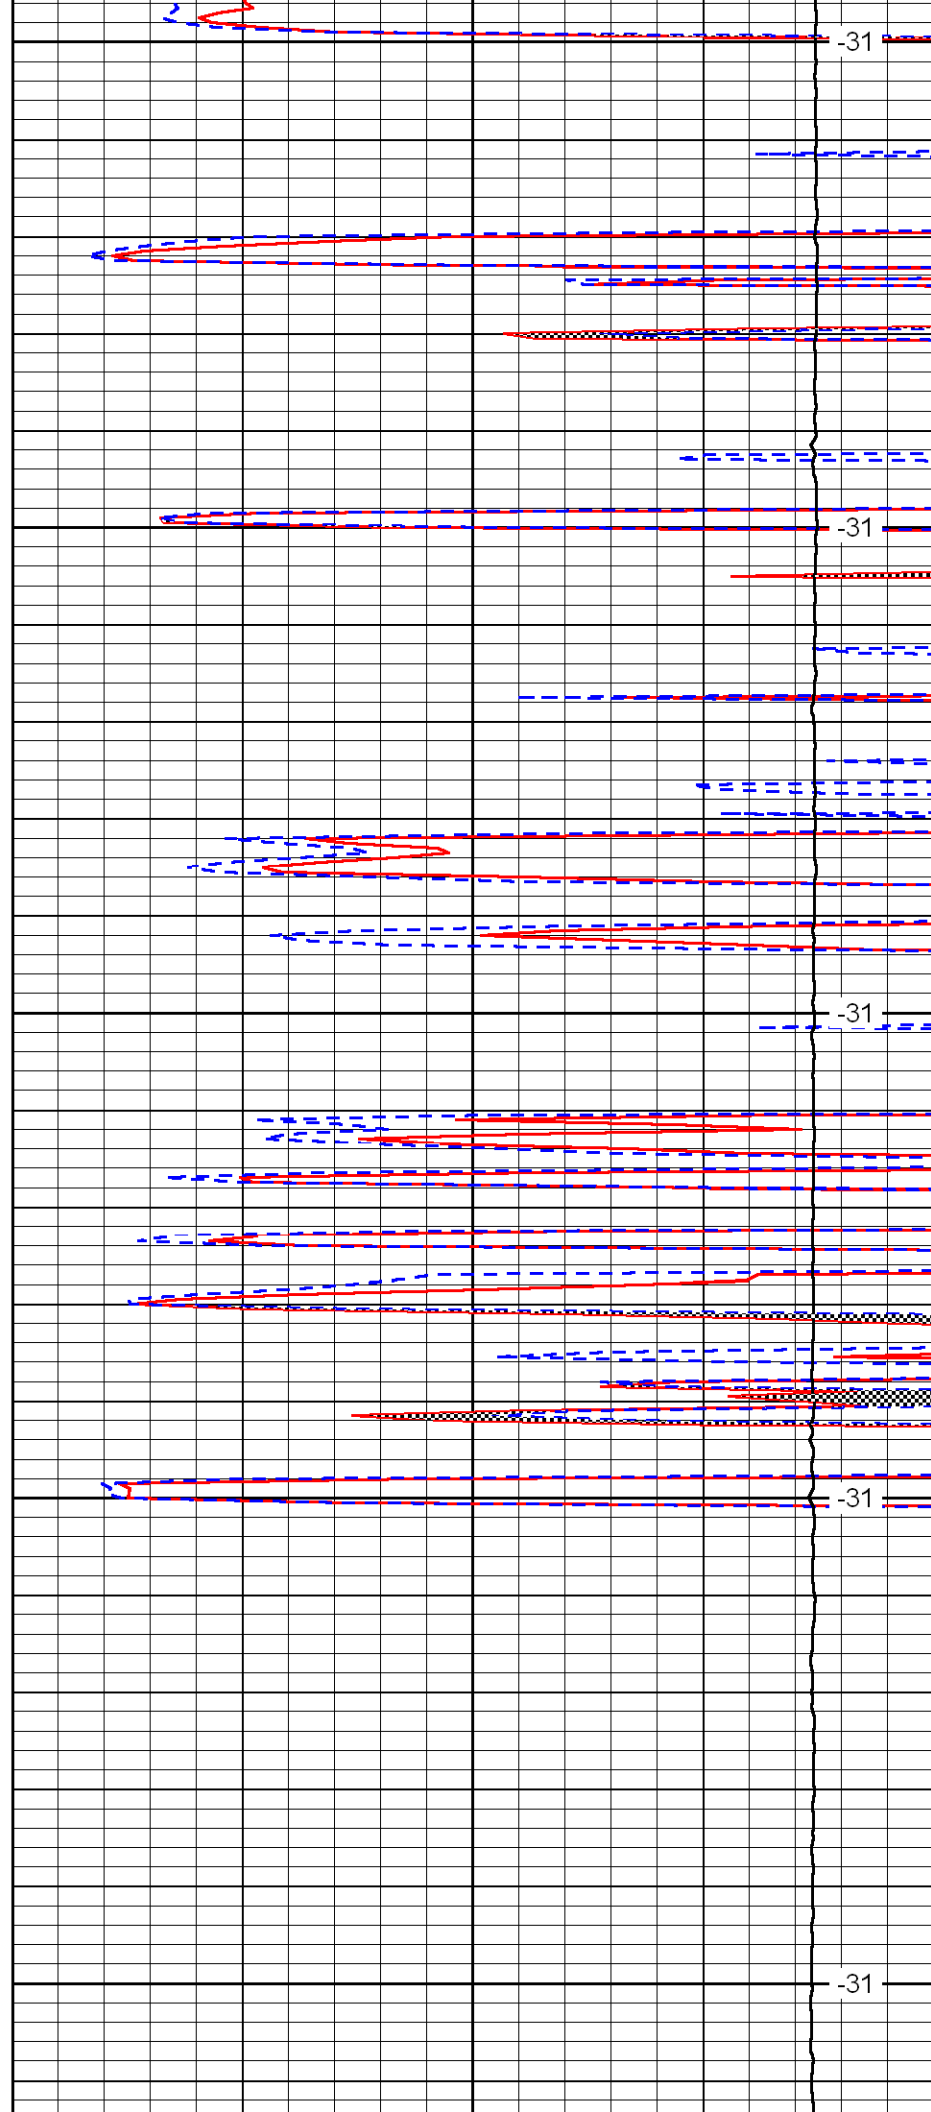

-31

-31

-31

-31

-31

