



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-065-23526

Company American Warrior, Inc.

Well Gosselin #3-6

Field Luck NE

County Graham

State

Kansas

Location 1550' FSL & 1675' FEL

Sec: 6 Twp: 8S Rge: 21W

Other Services
CNL/CDL
DIL

Permanent Datum Ground Level Elevation 2120

Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing K.B. 2128
D.F. 2120
G.L. 2120

Date 1/17/2009

Run Number Two

Depth Driller 3695

Depth Logger 3693

Bottom Logged Interval 3692

Top Log Interval 2950

Casing Driller 8.625 @ 214

Casing Logger

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 1,200

Density / Viscosity 9.1 52

pH / Fluid Loss 10.0 8.8

Source of Sample Flowline

Rm @ Meas. Temp 1.0 @ 72

Rmf @ Meas. Temp .75 @ 72

Rmc @ Meas. Temp 1.35 @ 72

Source of Rmf / Rmc Charts

Rm @ BHT .62 @ 115

Operating Rig Time 4 Hours

Max Rec. Temp. F 115

Equipment Number 4

Location Hays

Recorded By C. McLaughlin

Witnessed By Marc Downing

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858


Hwy 24 & Hwy 18 jct.
1W, N into

Database File: c:\warrior\data\amwar_gosselin #3-6\amwahd.db
Dataset Pathname: dil/amwarstck
Presentation Format: micro
Dataset Creation: Sat Jan 17 19:33:48 2009
Charted by: Depth in Feet scaled 1:240



LSPD

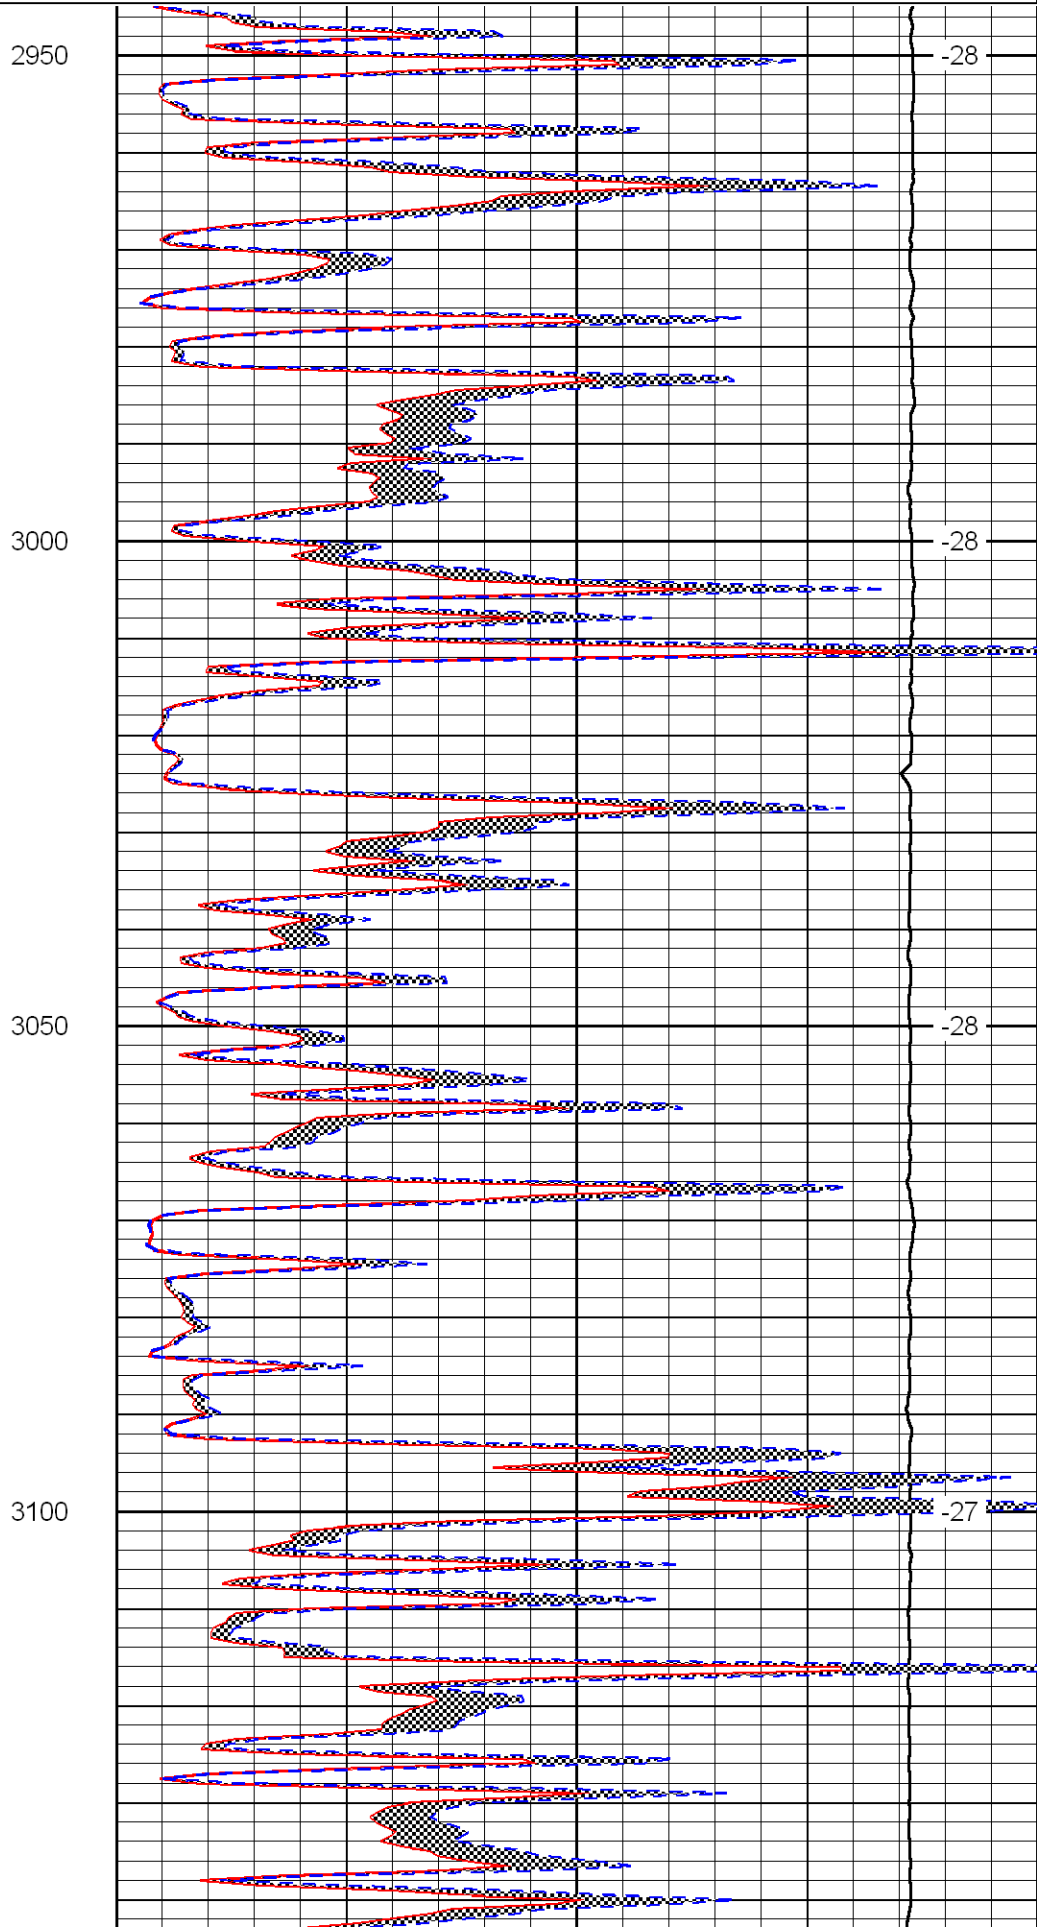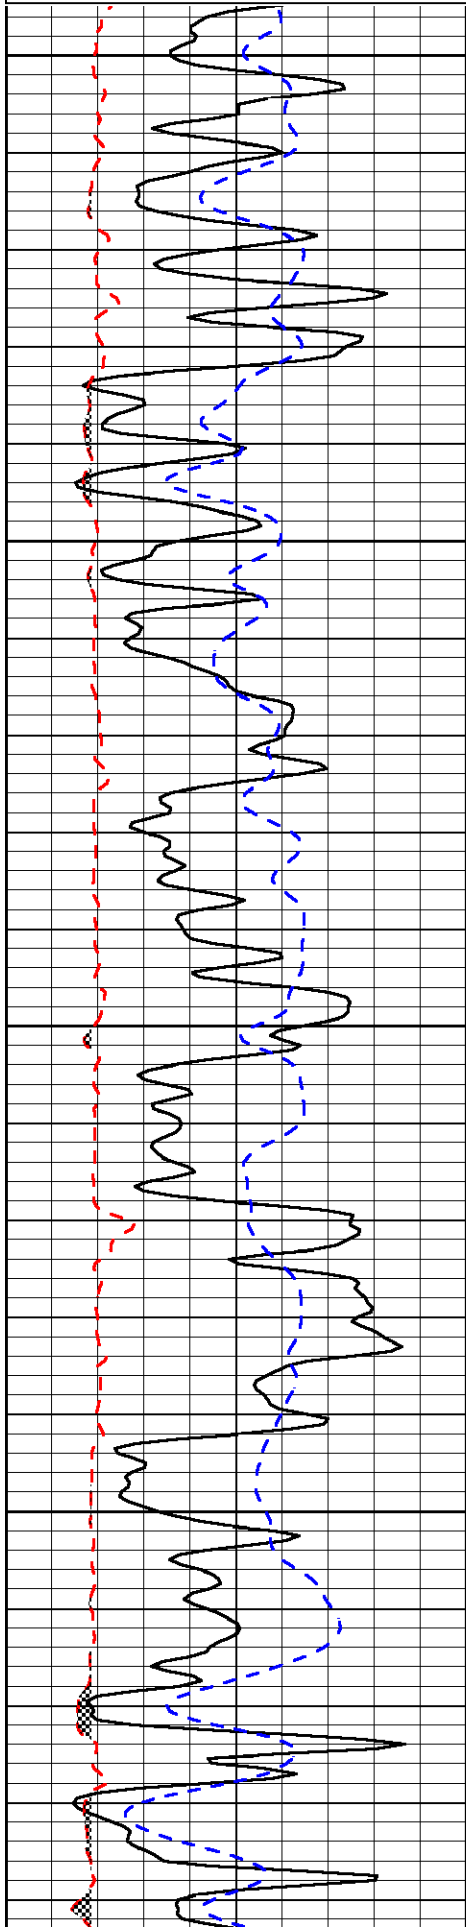

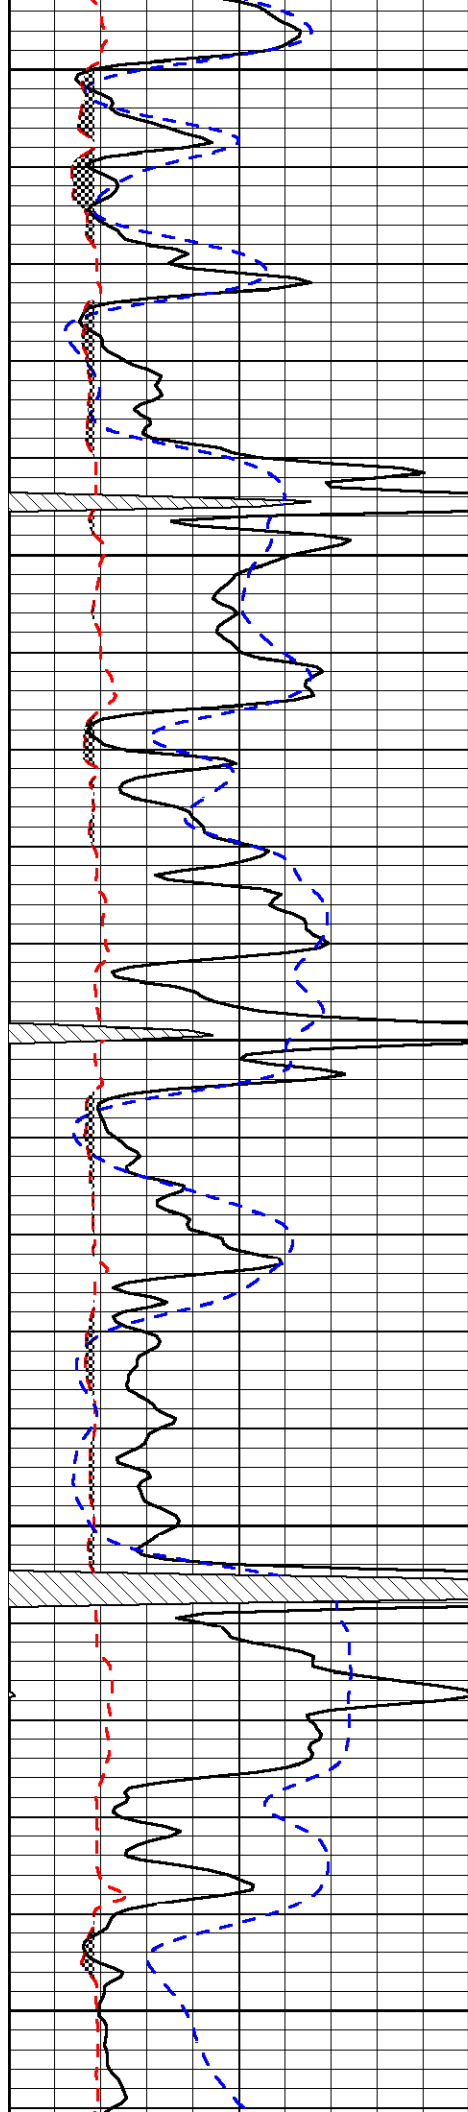


3150

3200

3250

3300

3350

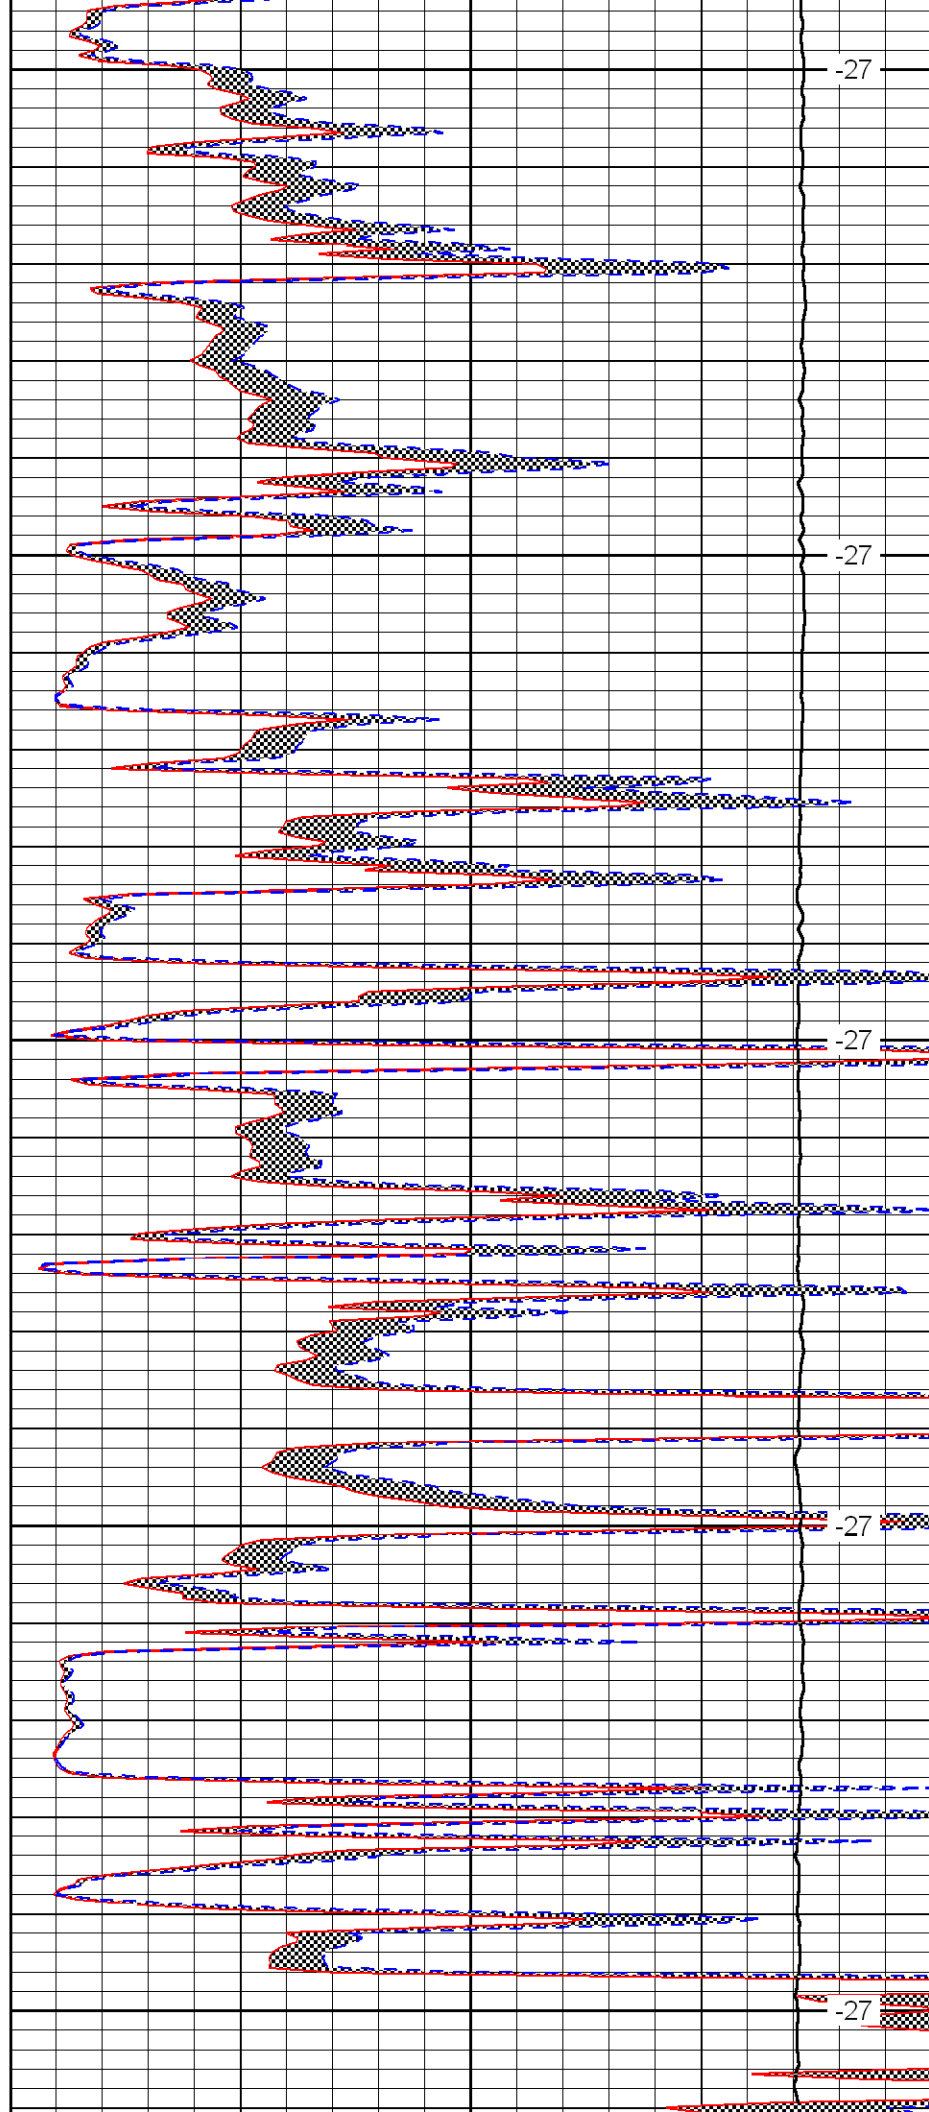


-27

-27

-27

-27

-27

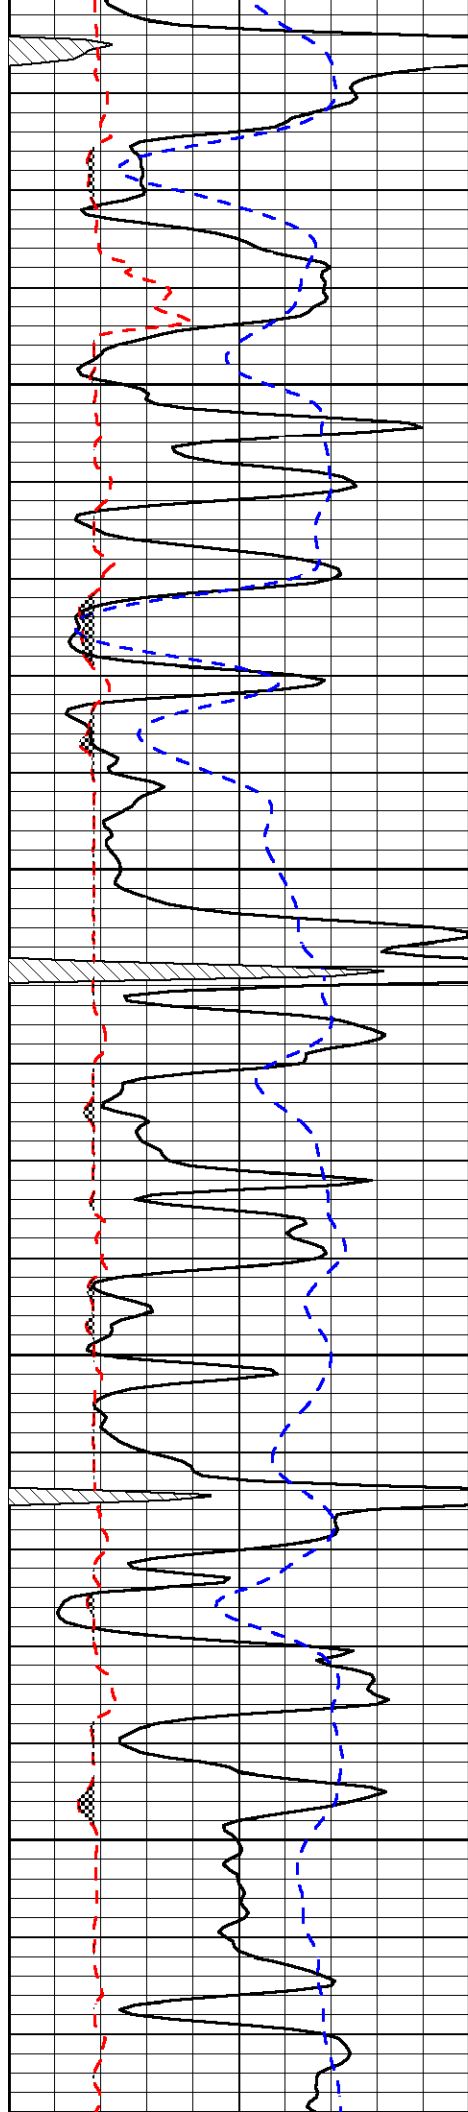


3400

3450

3500

3550


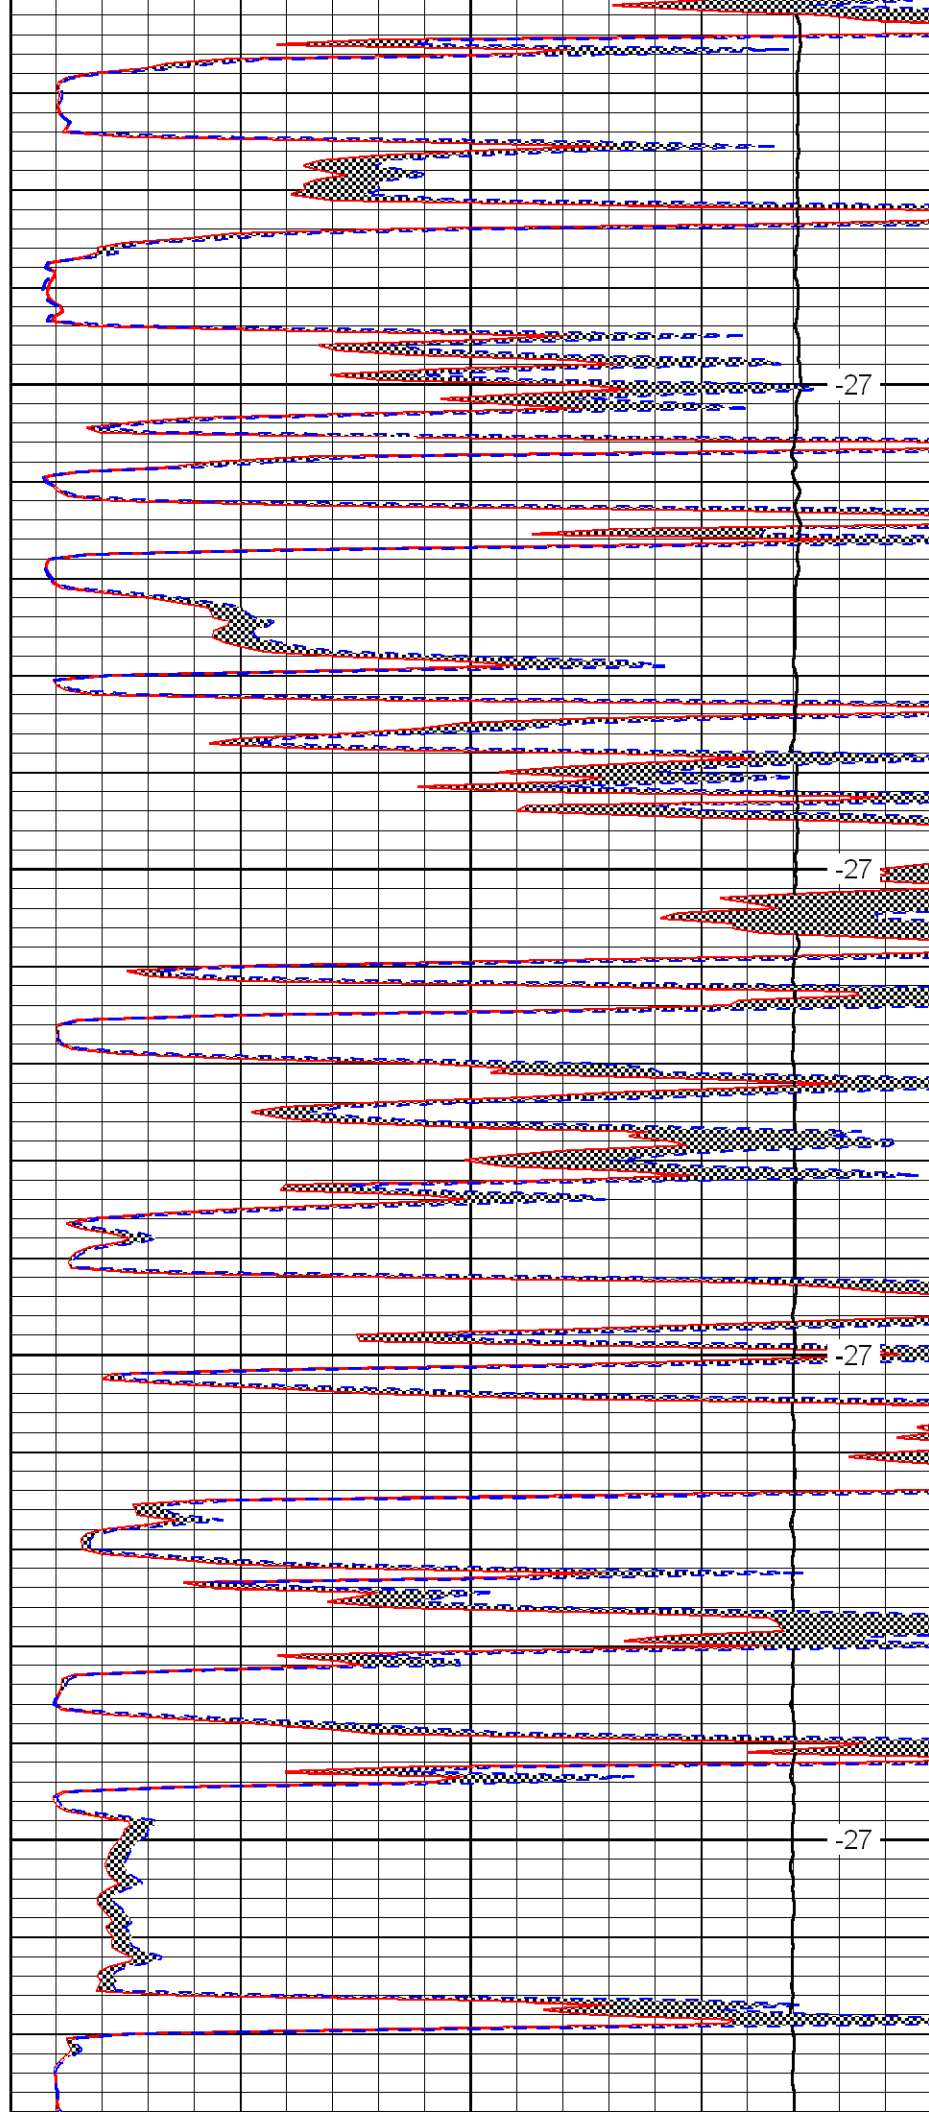


-27

-27

-27

-27

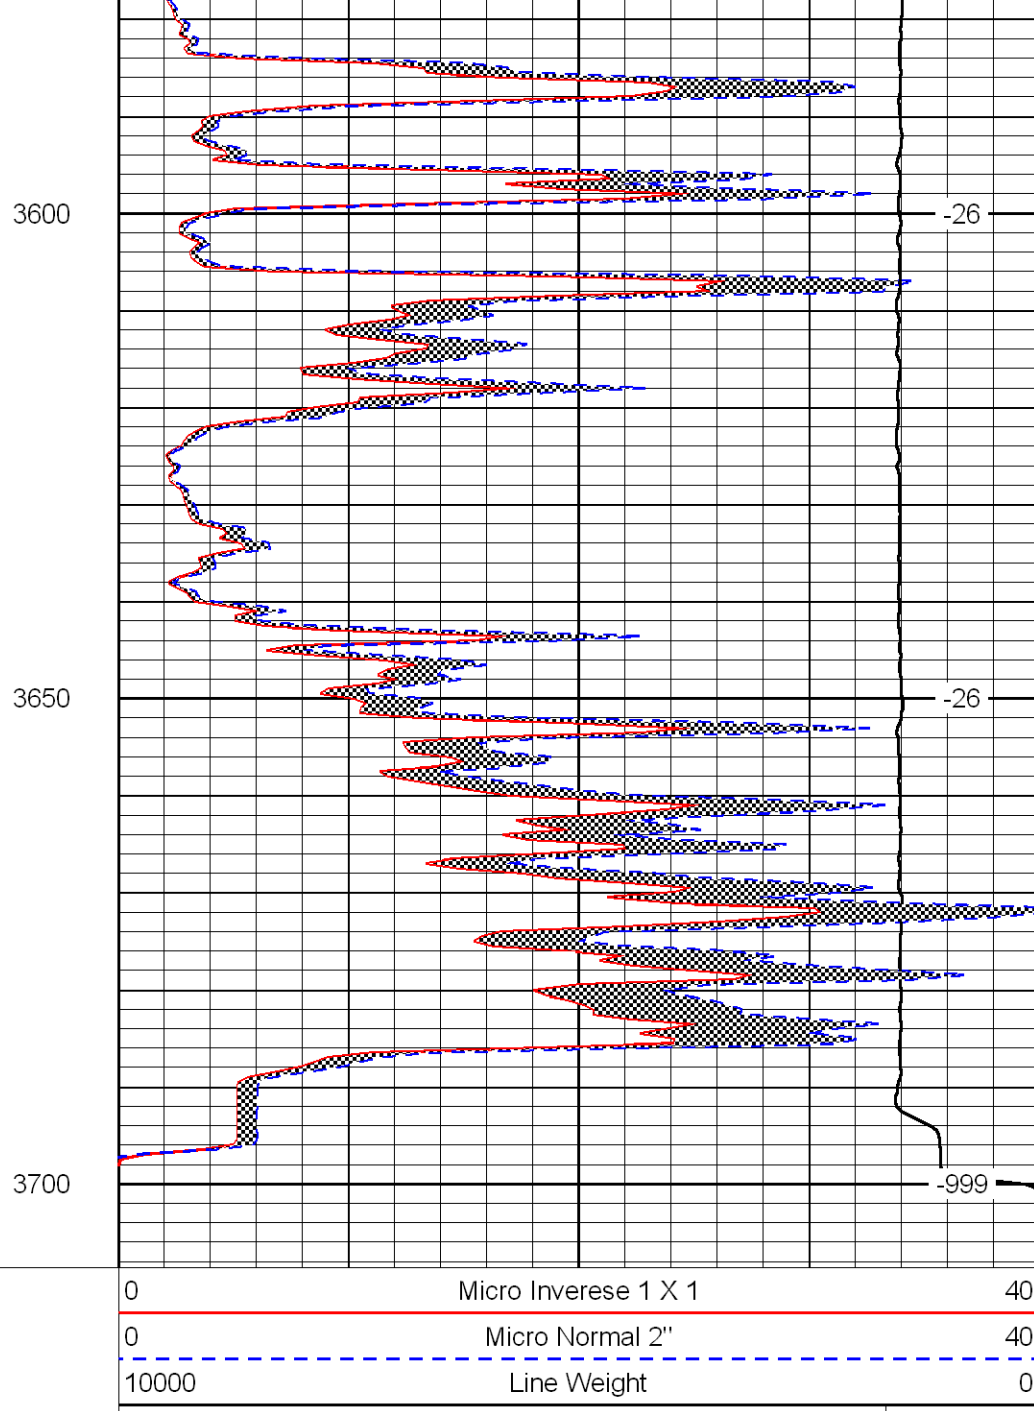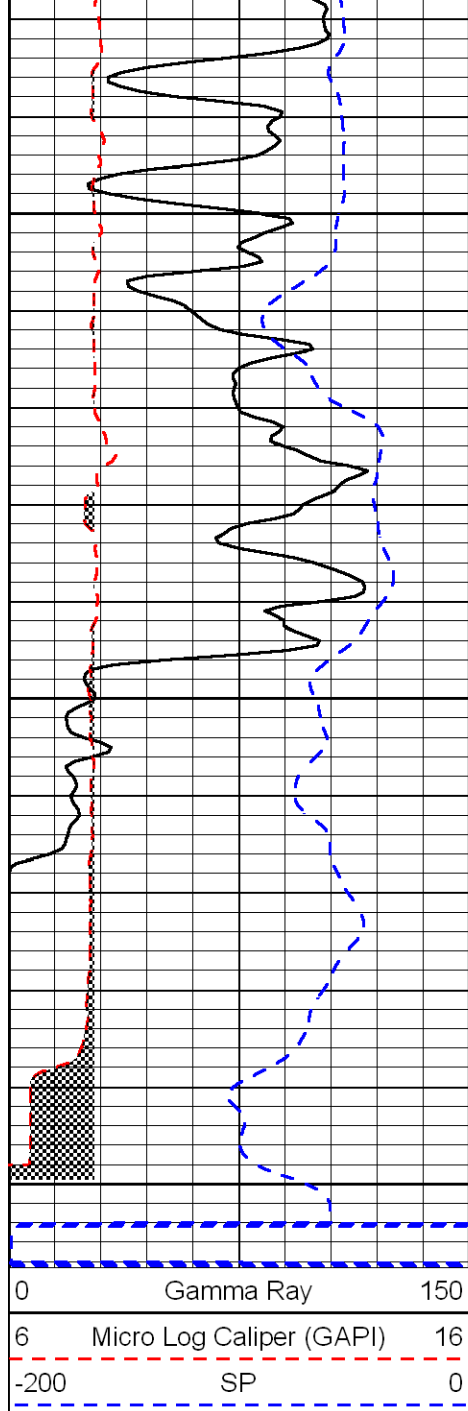

LSPD