

15-137-00655-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
300 BITTING BUILDING
WICHITA, KANSAS

WELL PLUGGING APPLICATION FORM

Well Location 330' N)
330' W) E 1/2 Co Sec. 27 Twp. 5 Rge. 21 (E) (W) West

Field Name (if any) Ray West-Arb. County Norton

Lease (Farm Name) Wiltrout Well No. 1

Was well log filed with application? Yes If not, explain circumstances and give available data (Use an additional sheet if necessary)

Log attached.

Date and hour plugging is desired to begin As soon as possible

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary)

Name of the person on the lease in charge of well for owner

J. A. Cleverley Address Russell, Kansas

Name of well owner or Acting Agent Cities Service Oil Company

Address Bartlesville, Oklahoma

Invoice covering assessment for plugging this well should be sent to:


Cities Service Oil Co. Address Box 751, Great Bend, Kansas

and payment will be guaranteed by applicant.

27 5 21W
22 5

Operator or Acting Agent

Date July 31, 1945

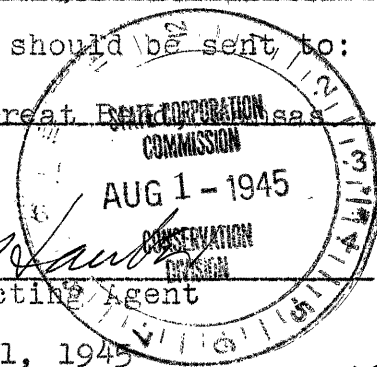

8-1-45

15-137-00655-00-00

Geol. 63 500 7-45

WELL RECORD

Company Cities Service Oil Well No. 1 Farm Willow
 Location 330' N. & 330' W. of 1/4 Corner Sec. 27 T. 5 R. 21E
 Elevation 3254' County Horton State Kansas
 Drig. Comm. March 22, 1945 Contractor Holmes & Myers Inc.
 Drig. Comp. April 11, 1945 Acid 300 gals. 4-14-45
 T. D. 3670' Initial Prod. None. Dry Hole.

LOGGING RECORD:

5 3/8" @ 180' w/ 1 1/2 cu. local con.
 200' c.c.
 5 1/2" @ 3640' w/ 250 cu. Halliburton
 bulk con.

PENETRATION RECORD:

Sand and shale	0-220
Shale	430
Shale and shells	930
Sandy shale	1030
Sand	1270
Shale	1420
Sandy shale	1520
Shale and shells	1700
Shale	1840
Argillite	1860
Shale	1885
Shale and shells	2140
Lime and shale	2160
Pyrite and lime	2505
Shale and shells	2750
Lime and shale	2800
Shale and shells	2900
Lime and shale	2934
Shale and shells	3030
Lime and shale	3245
Lime	3302
Lime and shale	3347
Lime	3416
Lime and shale	3453
Lime	3492
Shert	3494
Lime	3555
Lime and shale	3565
Lime	3591
Lime and shale	3645
Lime soft	3690
Lime and shale	3660
Lime soft	3663
Lime	3675

3675 Rotary T. D. = 3671 S.L.M.

Dolomite

3670 T. D.

Corr. Top Artuckle 367'
 Penetration 11'
 Total Depth 3670'

Fill-up:

120' oil in 1 1/2 hrs. at 3670.
 Bailed dry, and hole filled.
 400' oil in 3 1/2 hrs.; 700' oil
 in 11 3/4 hrs.; 1400' oil in 35 hrs.

Acidized 300 gals.

Shutted 15 min. wtr. per hr., 24 hrs.
 Plugged back 3670-75 w/ plastic. wtr.
 not shut-off.


Drilled cut plug and plugged back 3670-70
 w/ plastic; water not shut-off.

Set Lane-Wells bridge plug at 3625.

Prod. 35 shots 3466-77; 1/2 barrel wtr. 1/2 hr.
 34 shots 3563-71
 6 shots 3550-55
 23 shots 3508-14
 1 barrel wtr. per hr.
 23 shots 3440-48
 12 shots 3421-25
 12 shots 3387-73
 22 shots 3350-56; 150' of wtr. in 1 1/2 hrs.;
 1270' wtr. in 14 hrs.; total fill-up 2500'
 water, no oil.

Lyfo:

1500' @ 10
 2000' @ 10
 2500' @ 10
 3000' @ 10

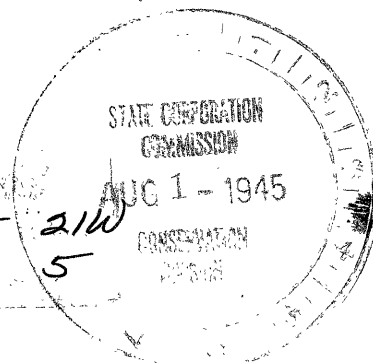



15-137-00655-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA 2, KANSAS

AUG. 8, 1948

IN REPLY PLEASE
REFER TO THIS
SUBJECT

Well No. 1
Farm Wilbrent
Description 32 32 27-8-2 W
County Barton
File: 22-5

Cities Service Oil Co.
Box 761
Great Bend
Kansas

This letter is your permit to plug the
above subject well, in accordance with the
Rules and Regulations of the STATE CORPORA-
TION COMMISSION.

Very truly yours,

STATE CORPORATION COMMISSION
CONSERVATION DIVISION

HA

BY:

J. F. Roberts
J. F. ROBERTS

NOTICE:

H.W. Kerr
Box 207
Great Bend, Kansas