



Dual Compensated
Porosity Log

DIGITAL LOG (785) 625-3858

API No. 15-153-20,875-00-00

Company: Murfin Drilling Company, Inc.
Well: Sutton No. 2-8
Field: Wildcat
County: Rawlins
State: Kansas

Location: 2600' FSL & 600' FWL
Sec: 8 Twp: 1S Rge: 35W

Other Services: DIL MEL/BHCS

Permanent Datum: Ground Level Elevation 3225
Log Measured From: Kelly Bushing 5 Ft. Above Perm. Datum
Drilling Measured From: Kelly Bushing

Elevation: K.B. 3230
D.F. G.L. 3225

Date: 03/11/2009

Run Number: One

Type Log: CNL / CDL

Depth Driller: 4520

Depth Logger: 4523

Bottom Logged Interval: 4502

Top Logged Interval: 3850

Type Fluid In Hole: Chemical

Salinity, PPM CL: 1,000

Density: 9.0

Level: Full

Max. Rec. Temp. F: 123

Operating Rig Time: 5 Hours

Equipment -- Location: 10 Hays

Recorded By: Jason Wellbrock

Witnessed By: Rocky Milford

Run No	Bit	Borehole Record		Casing Record	
		From	To	From	To
1	12.25	00	290	8.625	24#
2	7.875	290	4520		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858




Atwood 9 1/2 W to Beardsley 2 N, 1/4 W to 10.5 rd, 11.5 N to CC rd, 2 W, N Into


Database File: c:\warrior\data\murfin_sutton no. 2-8\murfhd.db
 Dataset Pathname: dil/murf
 Presentation Format: cdl
 Dataset Creation: Wed Mar 11 11:38:36 2009
 Charted by: Depth in Feet scaled 1:600


0	Gamma Ray	150
6	Caliper (in)	16


30	Compensated Density (pu)	-10
2	Bulk Density (g/cc)	3
15000	Line Tension (lb)	0
-0.25	Correction (g/cc)	0.25
		LSPD (ft/min)

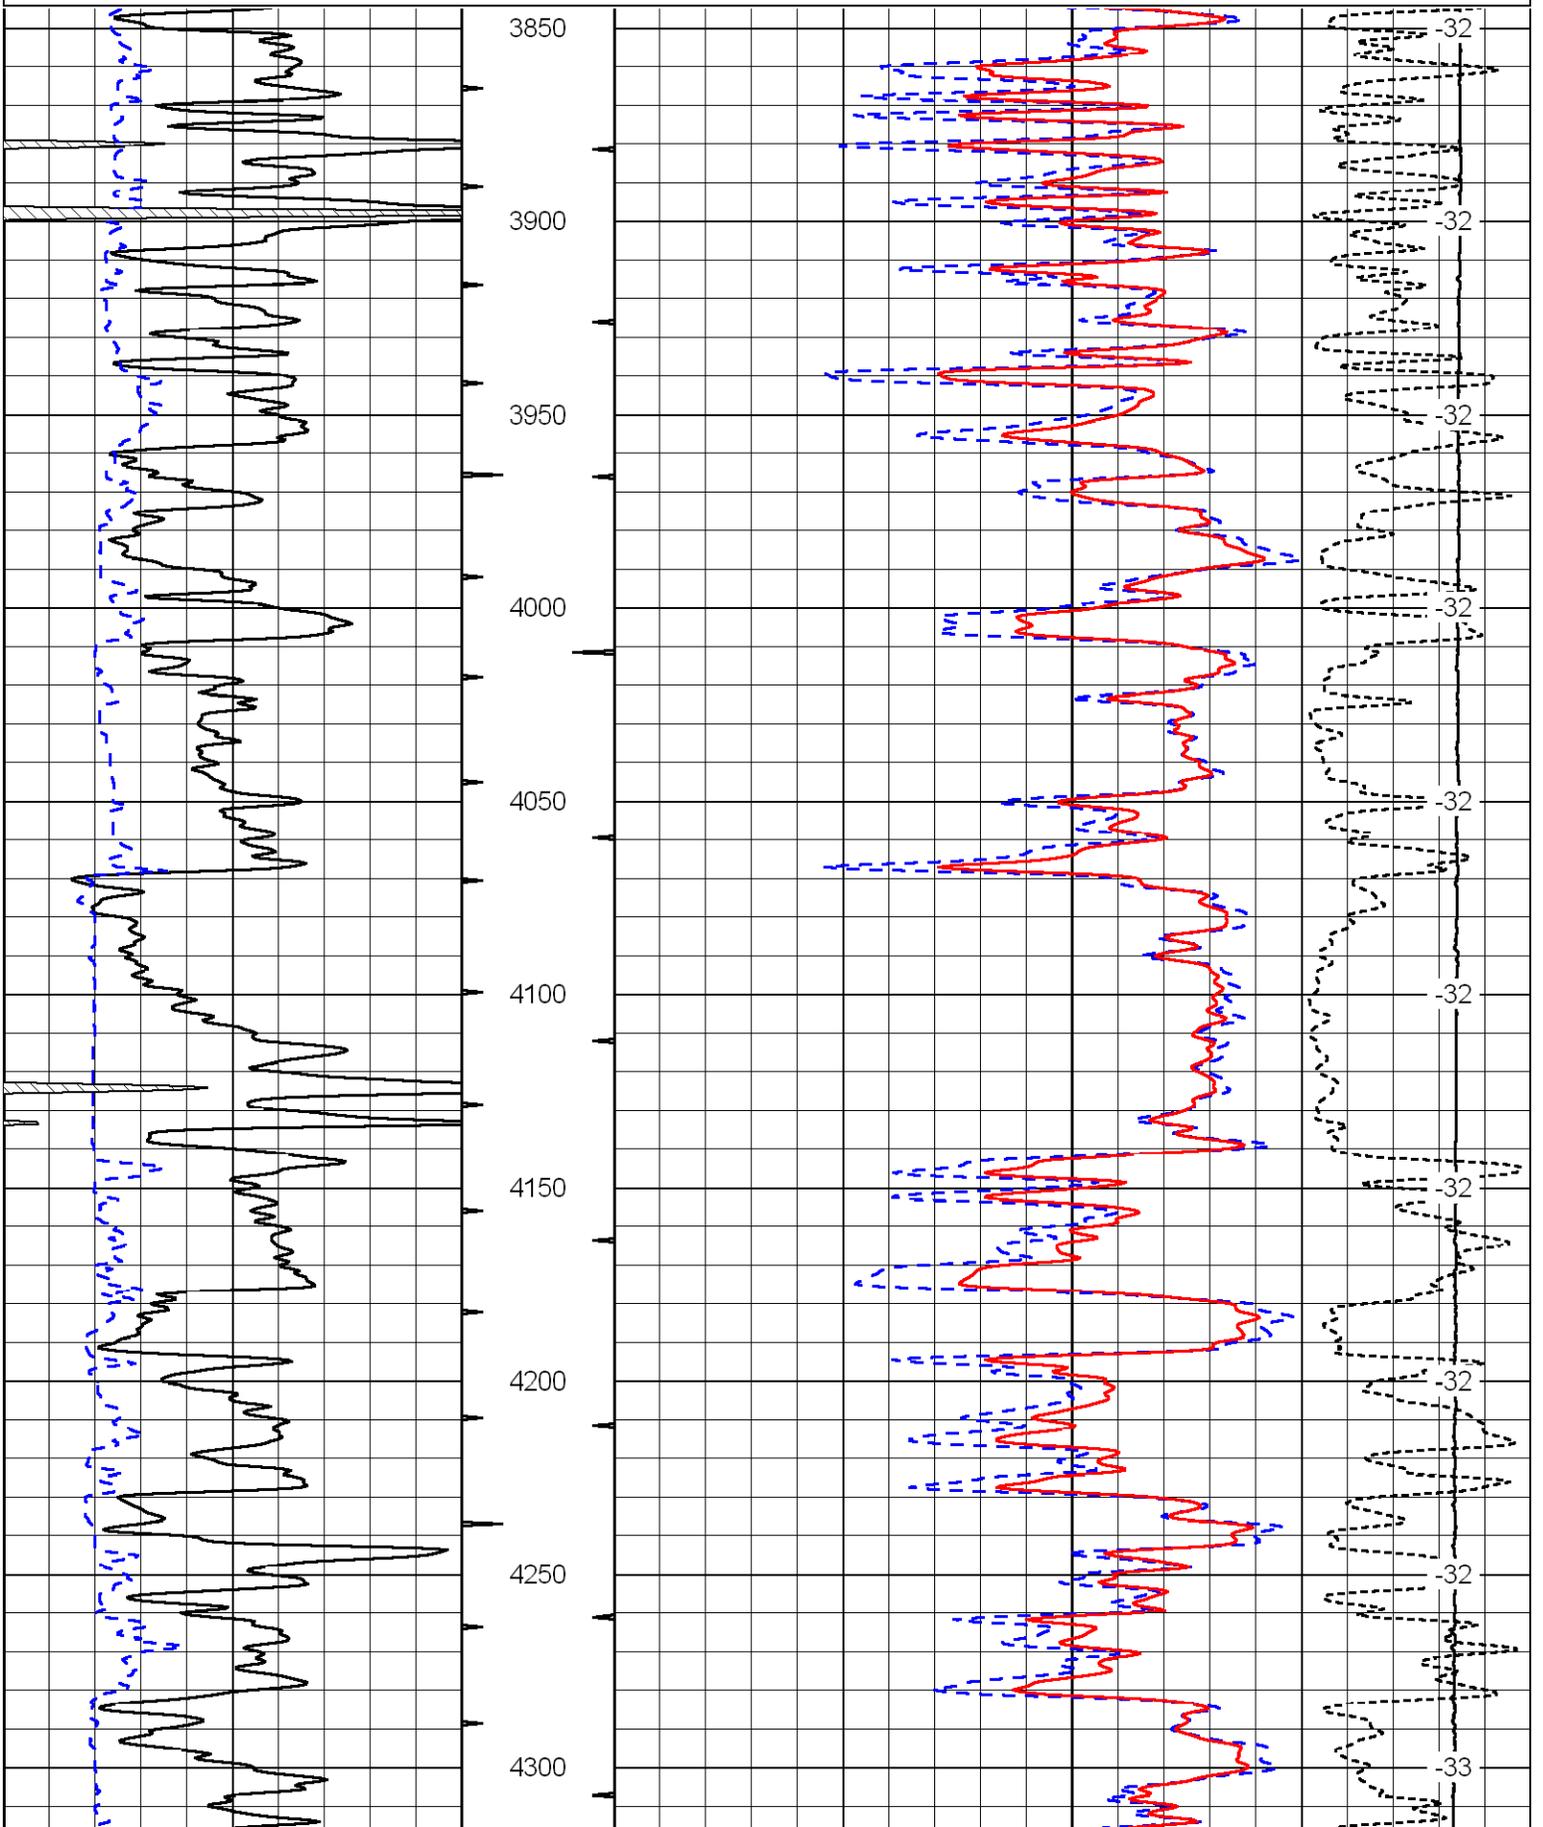

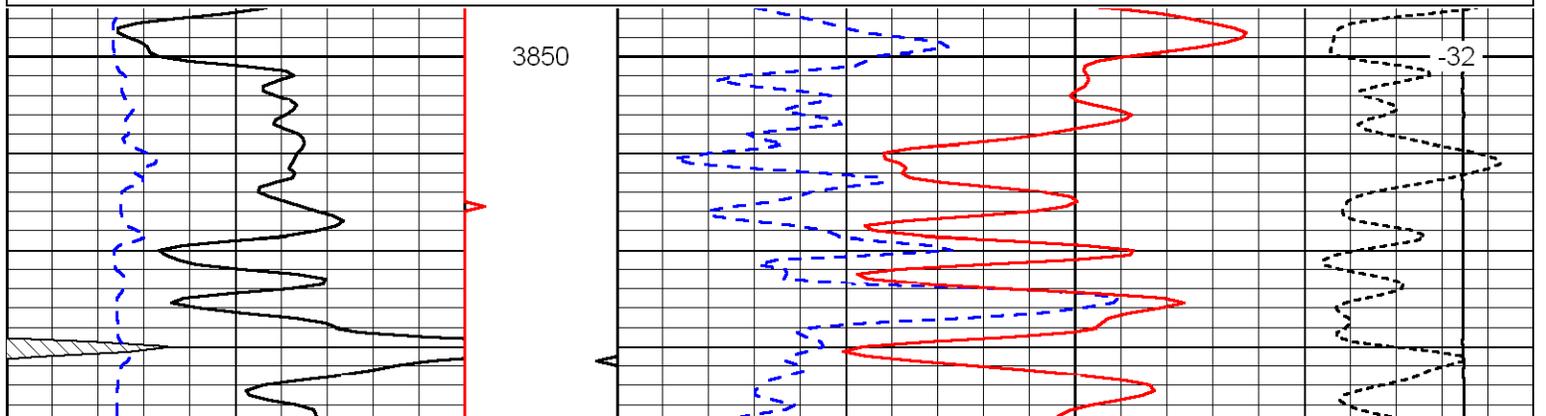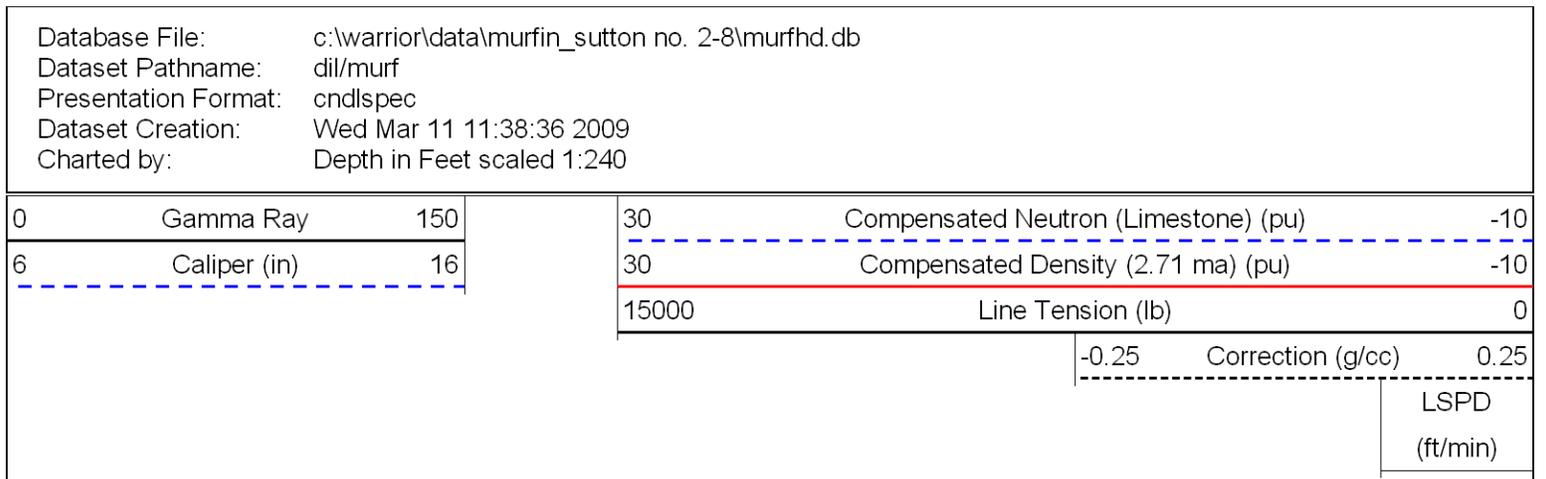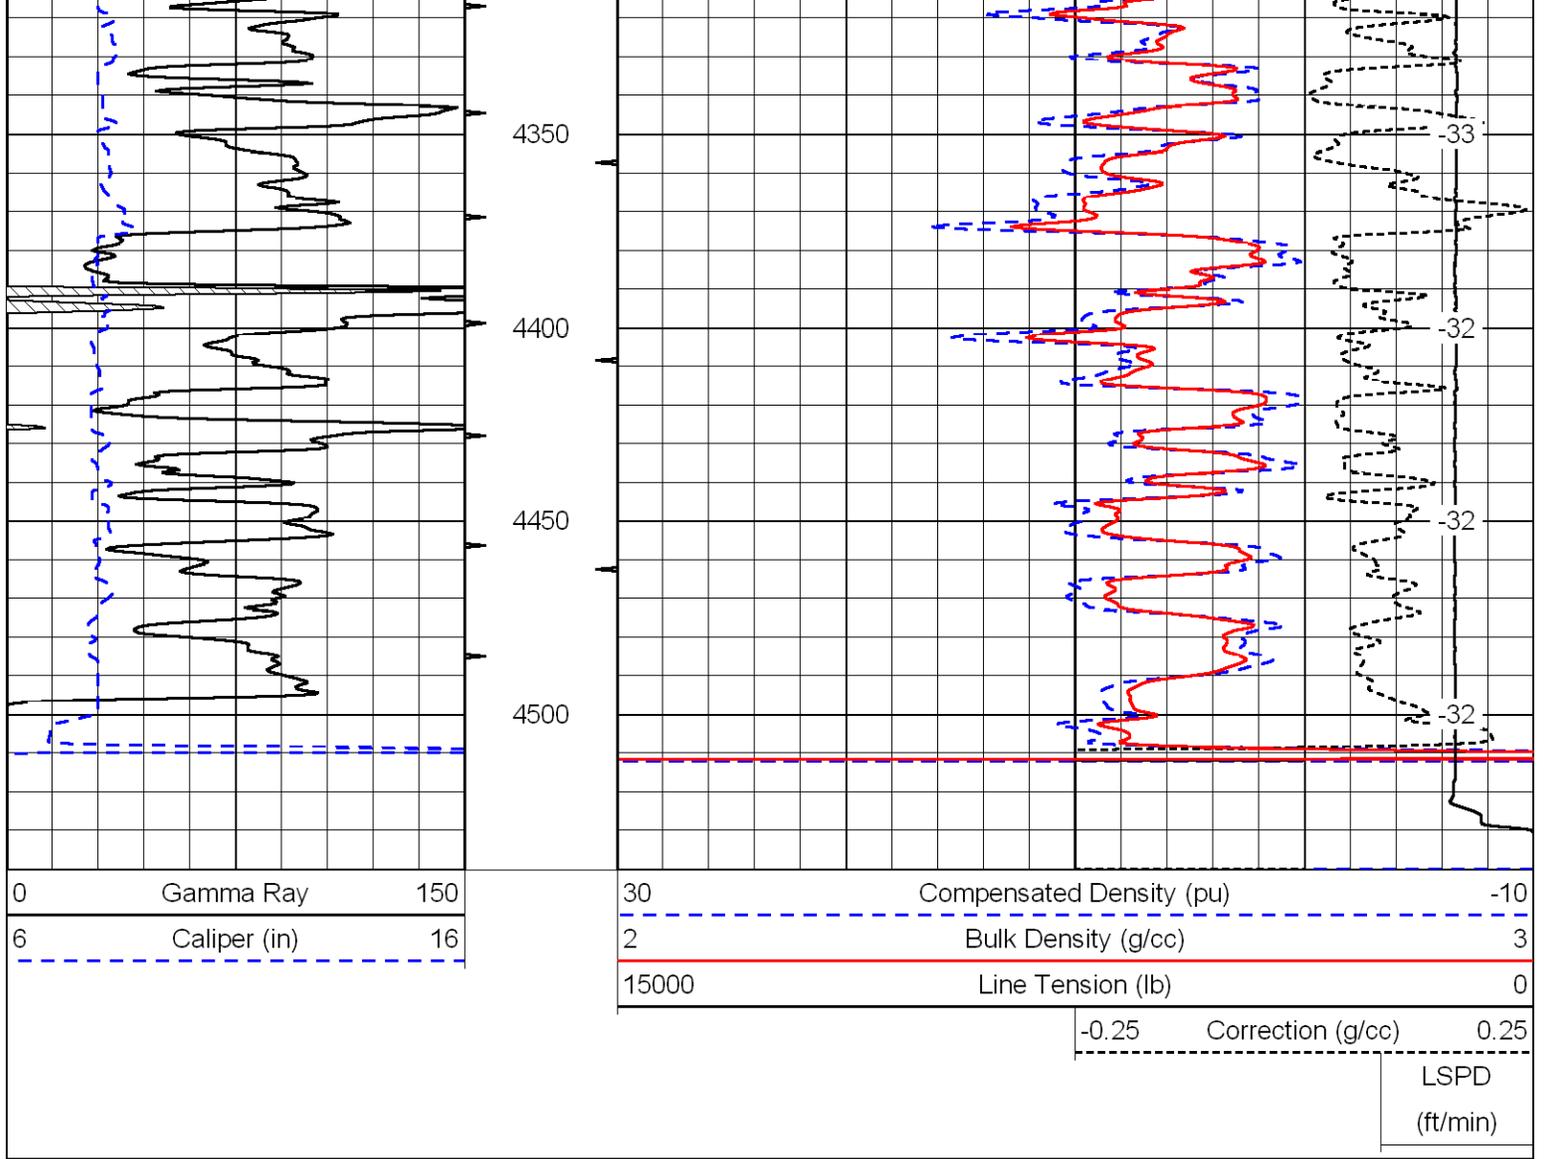

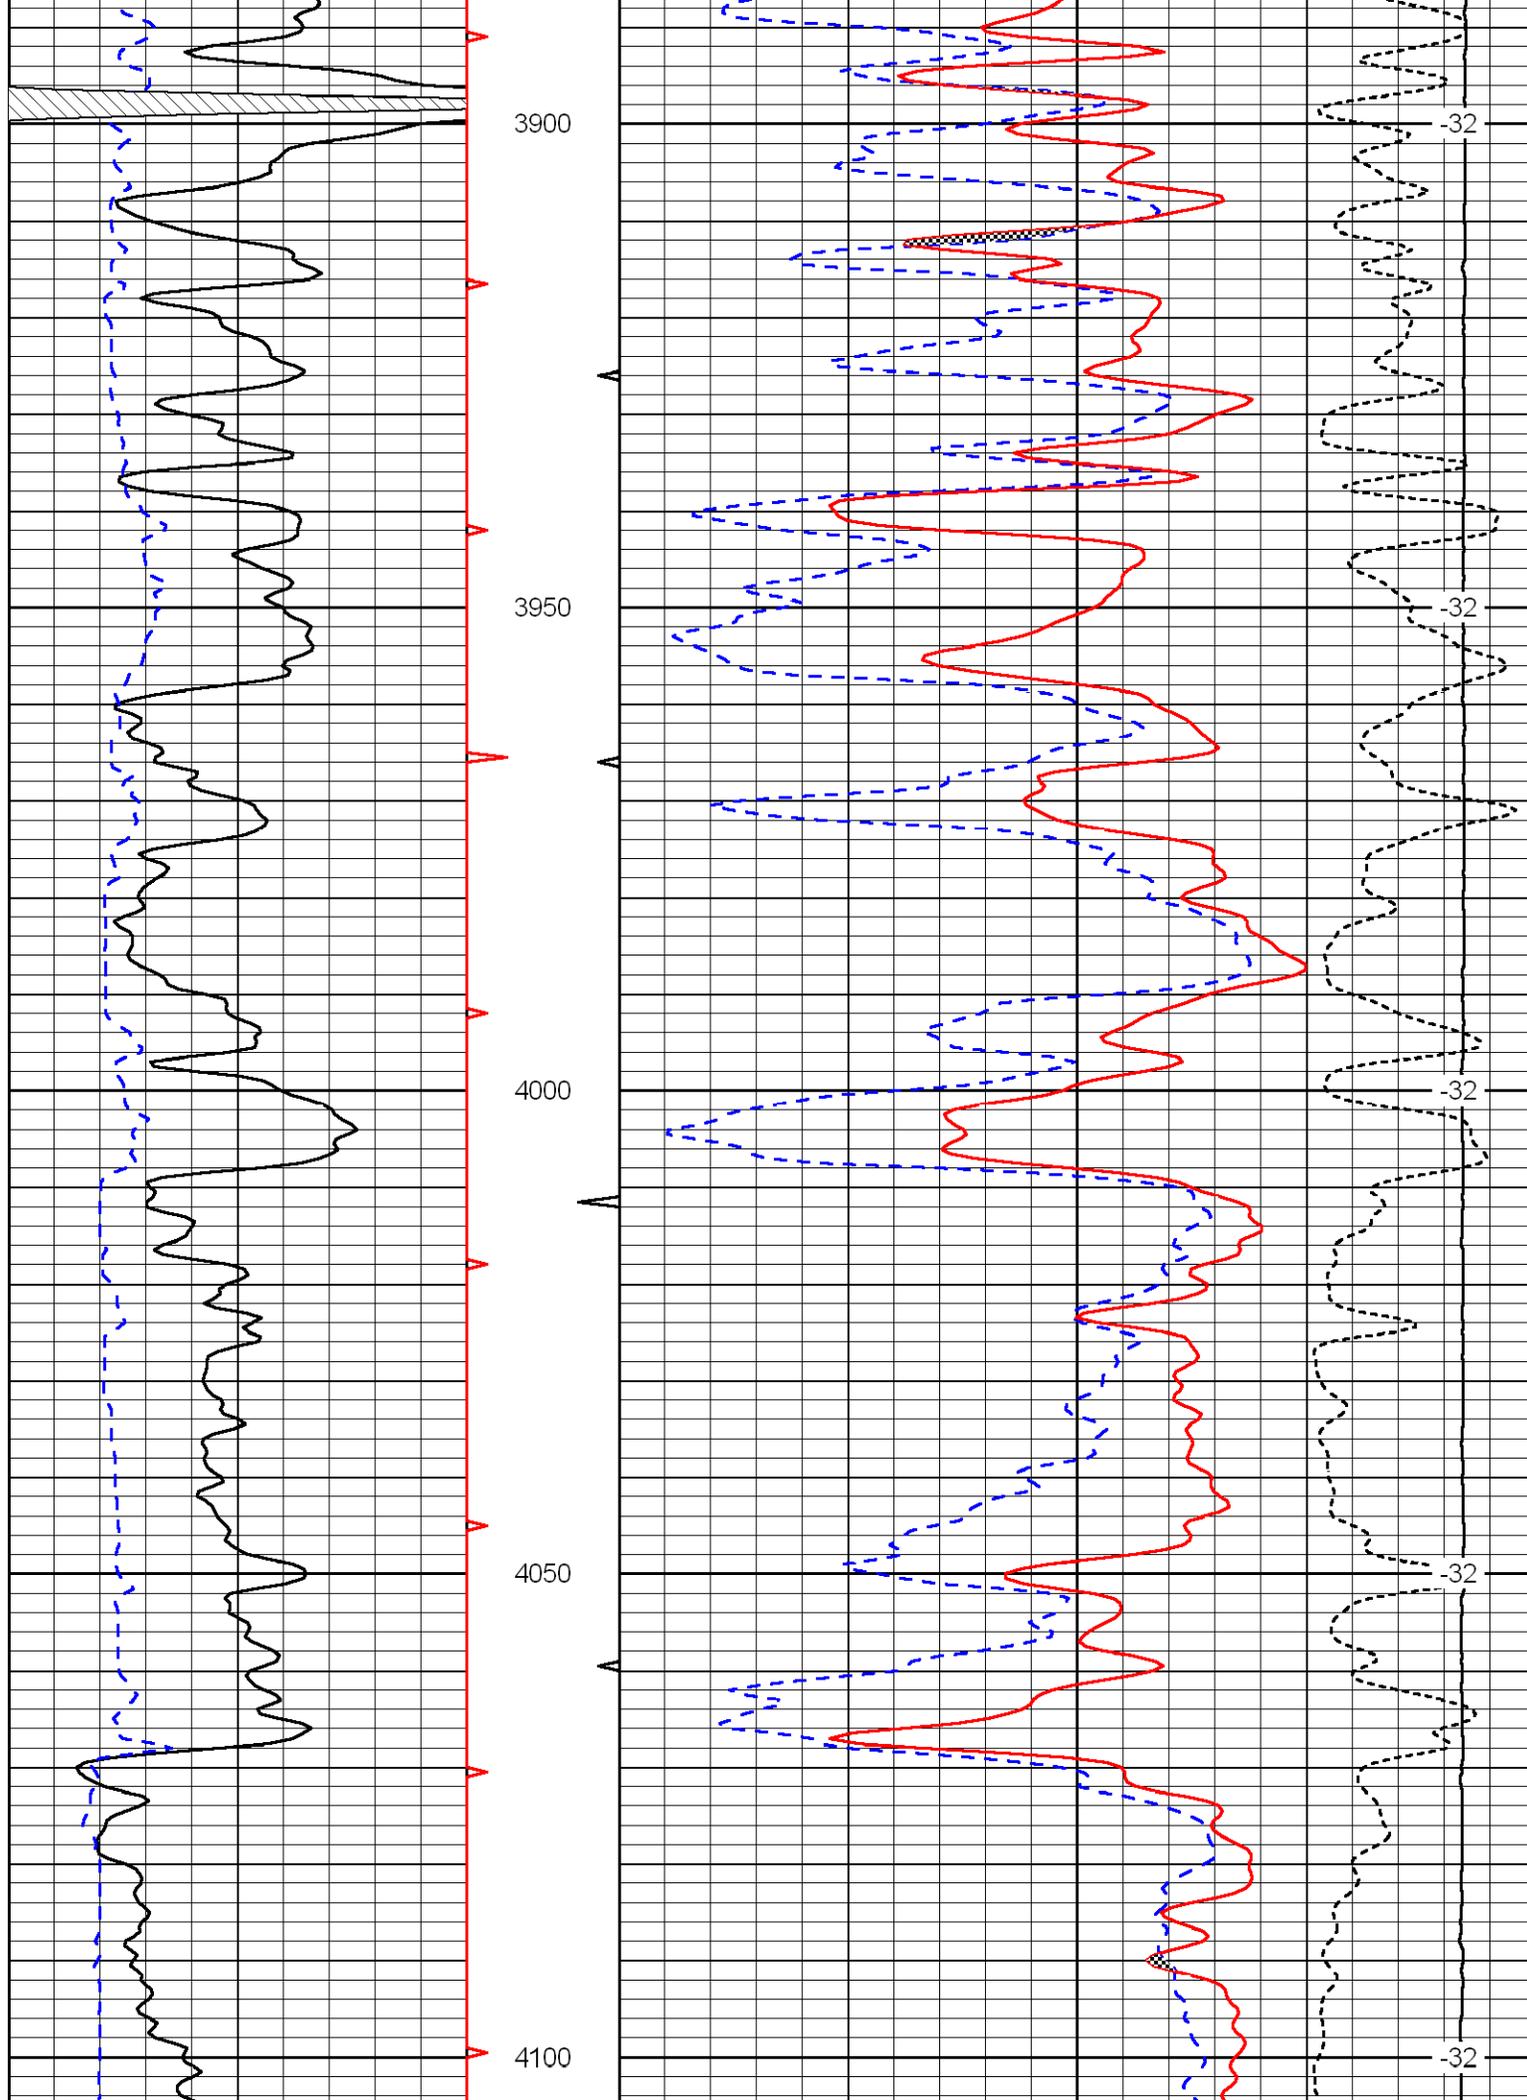

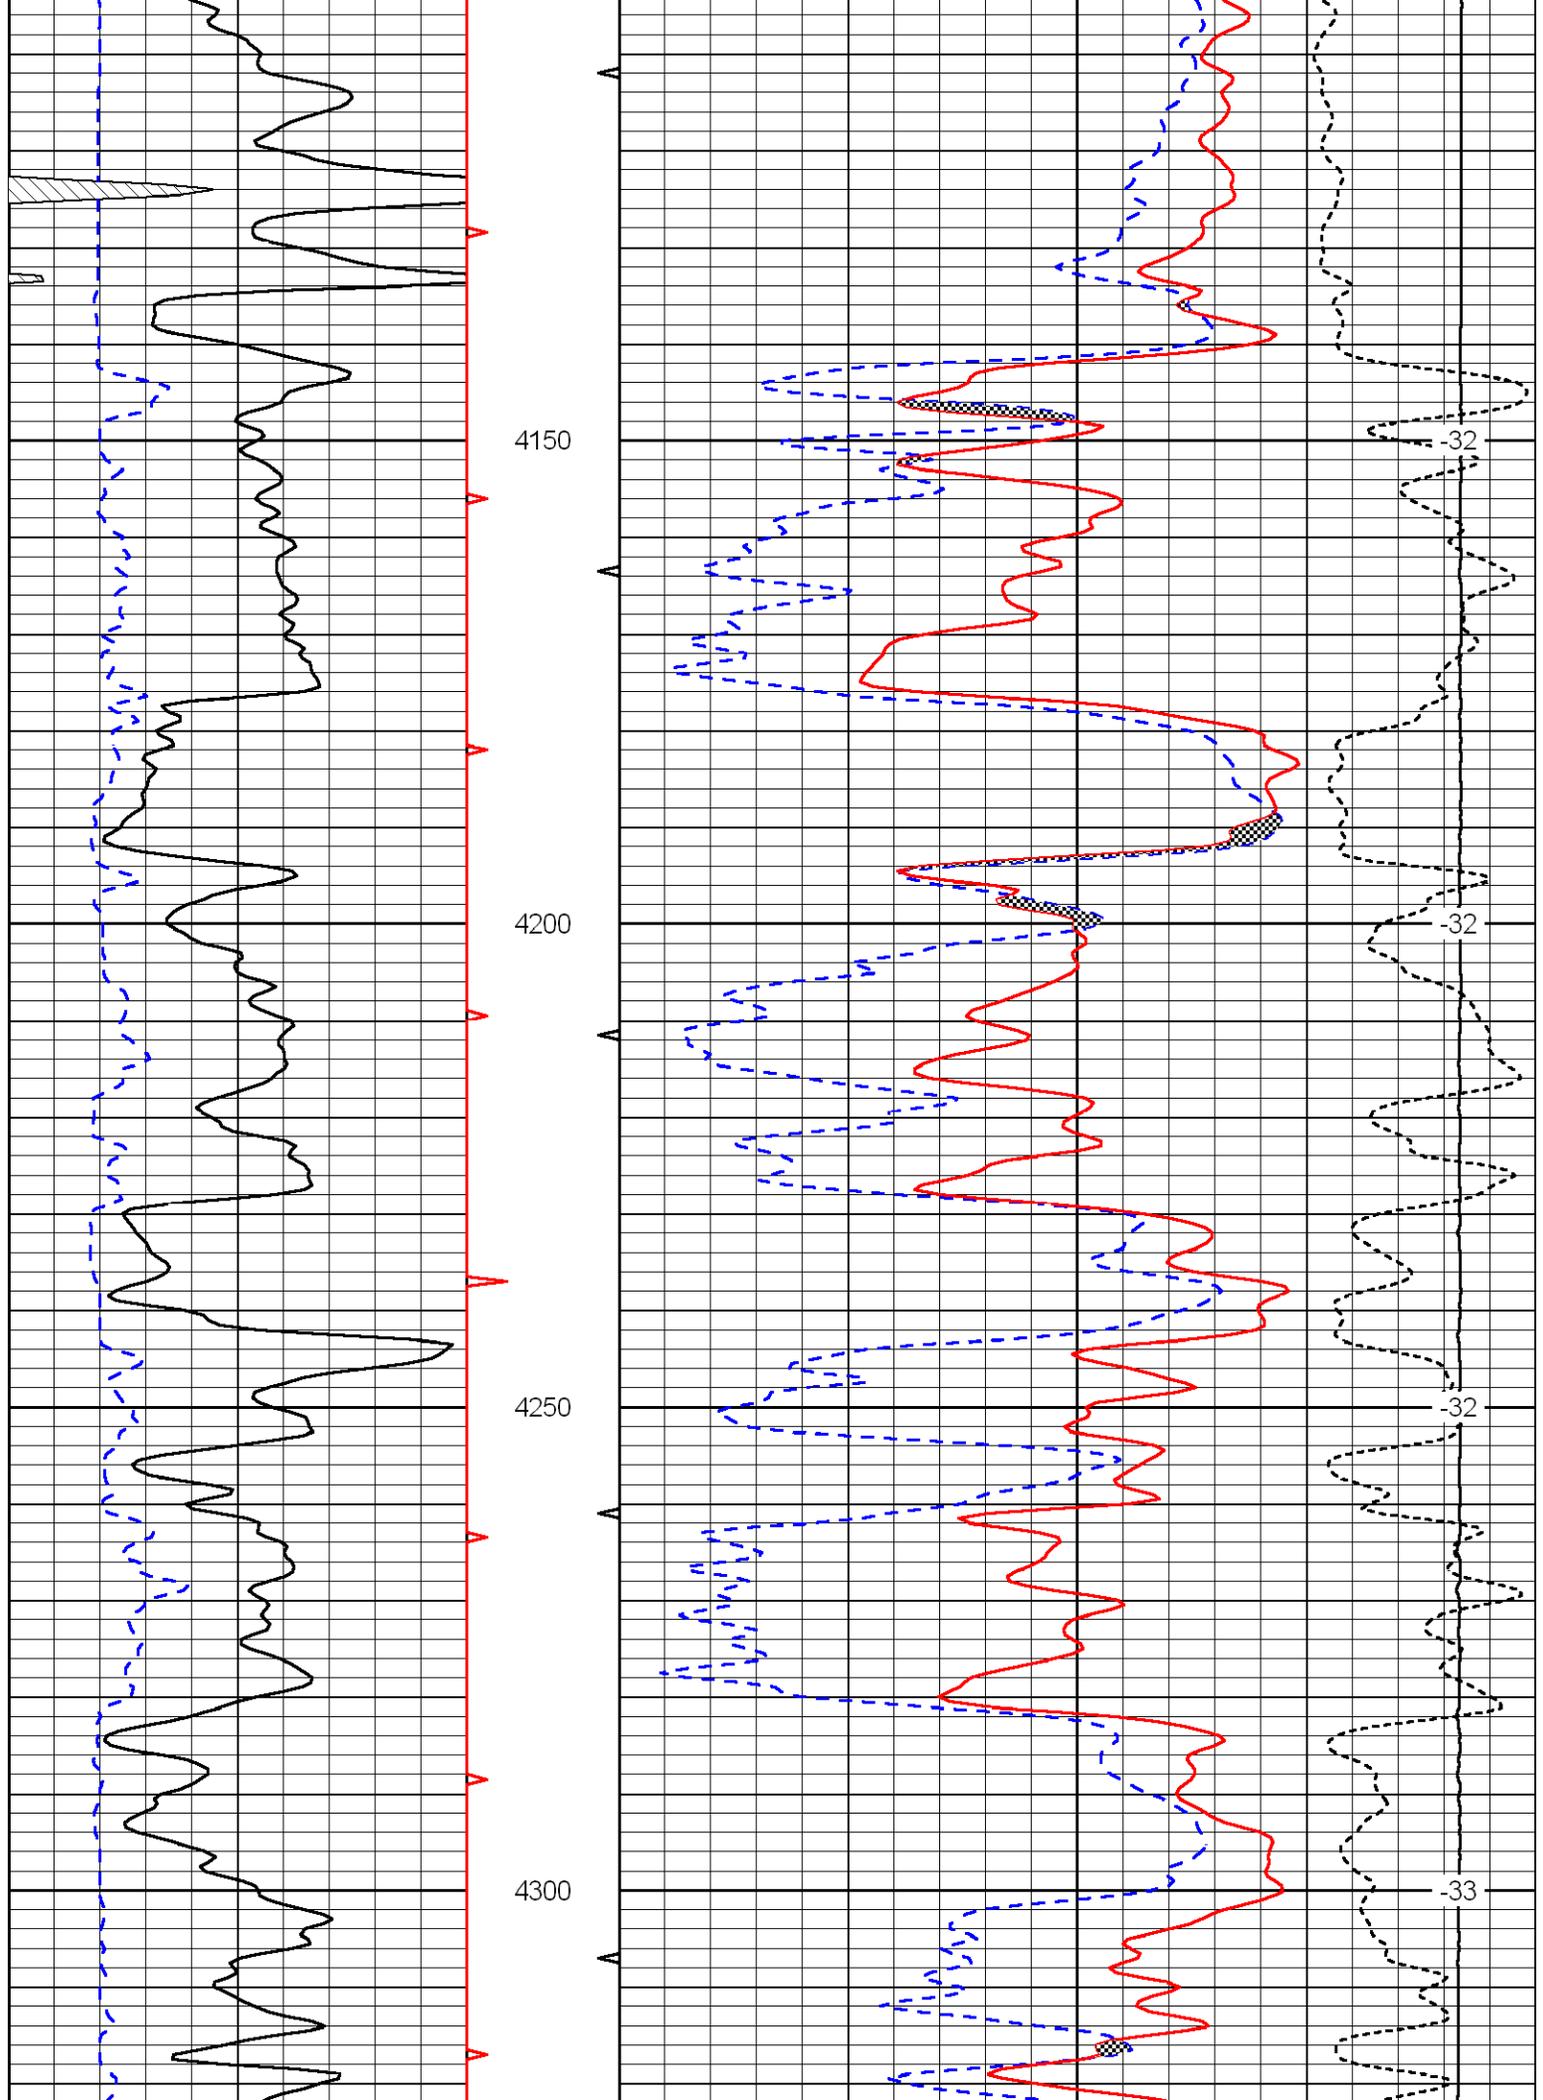

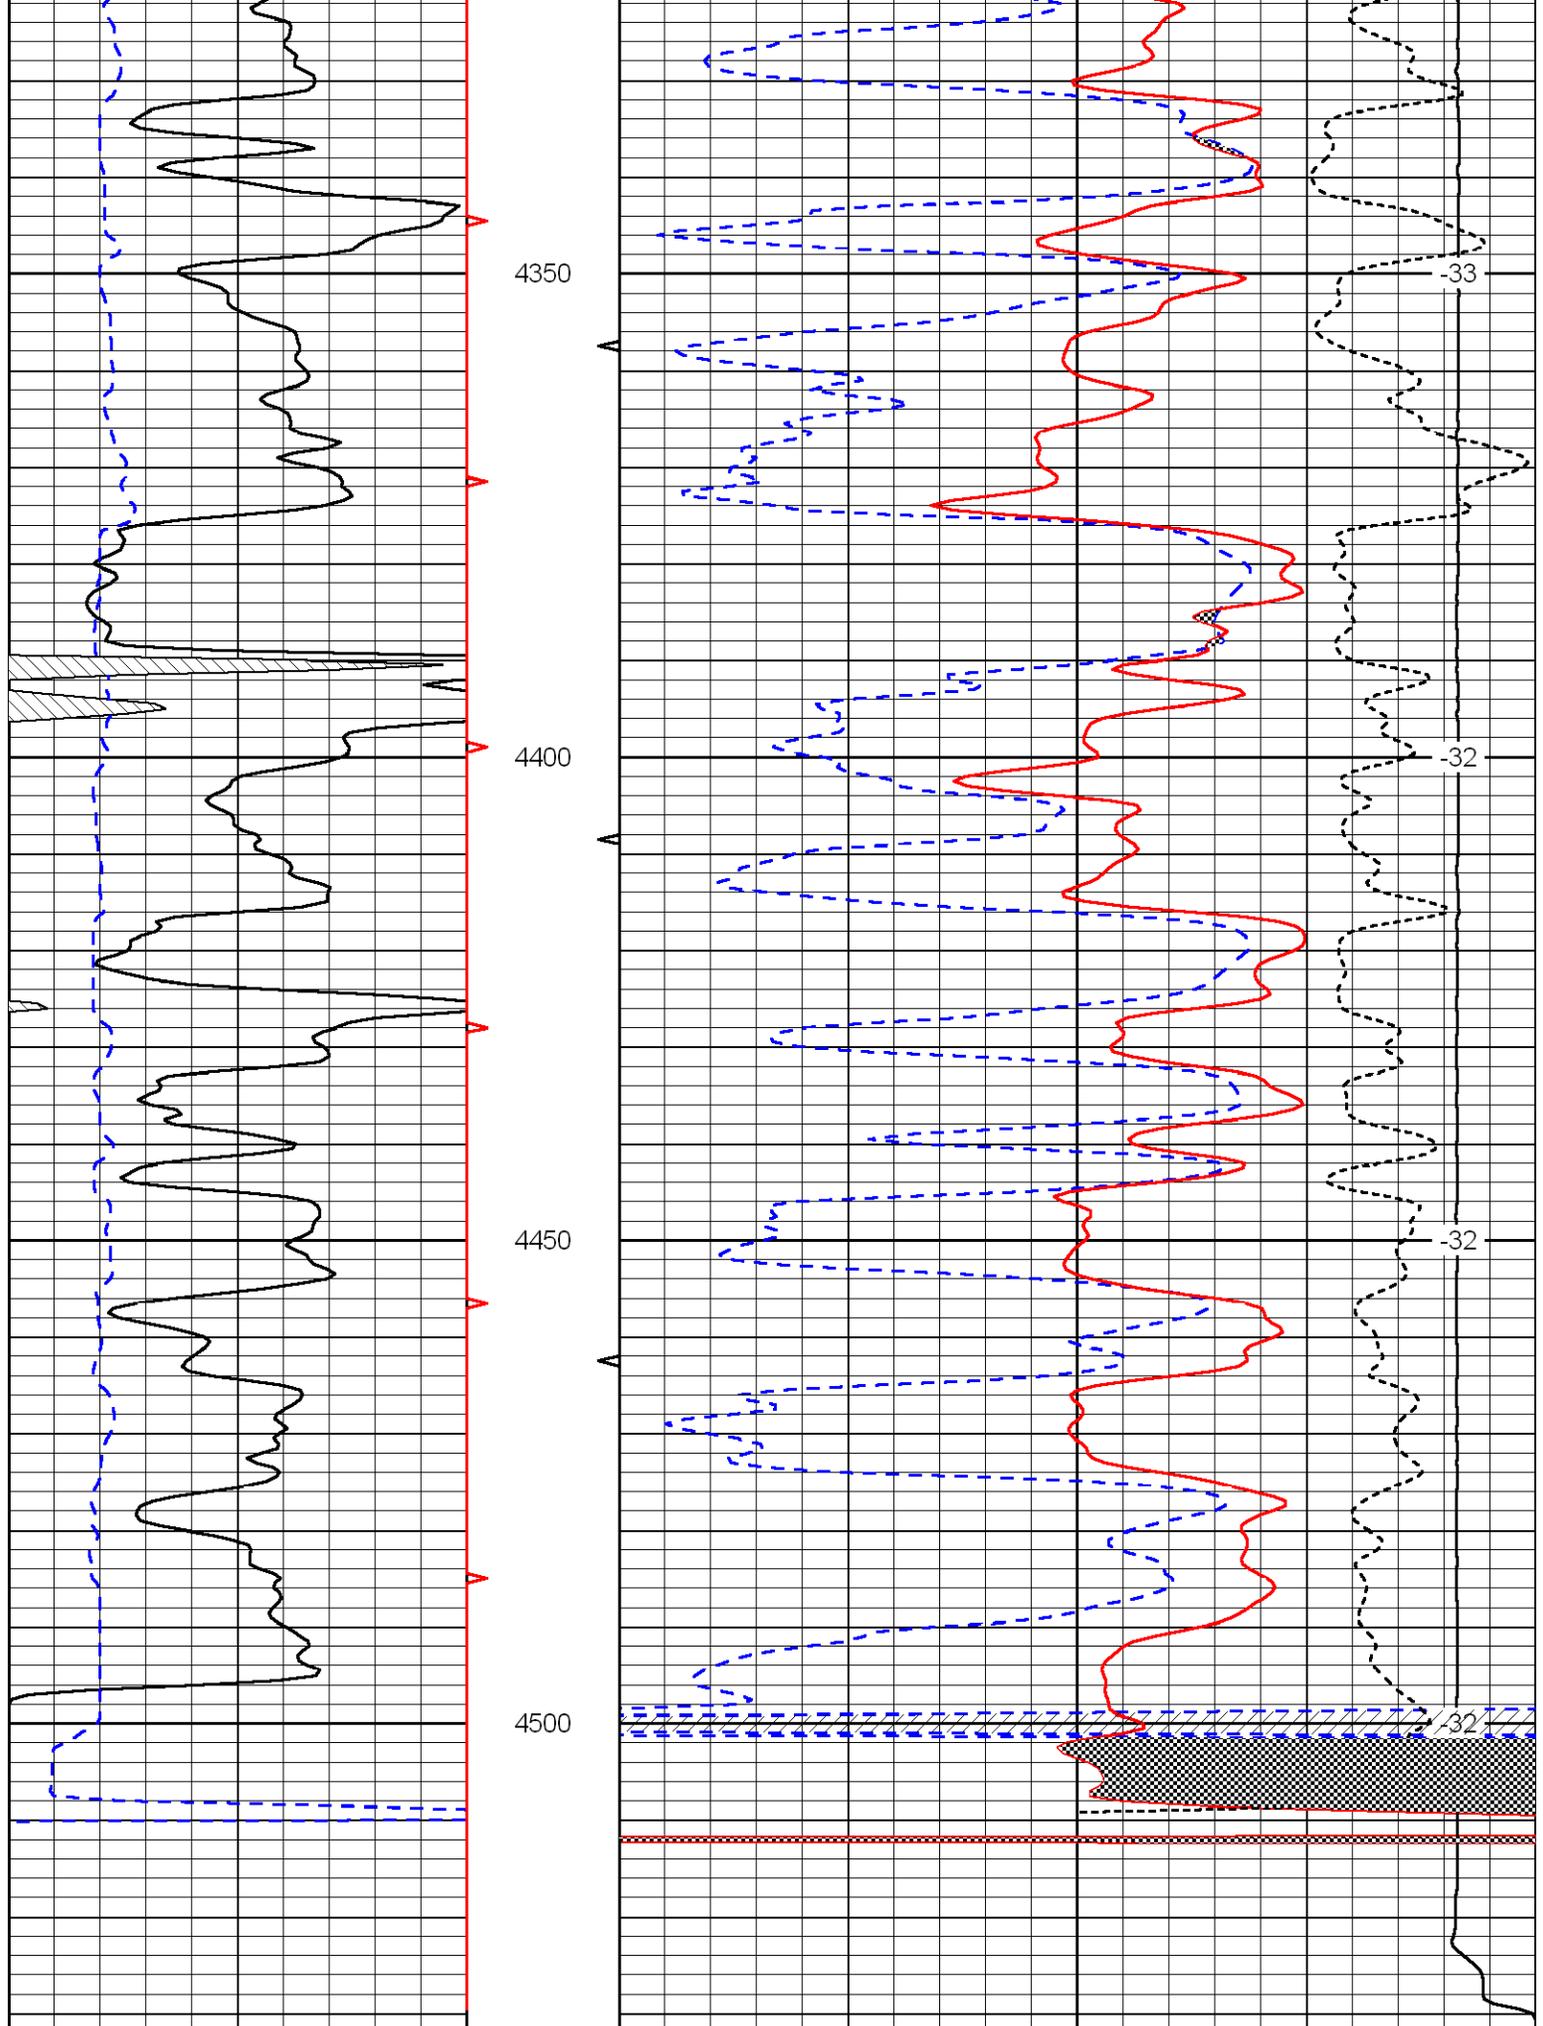

0	Gamma Ray	150
6	Caliper (in)	16

30	Compensated Neutron (Limestone) (pu)	-10
30	Compensated Density (2.71 ma) (pu)	-10
15000	Line Tension (lb)	0
-0.25	Correction (g/cc)	0.25
	LSPD (ft/min)	