



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Vess Oil Corporation		
	Well Wilson A 439		
	Field El Dorado		
	County Butler	State	Kansas
15-015-23,852-00-00	Location	2740' FNL & 2160' FWL	
	Sec: 9	Twp: 25S	Rge: 5 E
Permanent Datum	Ground Level	Elevation 1362	Other Services
Log Measured From	Kelly Bushing	9 Ft. Above Perm. Datum	CNL/CDL
Drilling Measured From	Kelly Bushing		DIL
Date	04/09/2010		Elevation
Run Number	Three		K.B. 1371
Depth Driller	2460		D.F. 1362
Depth Logger	2458		
Bottom Logged Interval	2457		
Top Log Interval	250		
Casing Driller	8.625 @ 261		
Casing Logger	258		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	1.100		
Density / Viscosity	9.4 48		
pH / Fluid Loss	8.0 9.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	2.0 @ 60		
Rmf @ Meas. Temp	1.50 @ 60		
Rmc @ Meas. Temp	2.70 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	1.17 @ 103		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	103		
Equipment Number	17		
Location	Hays		
Recorded By	Mike Garrison		
Witnessed By	Rodger Martin		

<<< Fold Here >>>




All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Potwin, East to Radio Tower, 1 South to 40th Ave, 1.5 East, North Into

Database File: c:\warrior\data\vess_wilson a 439\vess.db
Dataset Pathname: dil\vessdil
Presentation Format: micro
Dataset Creation: Fri Apr 09 06:23:54 2010
Charted by: Depth in Feet scaled 1:240

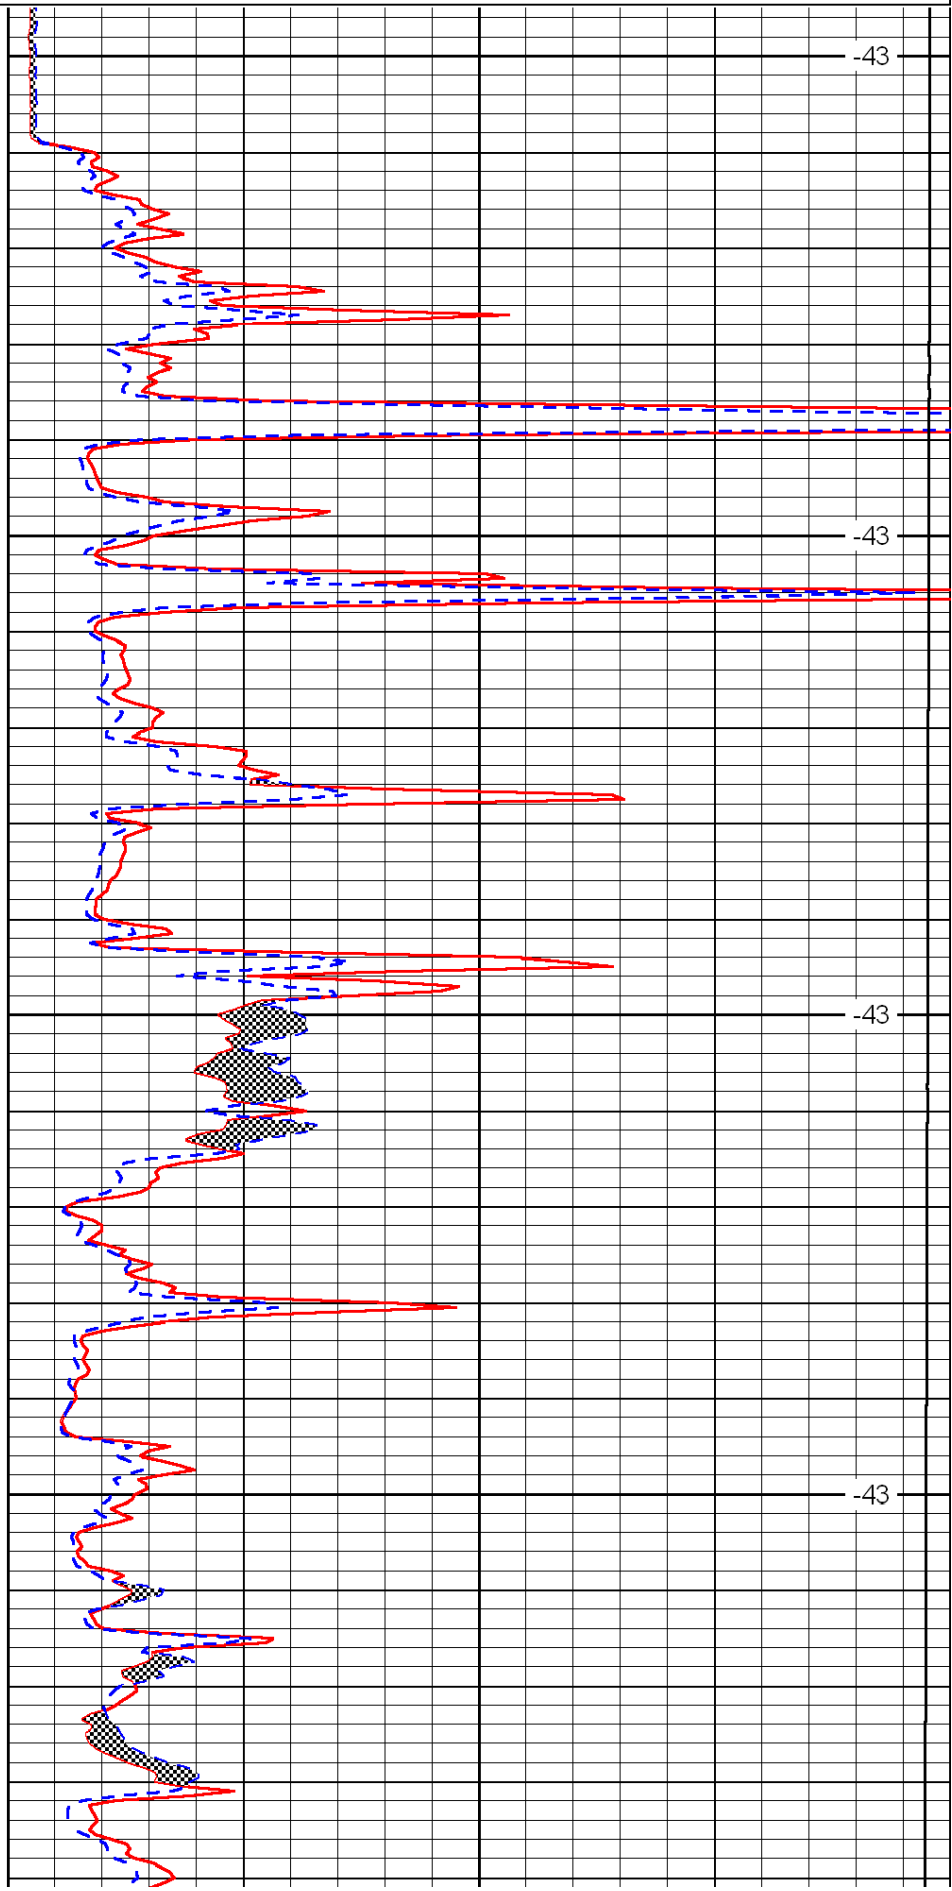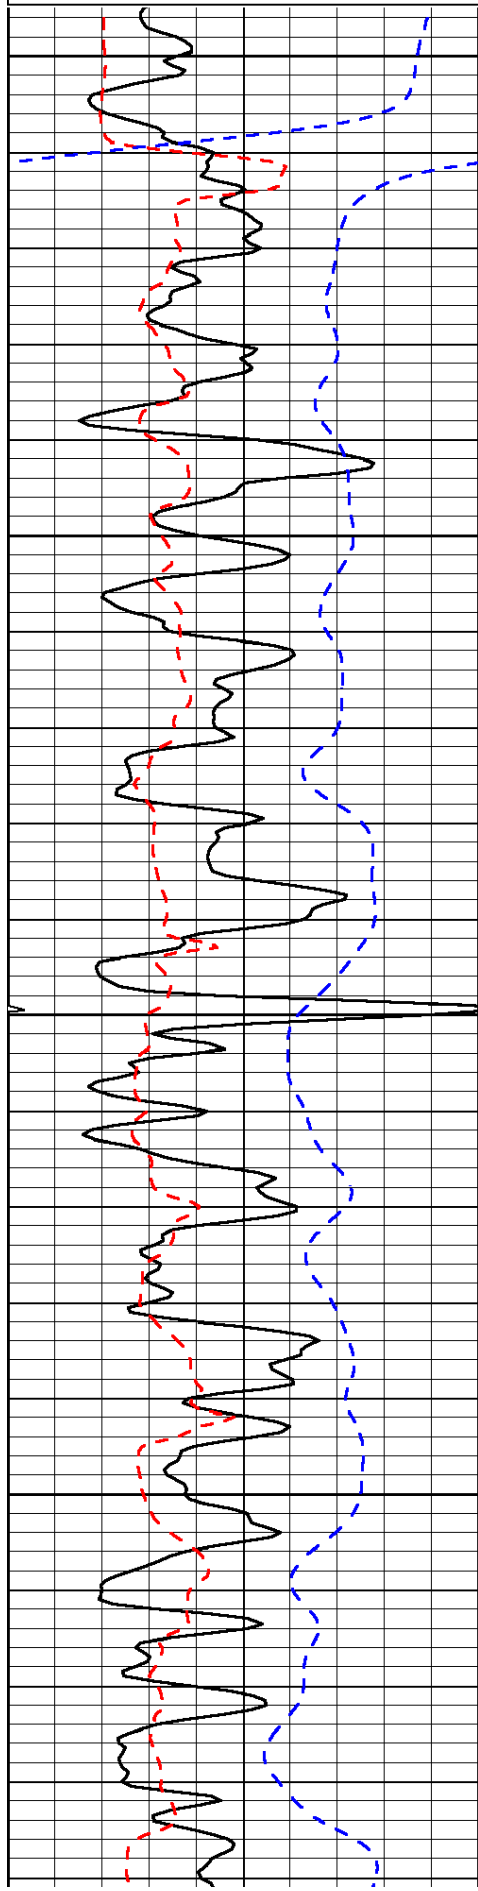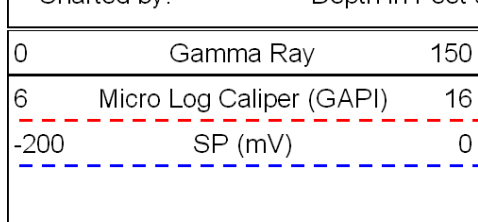

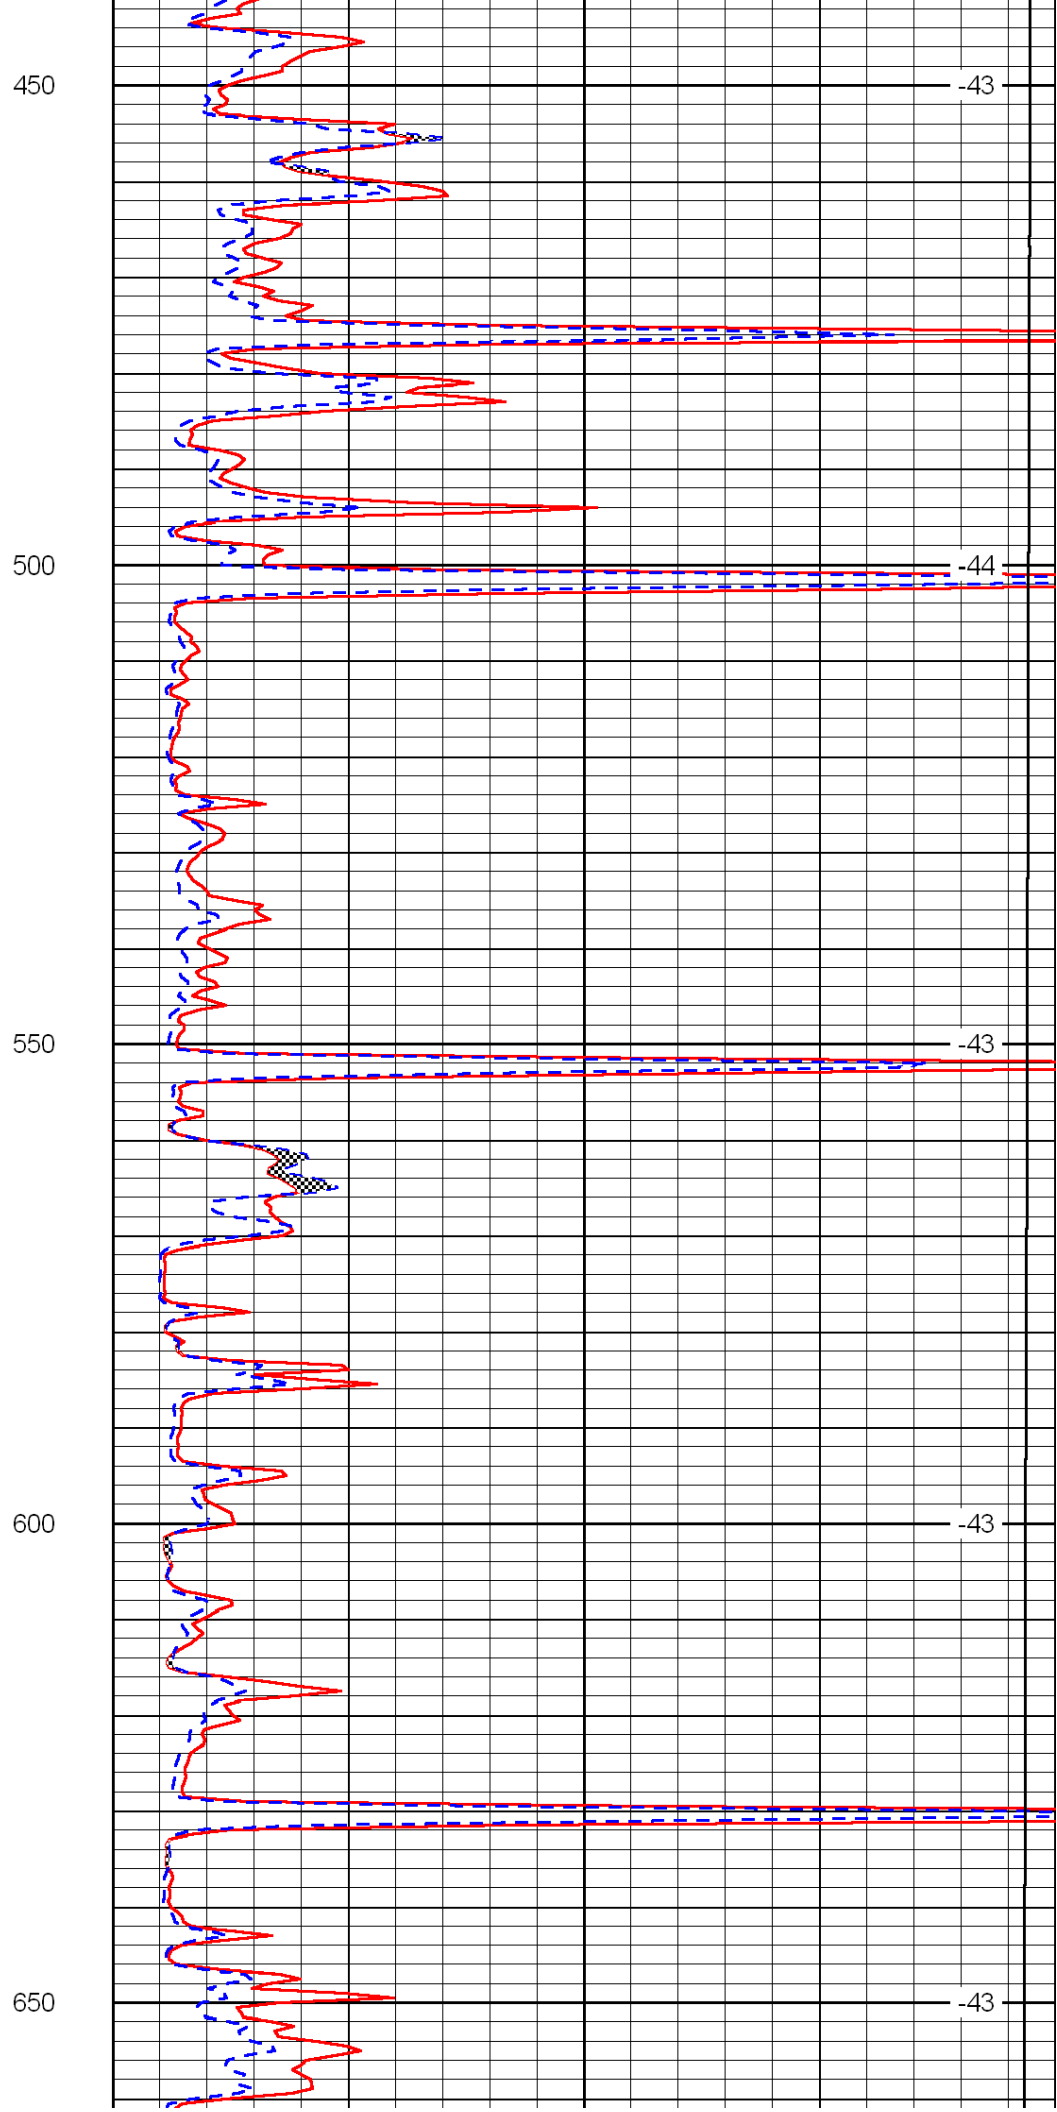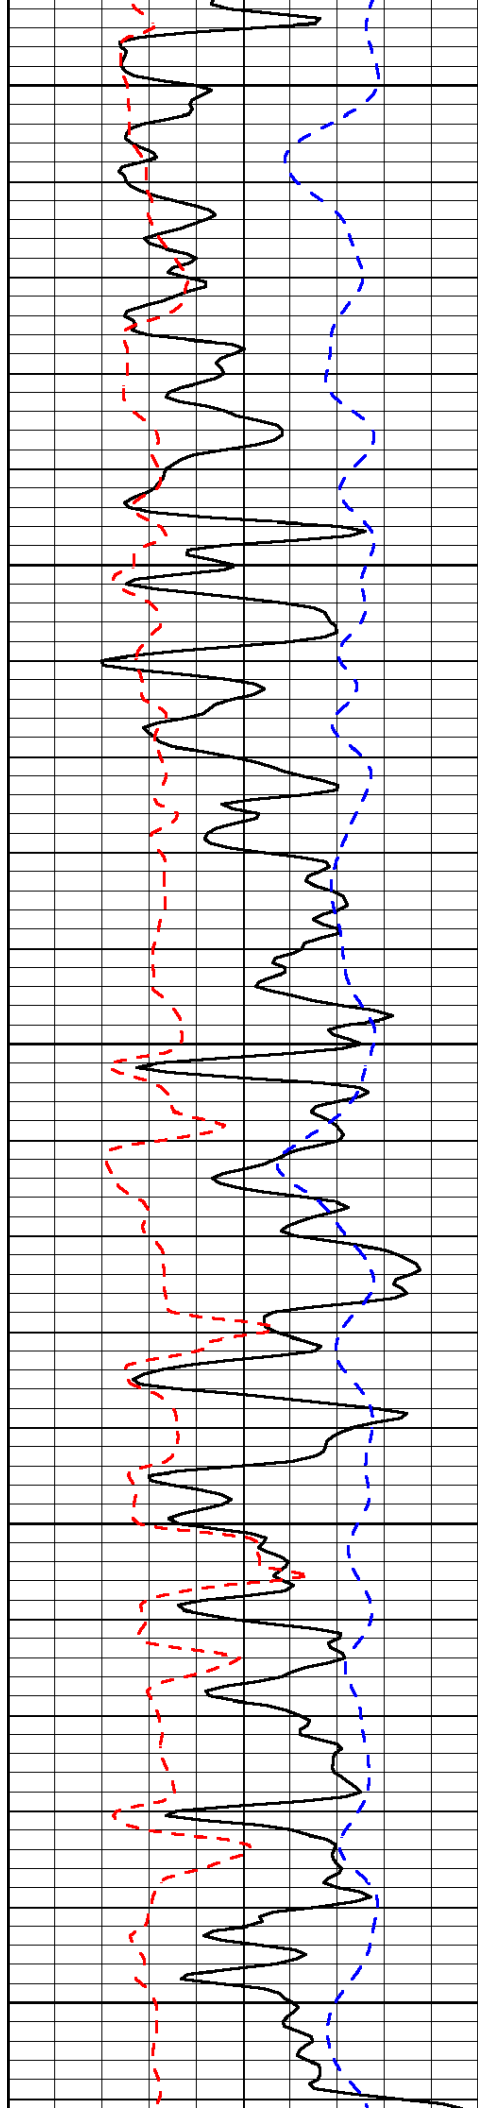

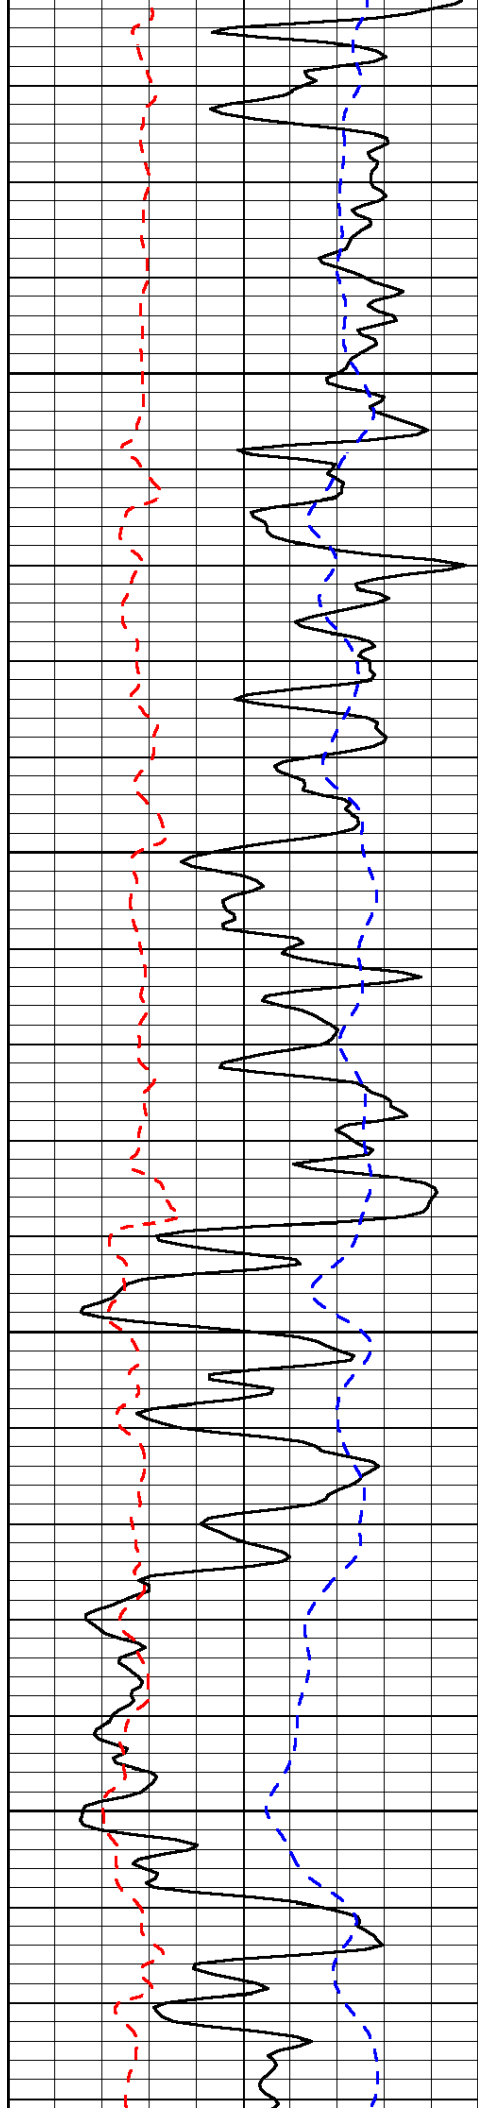


700

750

800

850


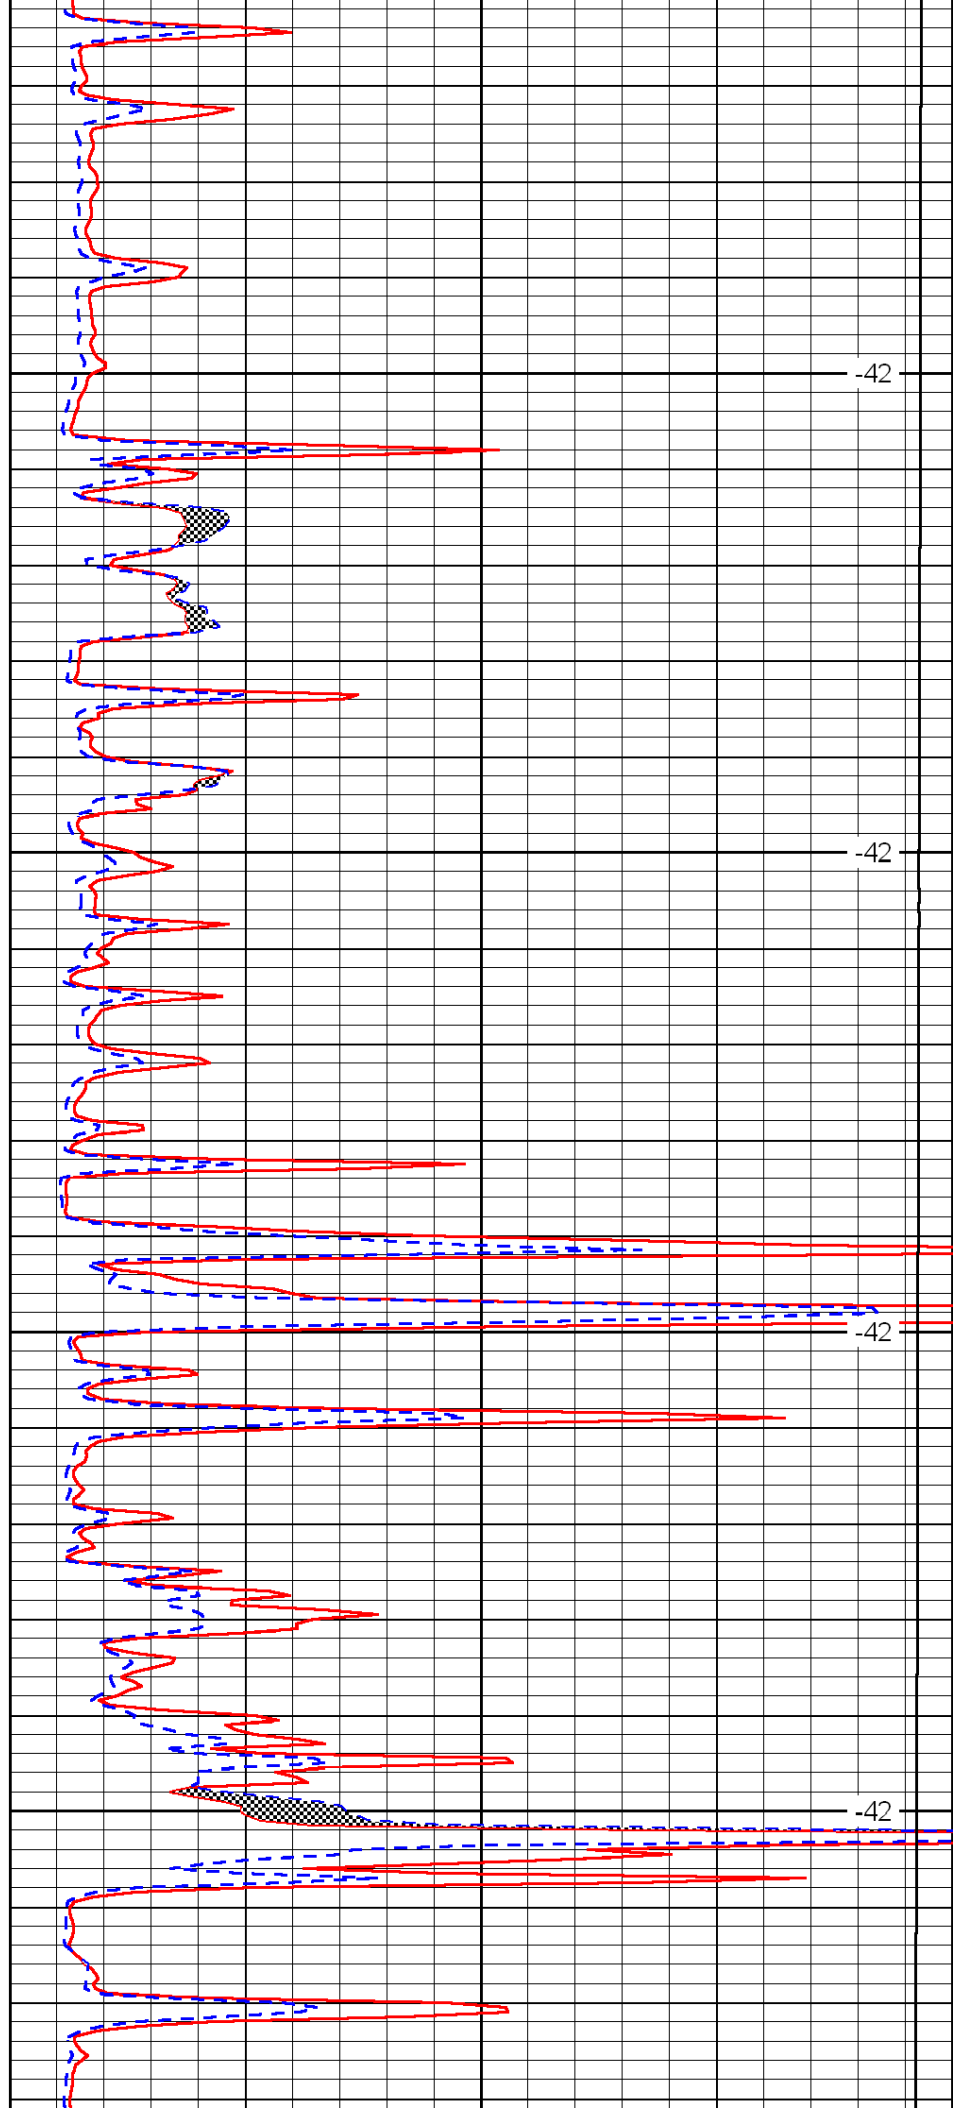



-42

-42

-42

-42

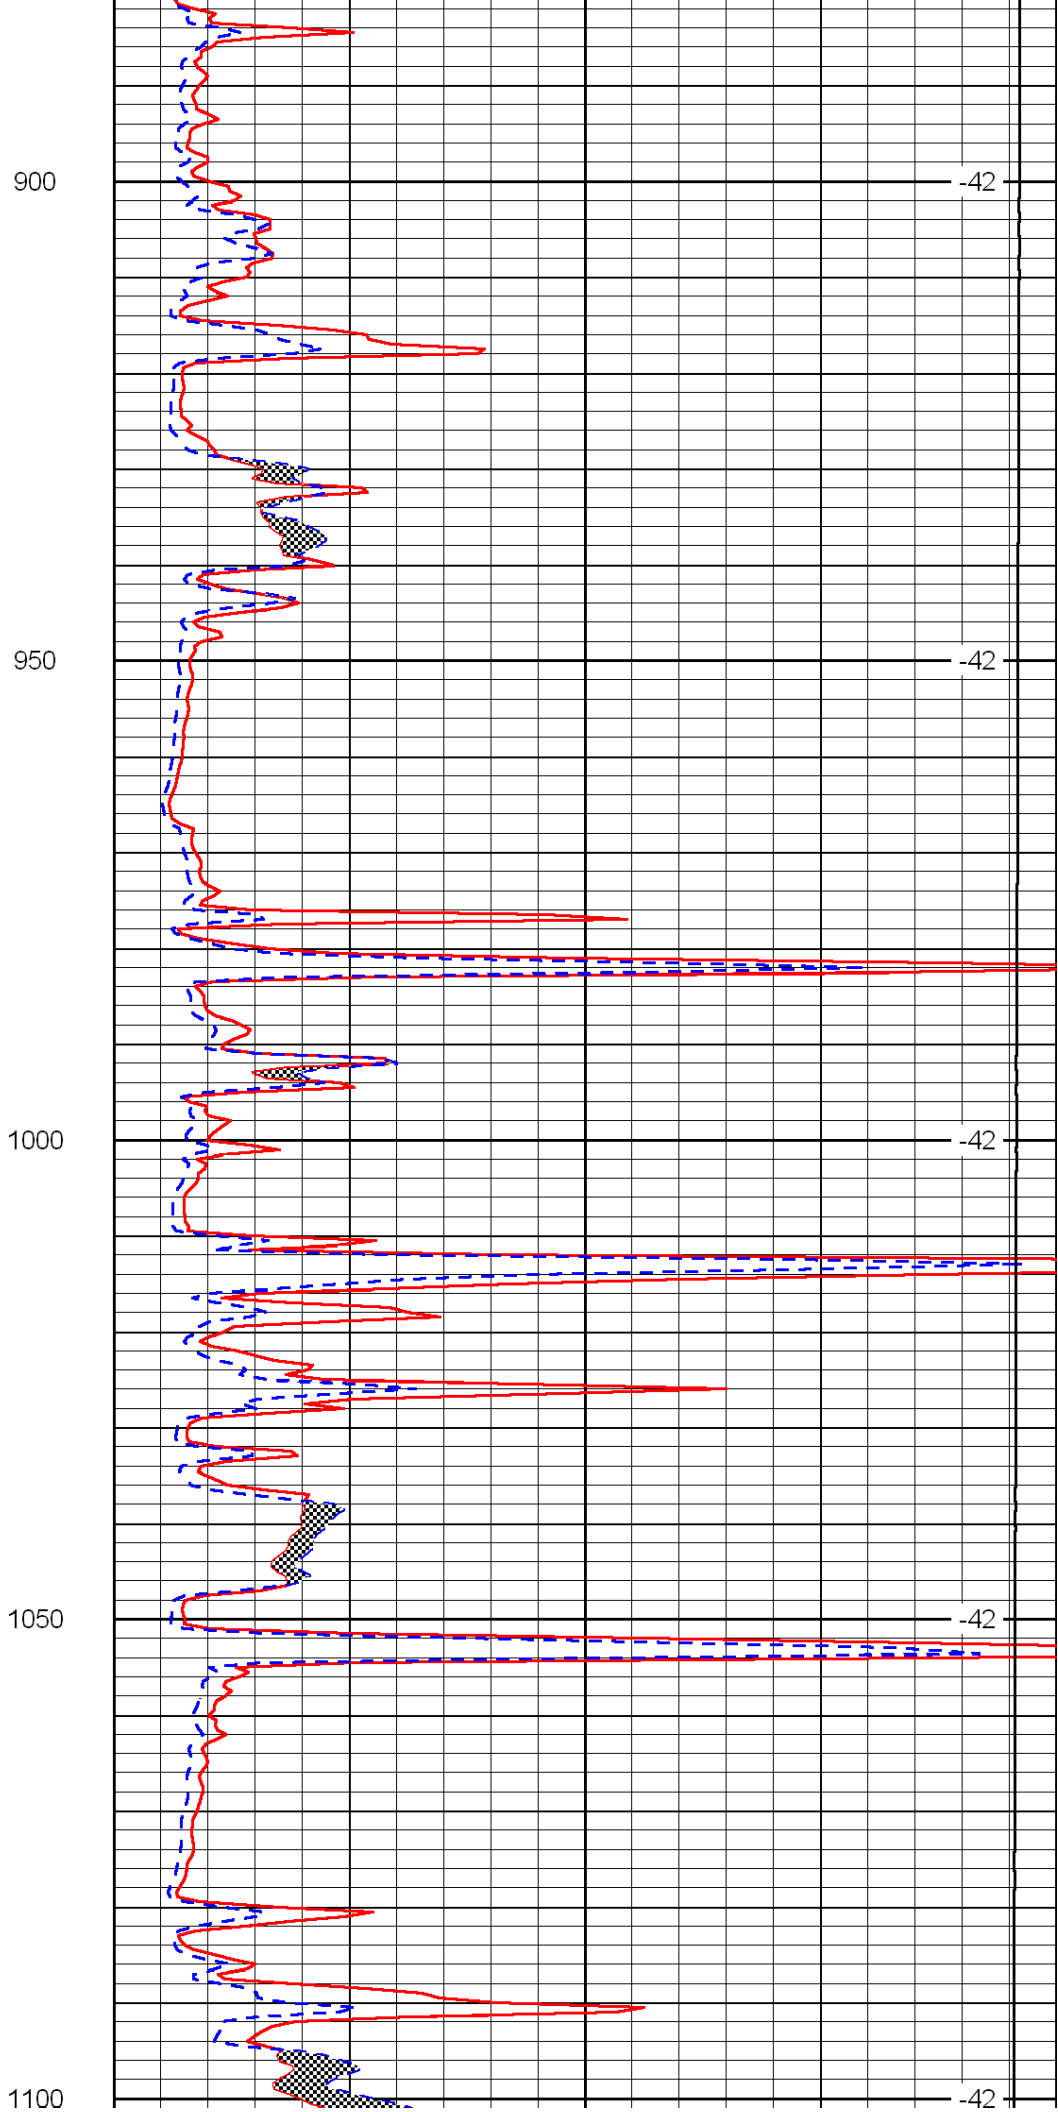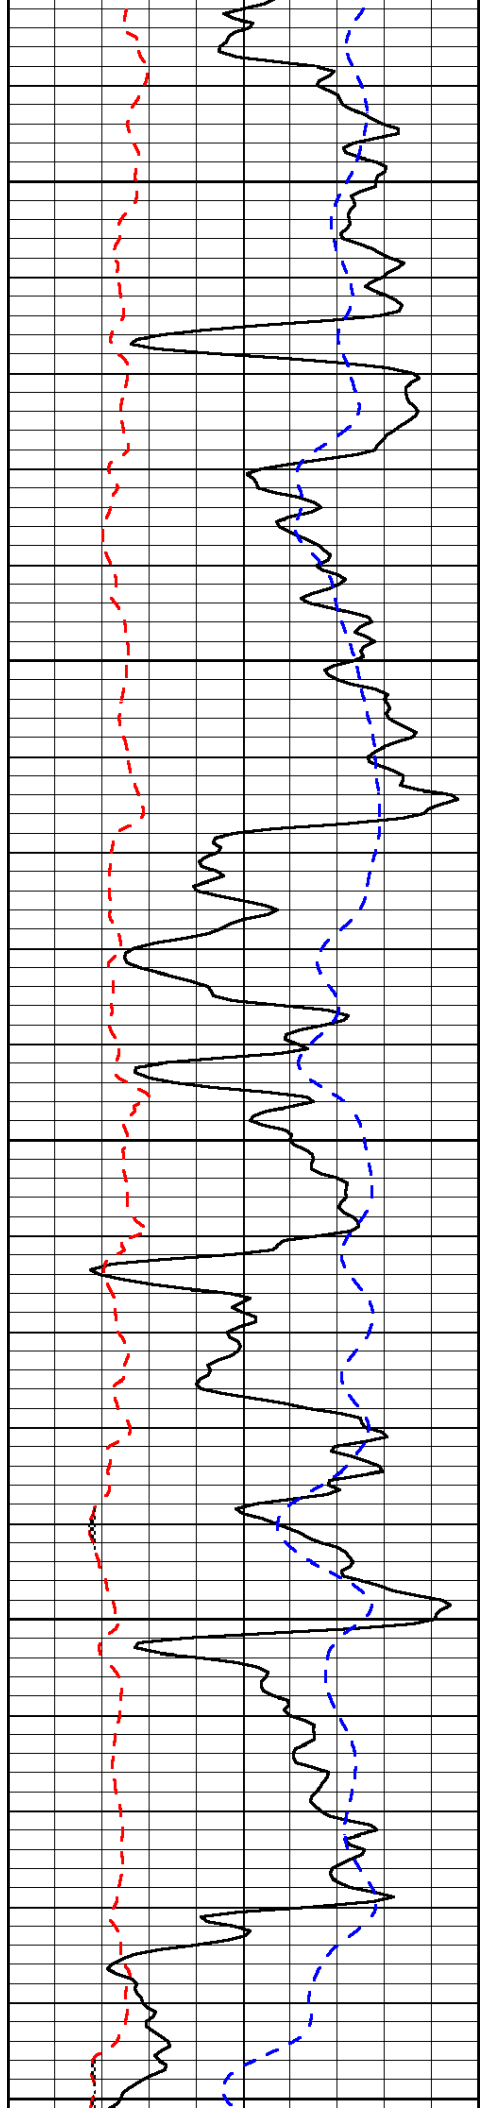

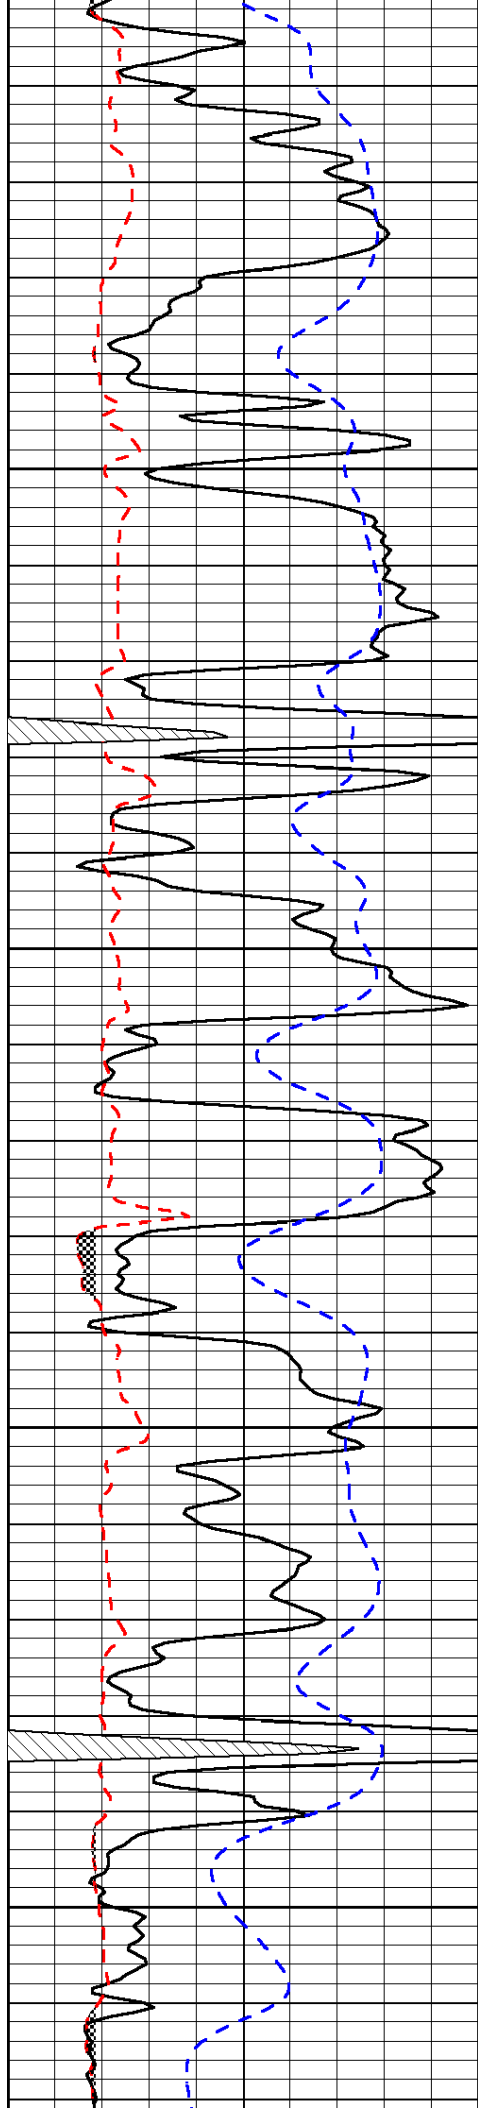



1150

1200

1250

1300

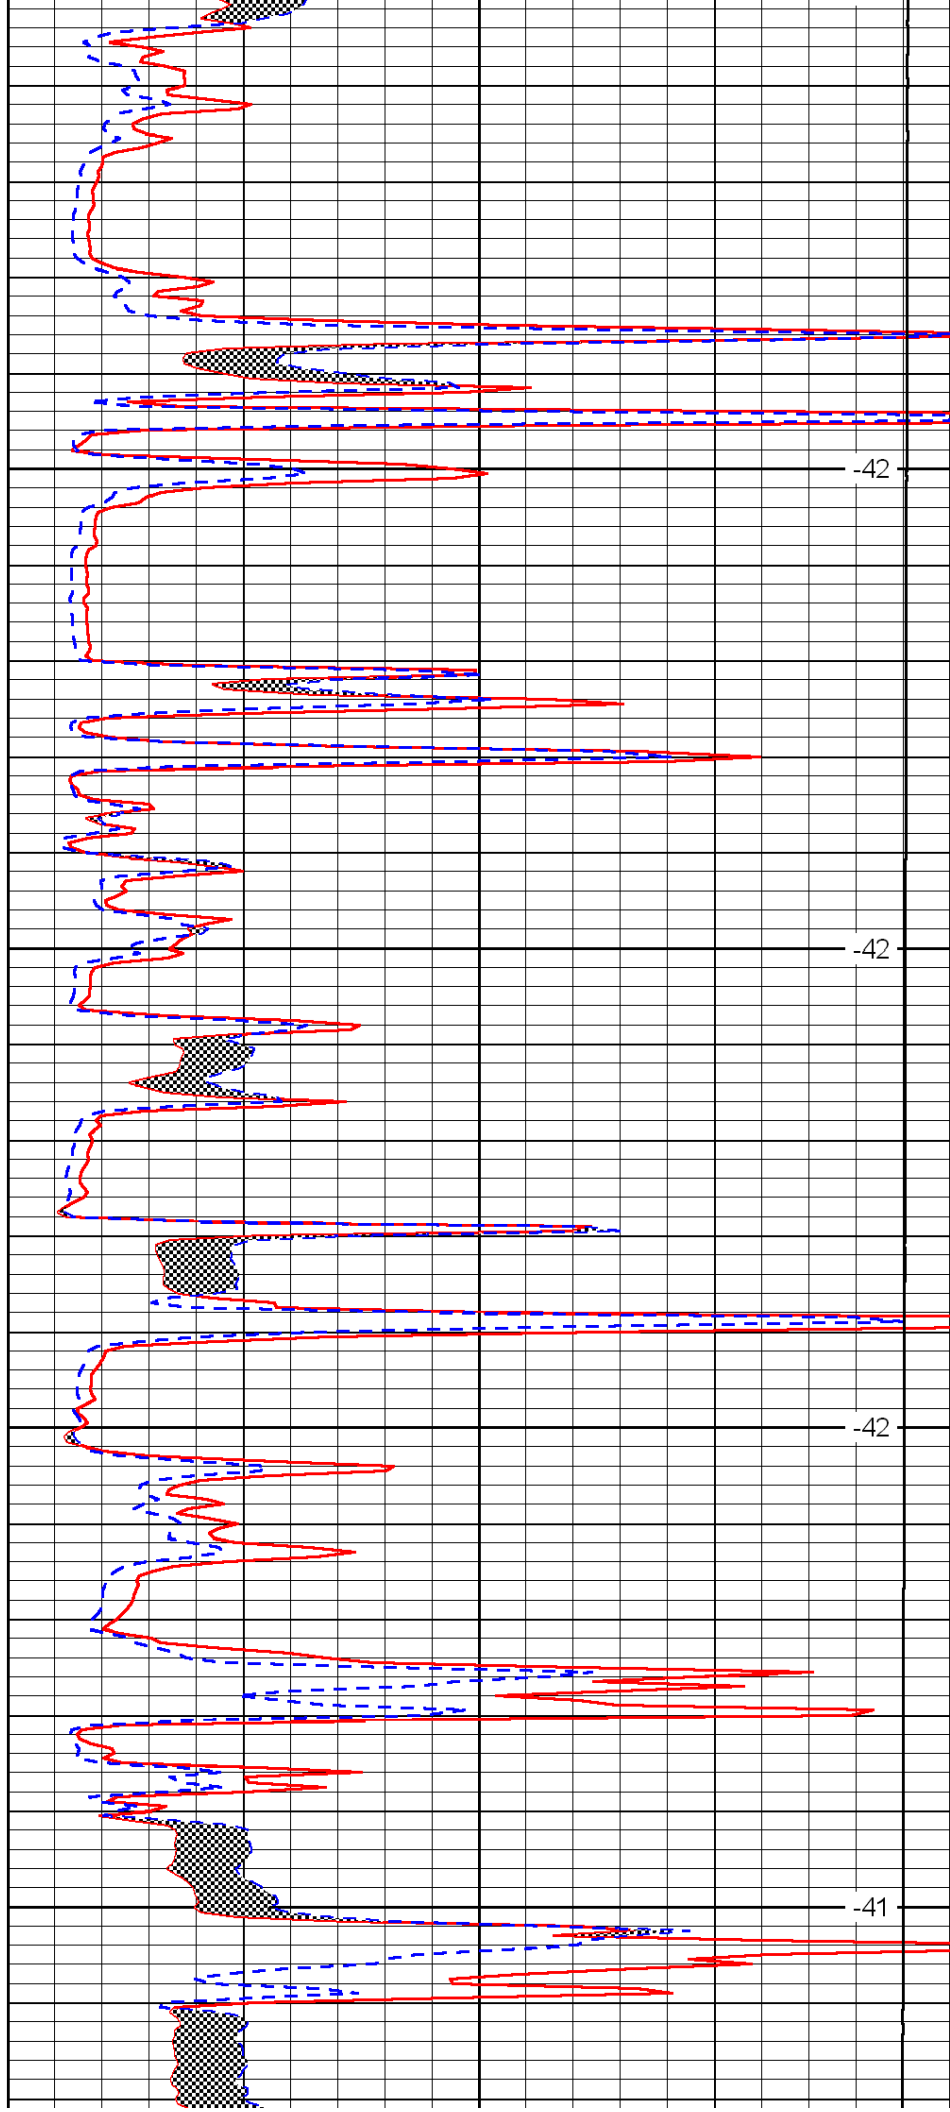

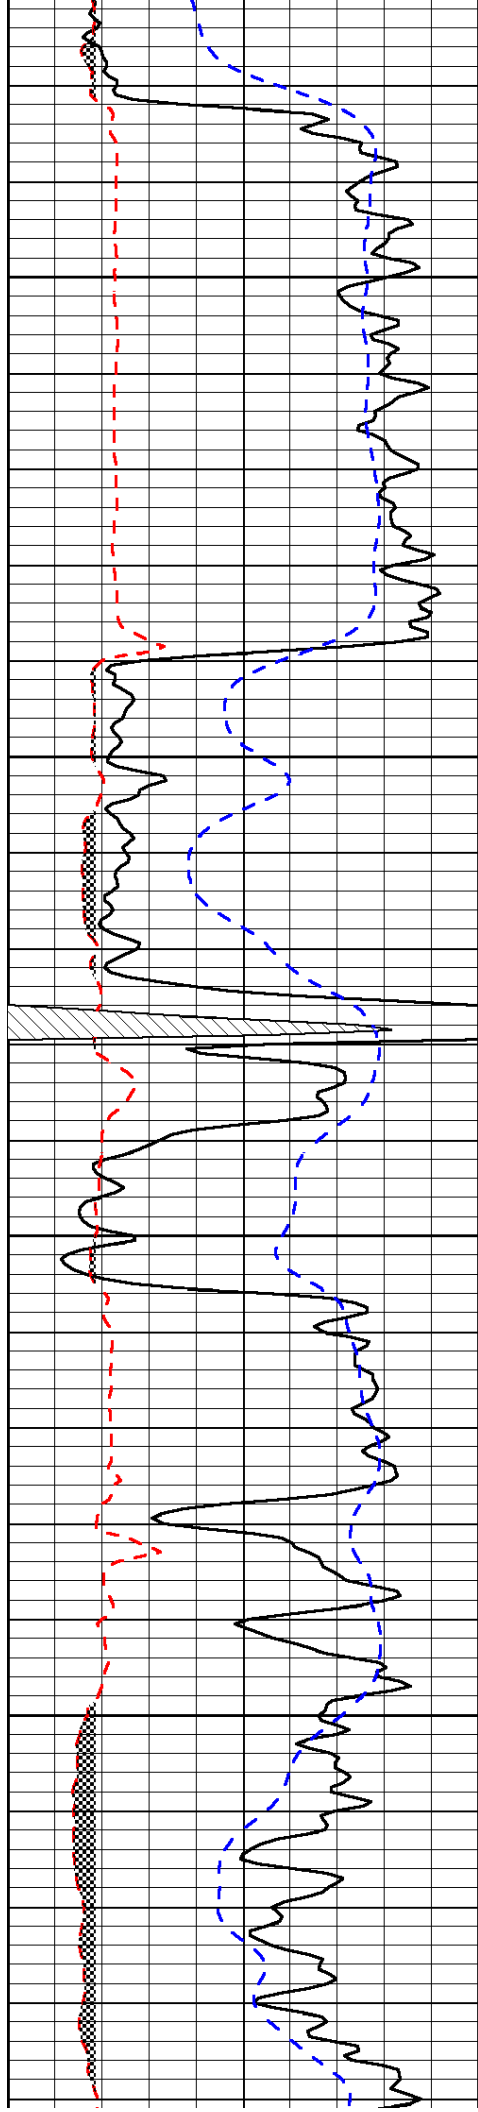


1350

1400

1450

1500

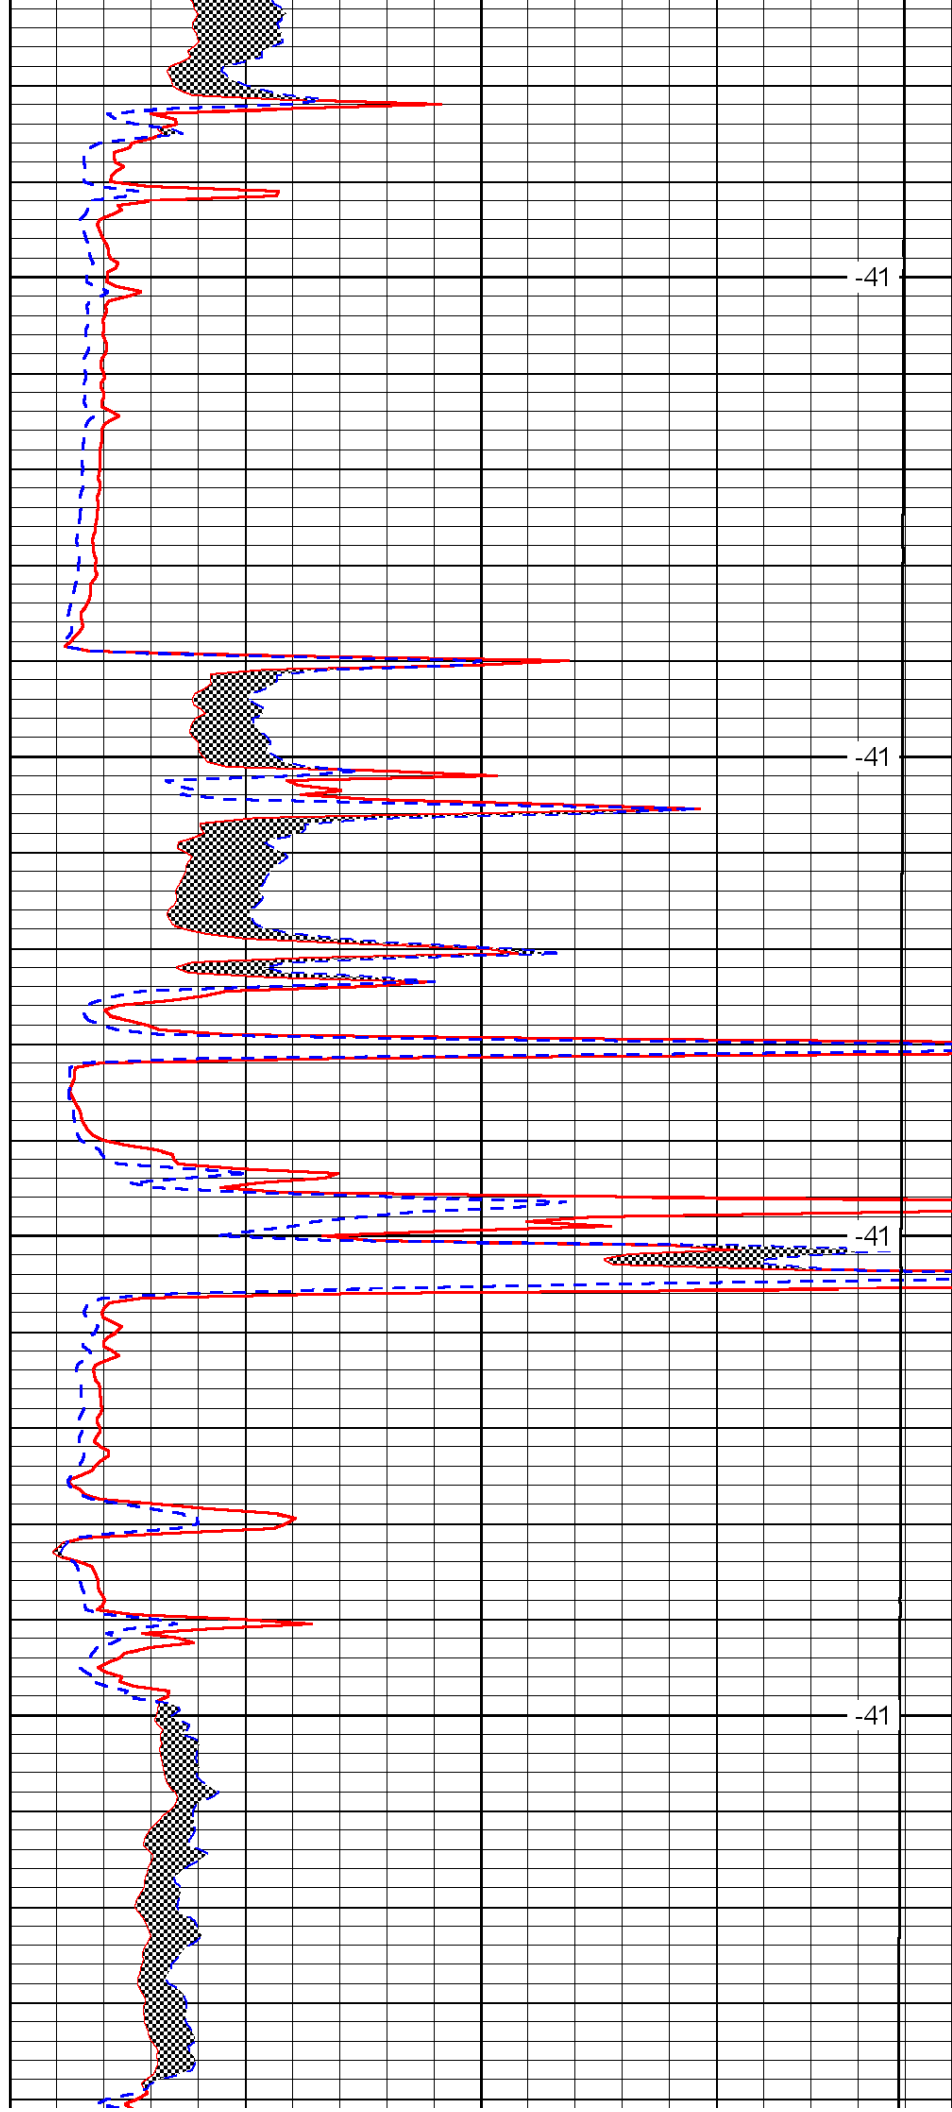


-41

-41

-41

-41

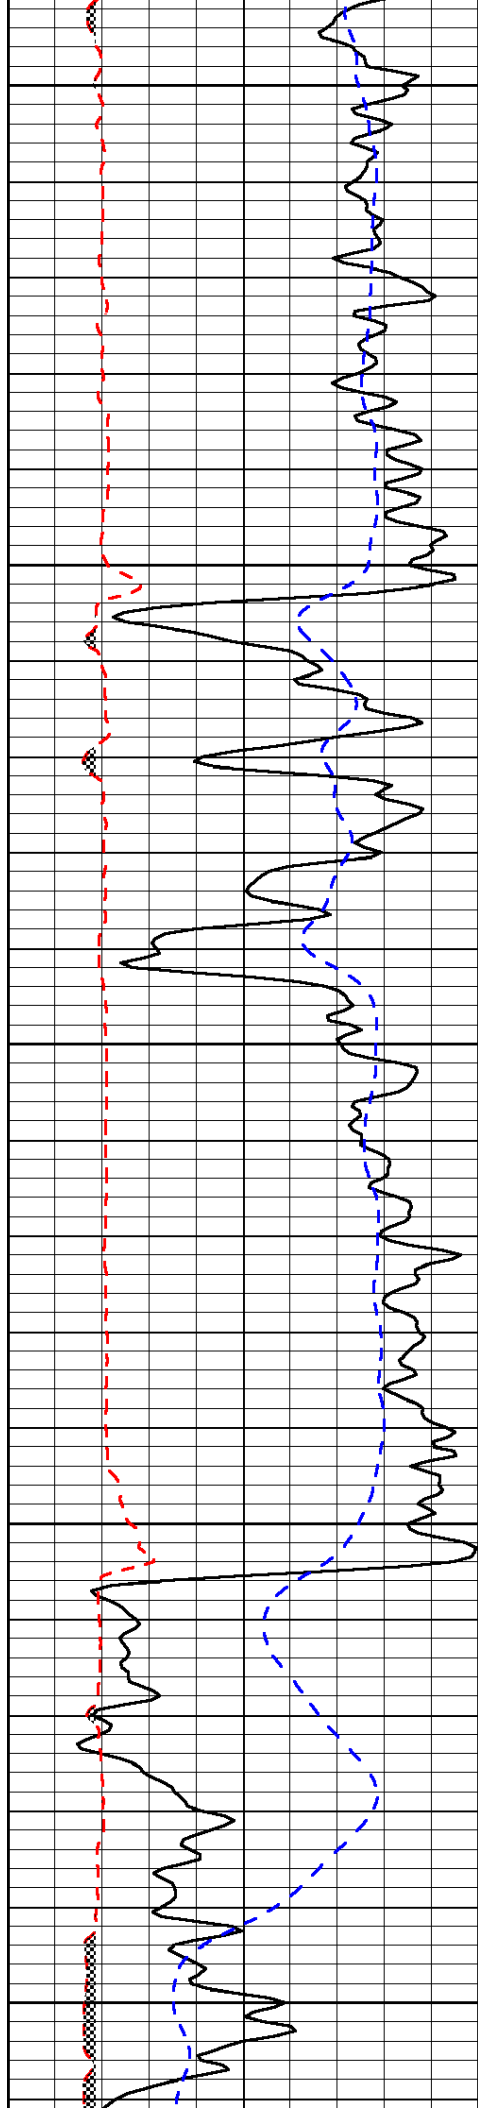


1550

1600

1650

1700

1750

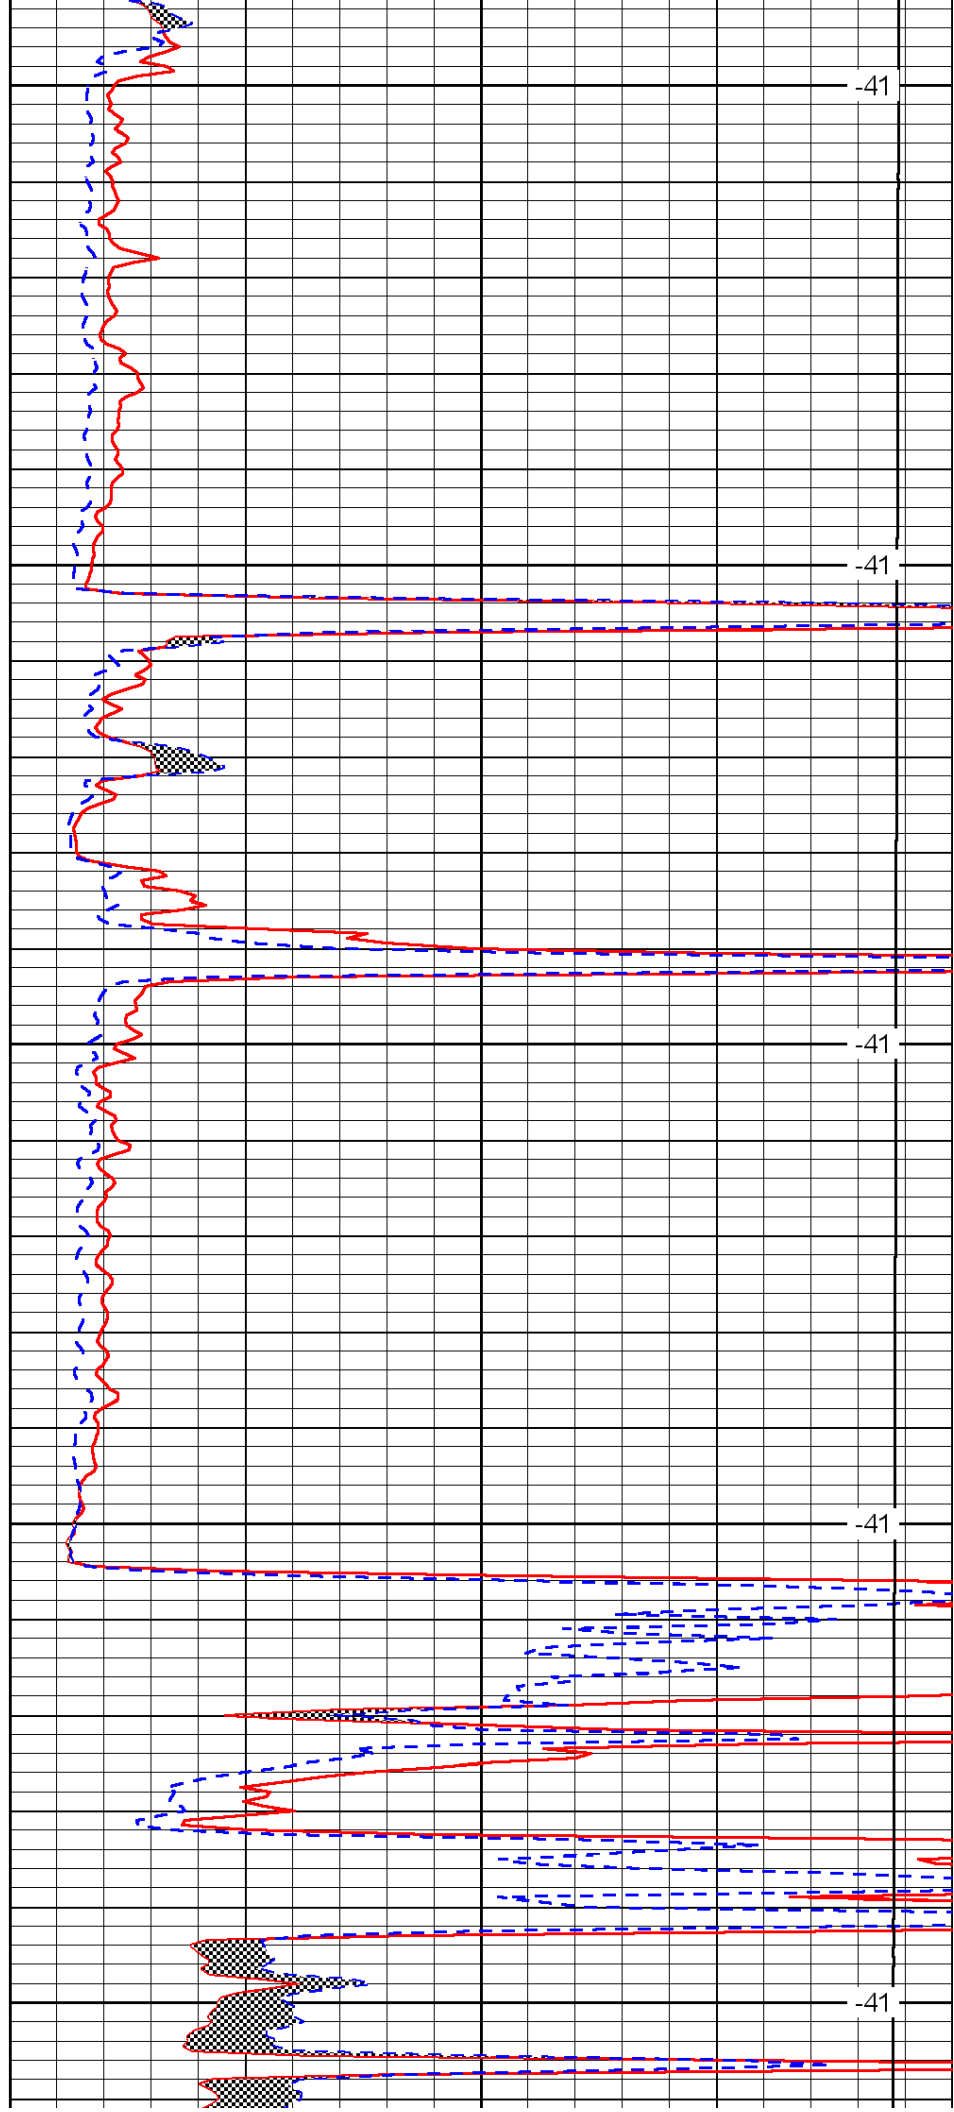



-41


-41

-41

-41

-41

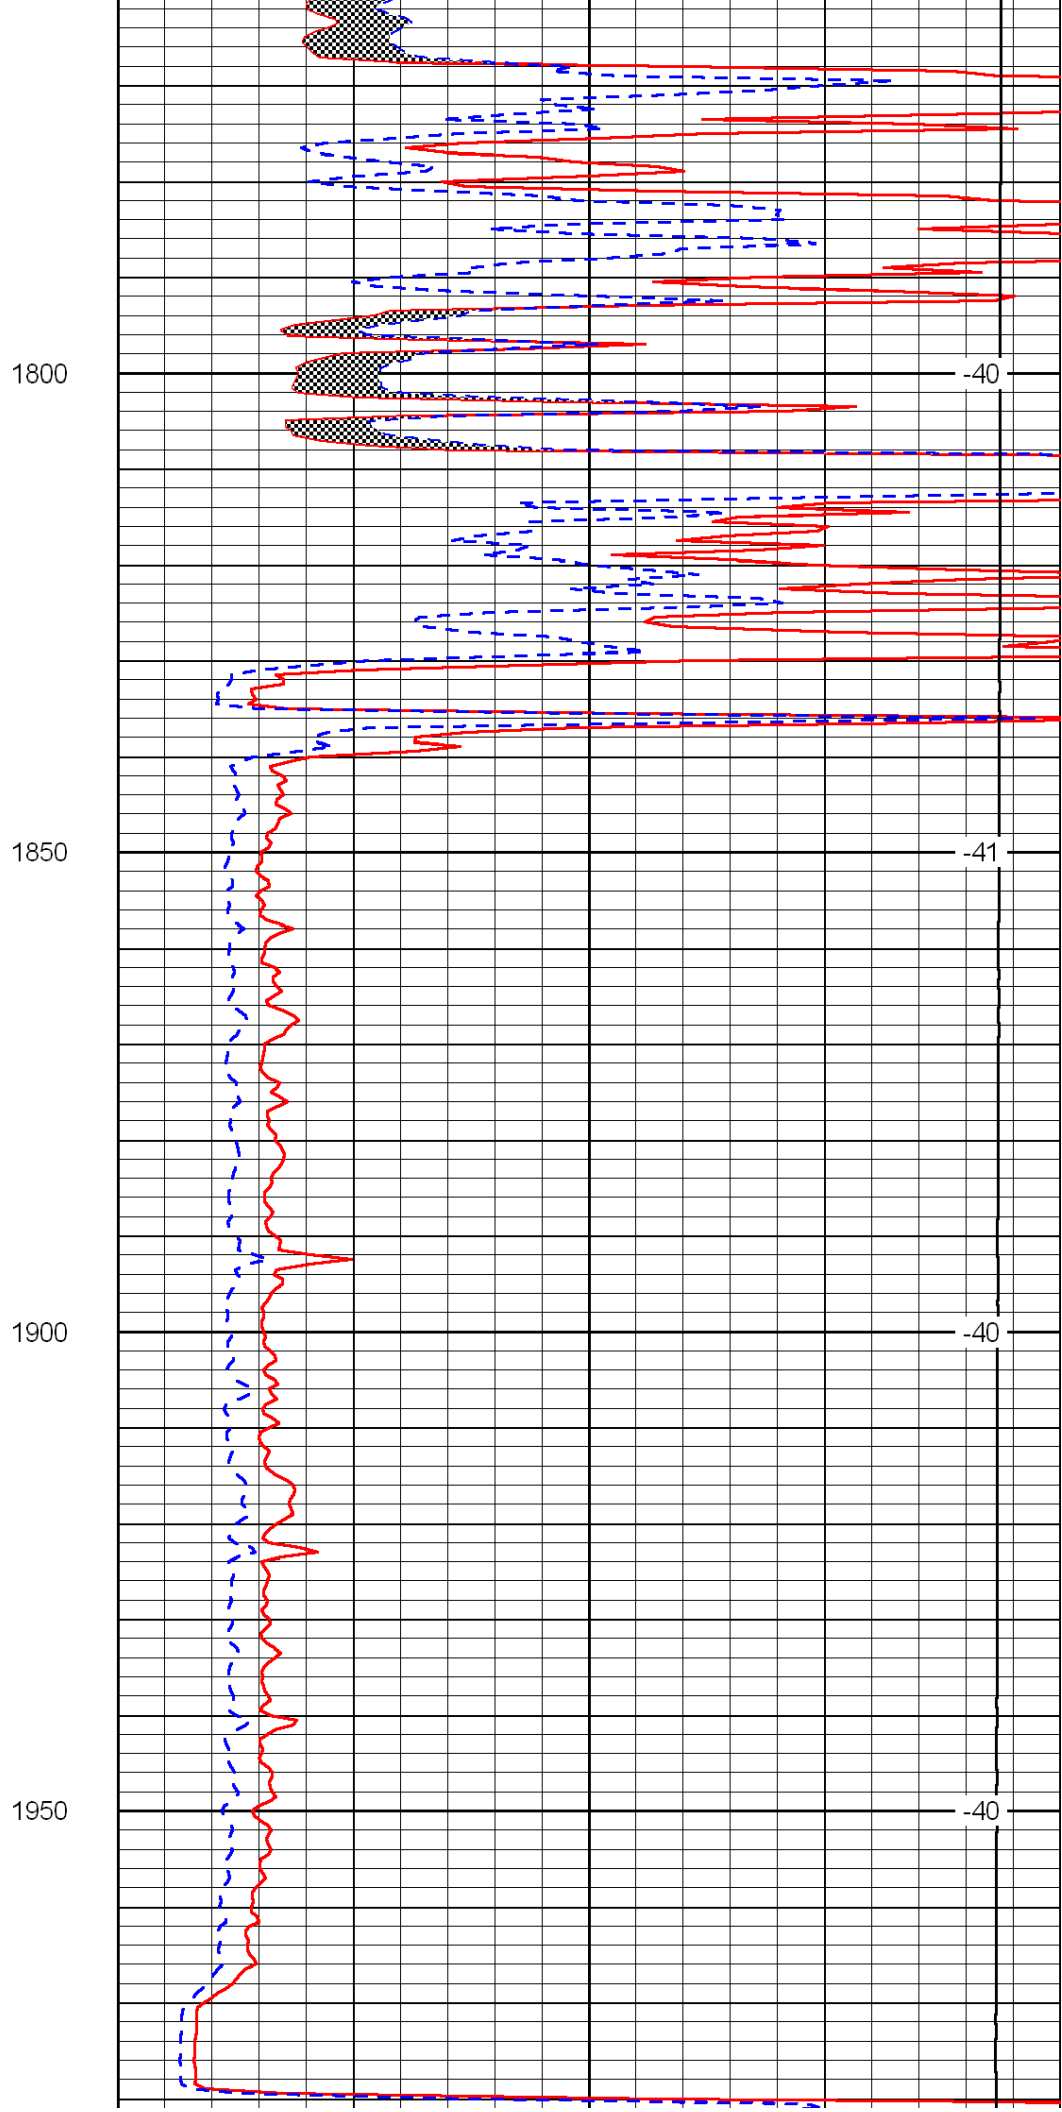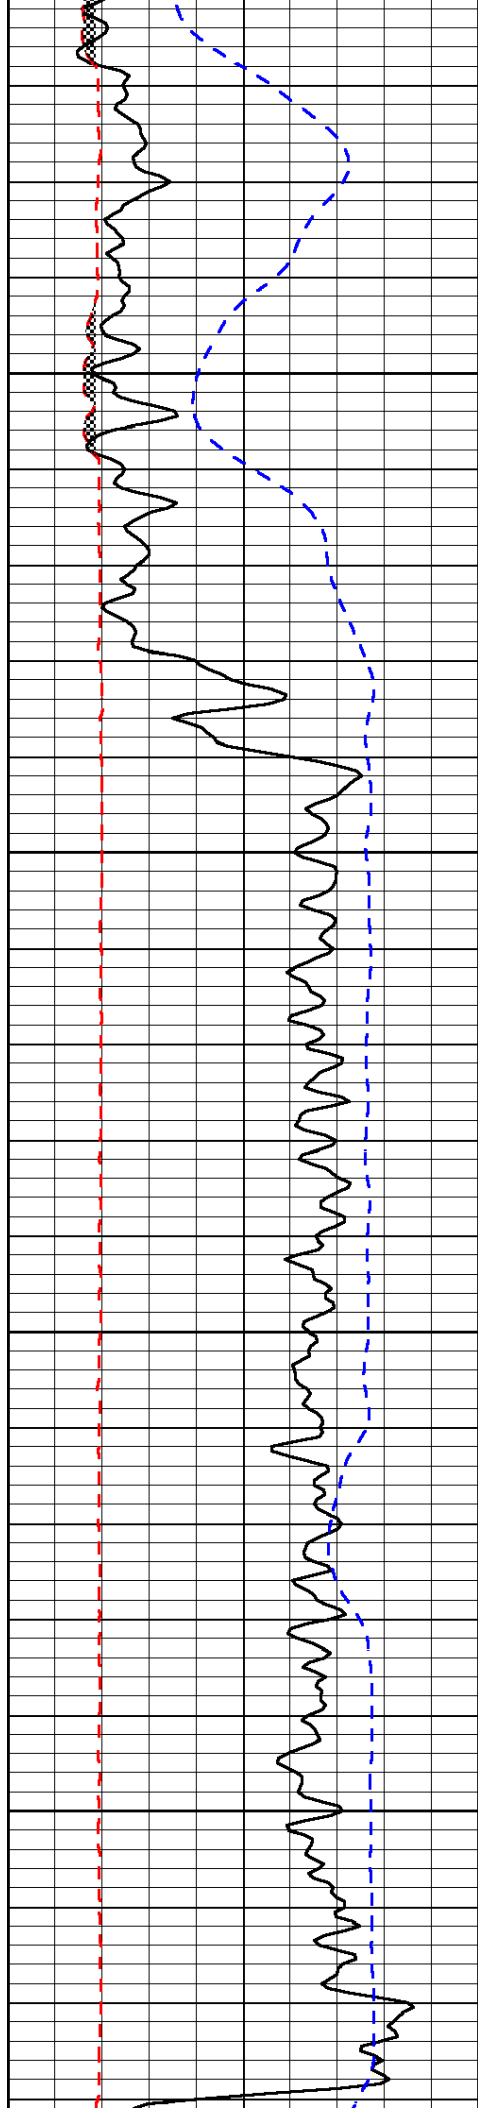

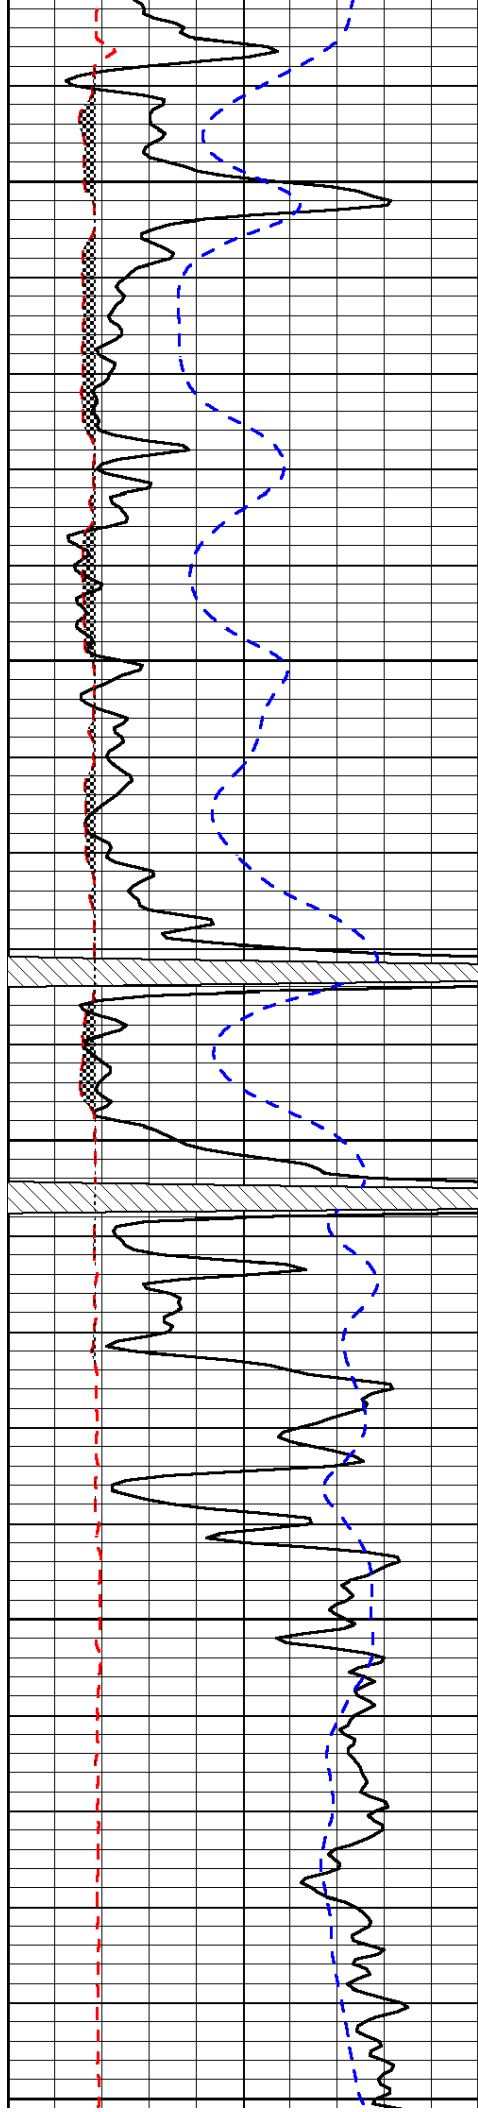


2000


2050

2100

2150

2200

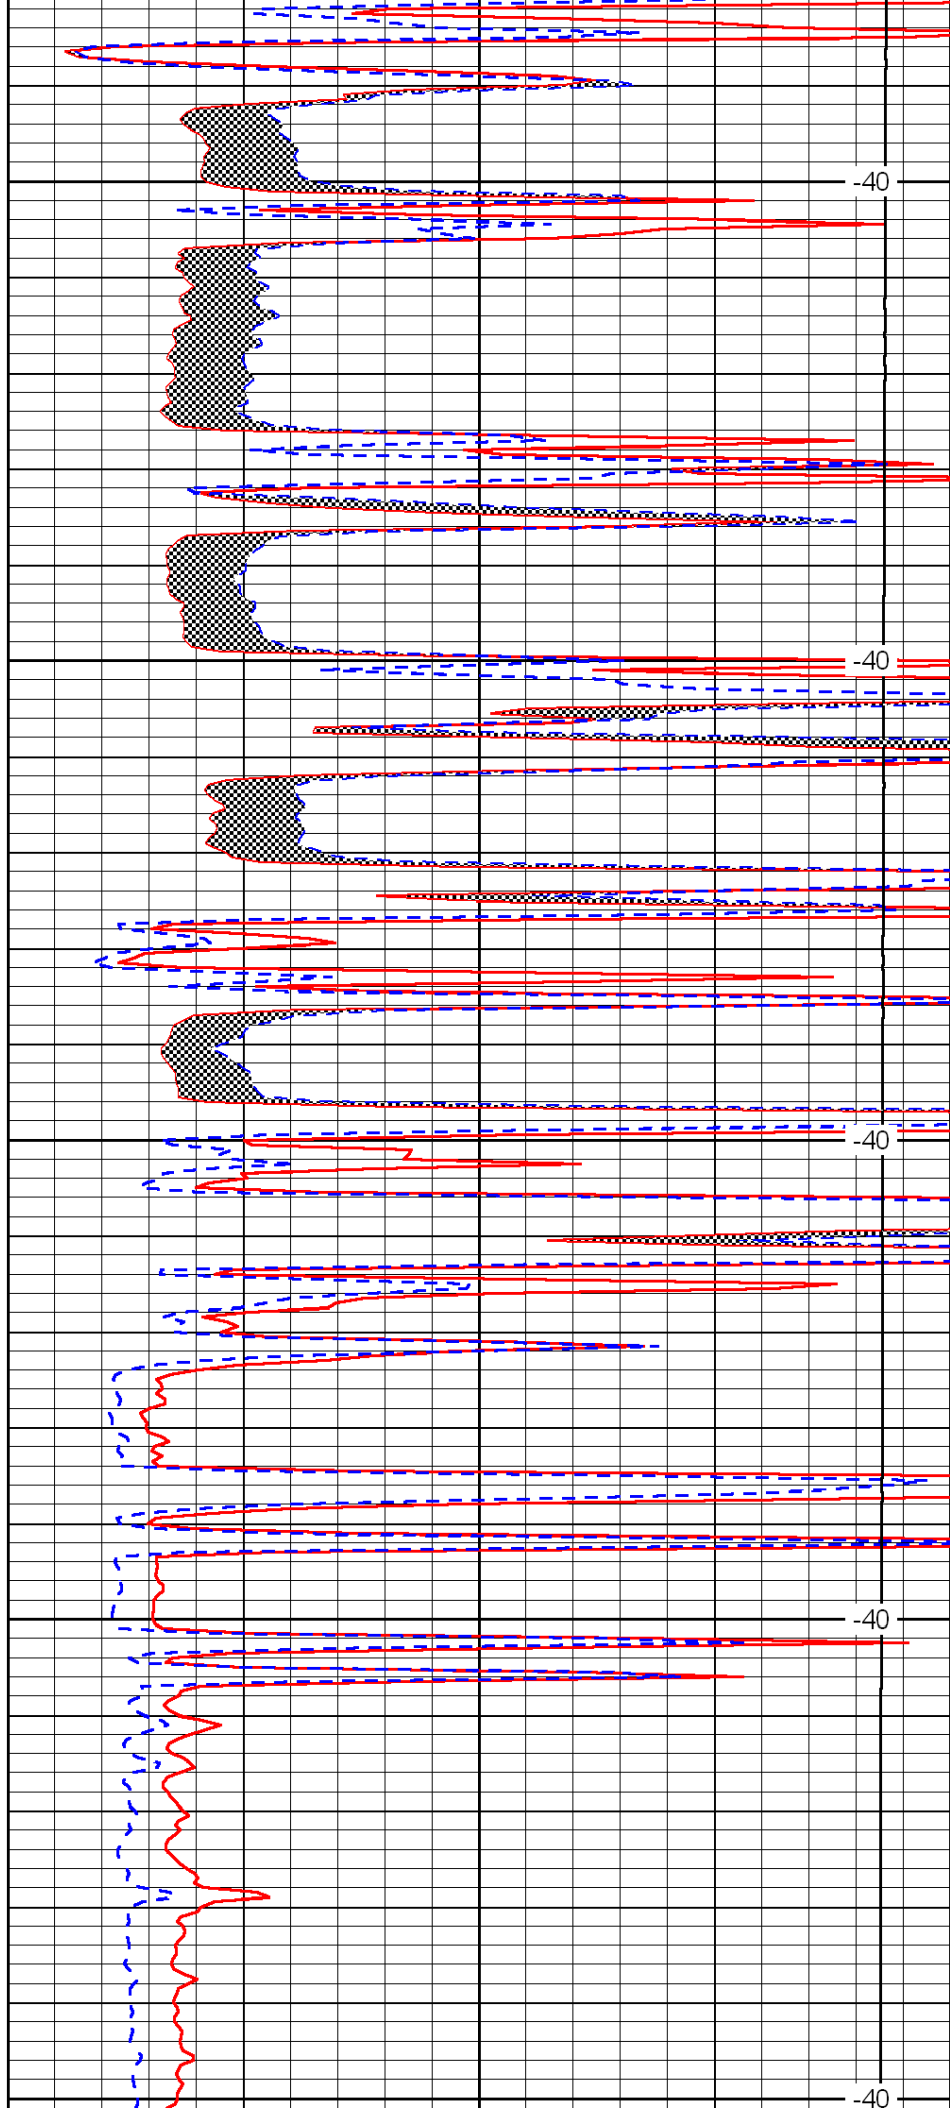

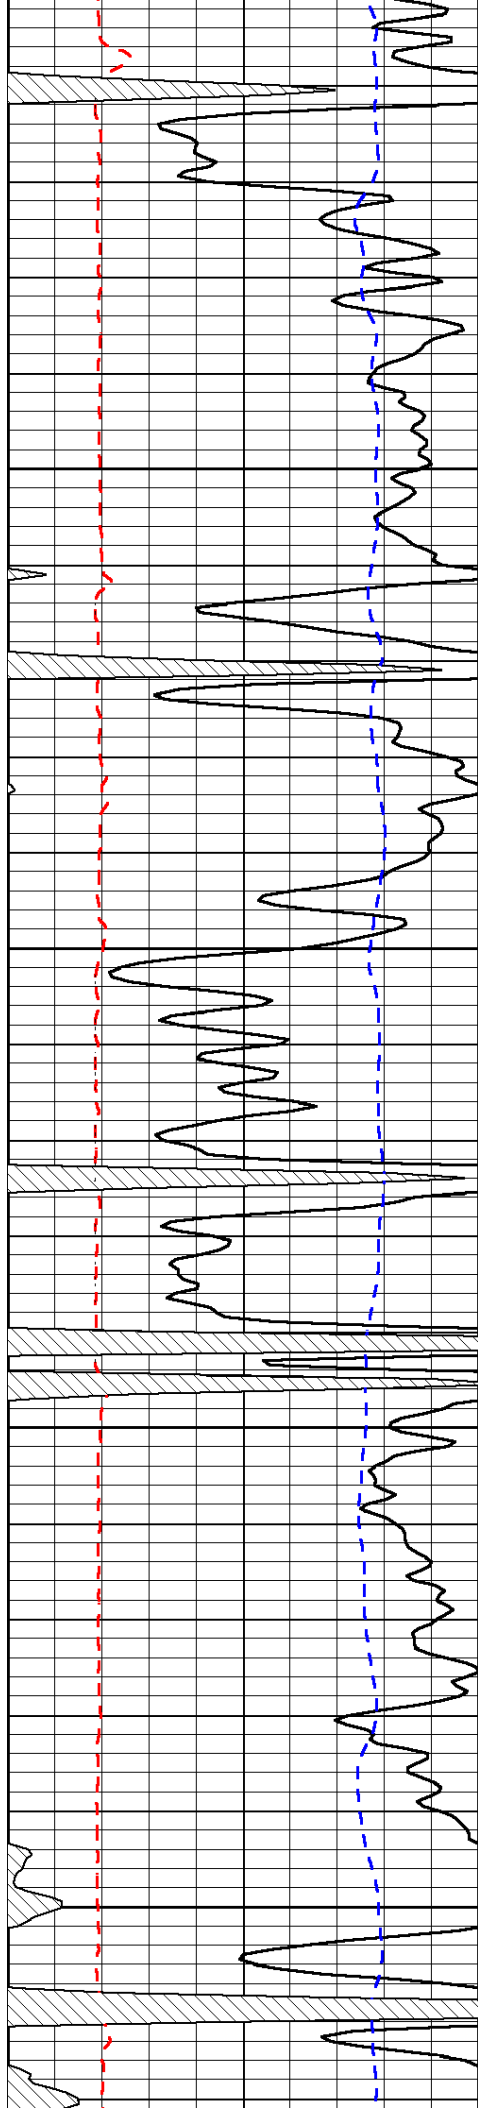


2250

2300

2350

2400

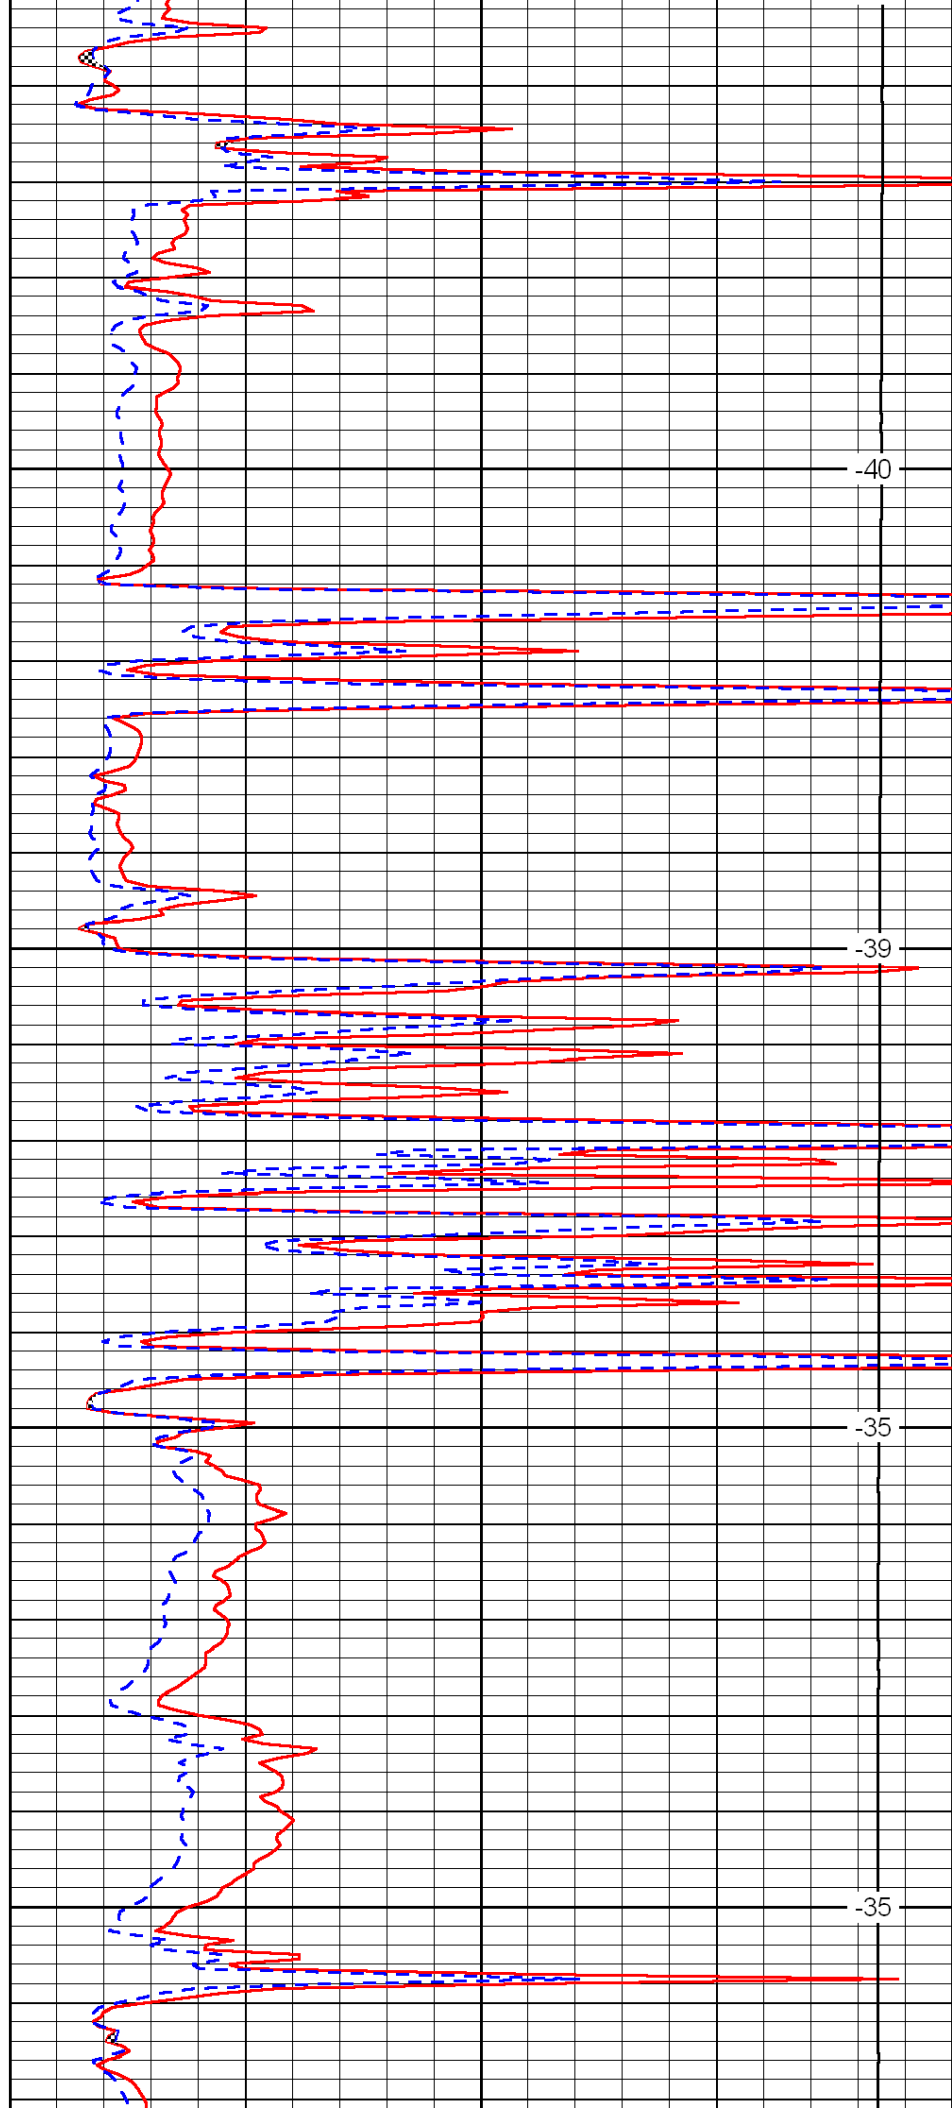


-40


-39

-35

-35

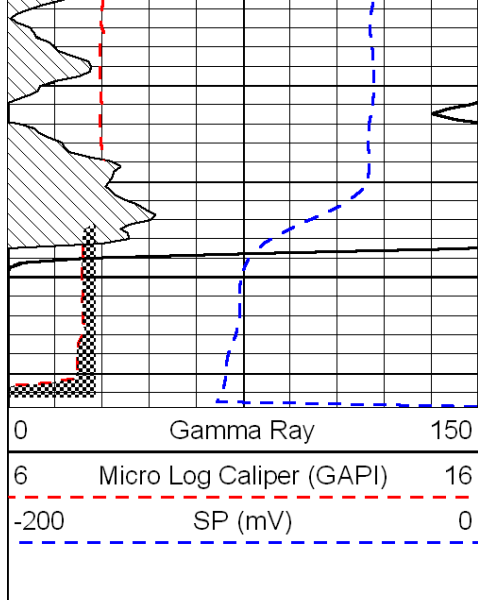

2450

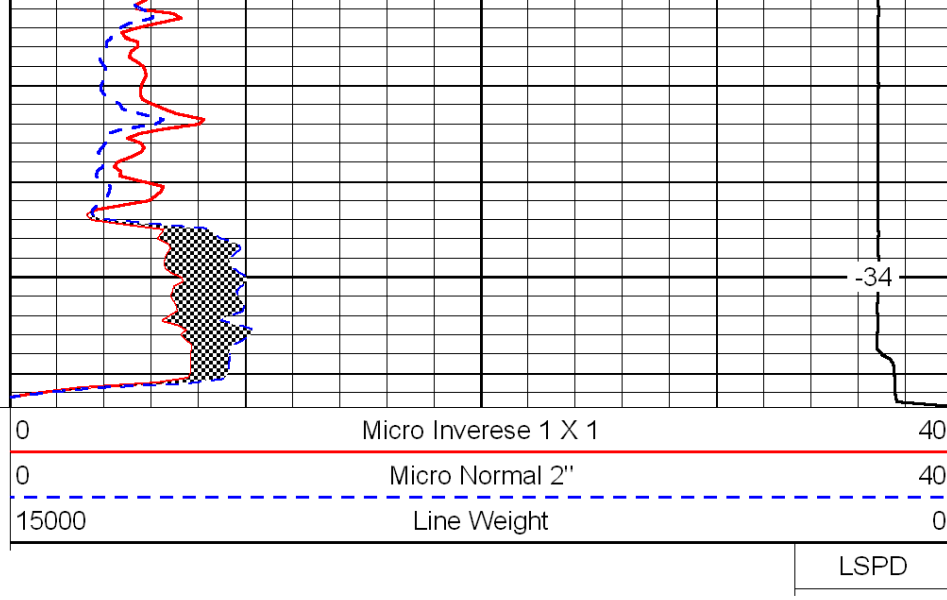

LSPD