LOG-TECH

DIGITAL LOG (785) 625-3858

Microresistivity Log

API No. 15-101-22,159-00-00

Company H & M Petroleum Corporation

Well Doyle's Dome No. 7

Field Doyle's Dome

County Lane State Kansas

Location C-SE-SE-SW
330' FSL & 2970' FEL
Sec: 31 Twp: 17 S Rge: 30 W

Other Services
CNL/CDL
DIL

Elevation
K.B. 2897
D.F.
G.L. 2892

Permanent Datum	Ground Level	Elevation 2892	
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		
Date	4/17/09		
Run Number	Two		
Depth Driller	4654		
Depth Logger	4652		
Bottom Logged Interval	4651		
Top Log Interval	3550		
Casing Driller	8.625 @ 219		
Casing Logger	218		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	1,800		
Density / Viscosity	9.6 / 54		
pH / Fluid Loss	11.0 / 7.6		
Source of Sample	Flowline		
Rm @ Meas. Temp	.92 @ 72		
Rmf @ Meas. Temp	.69 @ 72		
Rmc @ Meas. Temp	1.24 @ 72		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.53 @ 125		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	125		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Rick Hall		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton W to county line, 2 W, 3 N to rd 180, 2 1/2 E past tank battery (N side), N into

Database File:	c:\warrior\data\h&m_doyle's dome no. 7\h&mhd.db
Dataset Pathname:	dil/hm2in
Presentation Format:	micro
Dataset Creation:	Fri Apr 17 21:13:44 2009
Charted by:	Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)

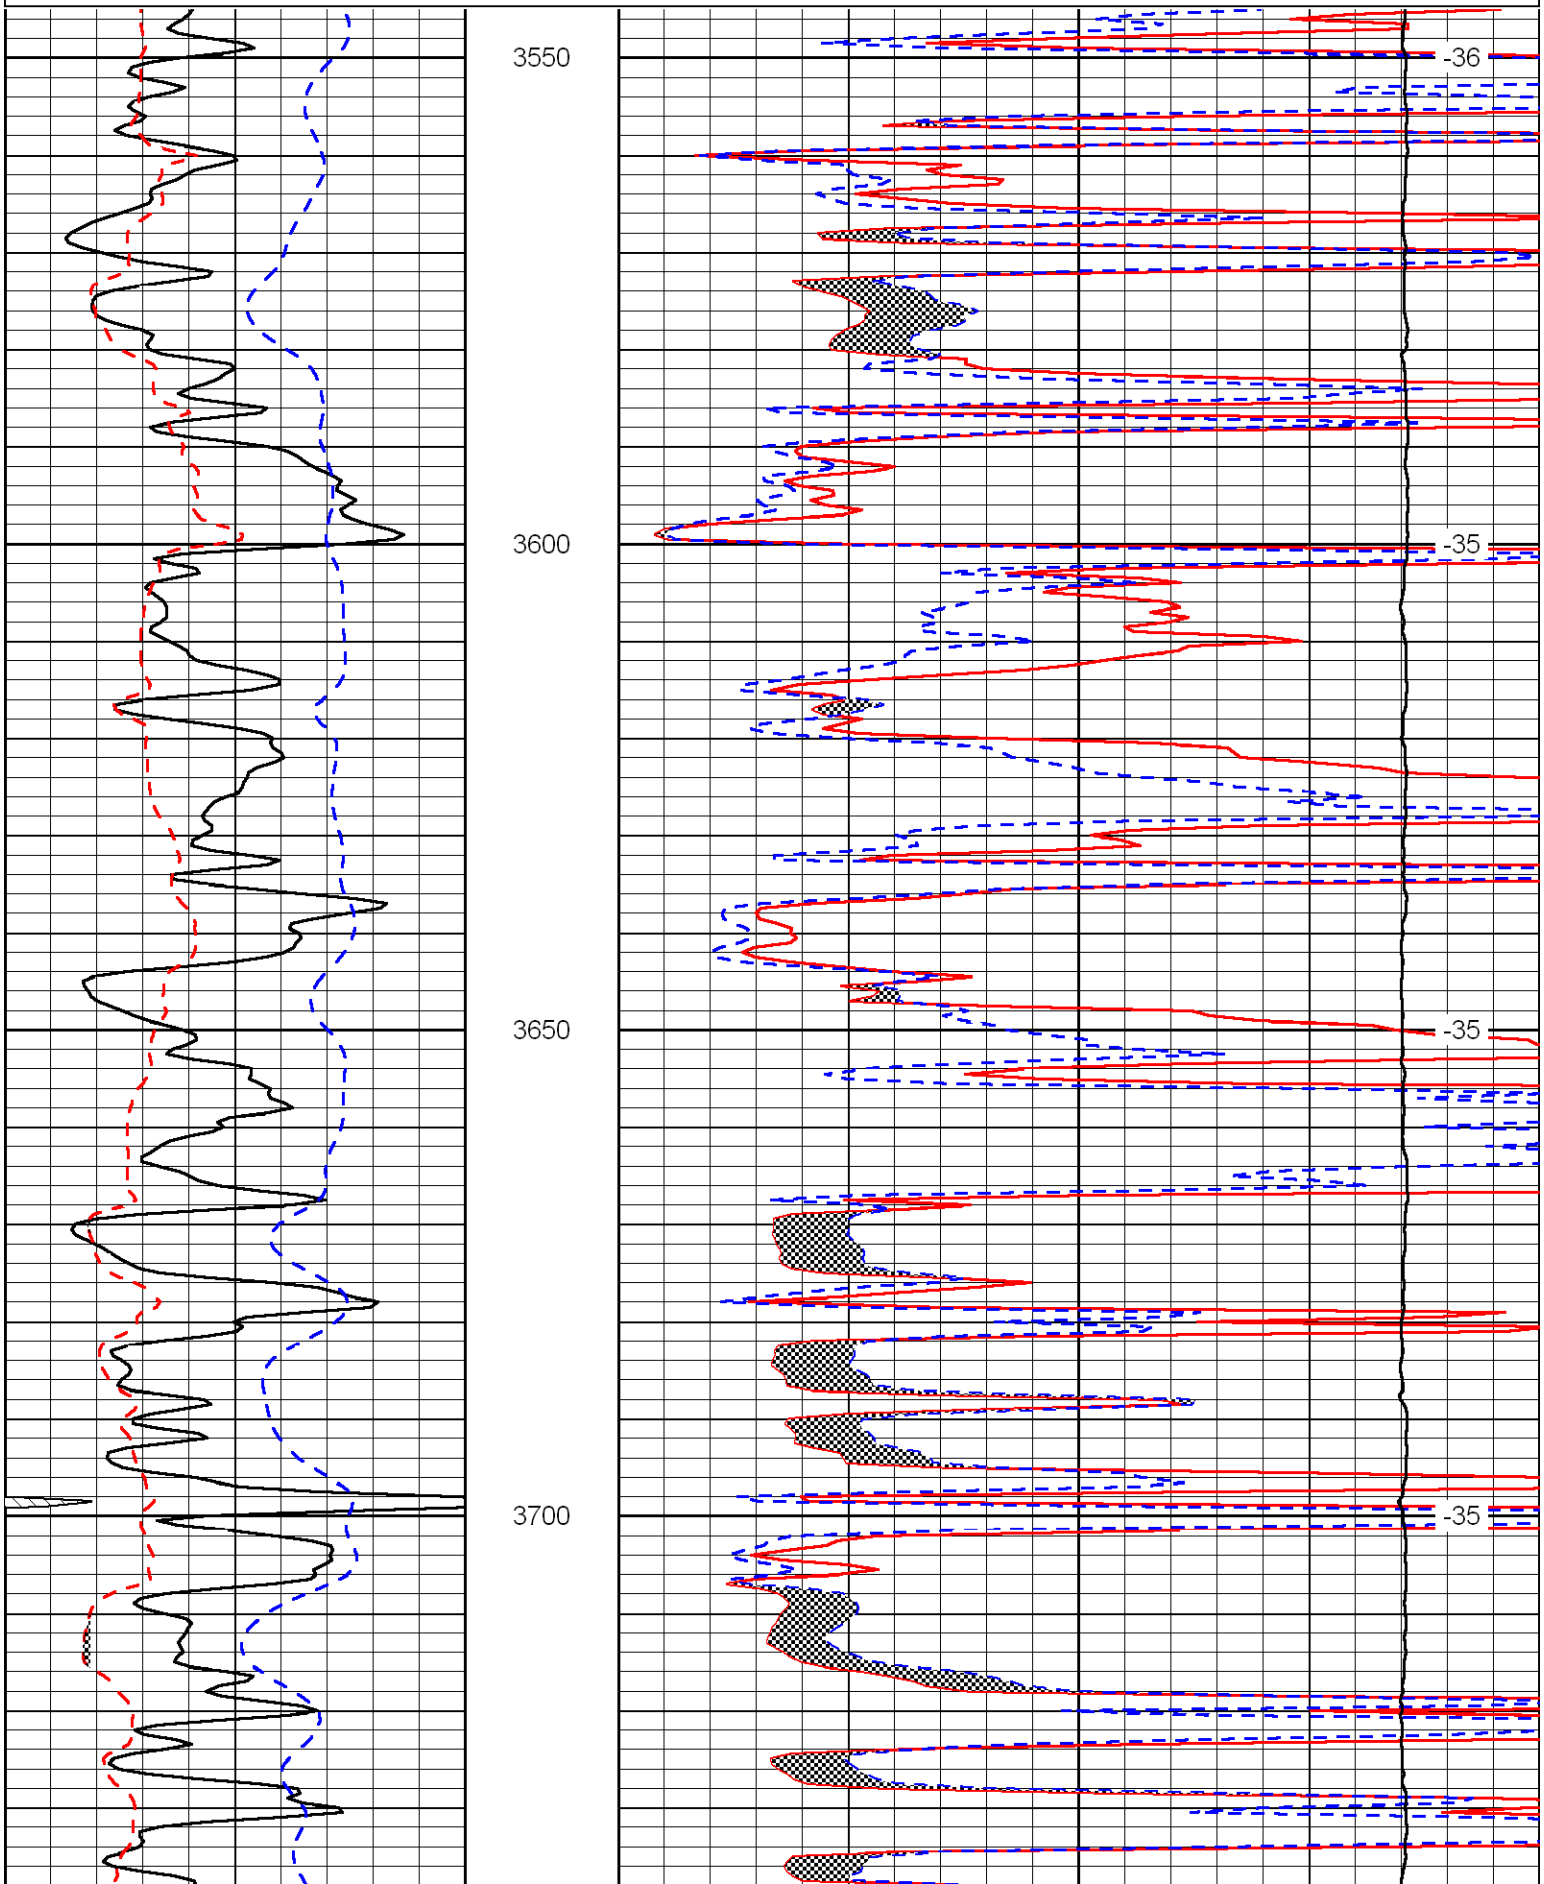

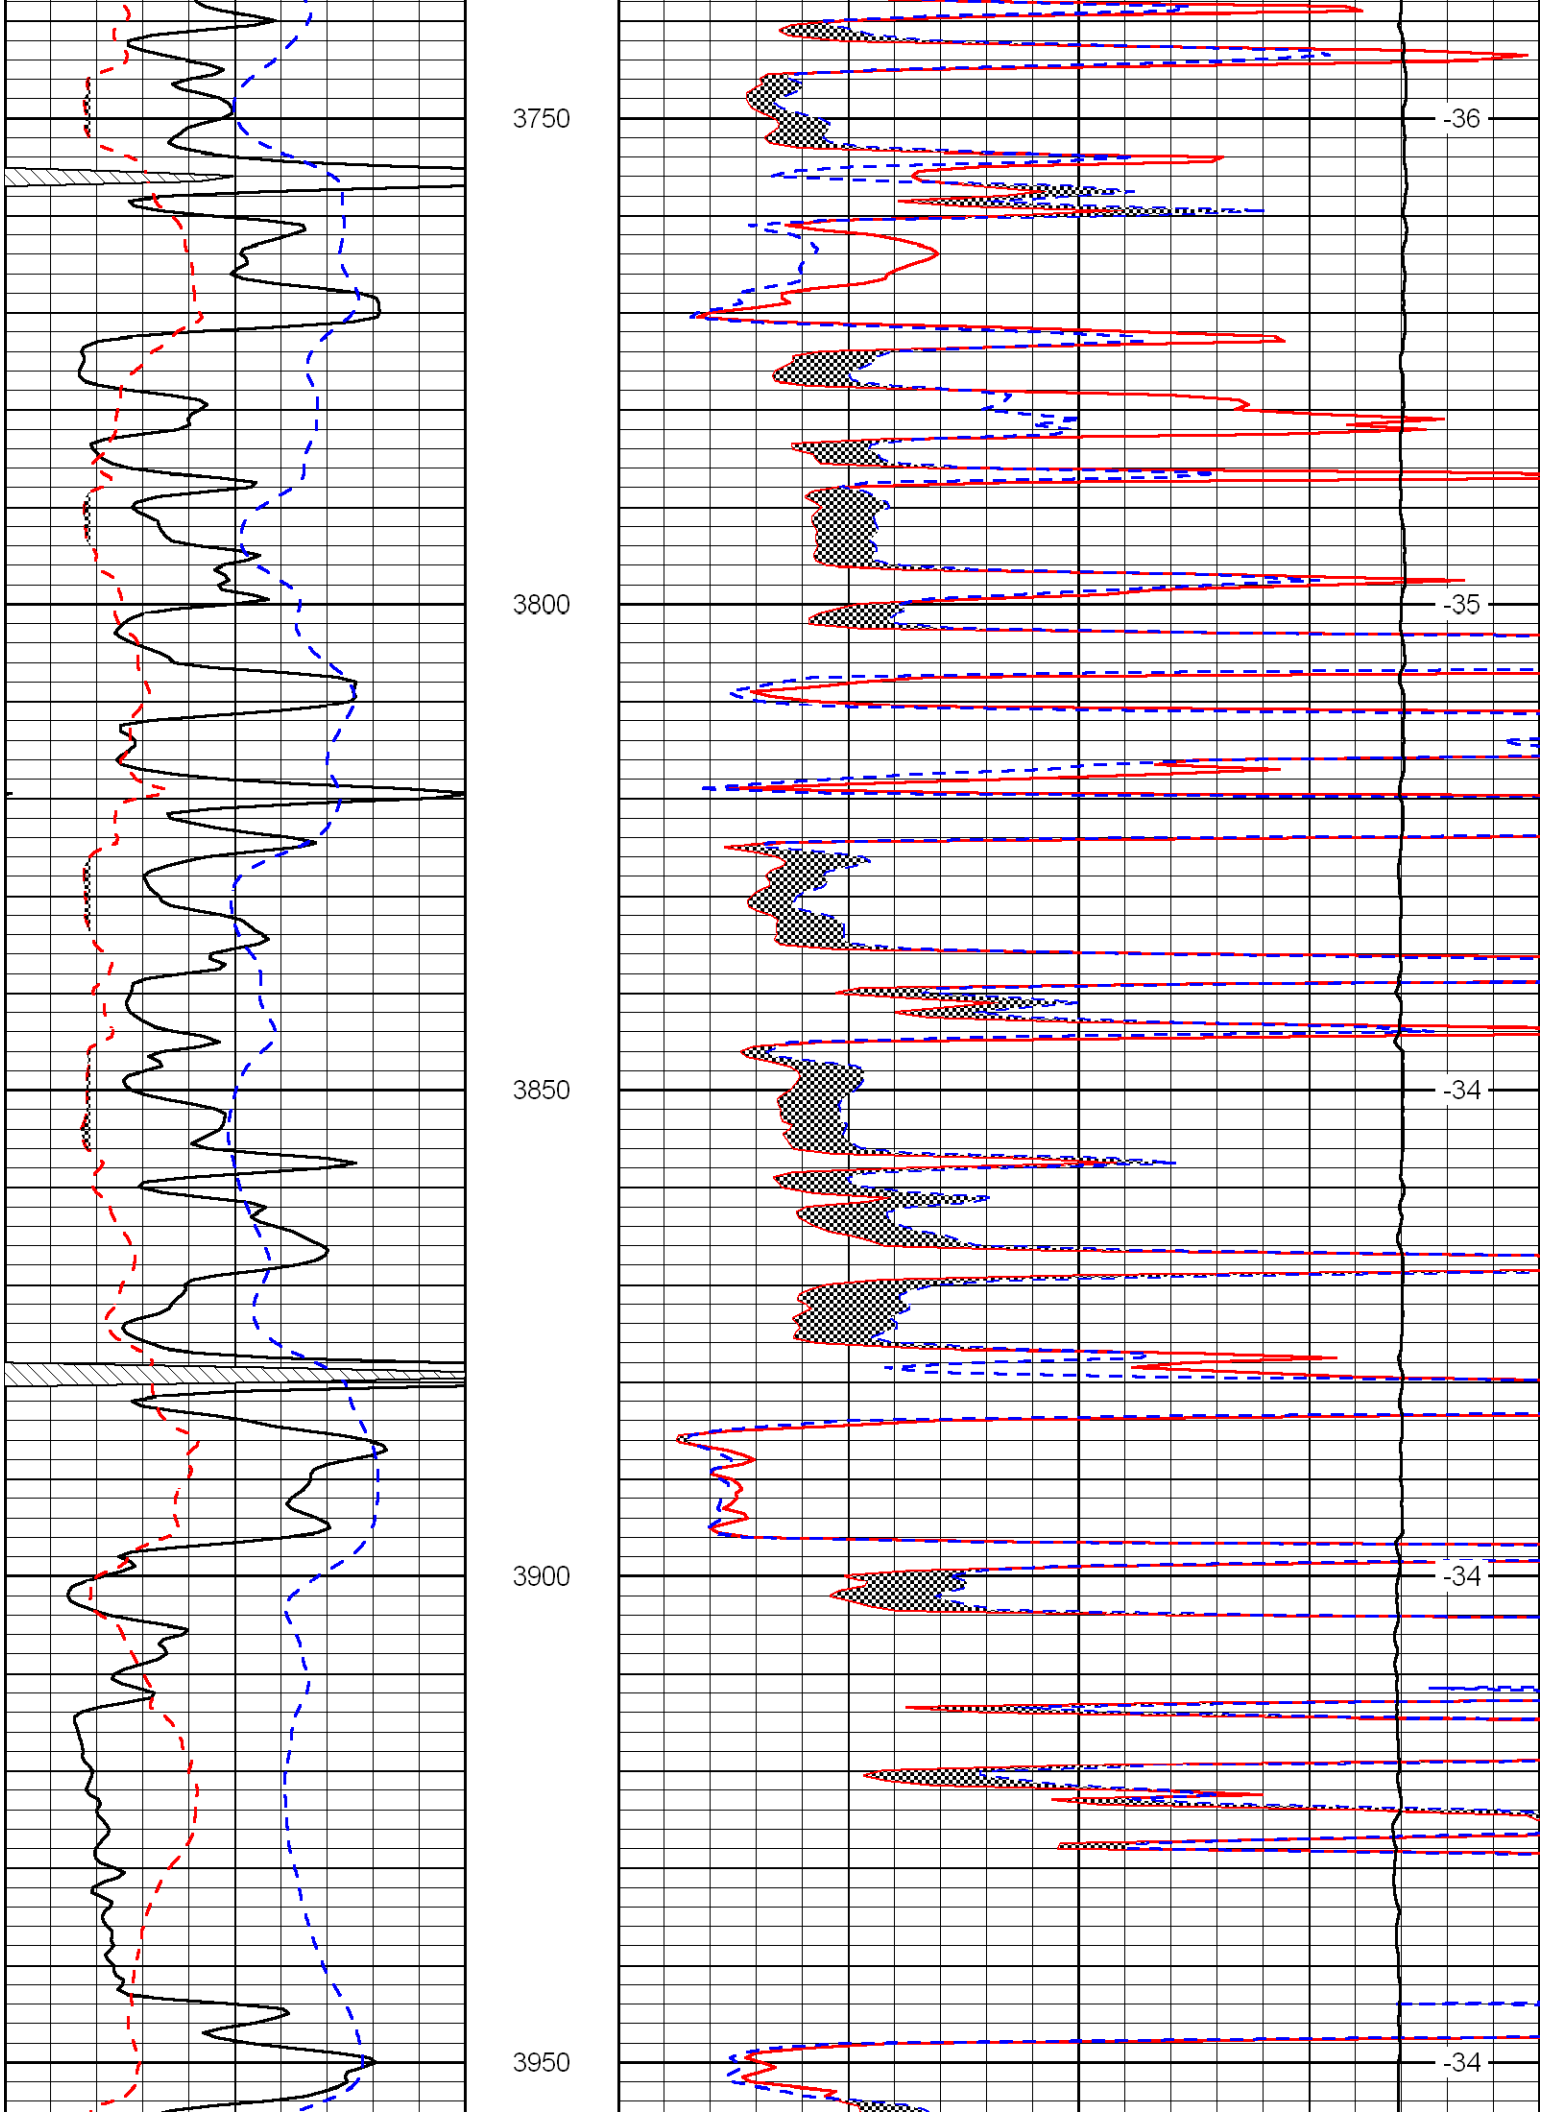
3750
3800
3850
3900
3950
-36
-35
-34
-34
-34

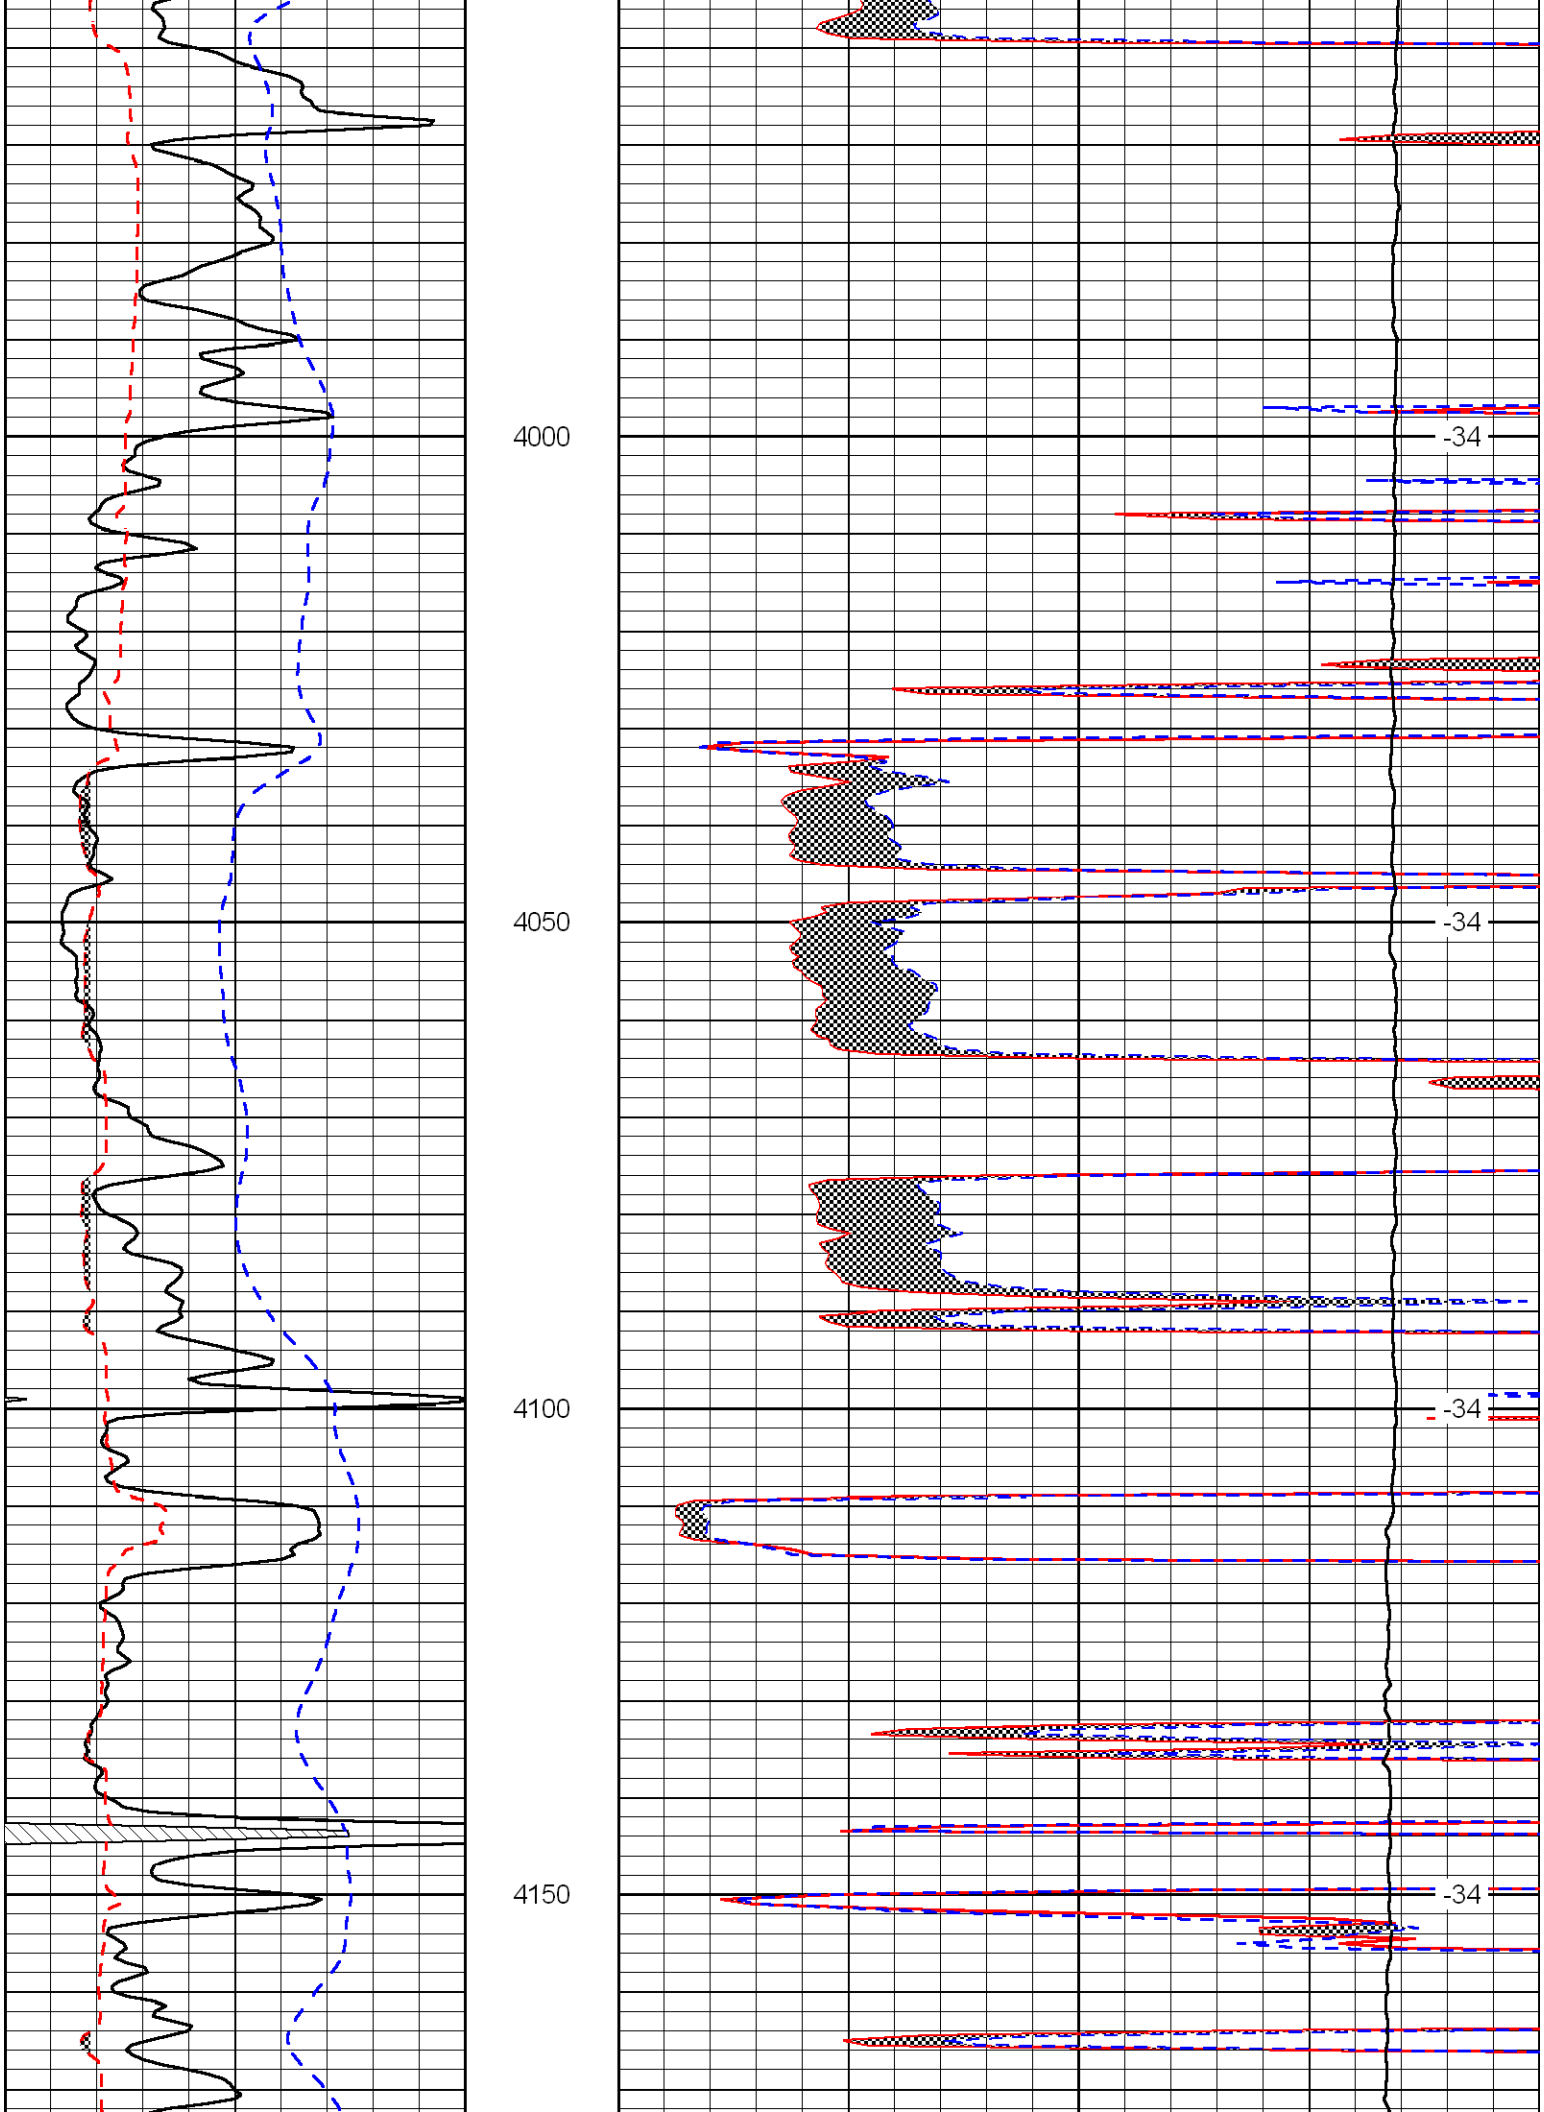
4000
4050
4100
4150
-34
-34
-34
-34

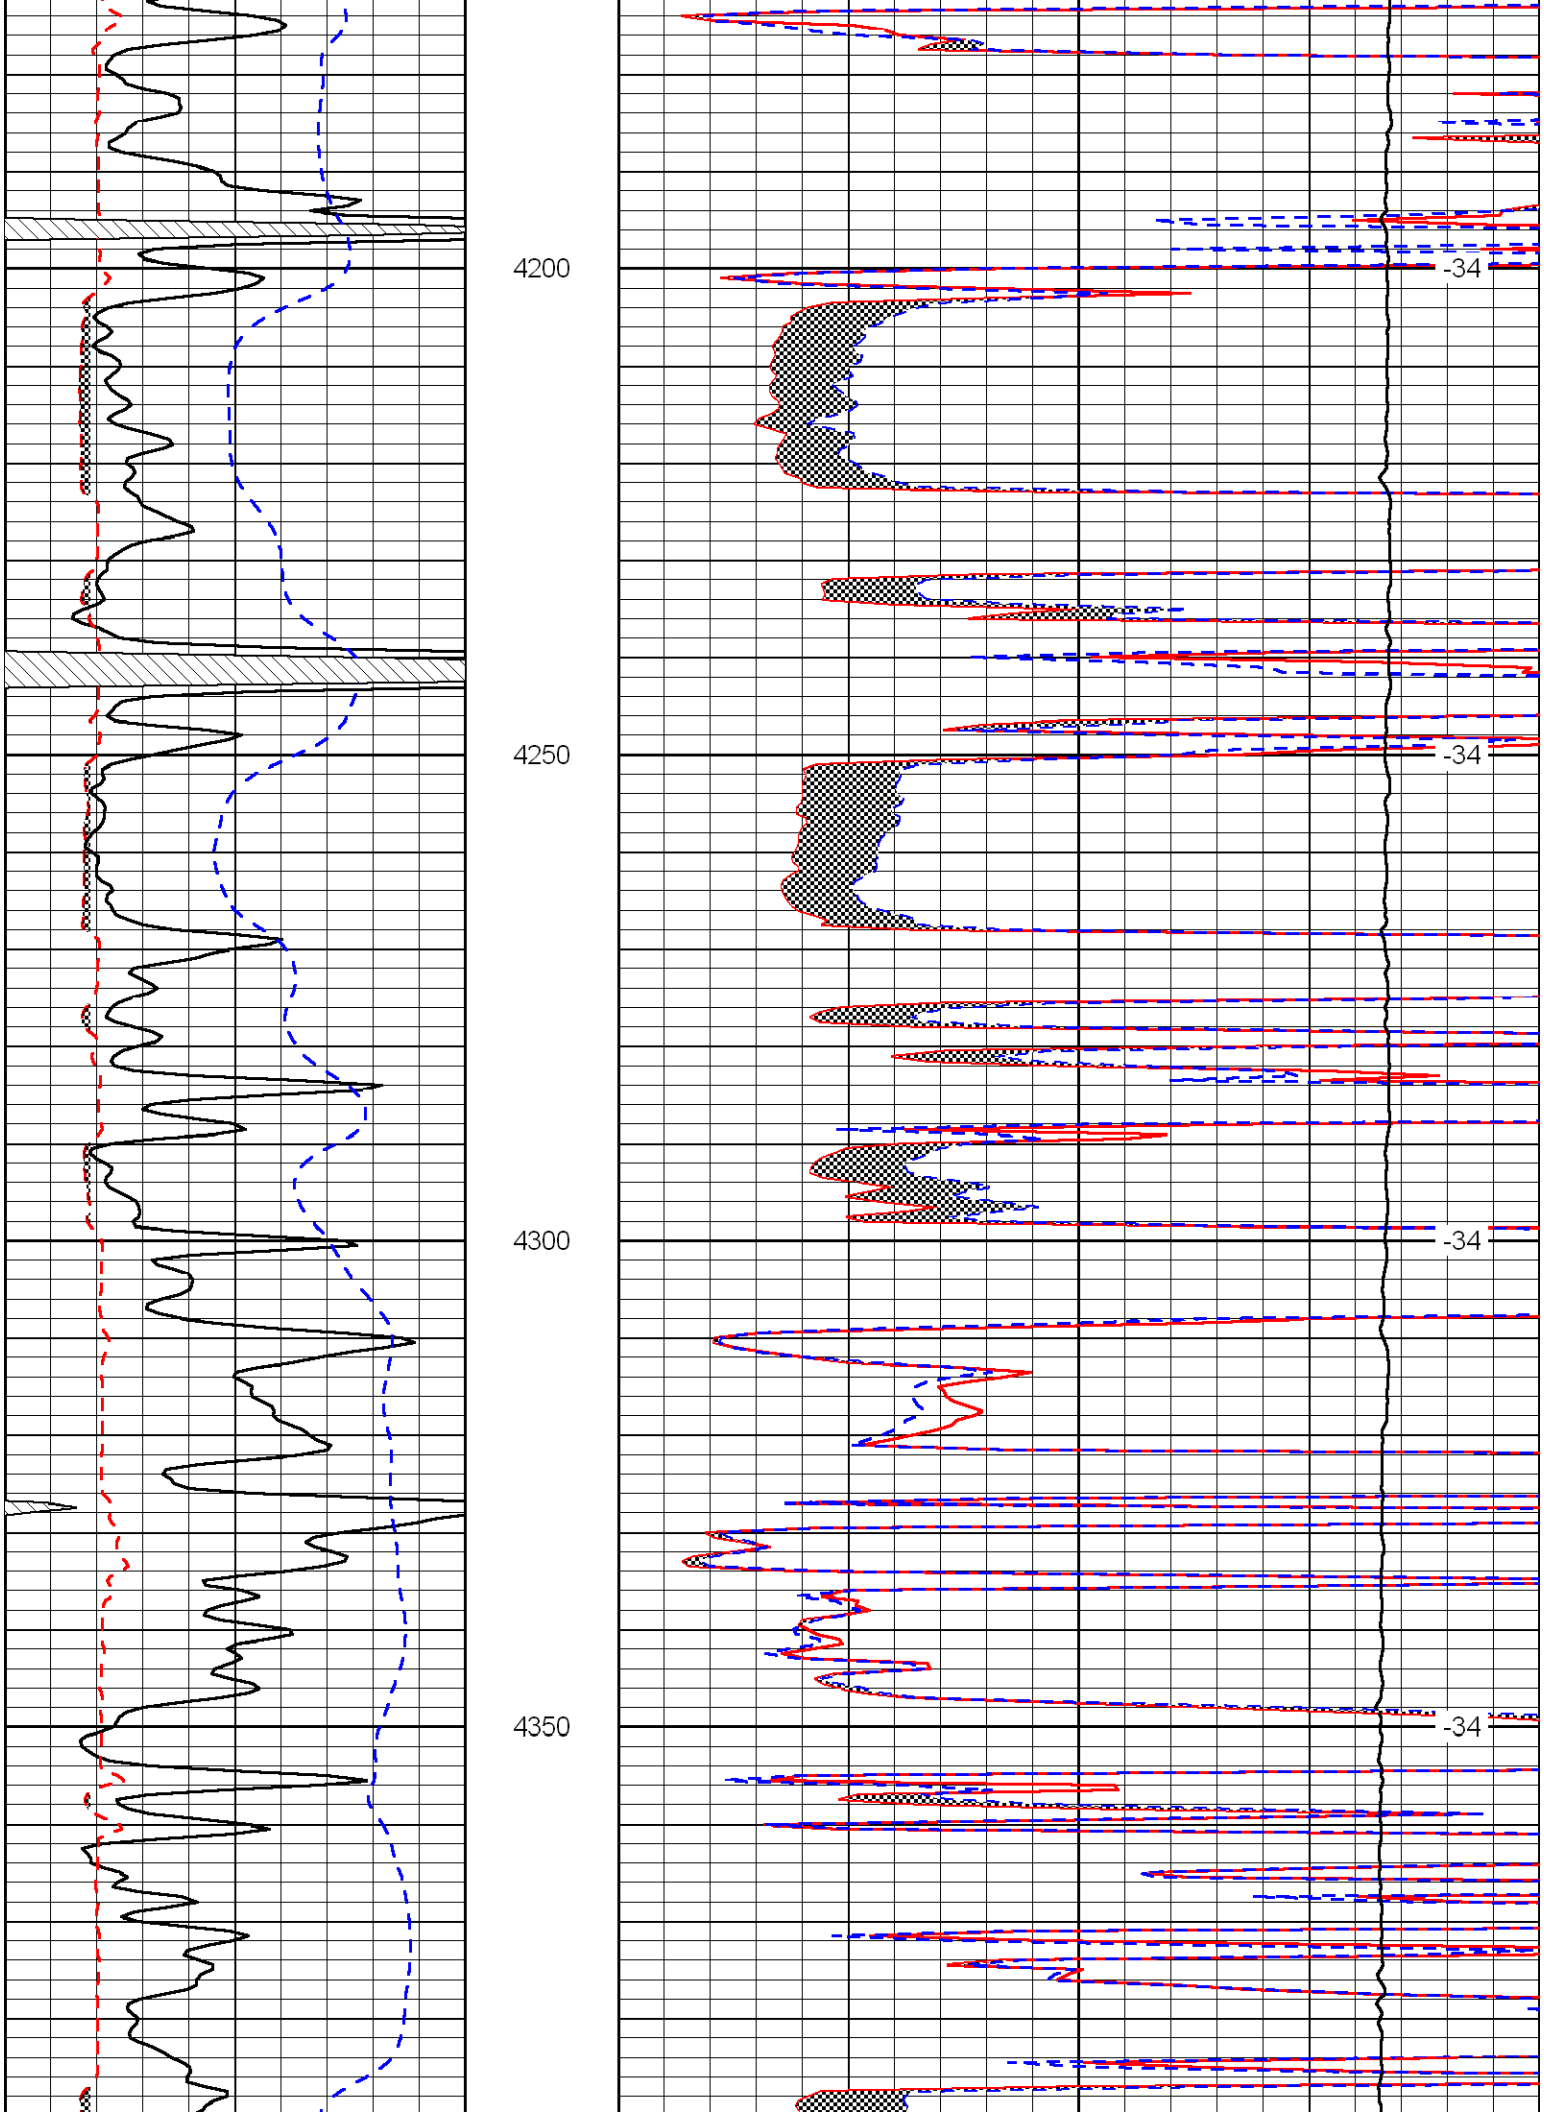
4200
4250
4300
4350
-34
-34
-34
-34

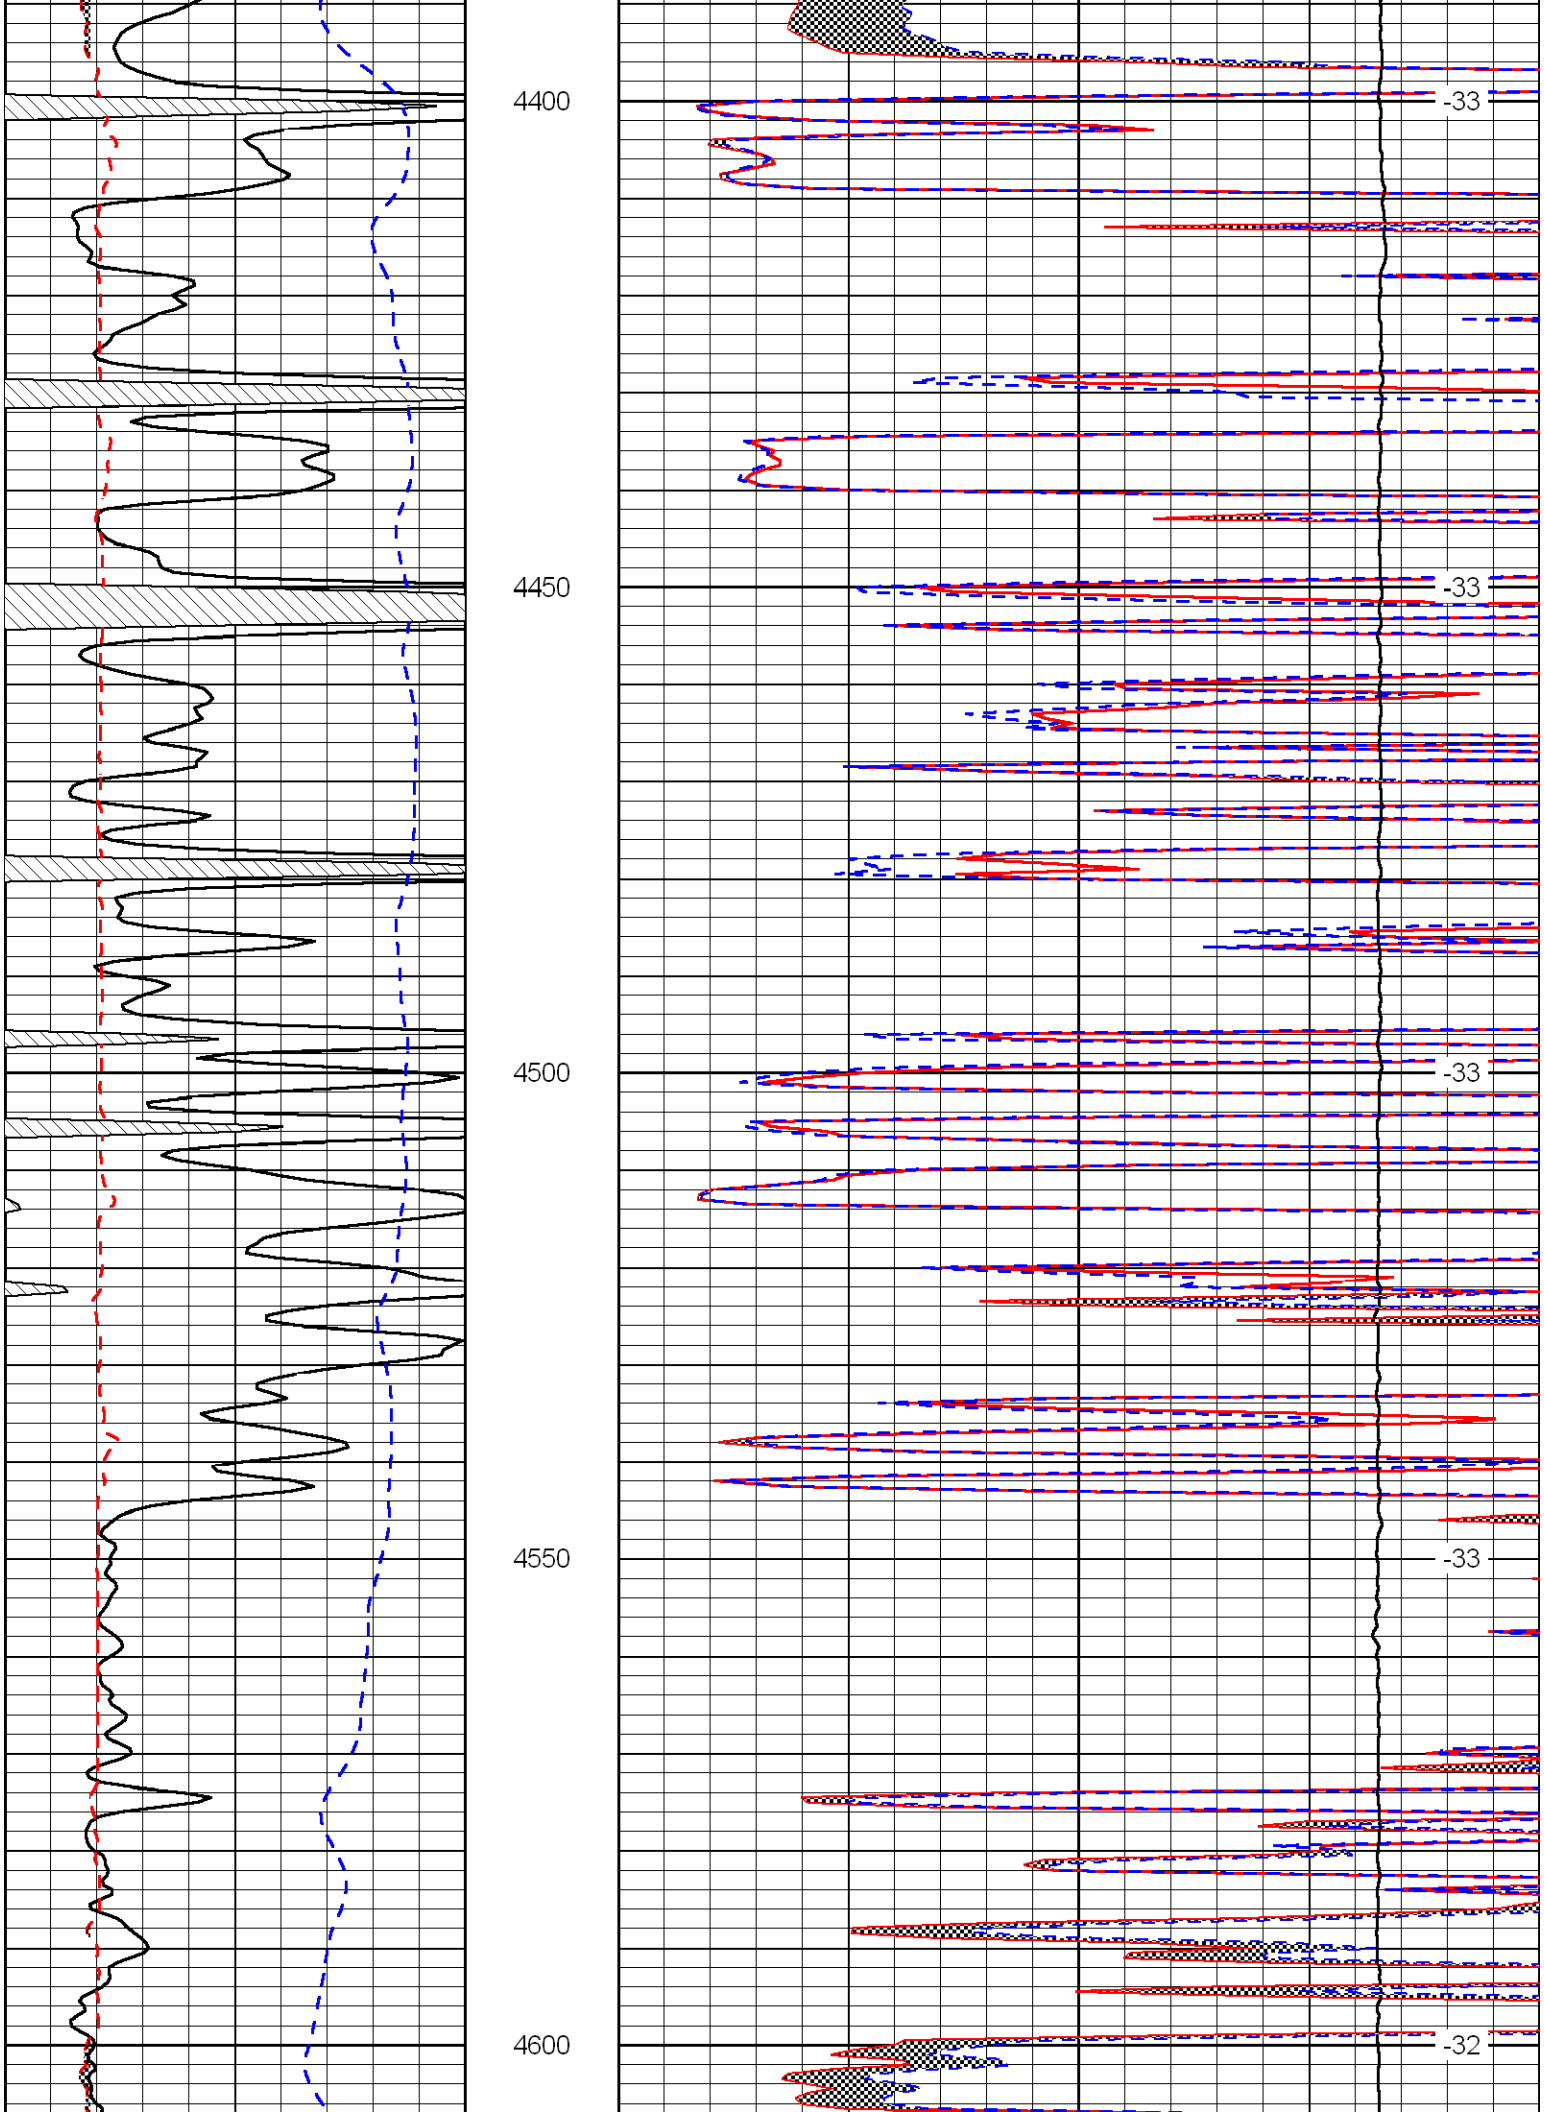
4400
-33
4450
-33
4500
-33
4550
-33
4600
-32

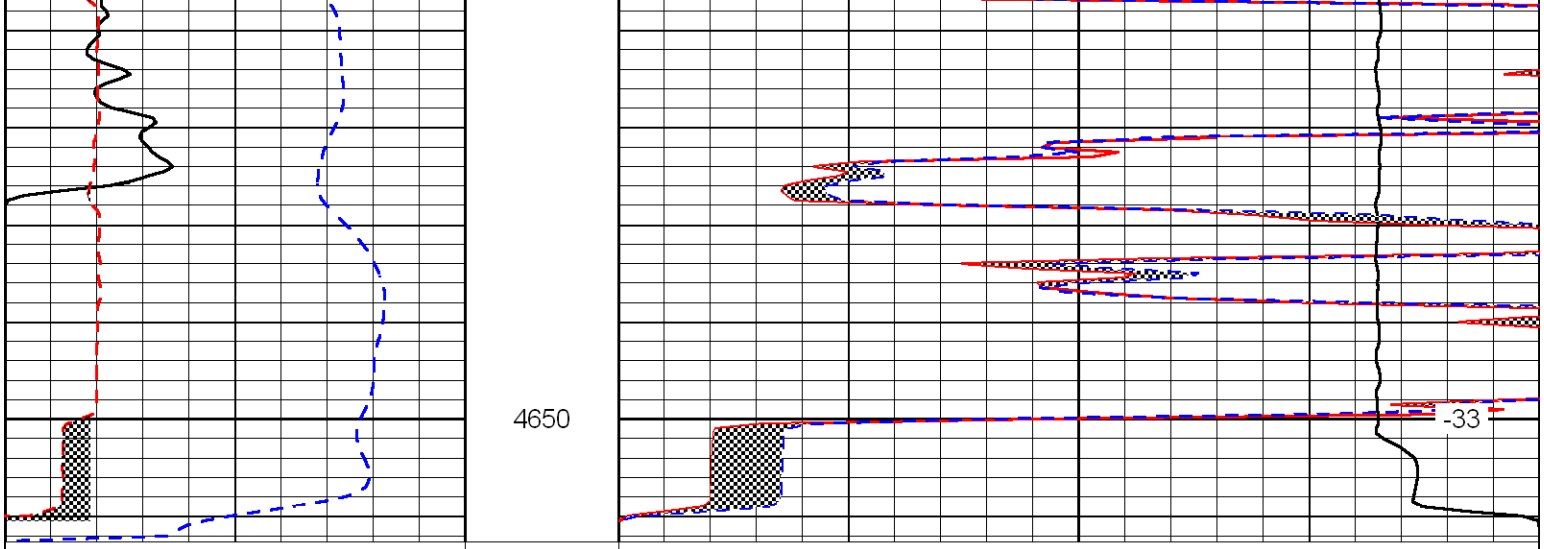

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)