

LOG-TECH



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	API 15-069-20,315-00-00		
Company	Falcon Exploration, Inc.		
Well	Lanterman No. 1-8		
Field	Wildcat		
County	Gray	State	Kansas
Location	NW SE SE NE 2,030' FNL & 370' FEL		Other Services CNL/CDL DIL/BHCS
Sec: 9	Twp: 28S	Rge: 30W	Elevation

Permanent Datum	Ground Level	Elevation 2812	K.B. 2822
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum	D.F. 2812
Drilling Measured From	Kelly Bushing		G.L. 2812
Date	4/6/2009		
Run Number	Two		
Depth Driller	5400		
Depth Logger	5399		
Bottom Logged Interval	5398		
Top Log Interval	2600		
Casing Driller	8,625 @ 566		
Casing Logger	563		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	3000		
Density / Viscosity	9.6 78		
pH / Fluid Loss	10.0 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.83 @ 50		
Rmf @ Meas. Temp	.62 @ 50		
Rmc @ Meas. Temp	1.12 @ 50		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.31 @ 132		
Operating Rig Time	6 Hours		
Max Rec. Temp. F	132		
Equipment Number	17		
Location	Hays		
Recorded By	J. Long	M. Garrison	
Witnessed By	Keith Reavis		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Montezuma, 1 1/2 N on Ingalls Blacktop to AA RD, 9 W to 3 Rd, 3/4 N, W Into

Database File: c:\warrior\data\falcon_lanterman no. 1-8\falconhd.db
 Dataset Pathname: dil/flcnstck
 Presentation Format: micro
 Dataset Creation: Mon Apr 06 04:44:50 2009
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

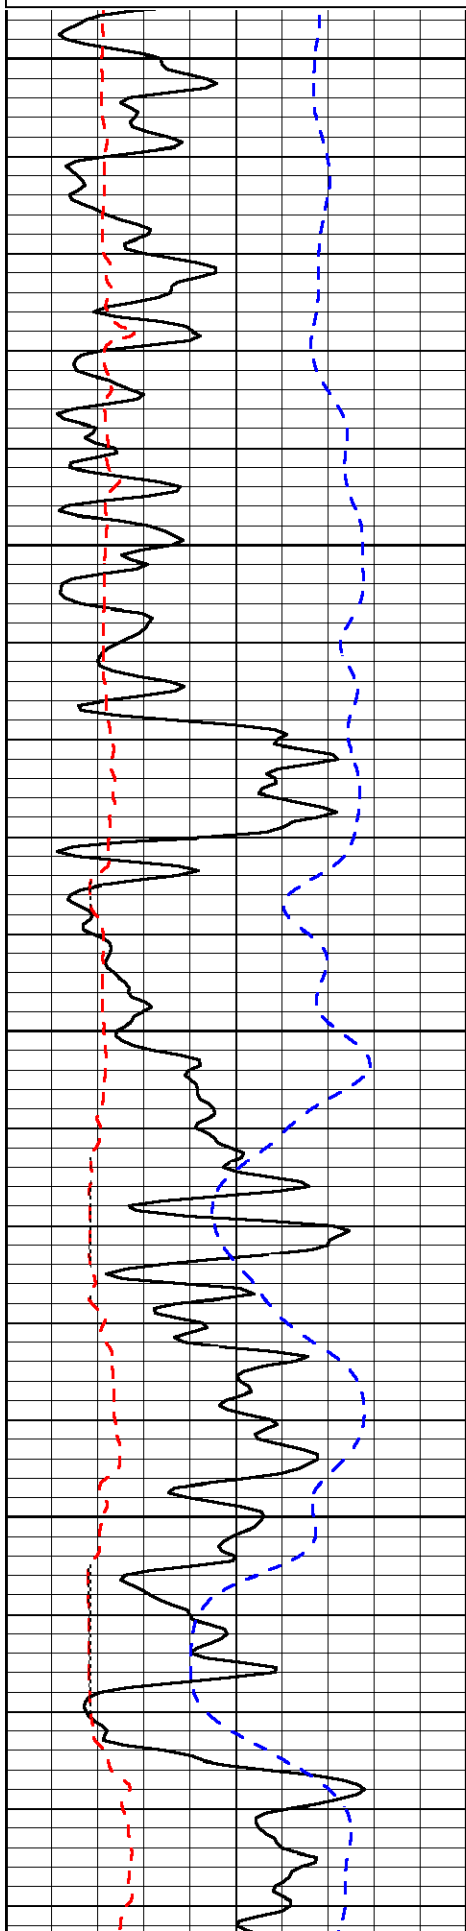



2600

2650

2700

2750

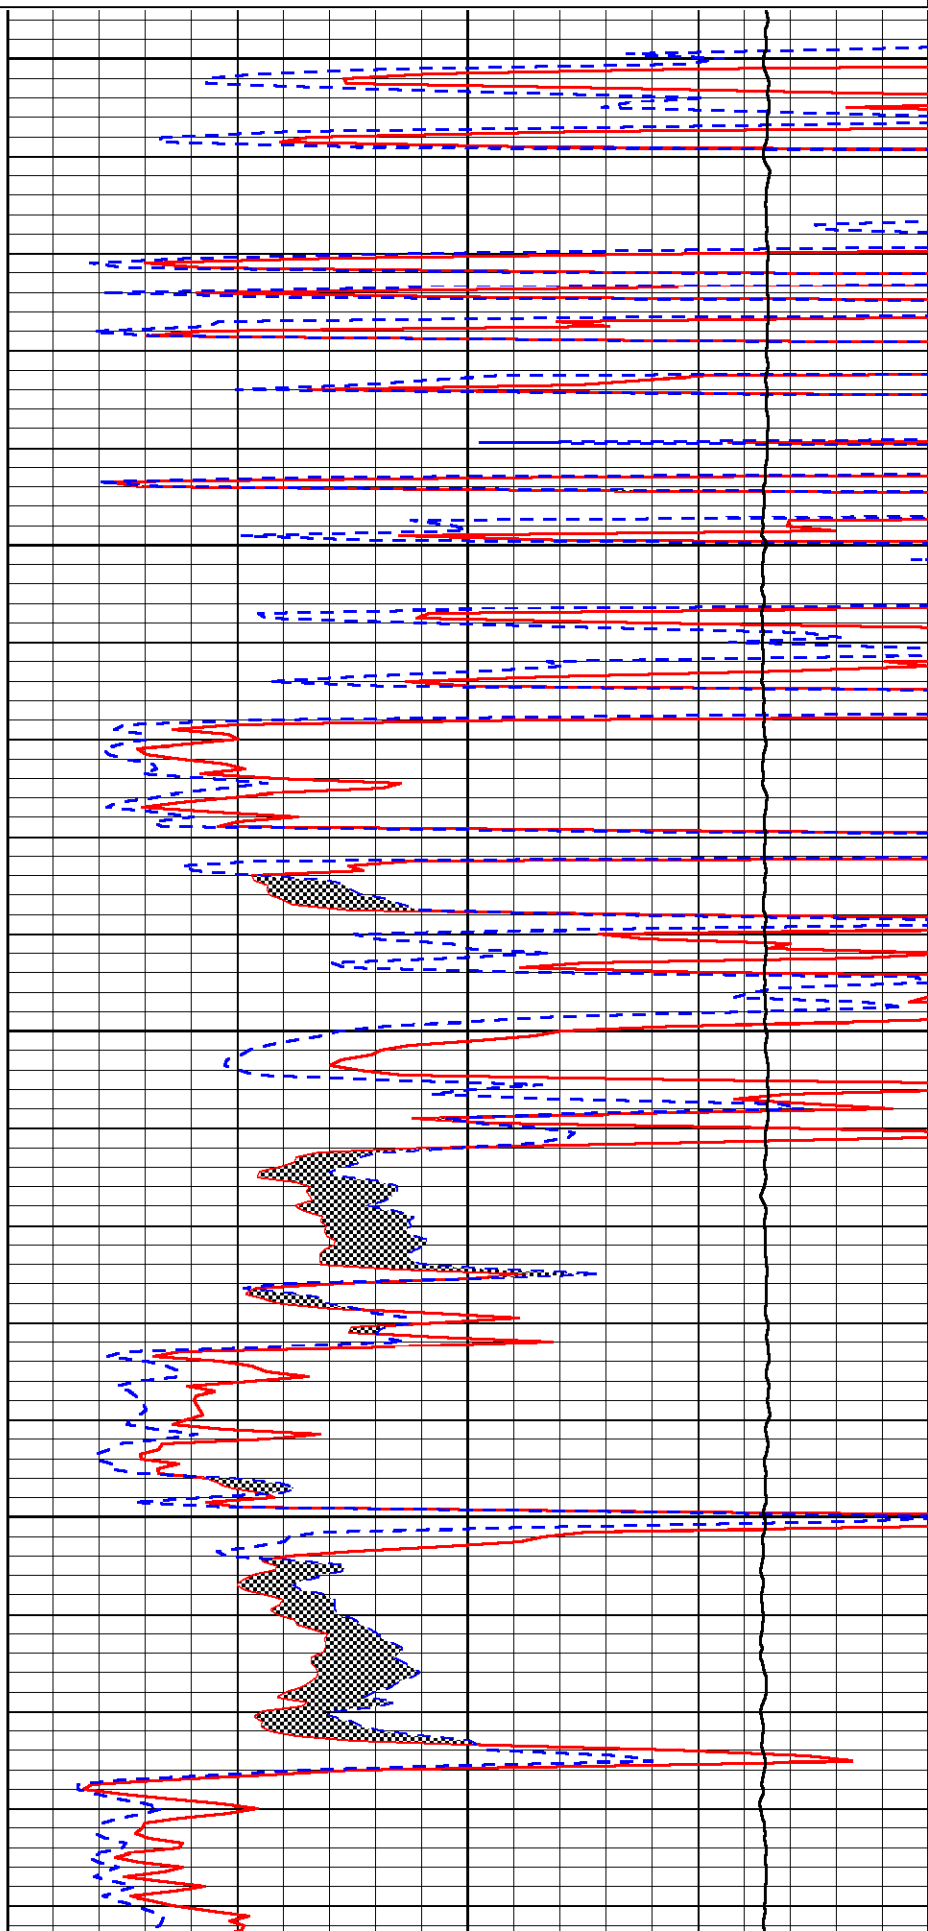

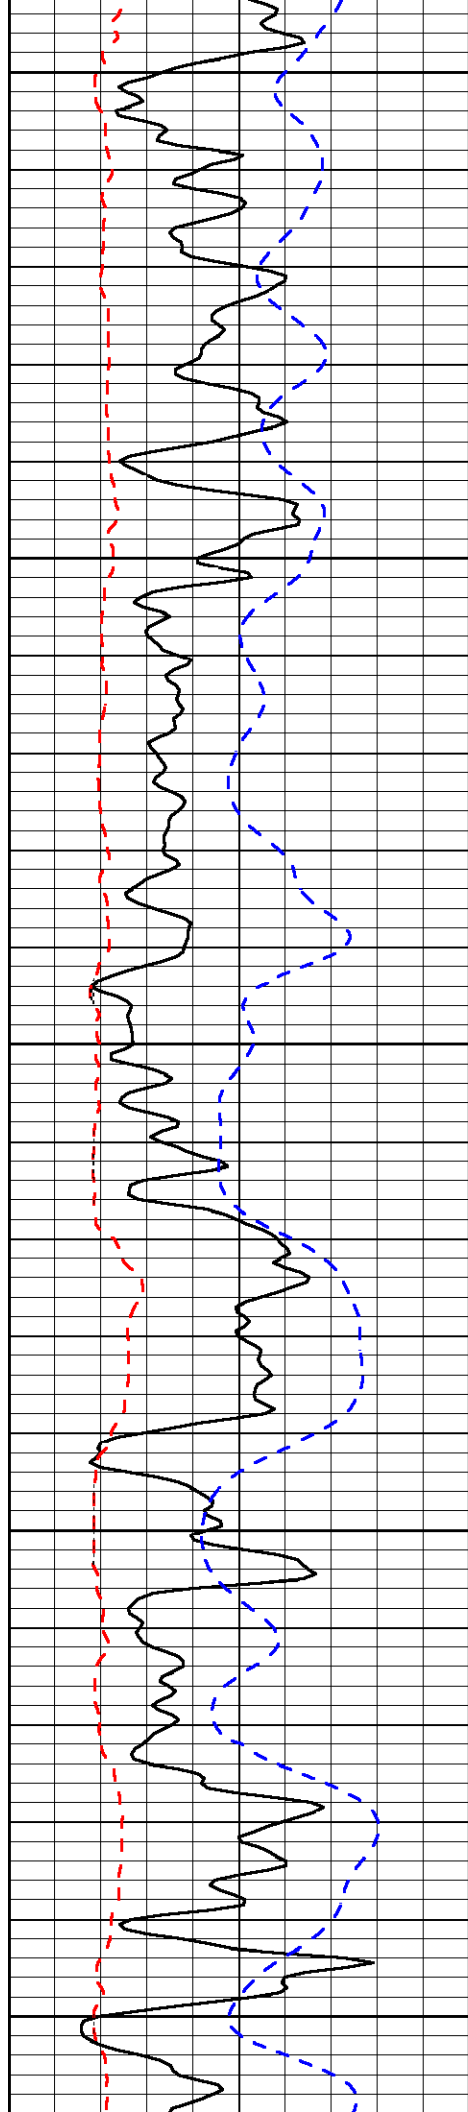


2800


2850

2900

2950

3000

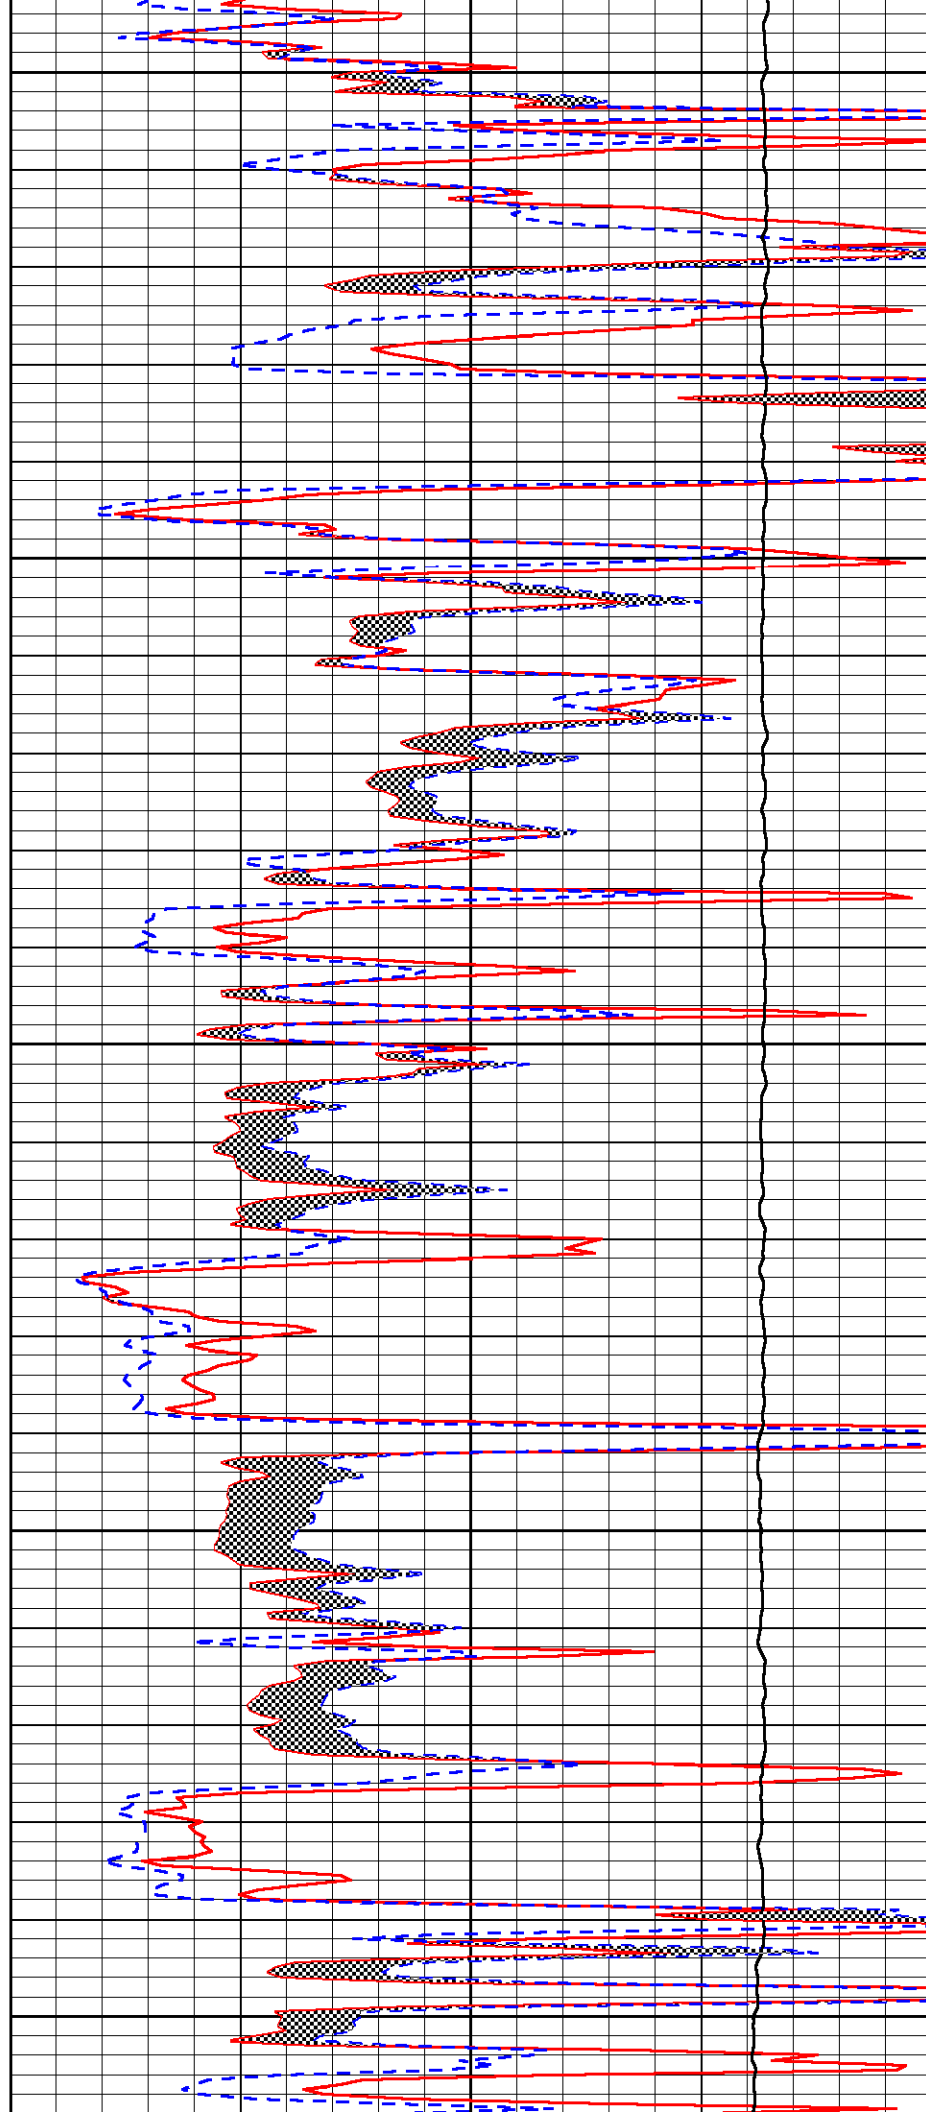

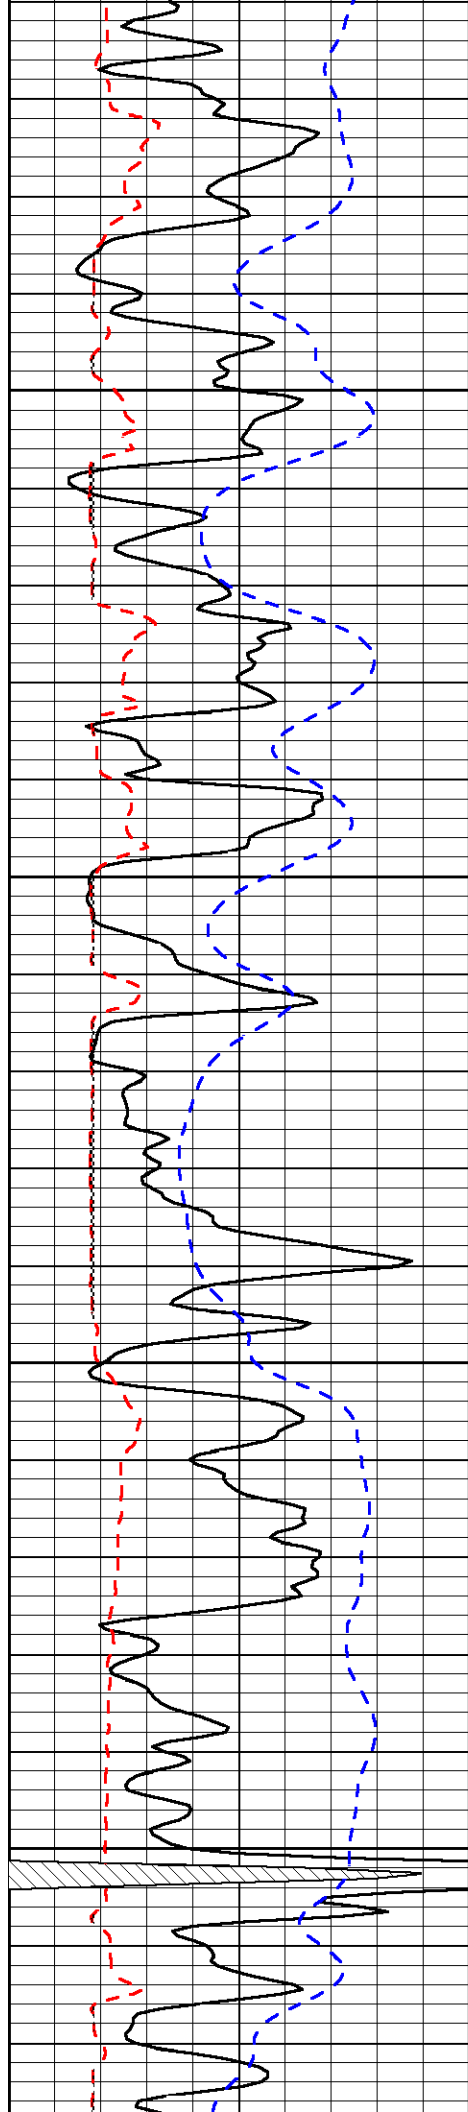



3050

3100

3150

3200

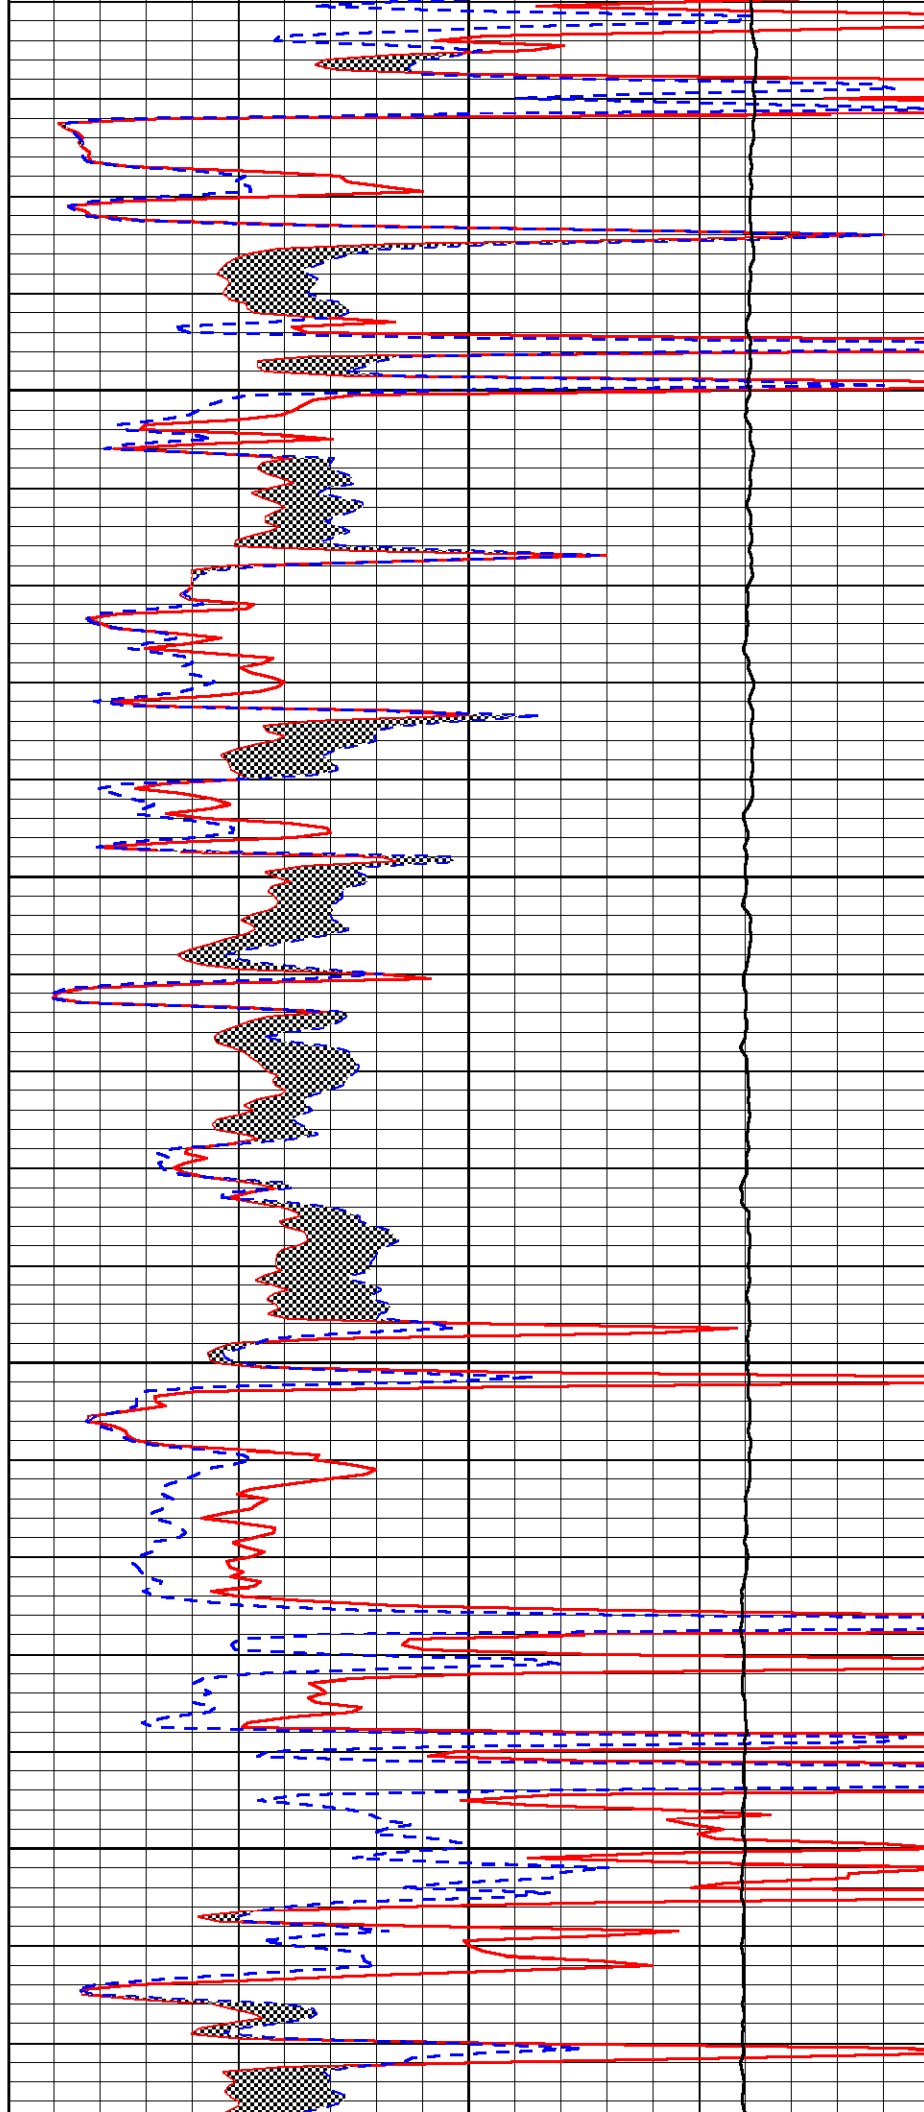

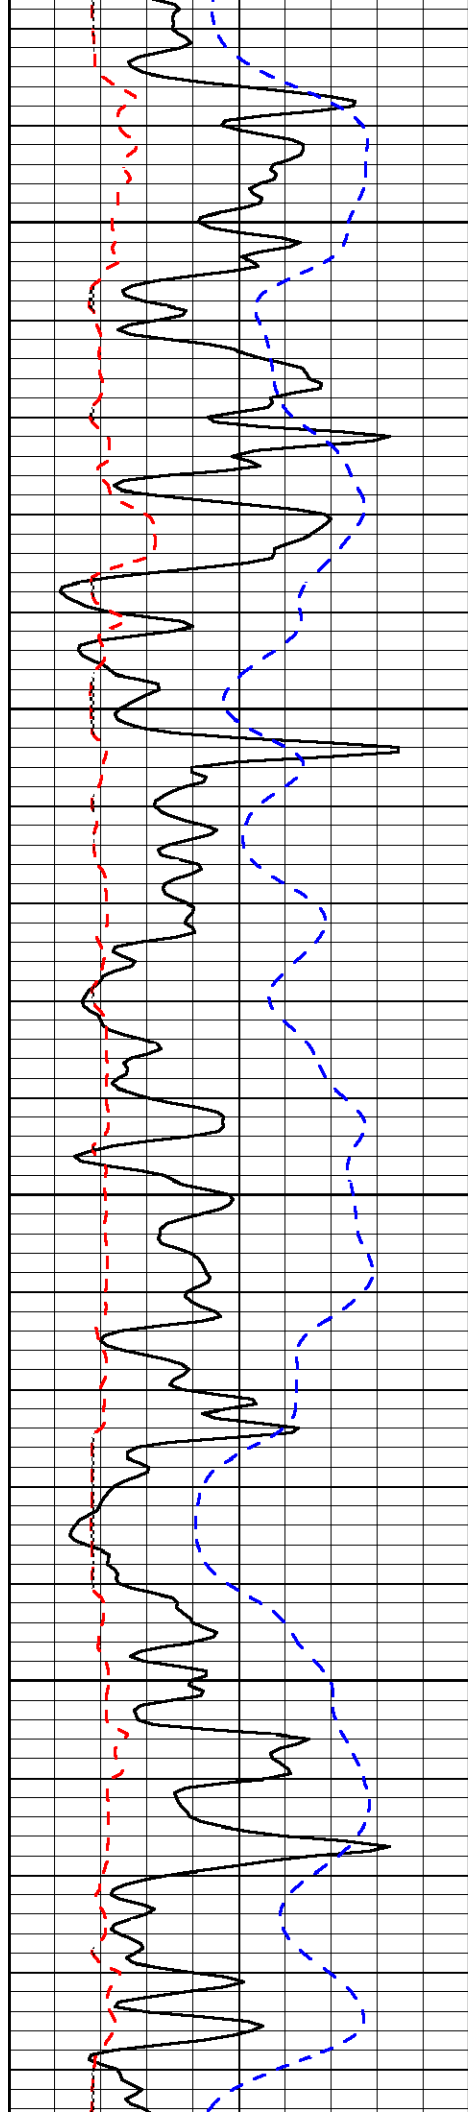



3250

3300

3350

3400

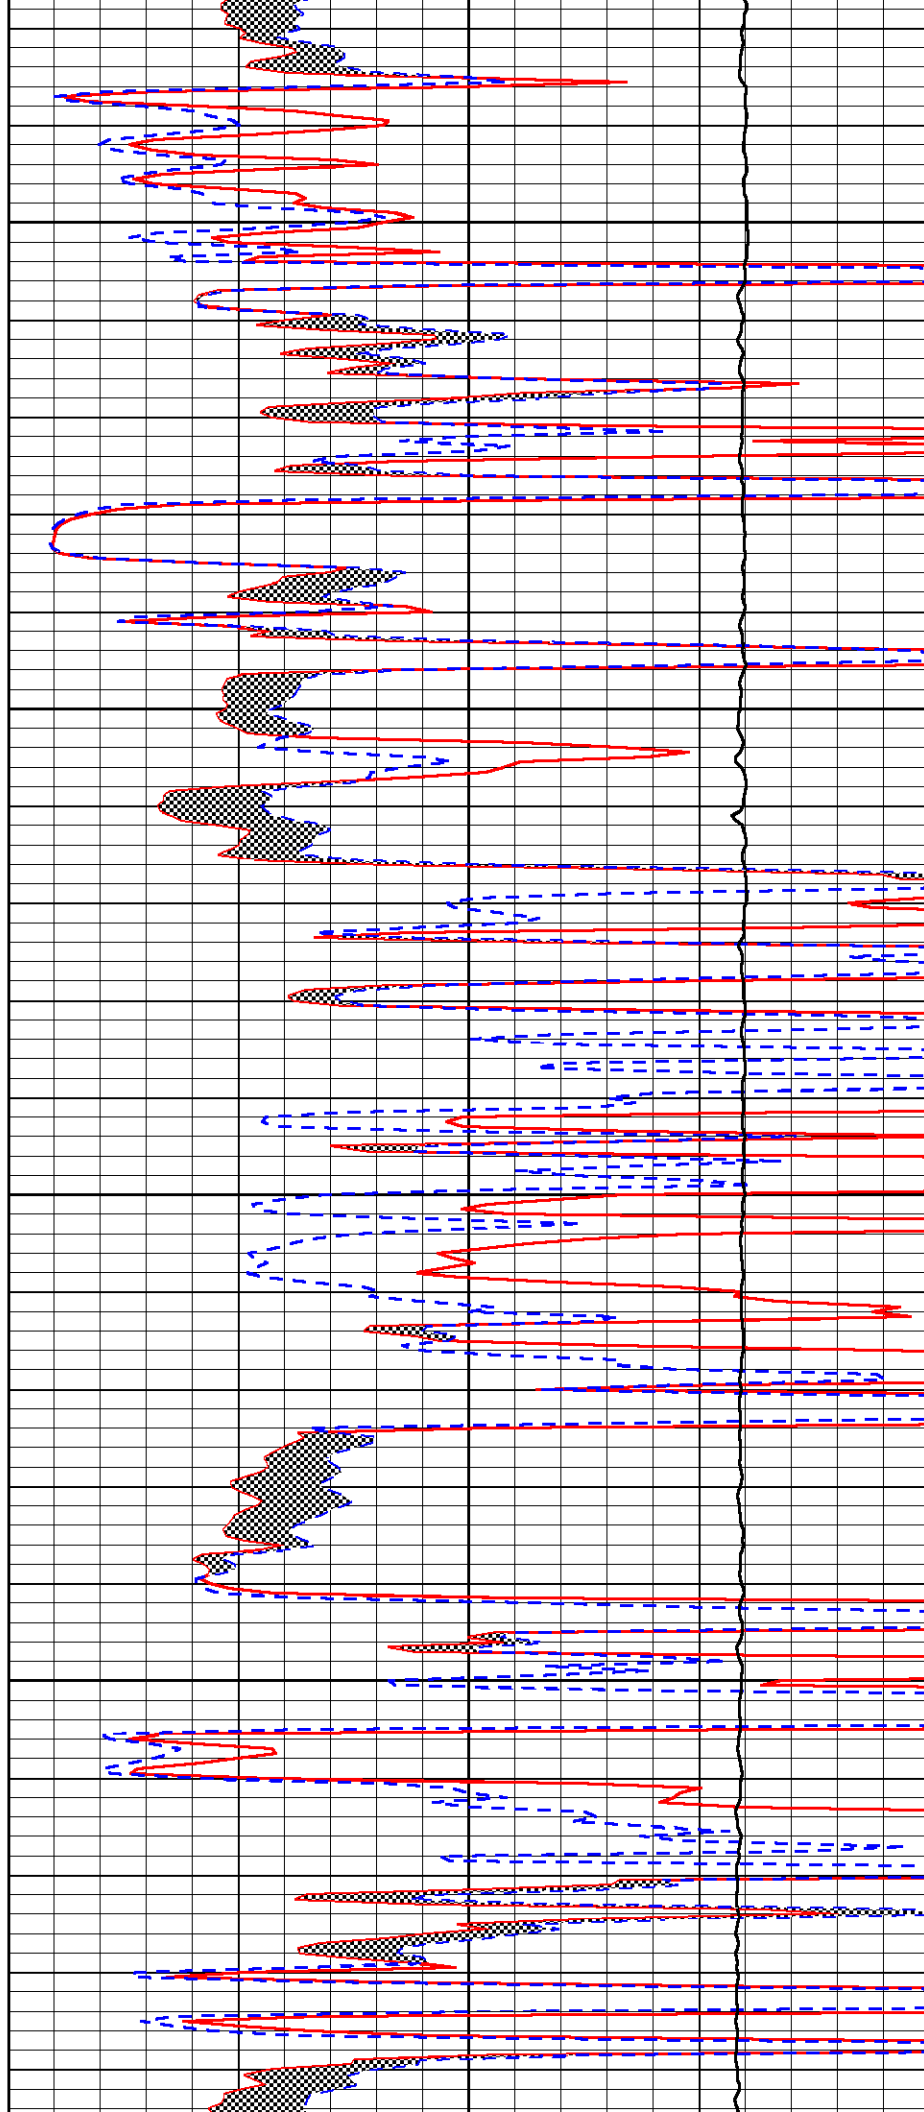

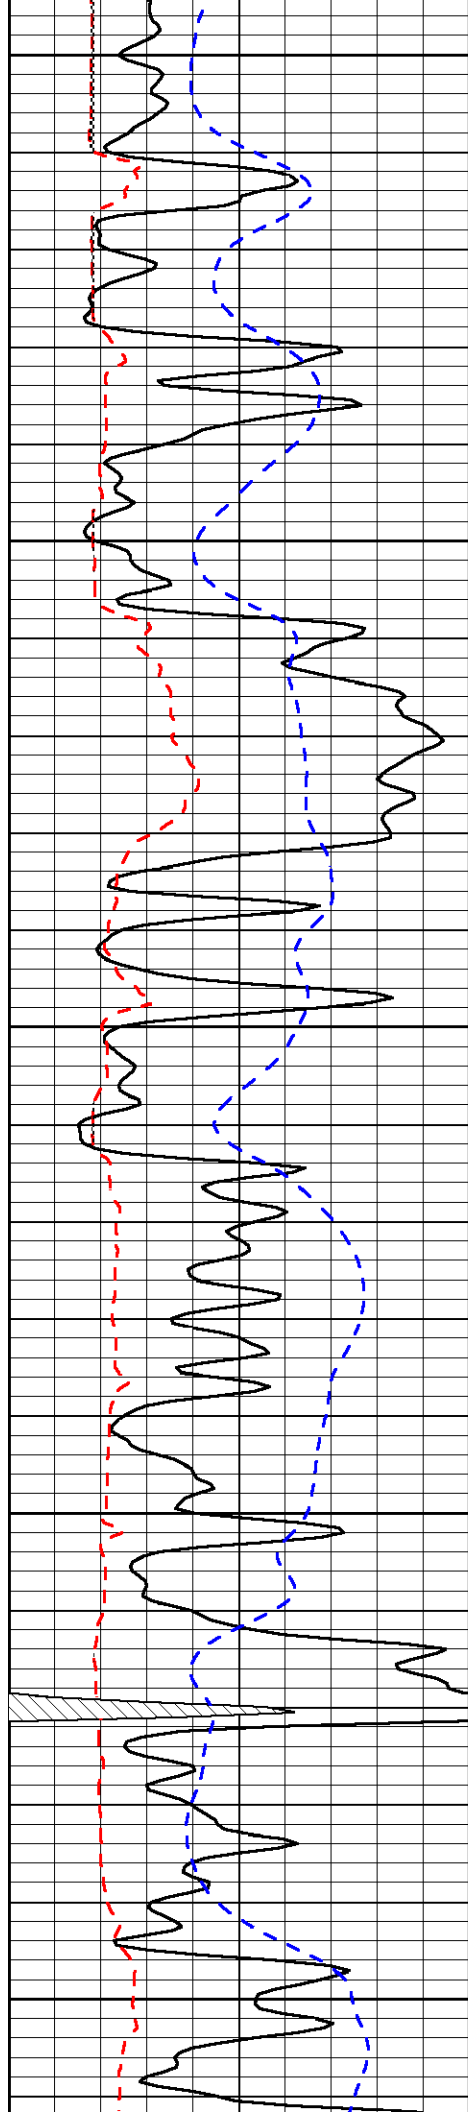


3450


3500

3550

3600

3650

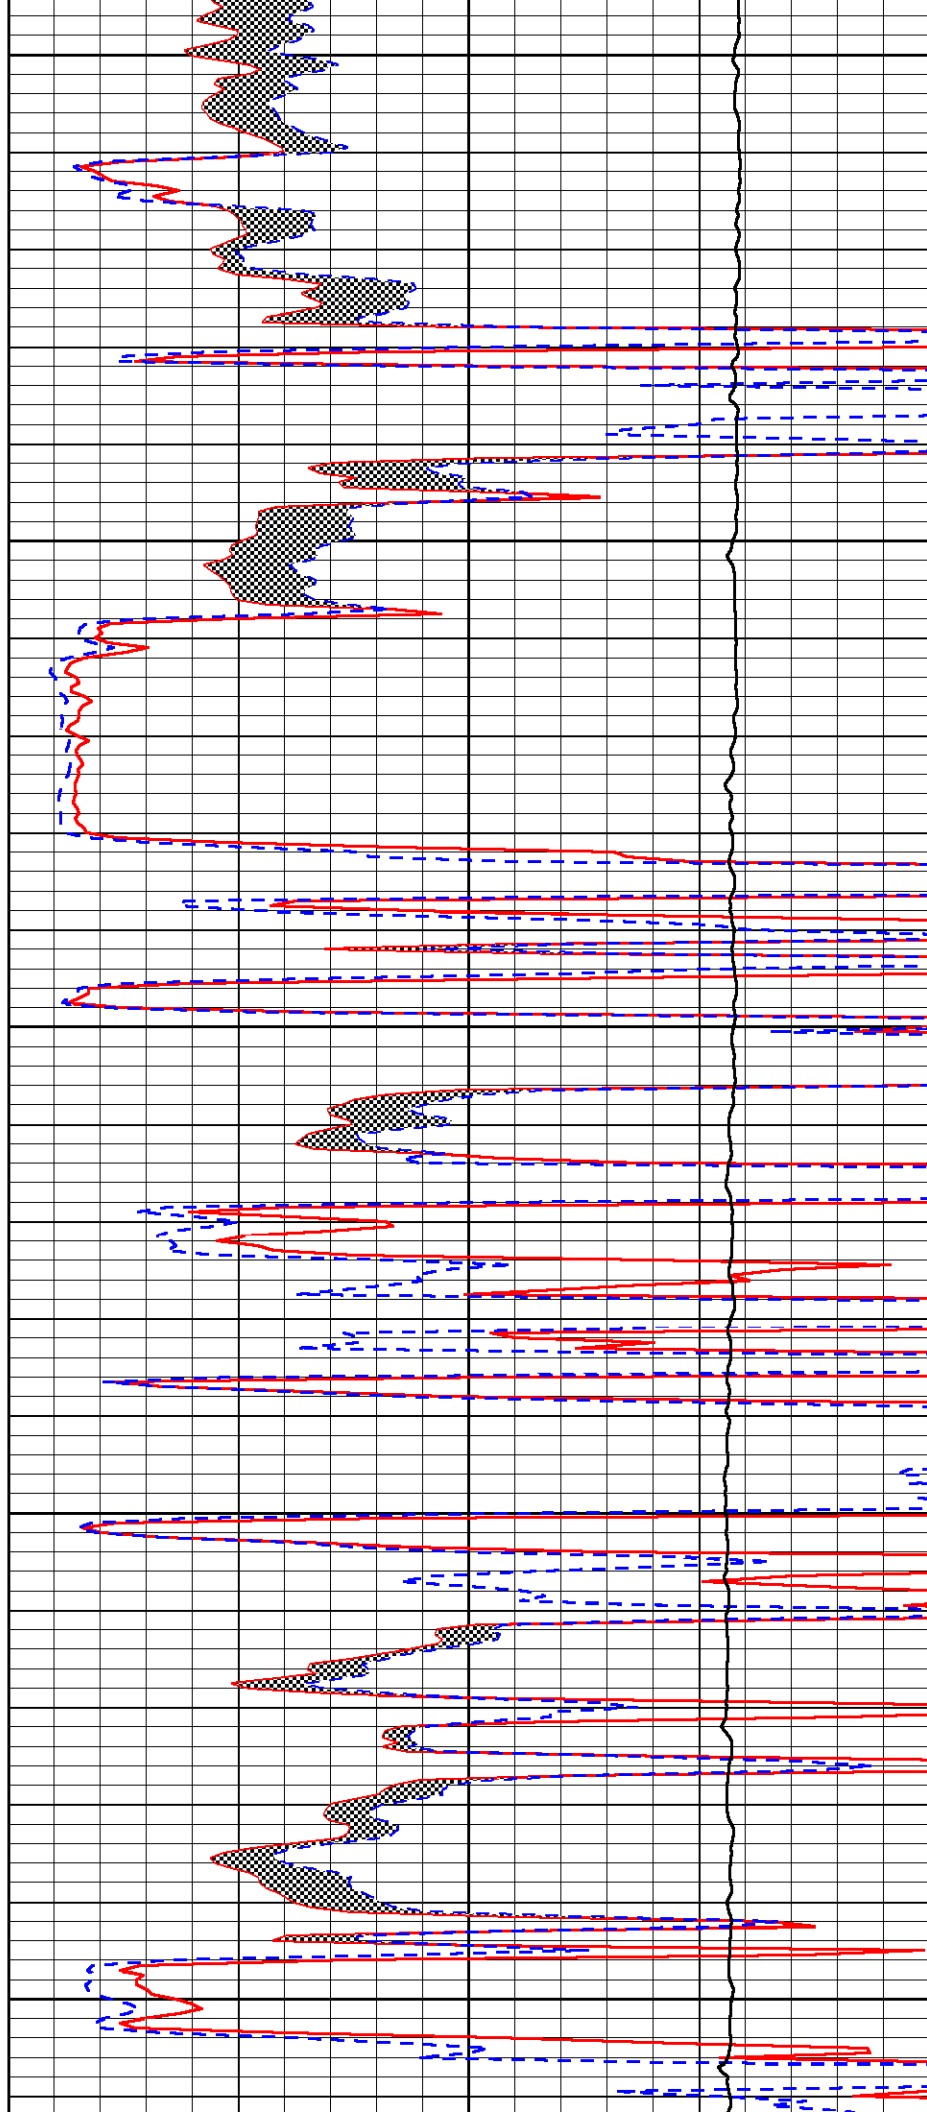

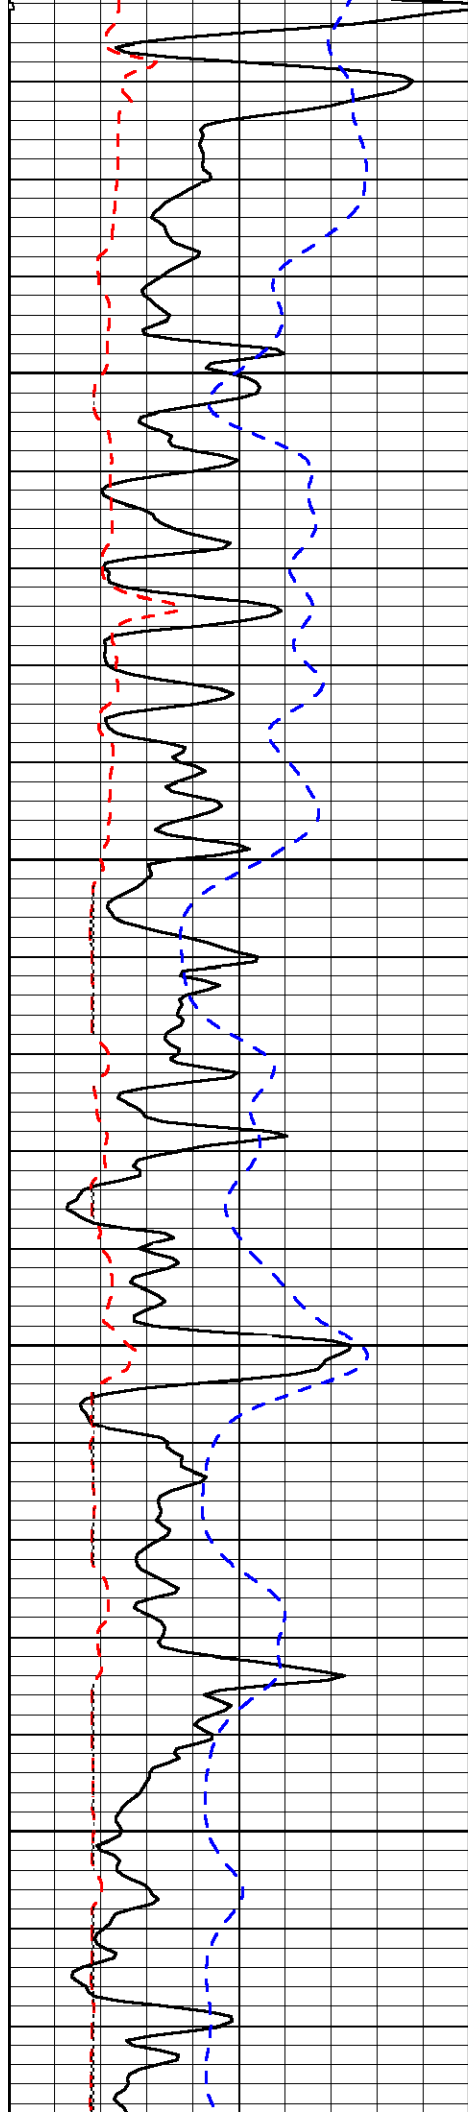



3700

3750

3800

3850

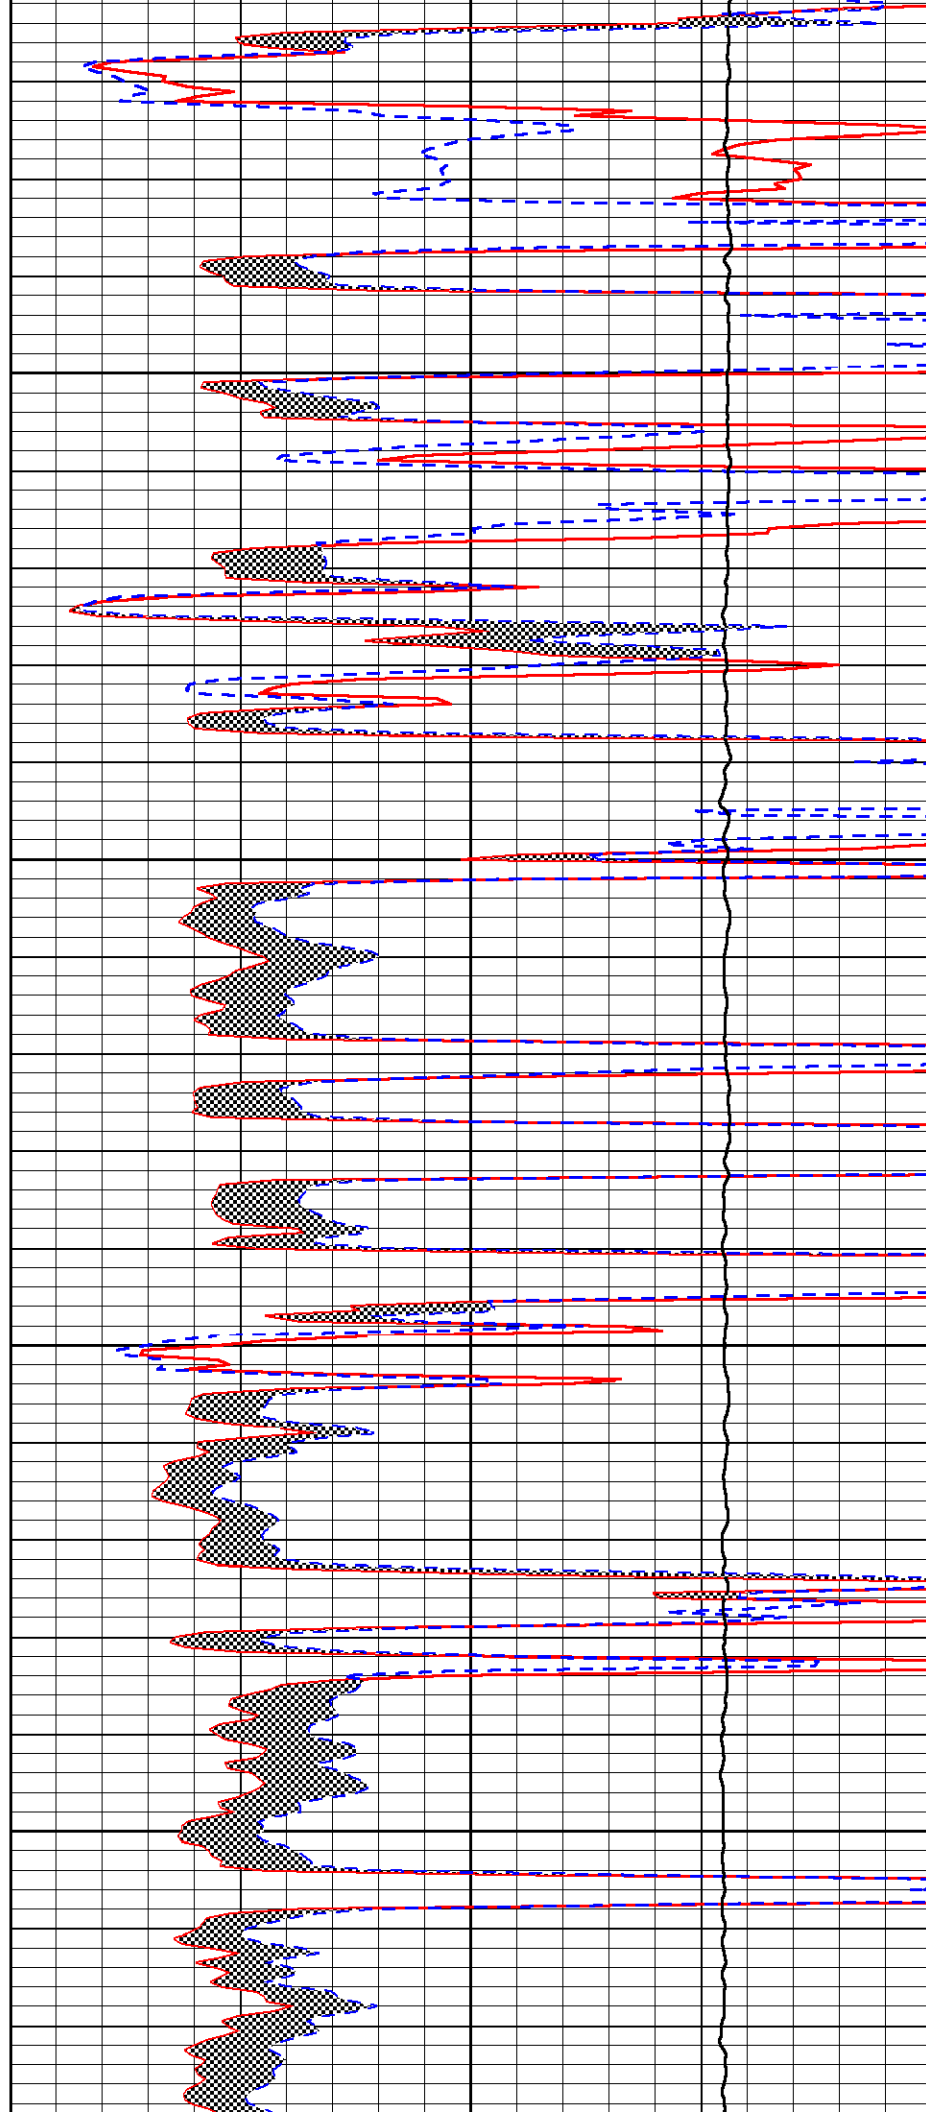

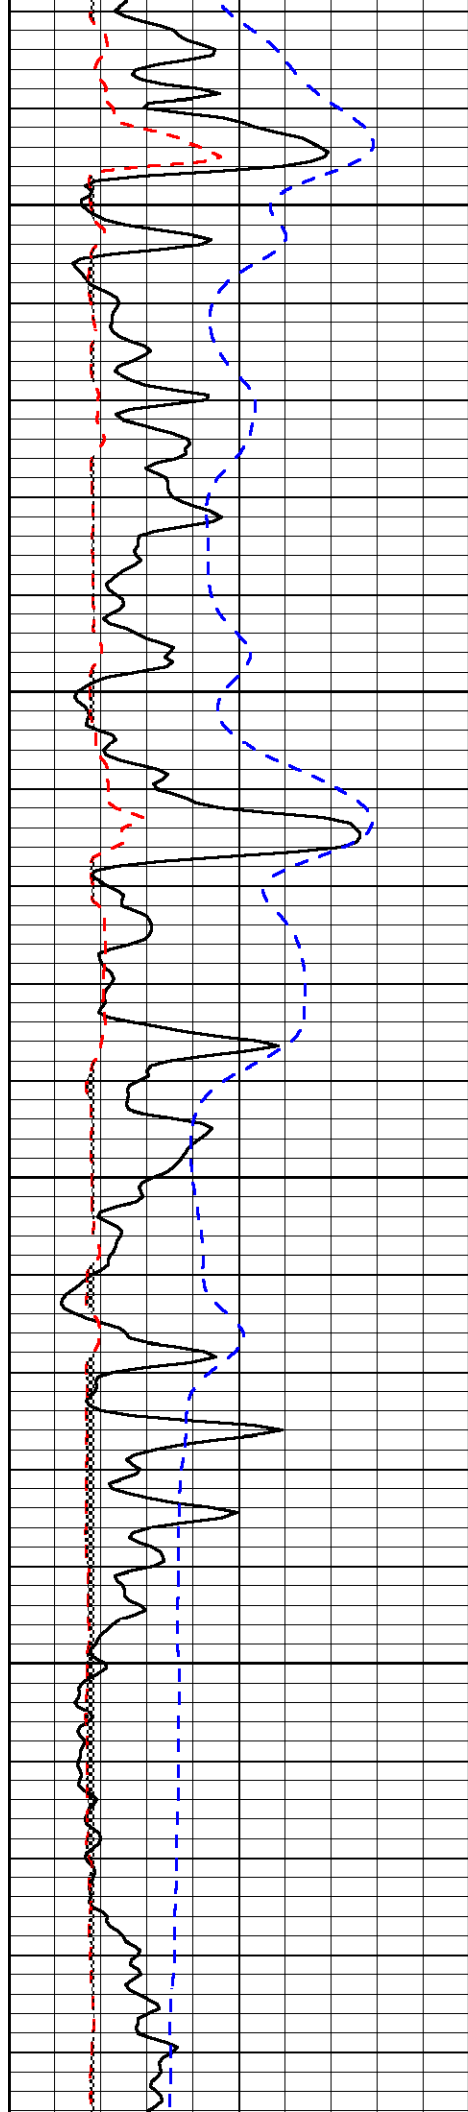



3900

3950

4000

4050

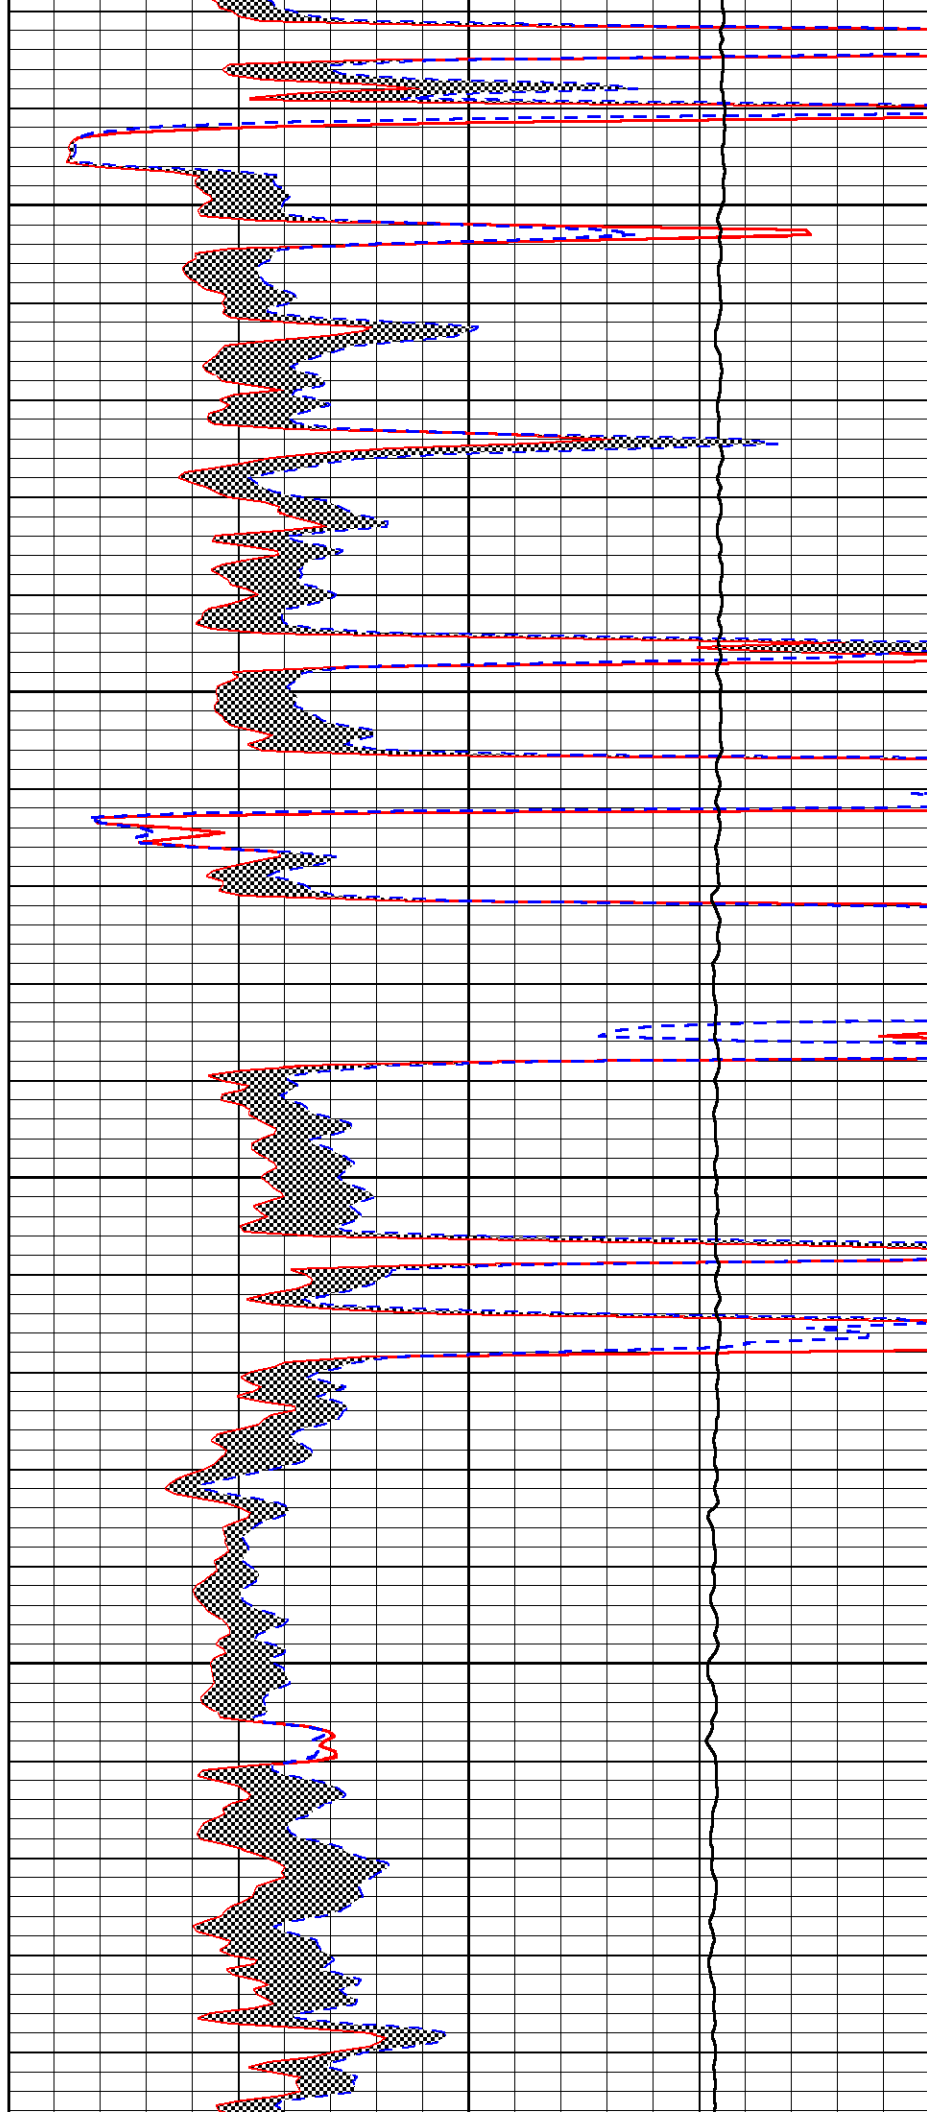

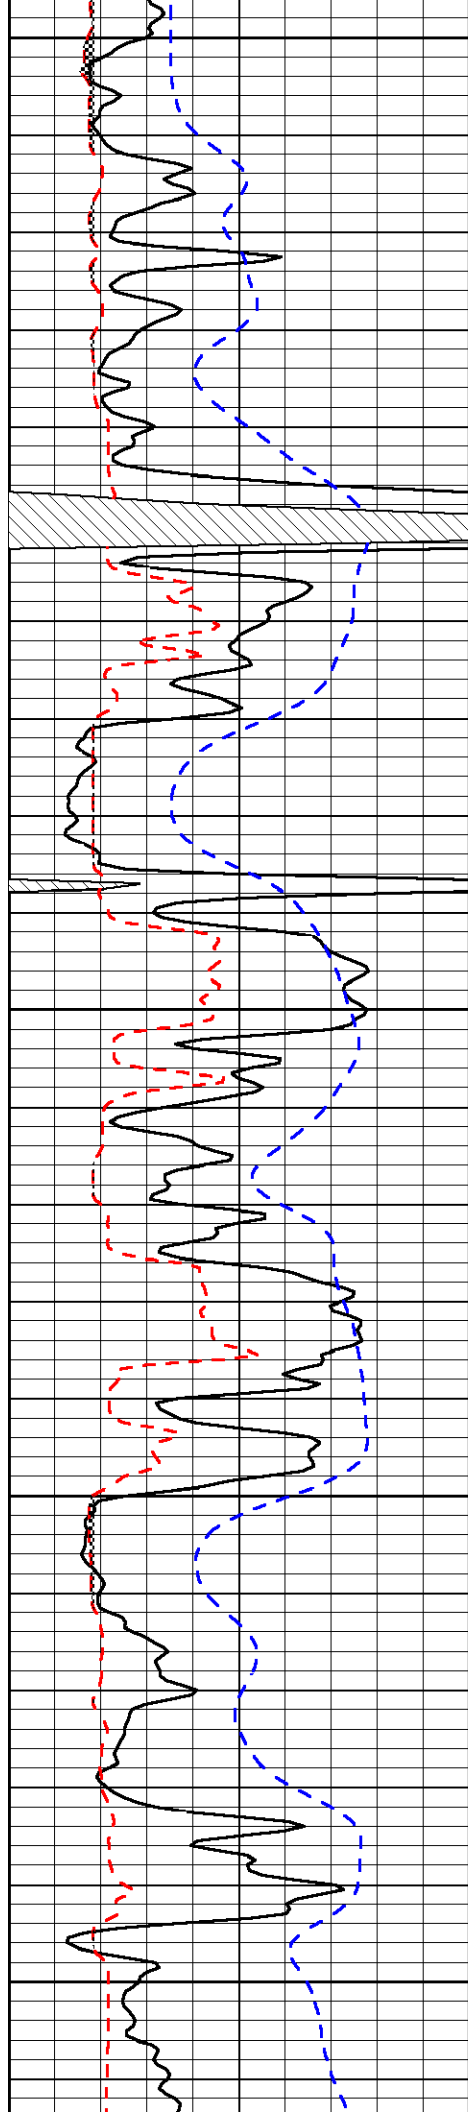


4100


4150

4200

4250

4300

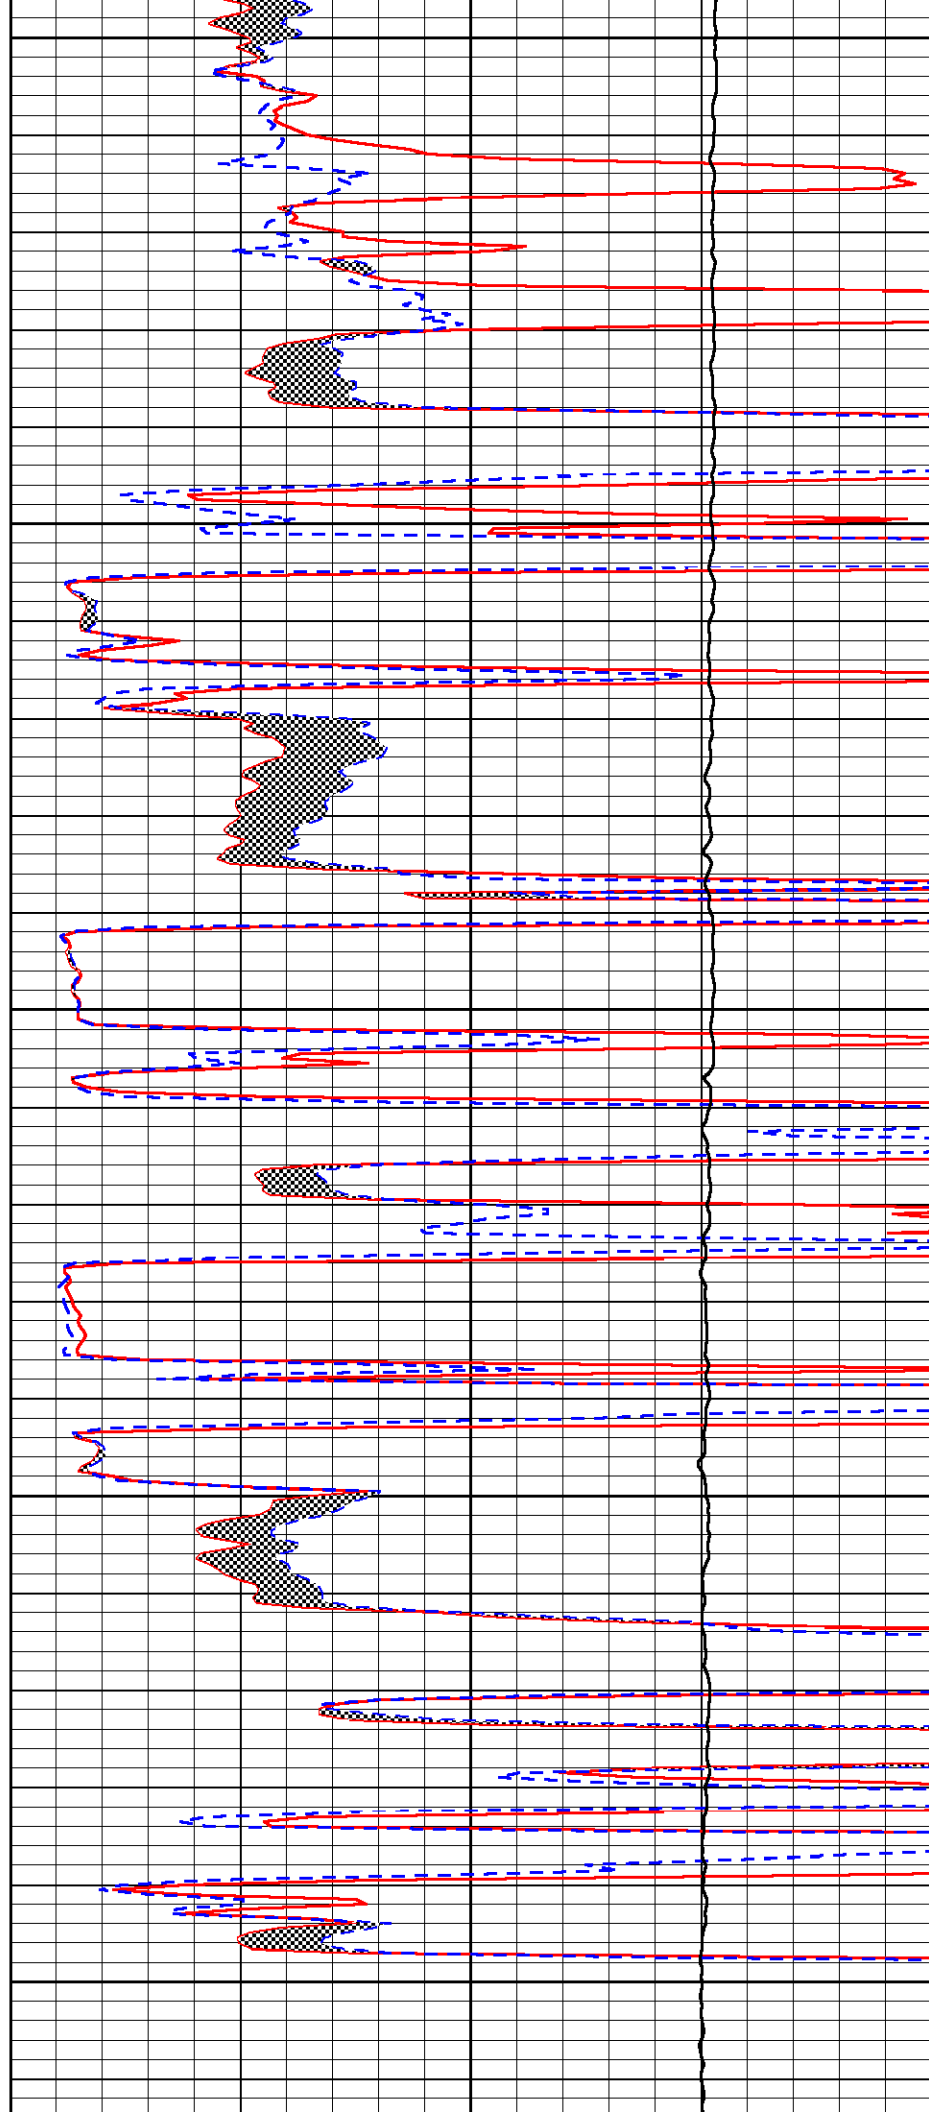

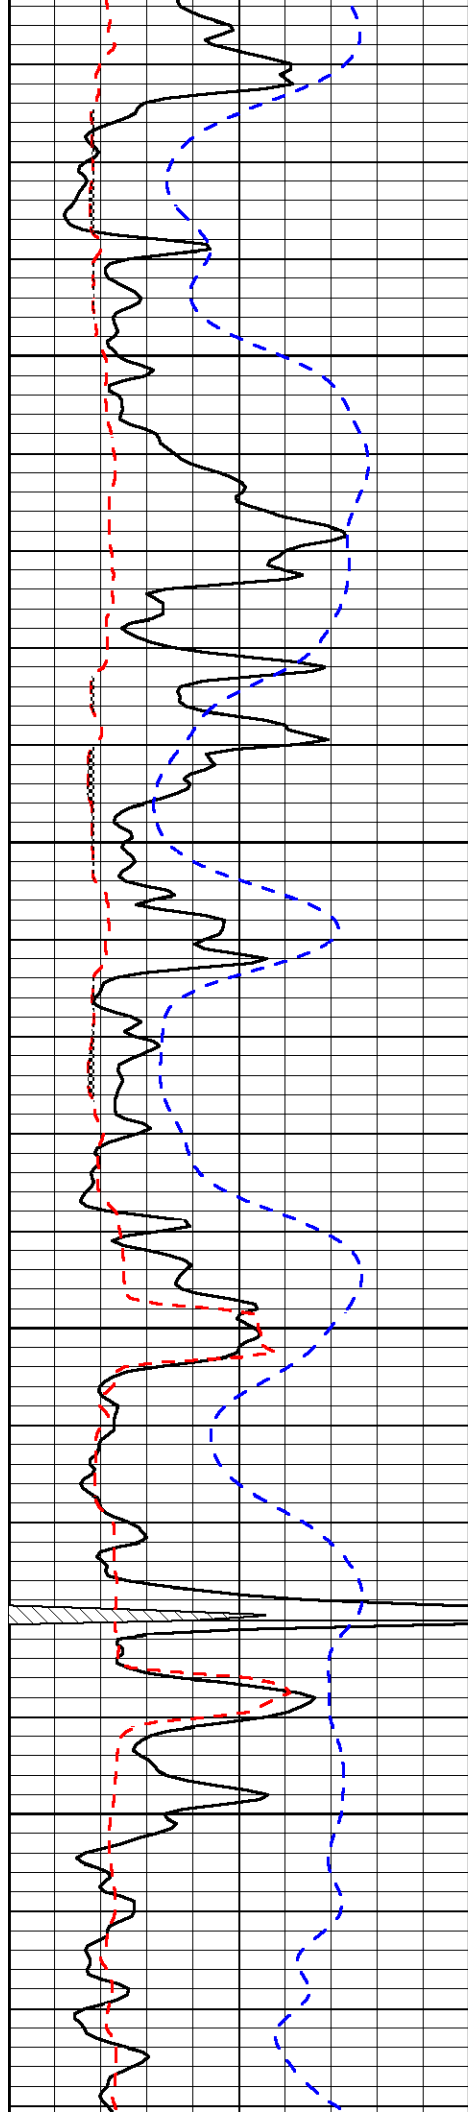



4350

4400

4450

4500

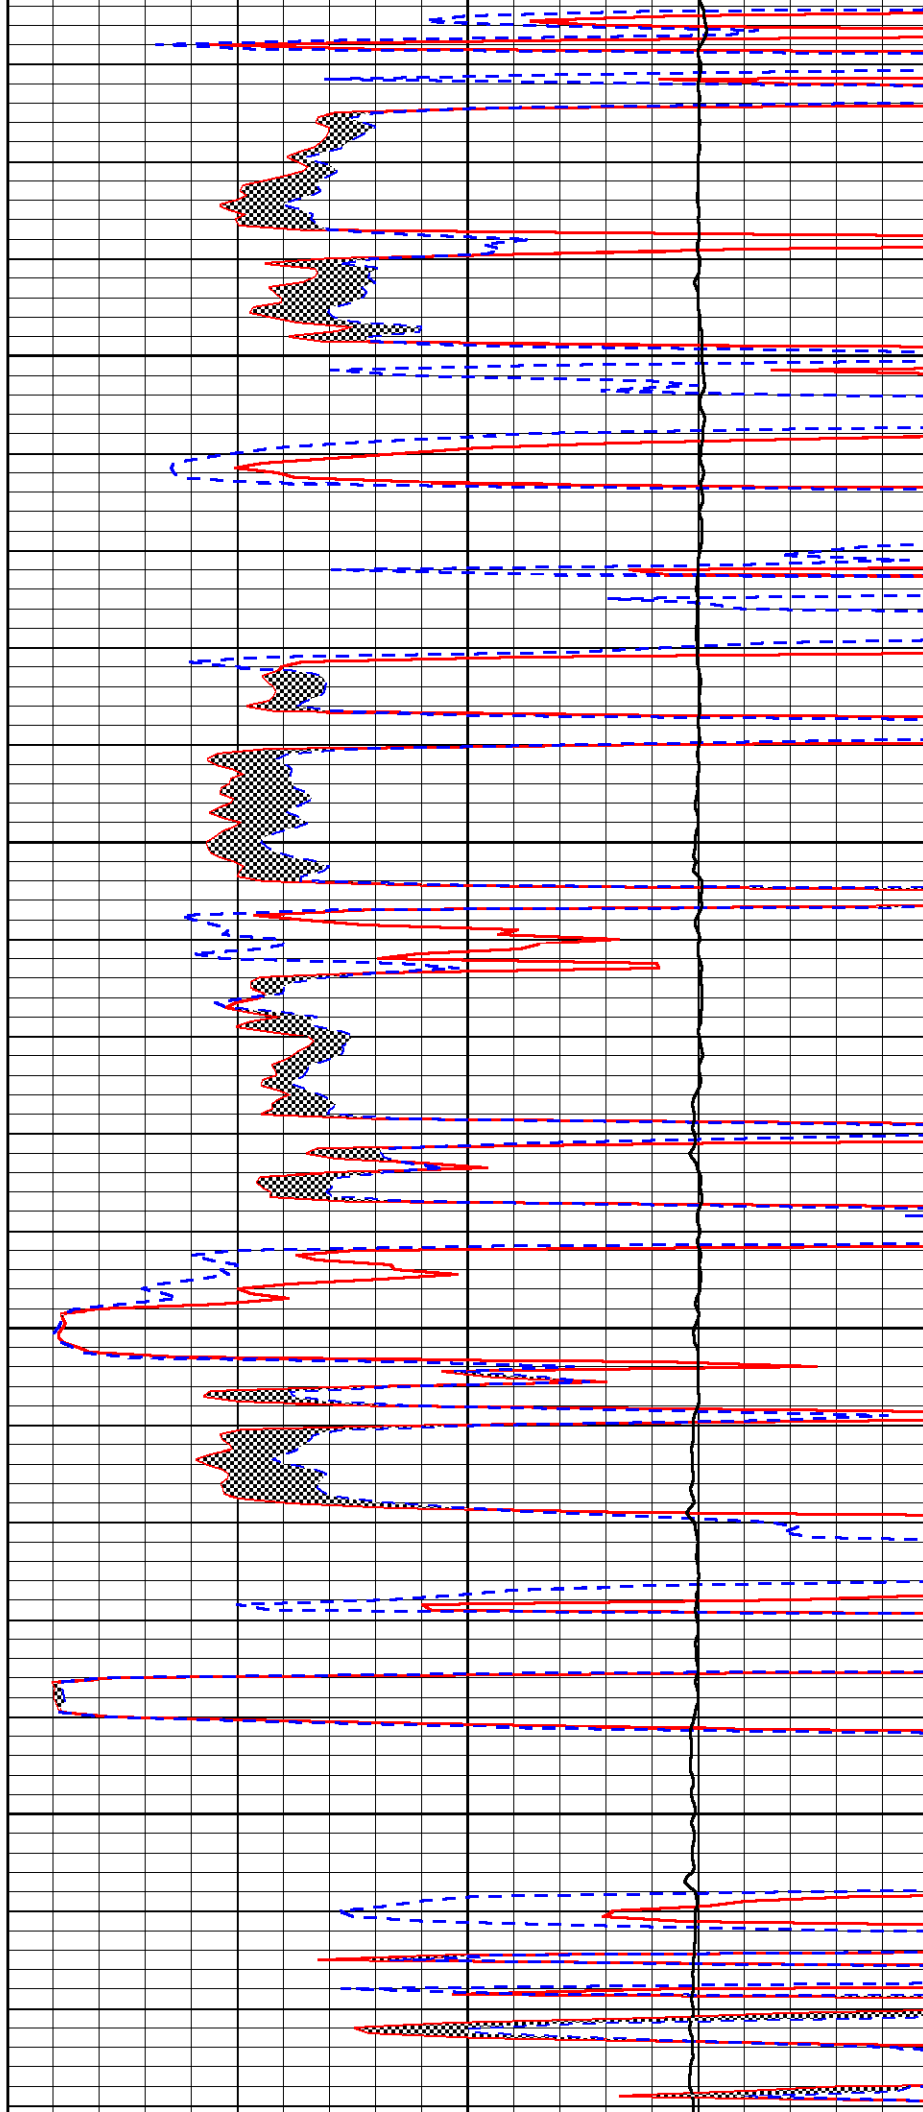

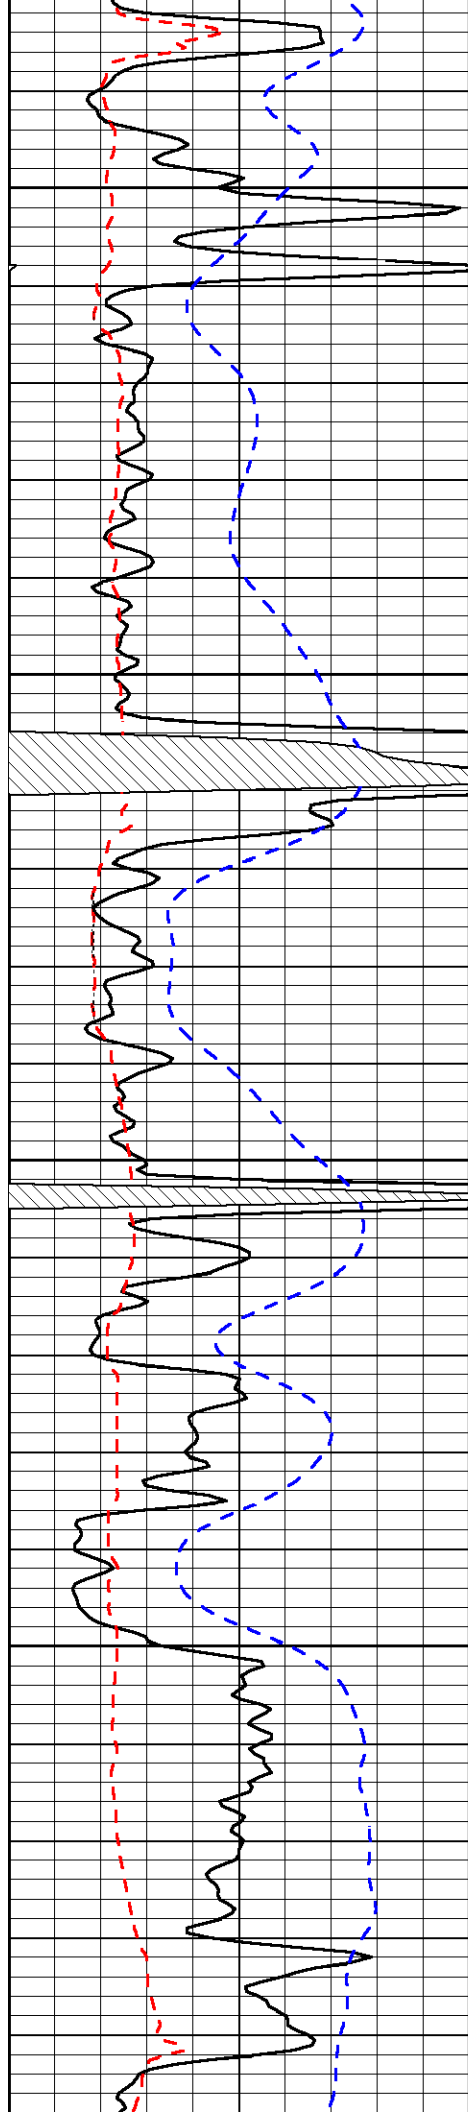



4550

4600

4650

4700

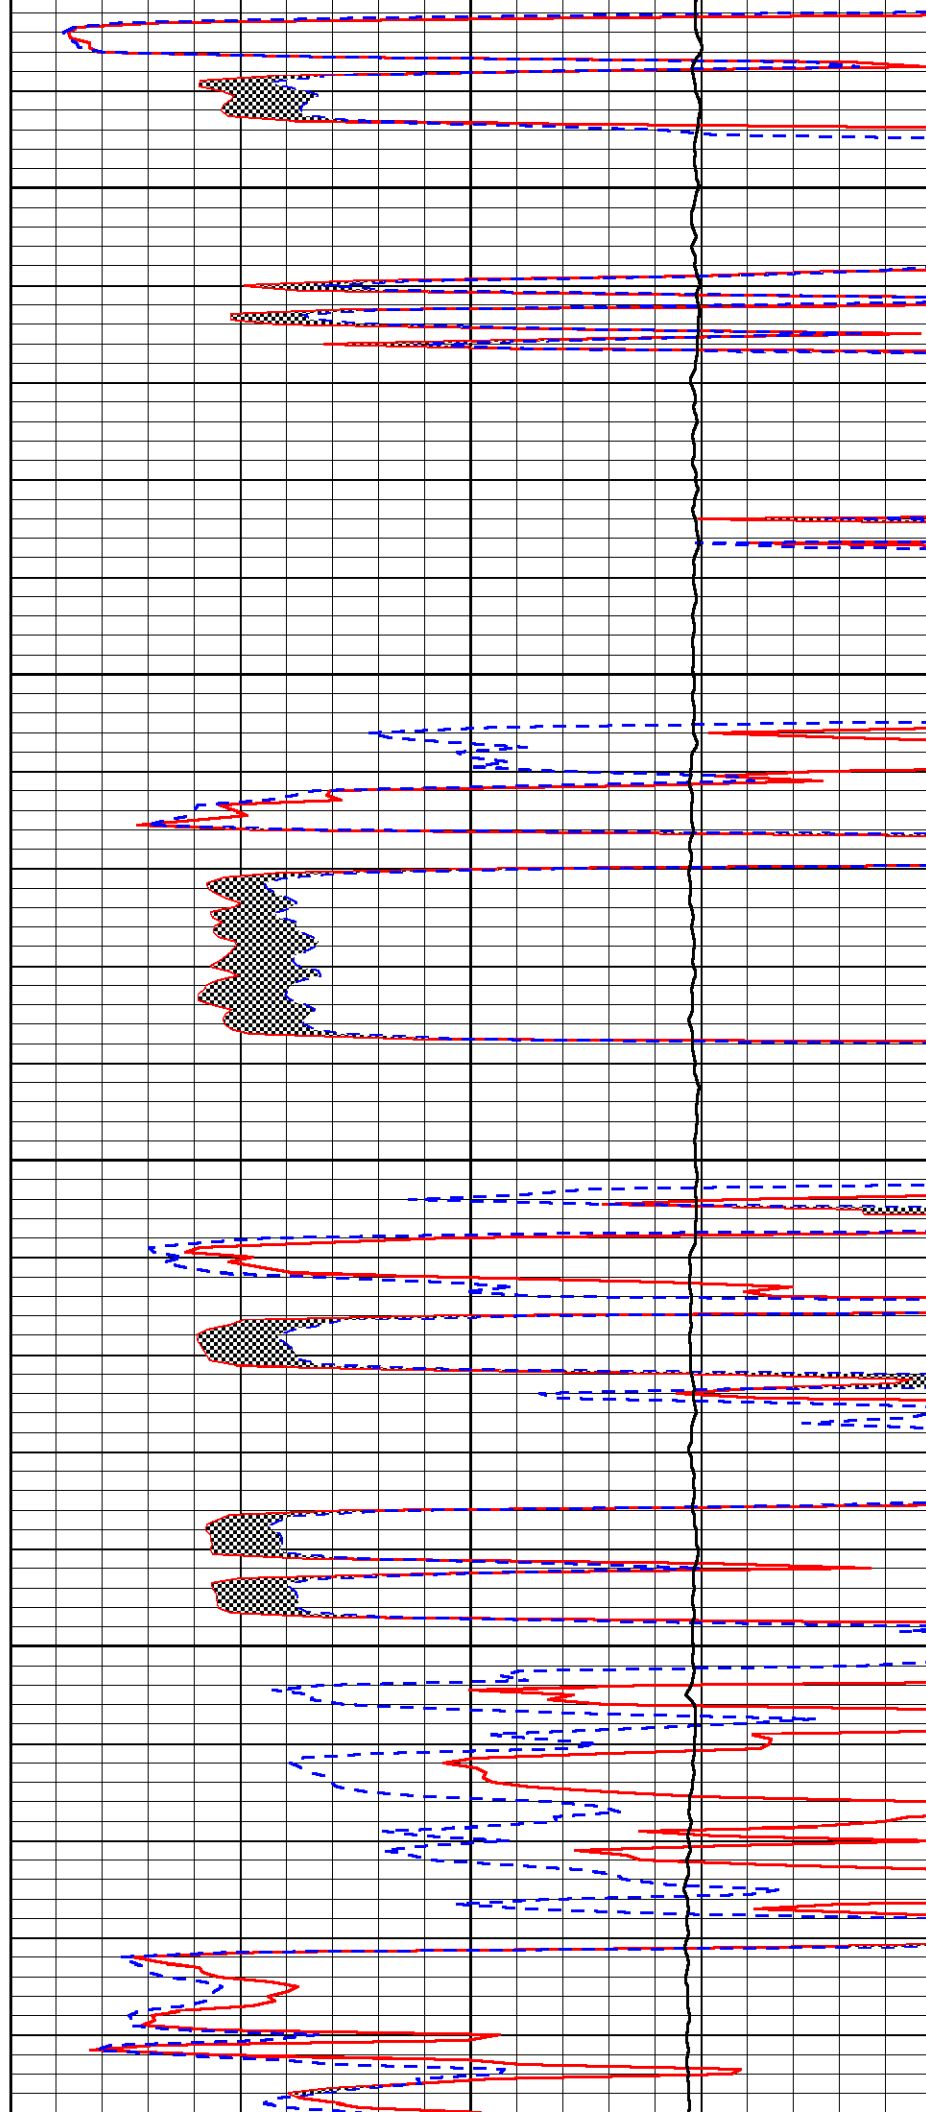

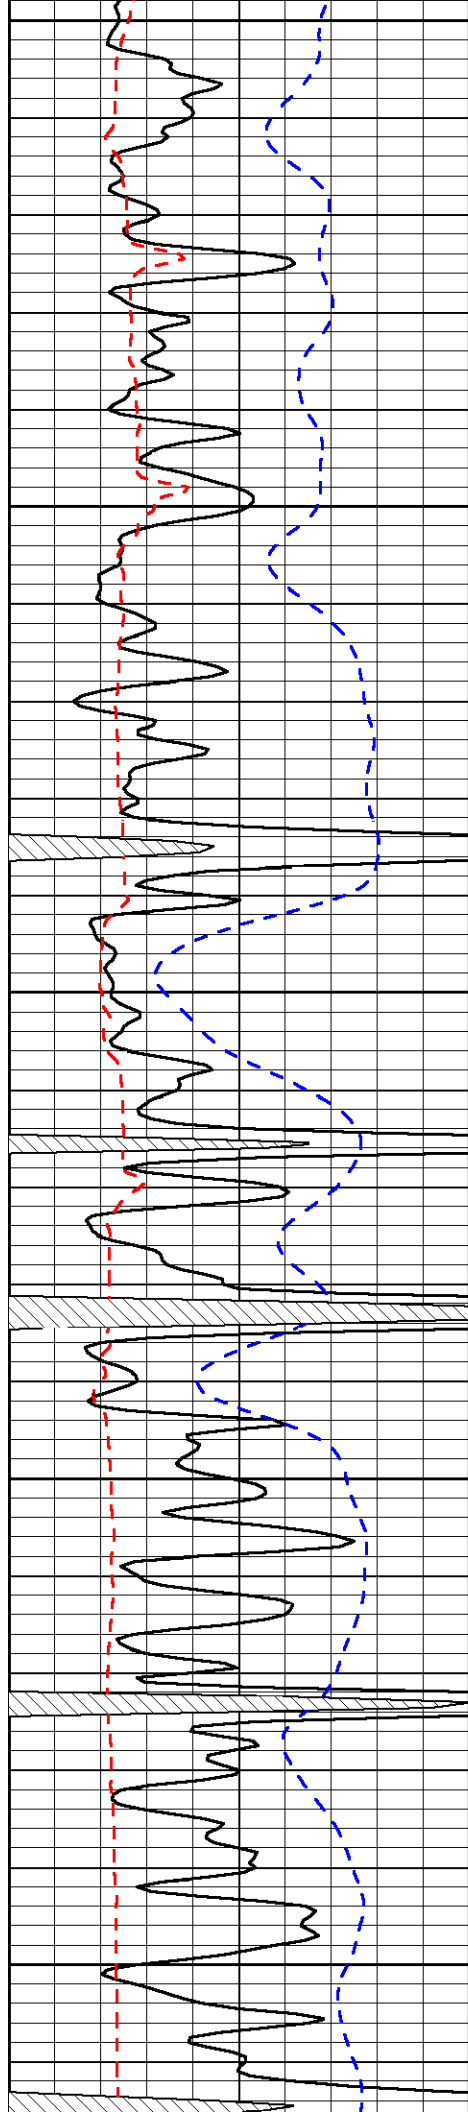


4750


4800

4850

4900

4950

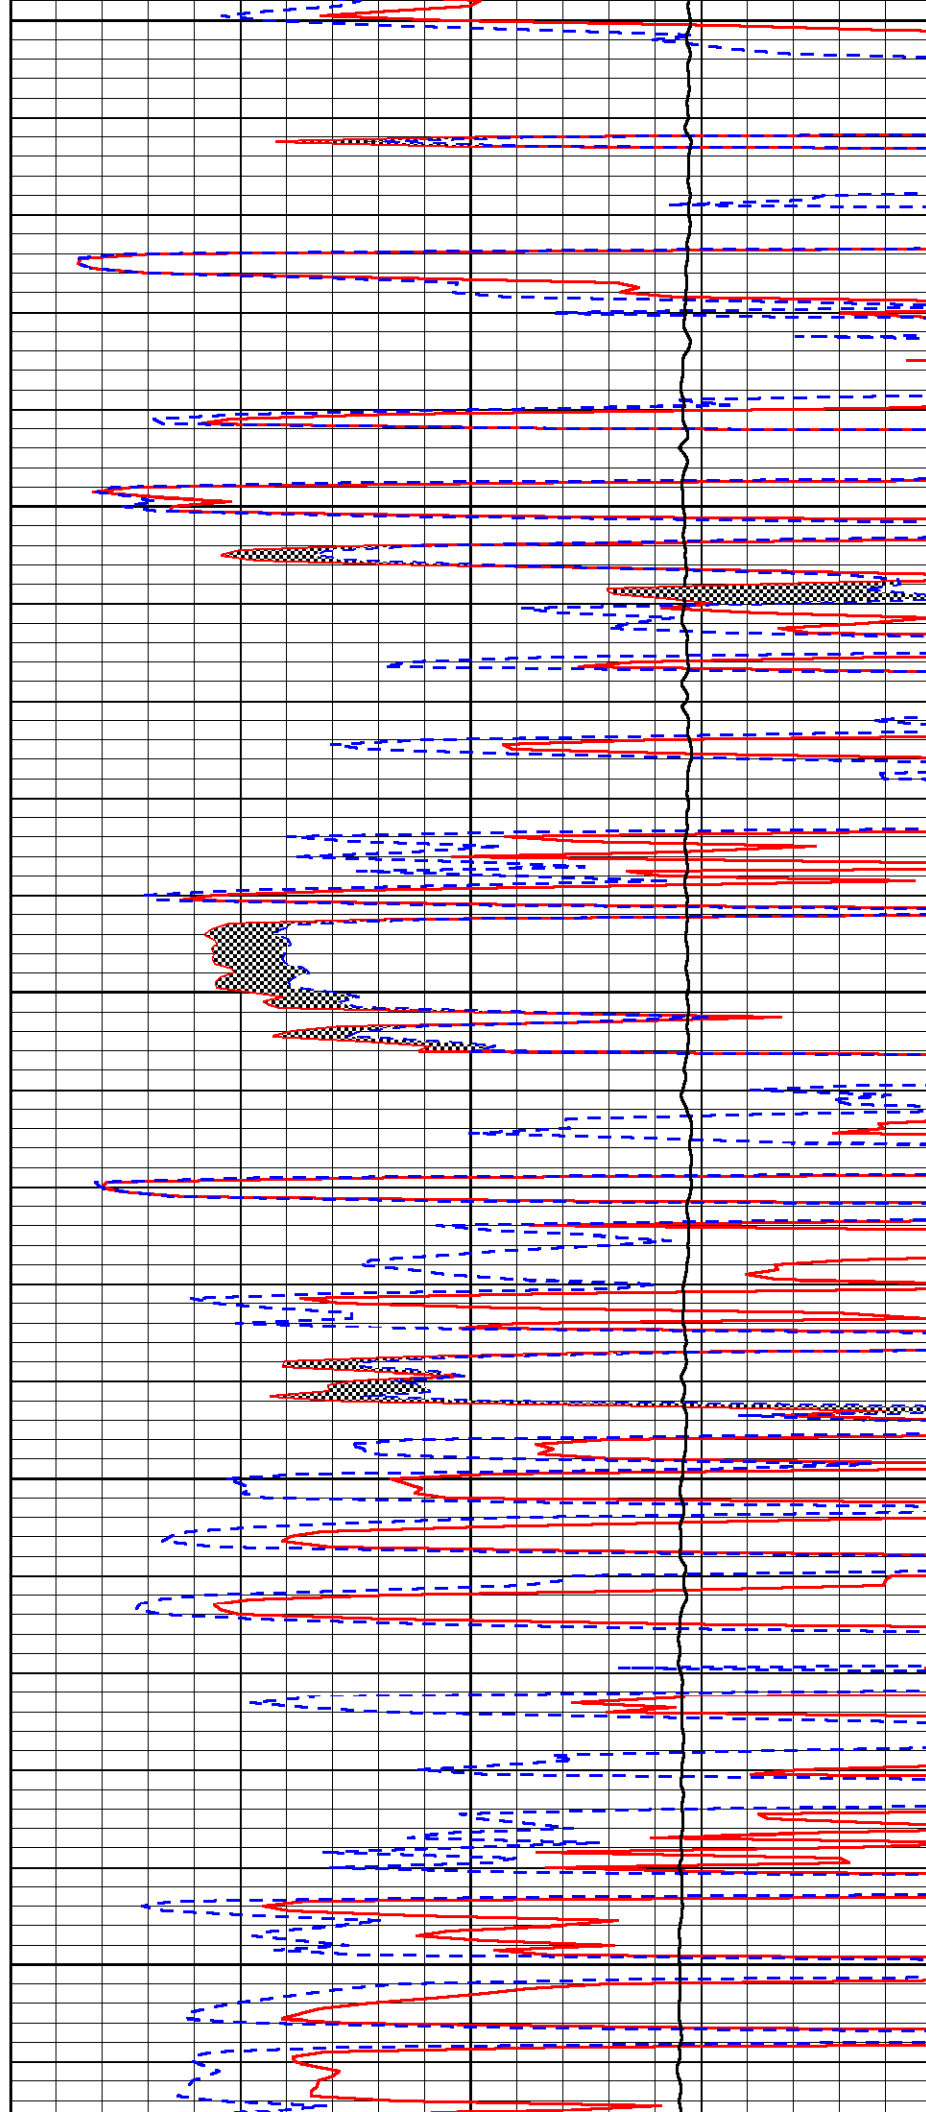

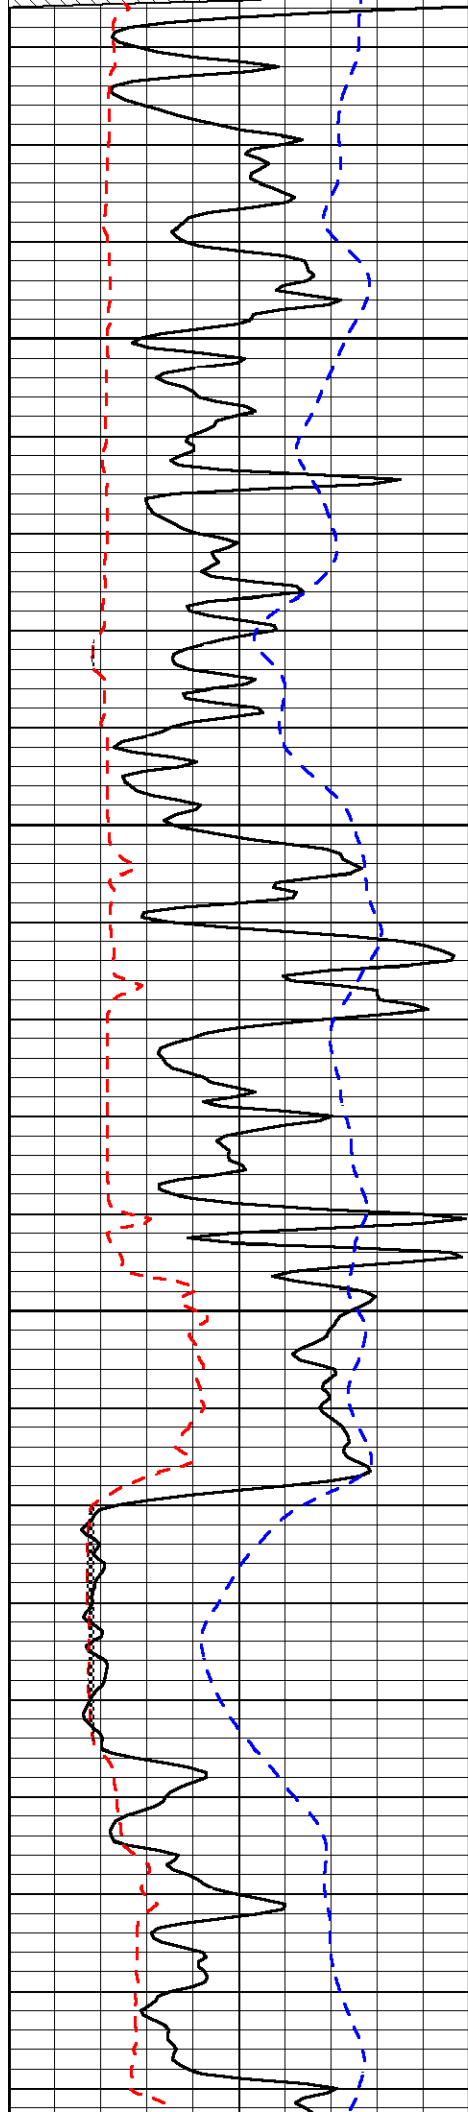



5000

5050

5100

5150

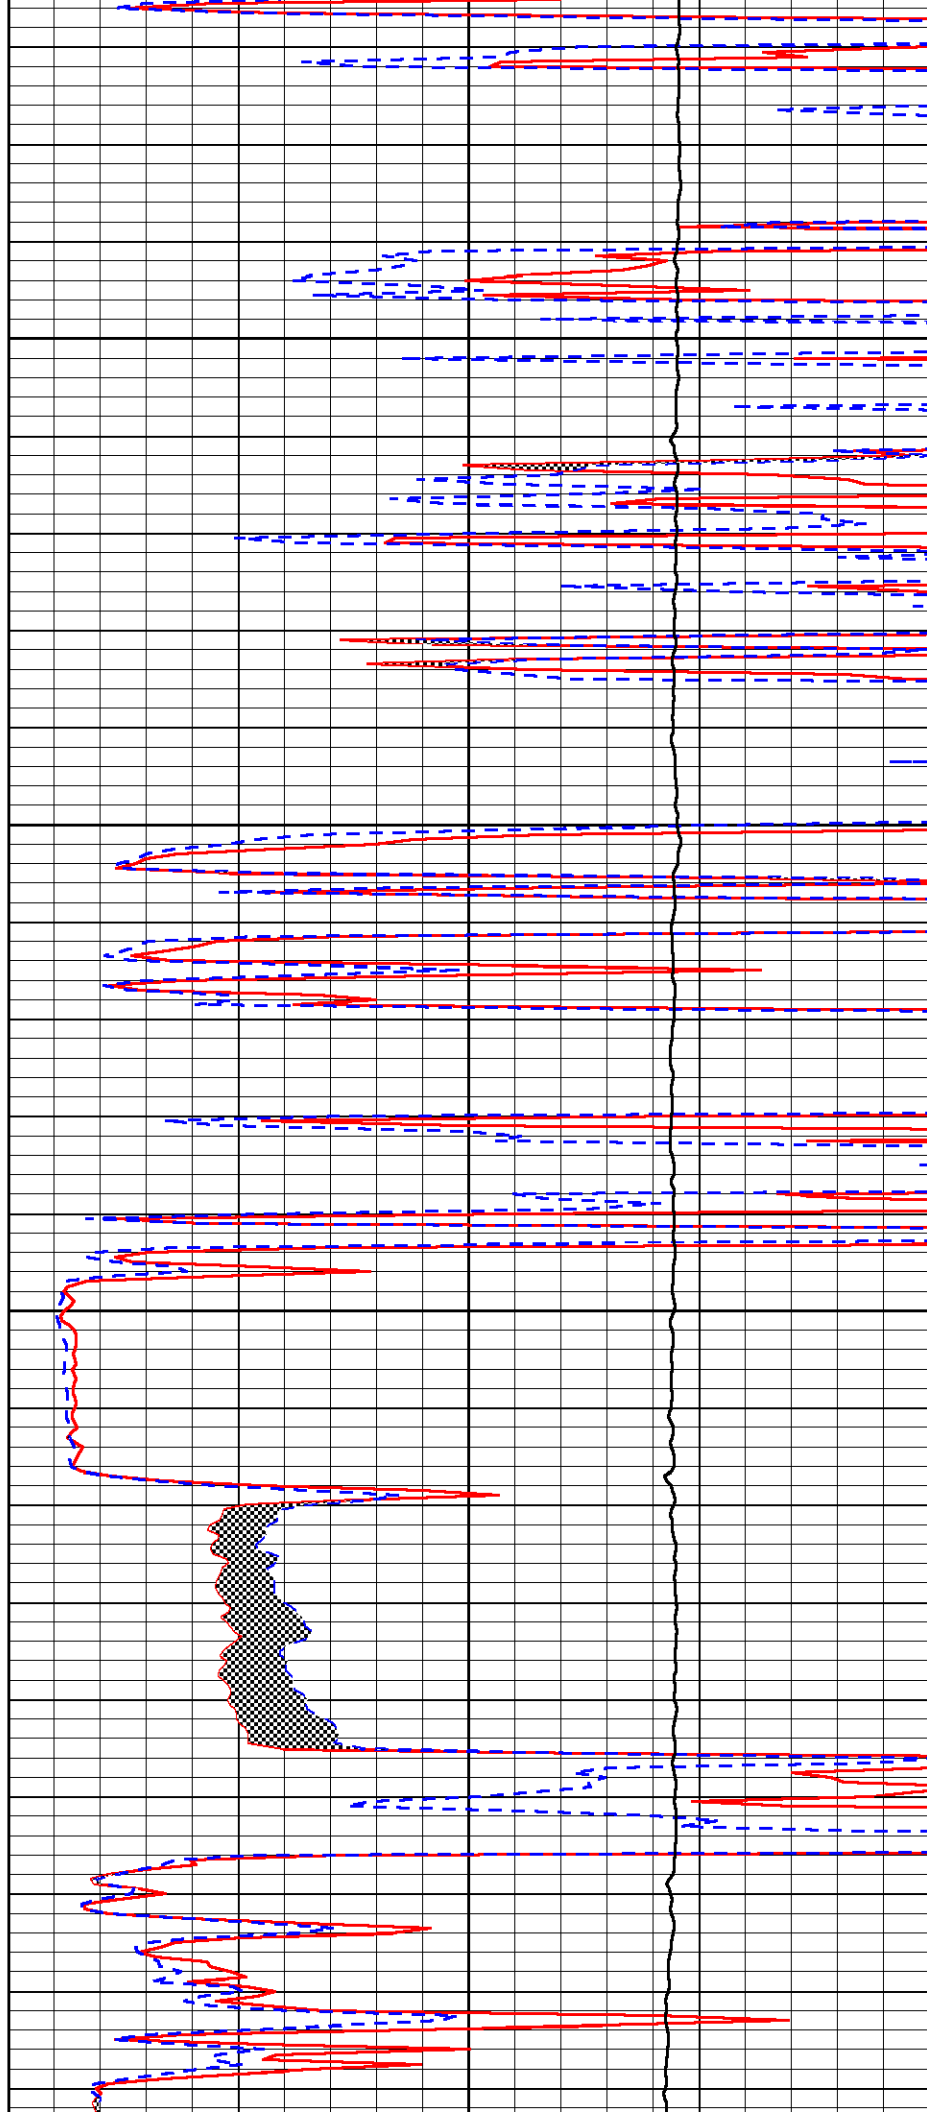

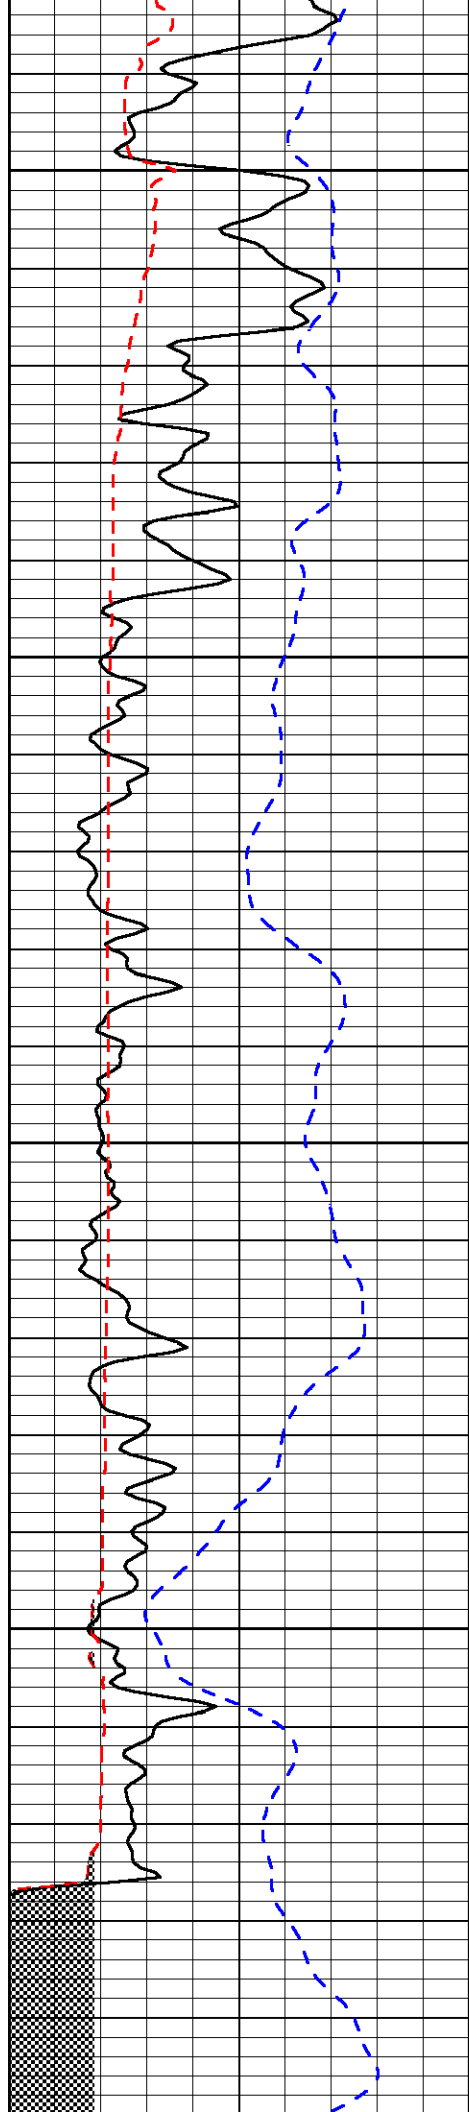


5200


5250

5300

5350

5400

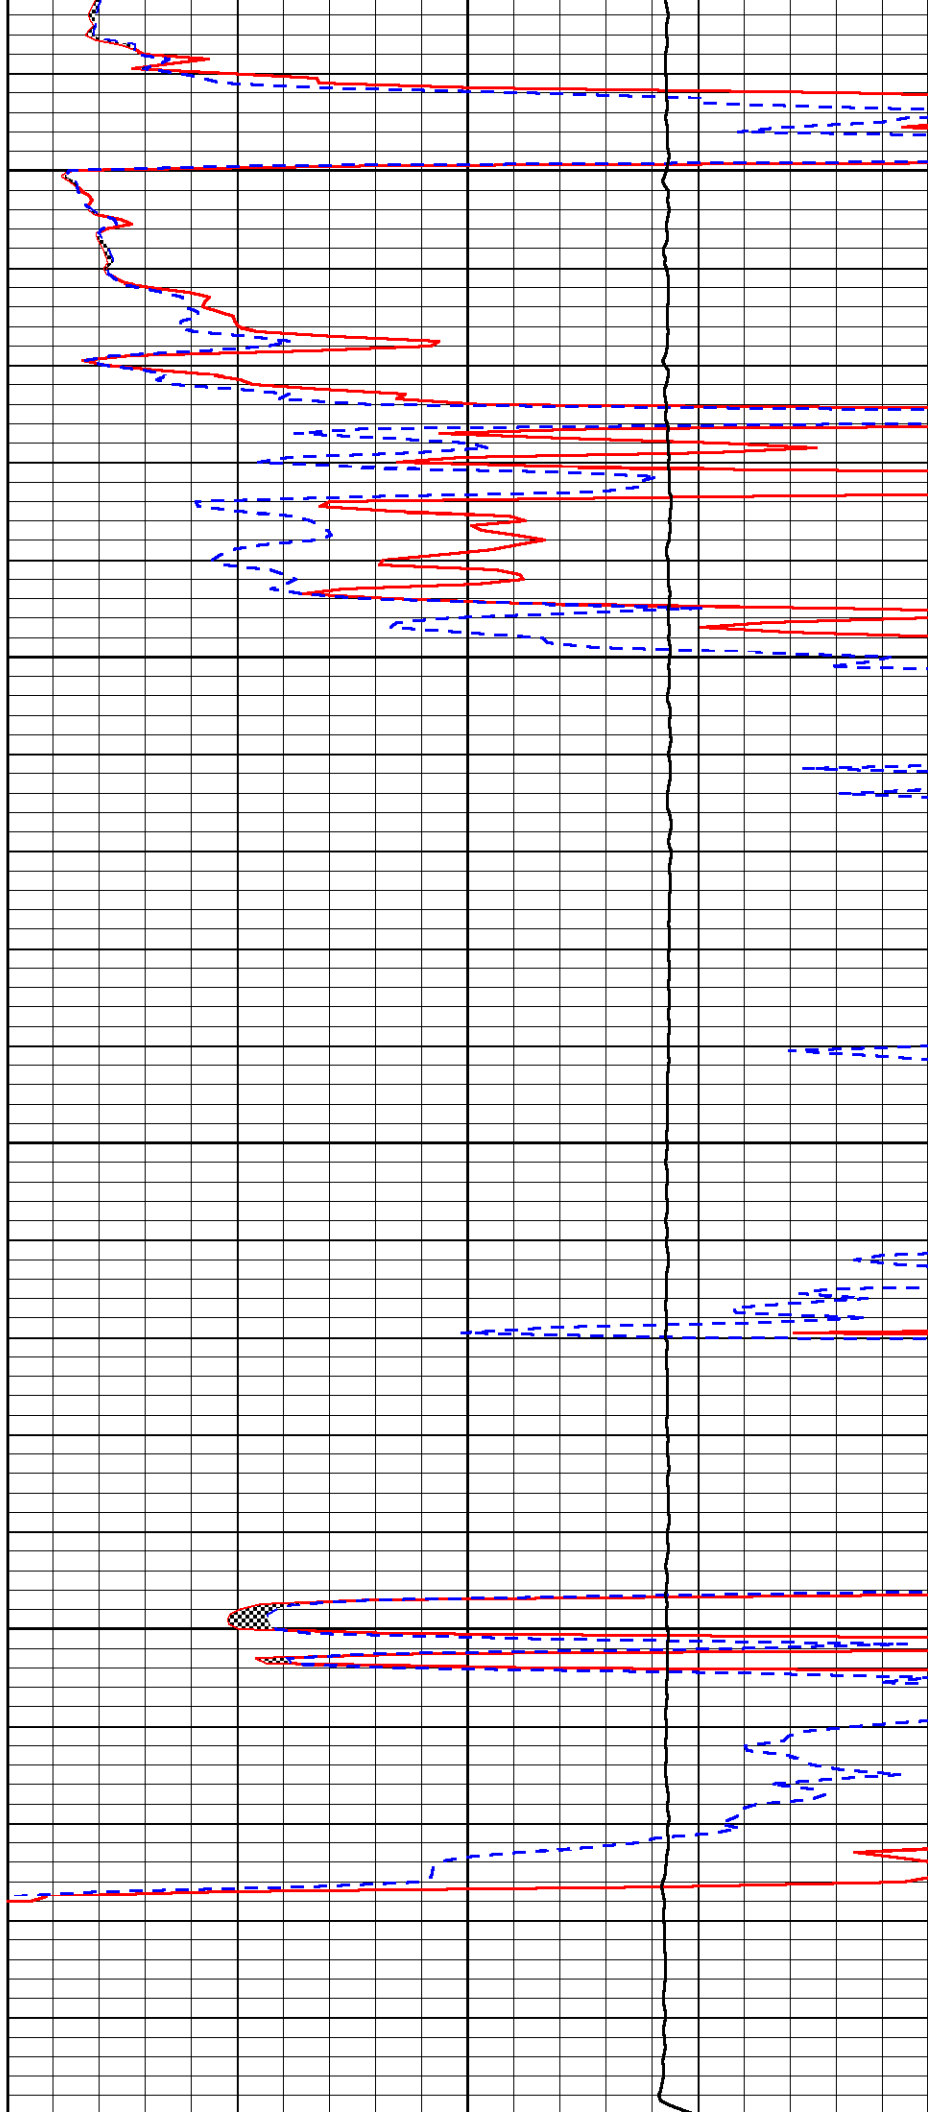

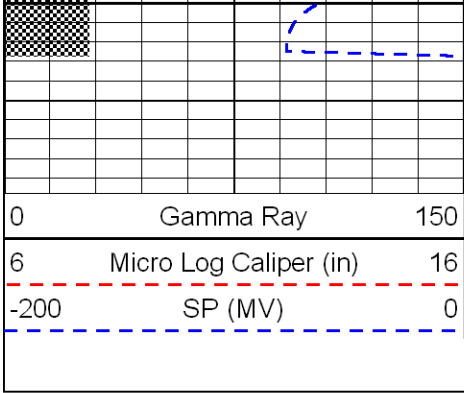

5400

