

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

15-137-00035-0000

WELL PLUGGING APPLICATION FORM

Well Location 330' S)
330' W) N $\frac{1}{2}$ Cor. Sec. 6 Twp. 5 Rge. 22 (E) (W) West

Field Name (if any) ---- County Norton

Lease (Farm Name) B. M. A. Well No. 1

Was well log filed with application? Yes If not, explain circumstances
and give available data (Use an additional sheet if necessary) _____

Log attached.

Date and hour plugging is desired to begin Immediately

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary) _____

Name of the person on the lease in charge of well for owner _____

J. A. Cleverley Address Russell, Kansas

Name of well owner or Acting Agent Cities Service Oil Company

Address Bartlesville, Oklahoma

Invoice covering assessment for plugging this well should be sent to:

Cities Service Oil Company Address Box 751, Great Bend, Kansas

and payment will be guaranteed by applicant.

R. A. Huber
Operator or Acting Agent

Date Confirming - Oct. 27, 1942

PLUGGING

FILE SEC-6-T-5-R11W
BOOK PAGE 54 LINE 38

11-21-42

WELL RECORD

15-137-00035-00-00

Company Cities Service Oil Co. Well No. 1 Farm B. H. A.
 Location 330' South and 330' West of N/4 Corner Sec. 6 T. 5 R. 22-W
 Elevation 2264 County Norton State Kansas
 Drlg. Comm. October 8, 1942 Contractor Hols Drilling Company
 Drlg. Comp. October 26, 1942 Acid None
 T. D. 3775' Initial Prod. Dry - Plugged and Abandoned

CASINO RECORD:

8-5/8" @ 314' cem. 125 sacks cement

FORMATION RECORD:


sand light	0-140
shale & shells	943
sand, shale & shells	1175
sand & iron shells	1265
shale & shells	1490
sand	1575
shale & shells	1635
shale red & shells	1765
shale & shells	1850
pyrite	1852
anhydrite	1890
shale & shells	1990
lime	2010
lime & shale	2049
shale & lime shells	2217
lime & shale	2243
shale & shells	2323
salt, shale & shells	2400
lime & shale breaks	2477
shale & shells	2510
lime & shale breaks	2663
shale	2678
lime & iron pyrite	2716
lime grey hard	2746
shale & shells	2753
lime hard	2900
lime & shale breaks	2967
lime & shale broken	3003
shale & shells	3025
lime & shale breaks	3067
lime	3080
lime & shale breaks	3260
lime hard	3270
lime med.	3303
lime hard	3334
lime & shale	3364

lime & shale breaks	3445
lime hard	3633
lime & shale breaks	3701
lime light hard	3710
lime soft	3715
lime & shale breaks	3725
lime broken	3748
Granite Wash	3775 T. D.


Top Eros. Arbuckle	3705'
Top Granite Wash	3733'
Top Granite	3772'
Penetration	3'
Total Depth	3775'

No shows. Han Schlumberger.

Byfo:	500'	0°
	1000'	1°
	1500'	1°
	2000'	0°
	2500'	0°
	3000'	1°



11-21-42
 NOV 21 1942
 RECEIVED
 DEPT. OF COMMERCE
 BUREAU OF MINES



CITIES SERVICE OIL COMPANY

PRODUCERS-REFINERS-MARKETERS OF PETROLEUM PRODUCTS

BARTLESVILLE
OKLAHOMA

Great Bend, Kansas
November 20, 1942

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

Gentlemen:

Attached is Well Plugging Record of the work done in connection with plugging and abandoning our B. M. A. well No. 1, Section 6-5-22W, Norton County, Kansas, drilled as a dry hole.


To complete all records, we are also attaching written Well Plugging Application, together with log of the well.

Yours very truly,

CITIES SERVICE OIL COMPANY

R. C. Hauber

EH:
Attach.

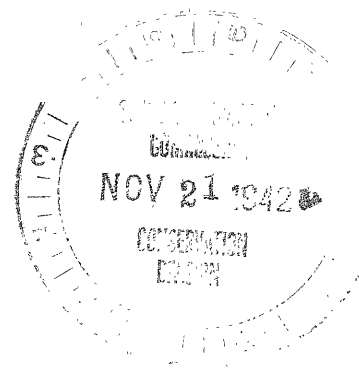



STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS
November 2, 1942

15-137-06035-00-00

IN REPLY PLEASE
REFER TO THIS
SUBJECT

Well No. 1
Farm K.M.A.
Description NE 6-5-22W
County Norton
File 54-38

City Service Oil Company
Box 751
Great Bend, Kansas

Dear Sirs:

This letter is your permit to plug
the above subject well, in accordance
with the Rules and Regulations of the
STATE CORPORATION COMMISSION.

Yours very truly,

STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR
CONSERVATION DIVISION

HA

BY: J. P. Roberts
J. P. ROBERTS

NOTICE: C. T. Alexander
Box 445
Great Bend, Kansas