

Borehole Compensated Sonic Log

(785) 625-3858

Company Credo Petroleum Corporation

Well Sattler No. 1-19

County

Rawlins

State Kansas

15-153-20.885-00-00

Sec: 19

Twp: 1S

Page: 31W

Permanent Datum	Ground Level	Elevation
28	2928	8 Ft. Above Perm. Datum
Log Measured From	Kelly Bushing	

Drilling Measured From Kelly Bushing

Elevation

2936 K. B.

G.L. 2928

Date	6/5/2010
------	----------

Type Log	BHC Soni
----------	----------

Depth Logger	4218
--------------	------

Top Logged Interval	300
---------------------	-----

Salinity, PPM CL	1,200
------------------	-------

Level	Full
High	
Low	

Operating Rig Time	5 1/2 Hours
--------------------	-------------

Recorded By	C. Desair
Witnessed By	Don Cunniff

Don Guy

Jim Musgrove

Un No.	Bit	From	To	Size	Wgt.	From
--------	-----	------	----	------	------	------

To

2	7.875	333	4225		
---	-------	-----	------	--	--

1

1

1

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858



Herndon, 1/2 N, 1 3/4 W,
1/2 N, 1/4 W, 1/2 N, 3/4 W,
1N, 1/2 W, 1/2 N, E Into



Database File: c:\warrior\data\credo_sattler no.1-19\credohd.db
Dataset Pathname: dil/crdostk
Presentation Format: sonic
Dataset Creation: Sat Jun 05 17:15:27 2010
Charted by: Depth in Feet scaled 1:240



Charted by:		Depth in Feet scaled 1:2.15					
0	Gamma Ray	150	5	0	140	Delta Time (usec/ft)	40
150	Gamma Ray	300			30	SPOR	-10
6	Caliper (GAPI)	16			15000	LTEN (lb)	0
							LSPD


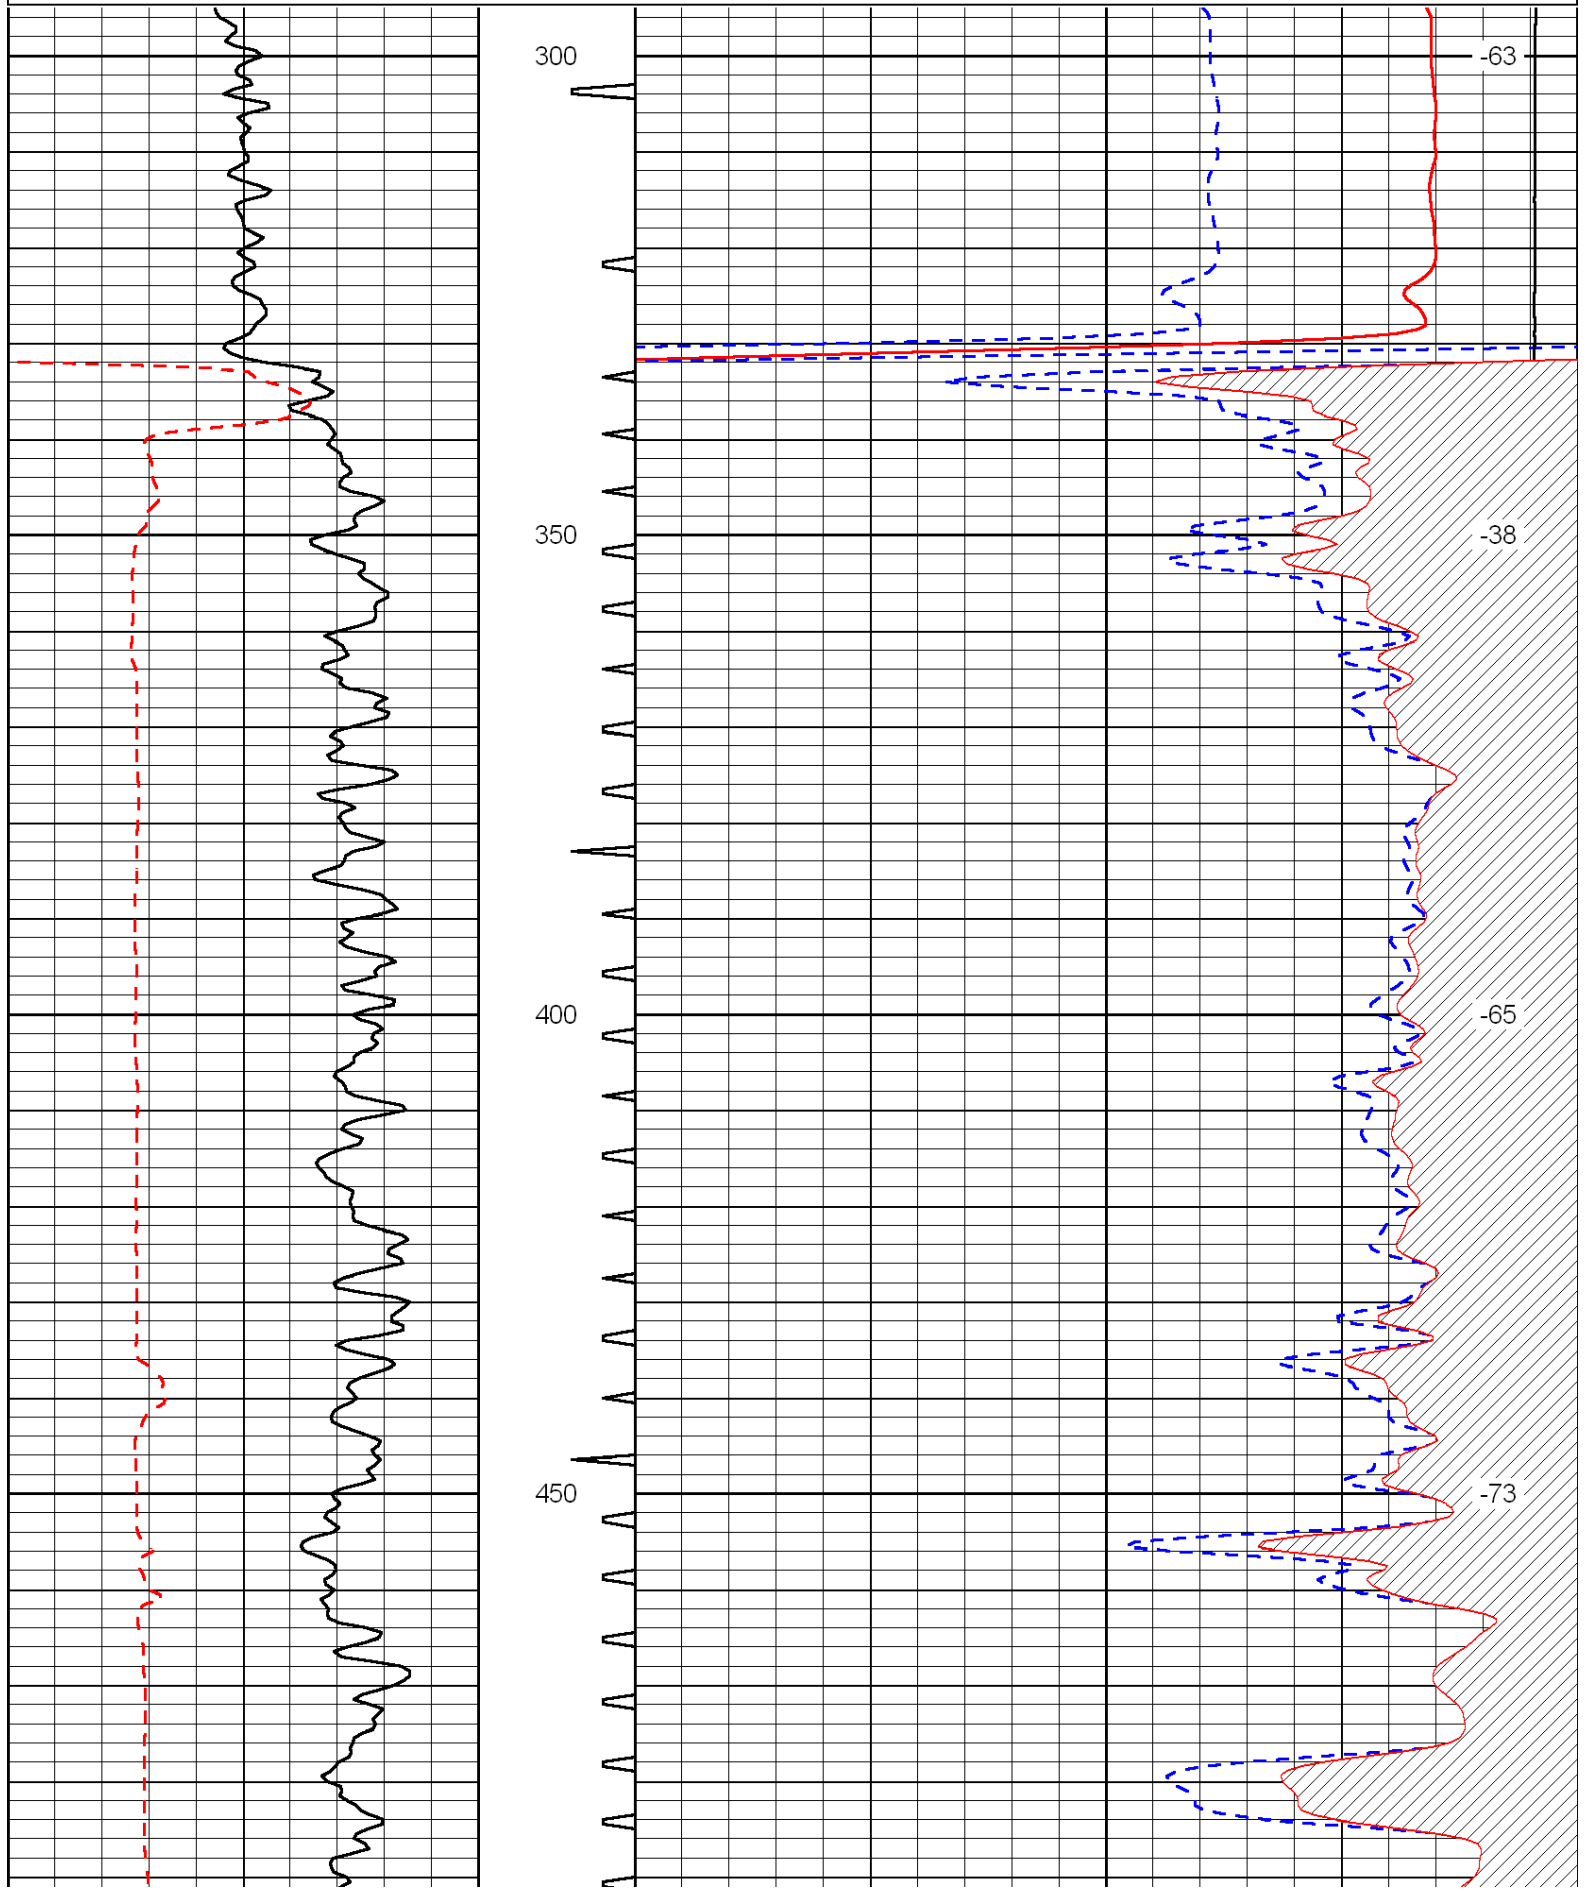


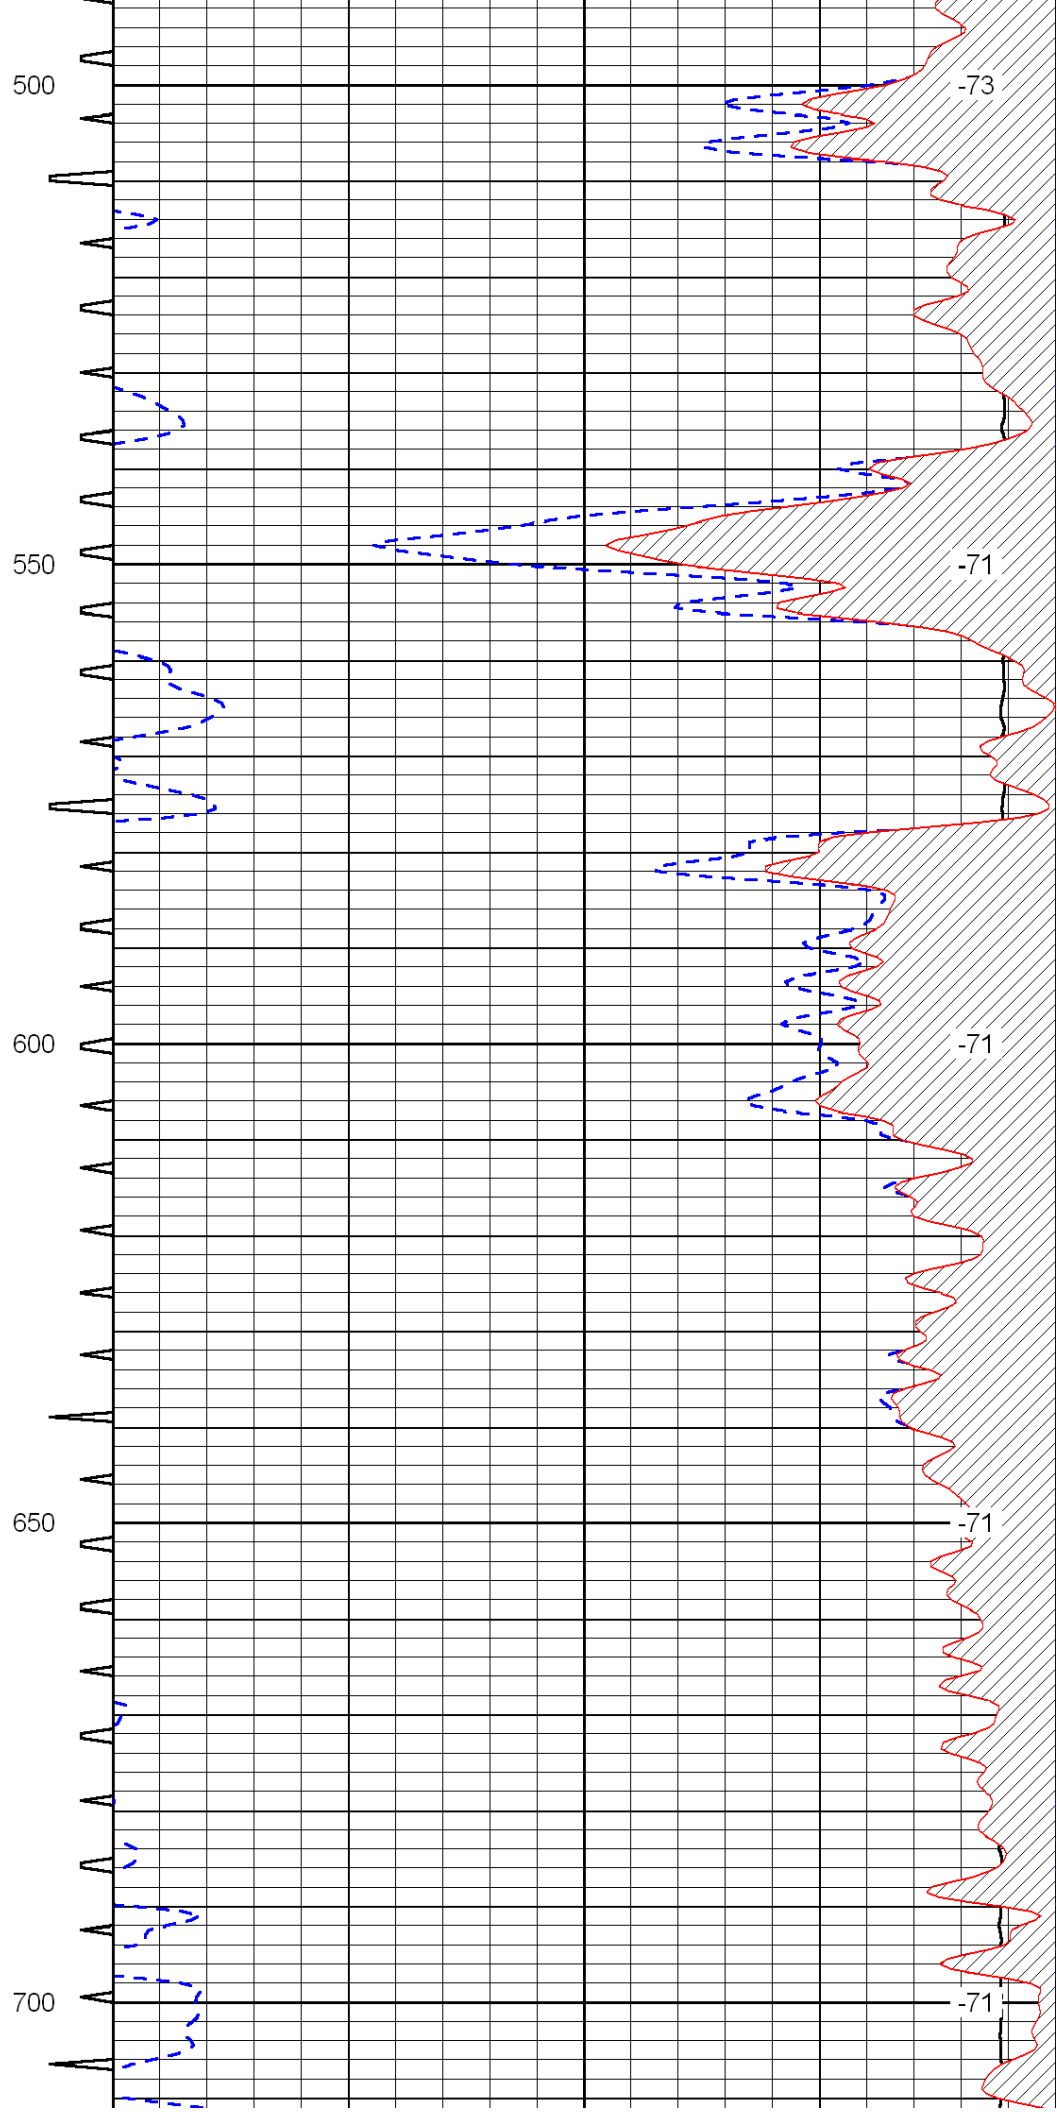
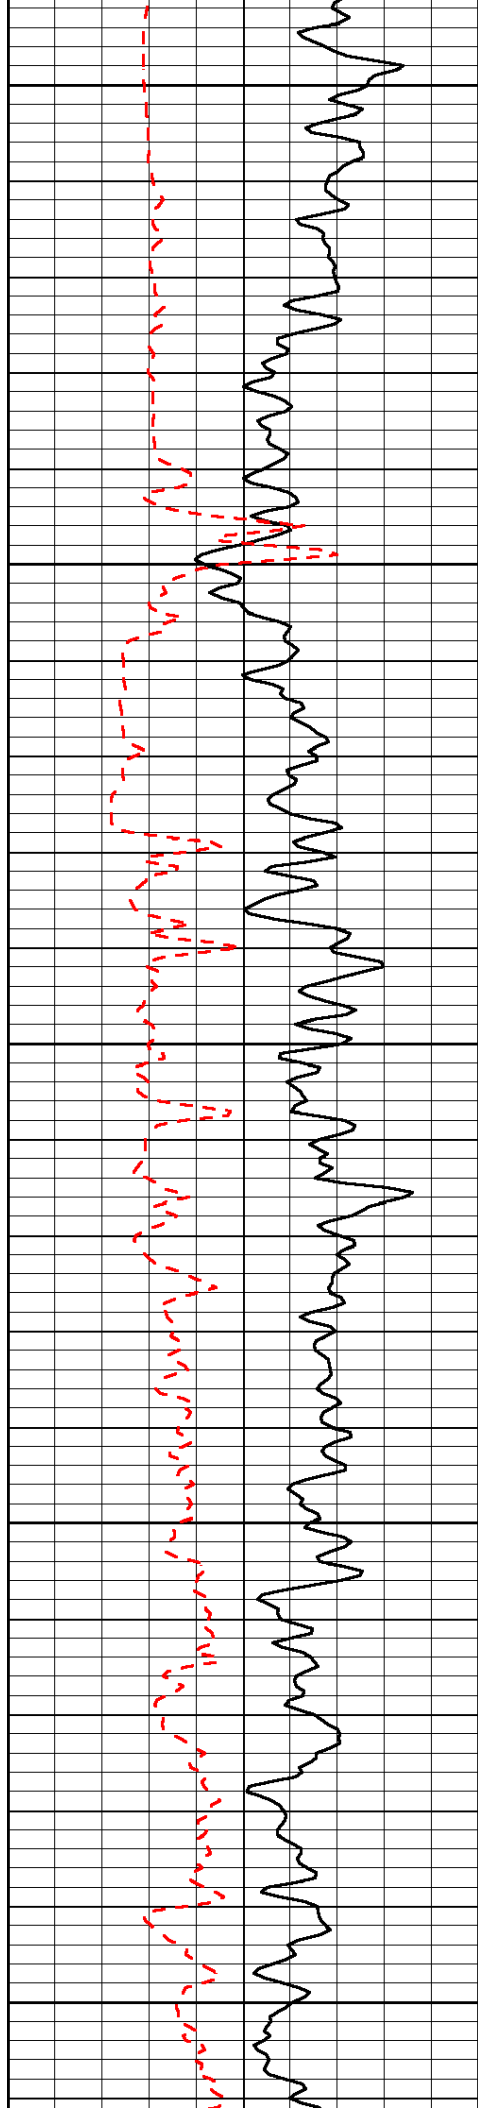


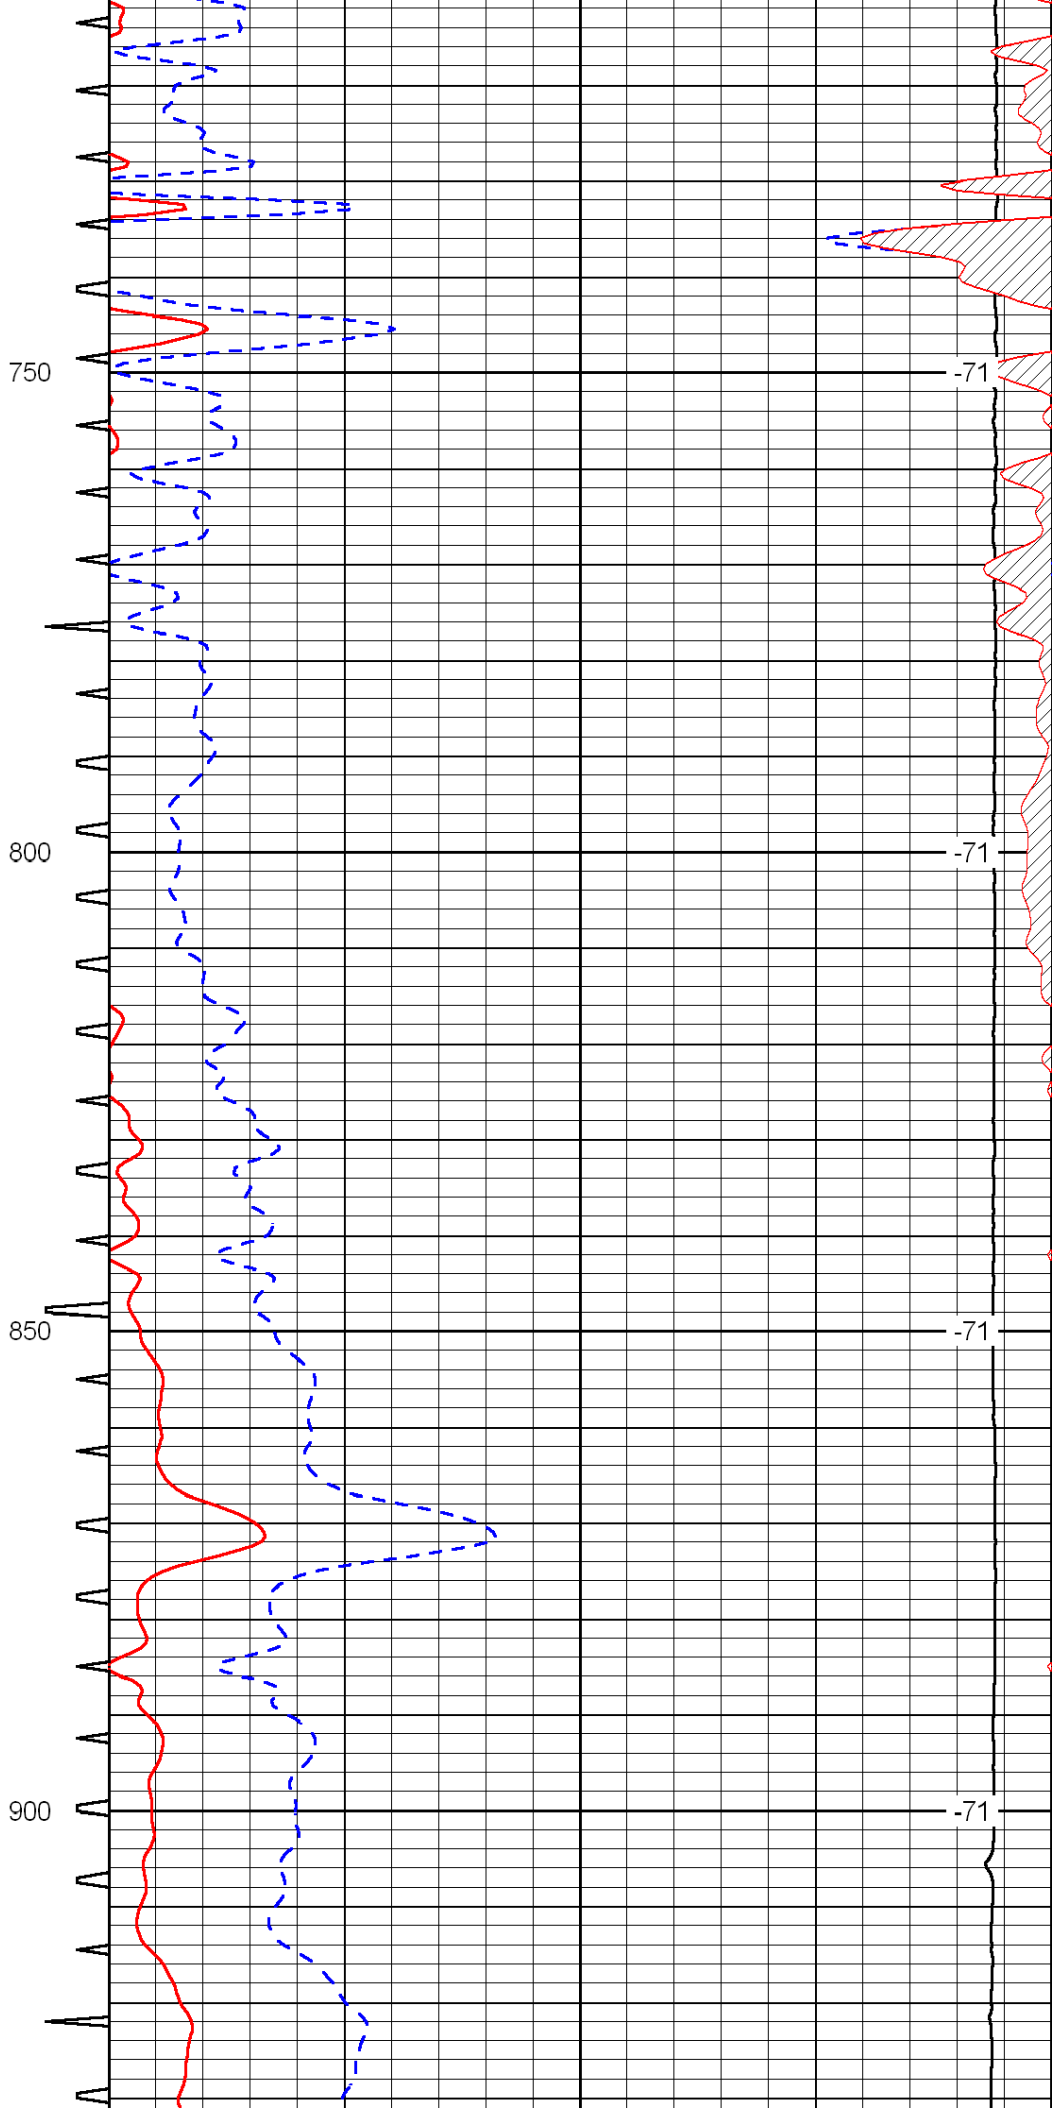
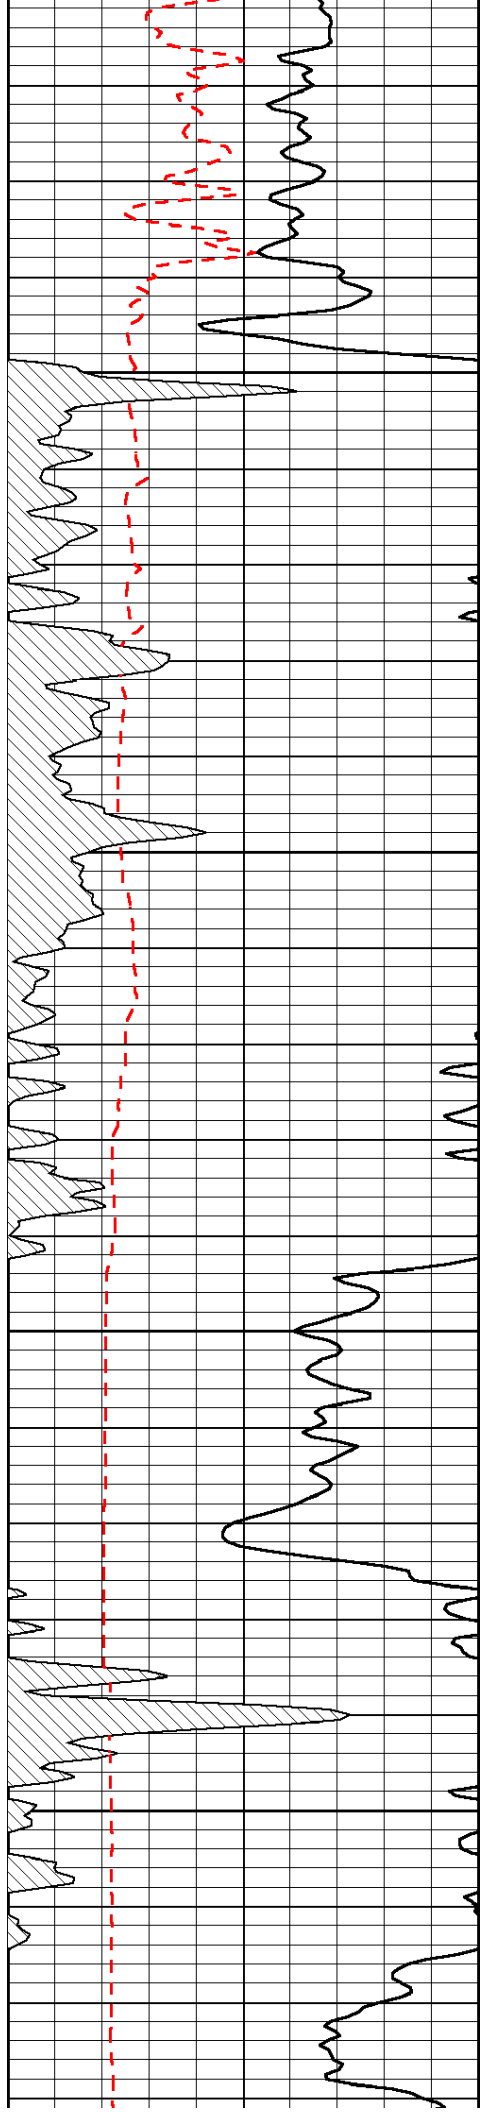


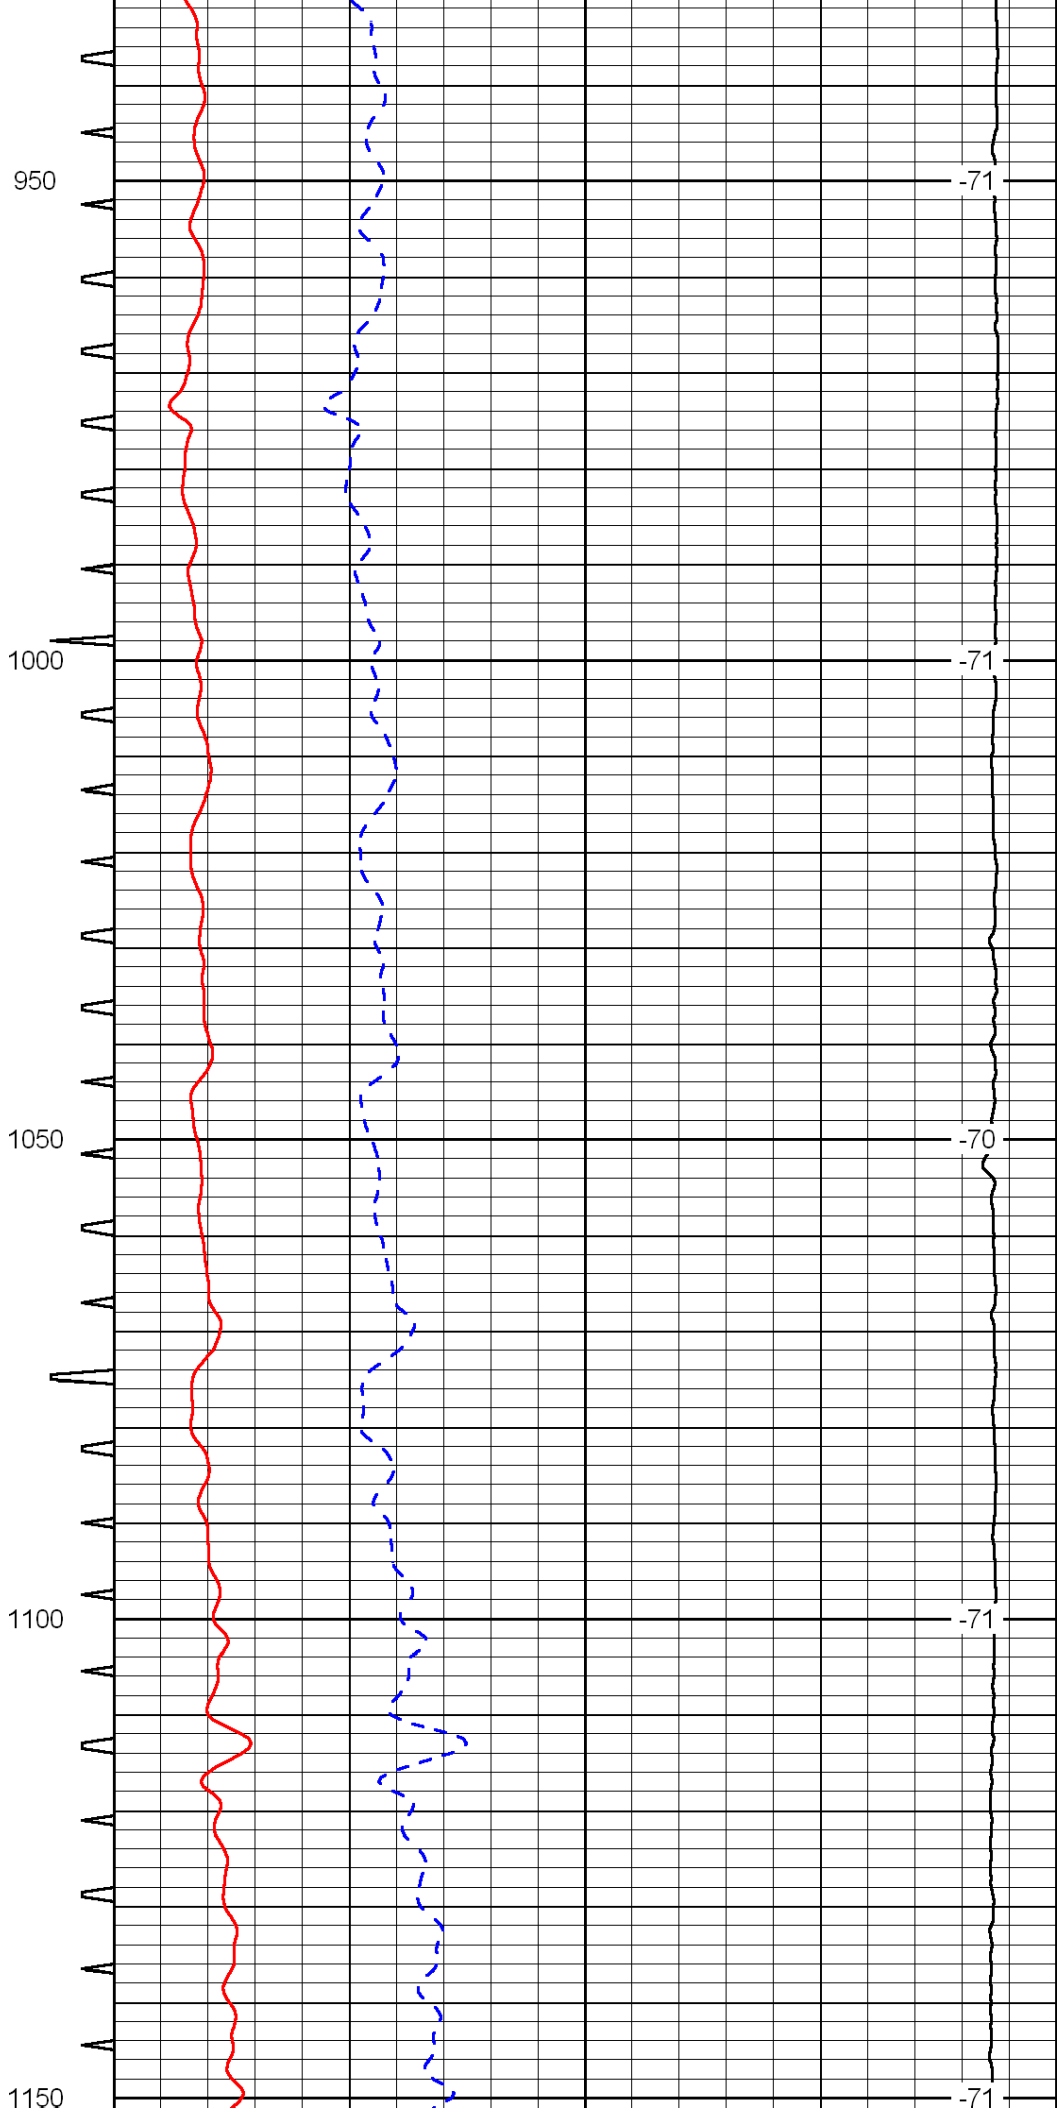
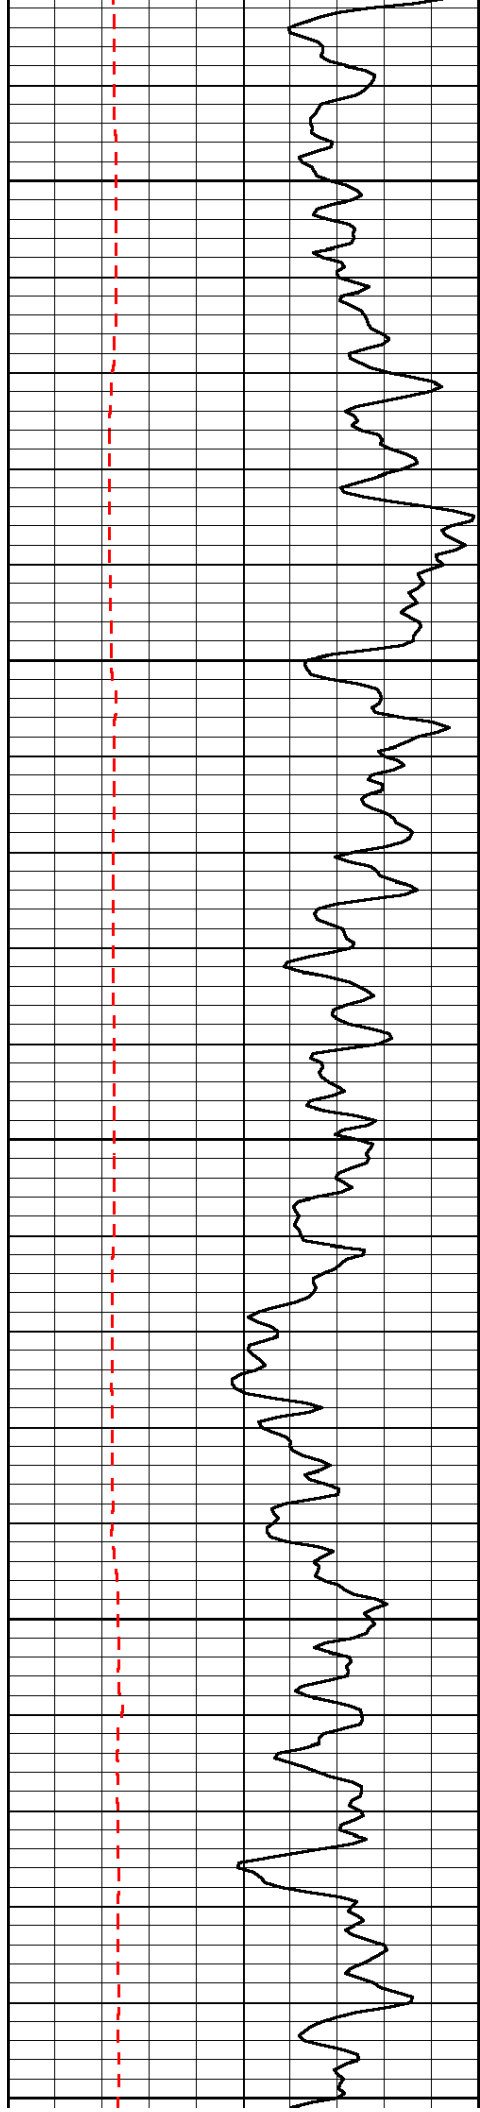


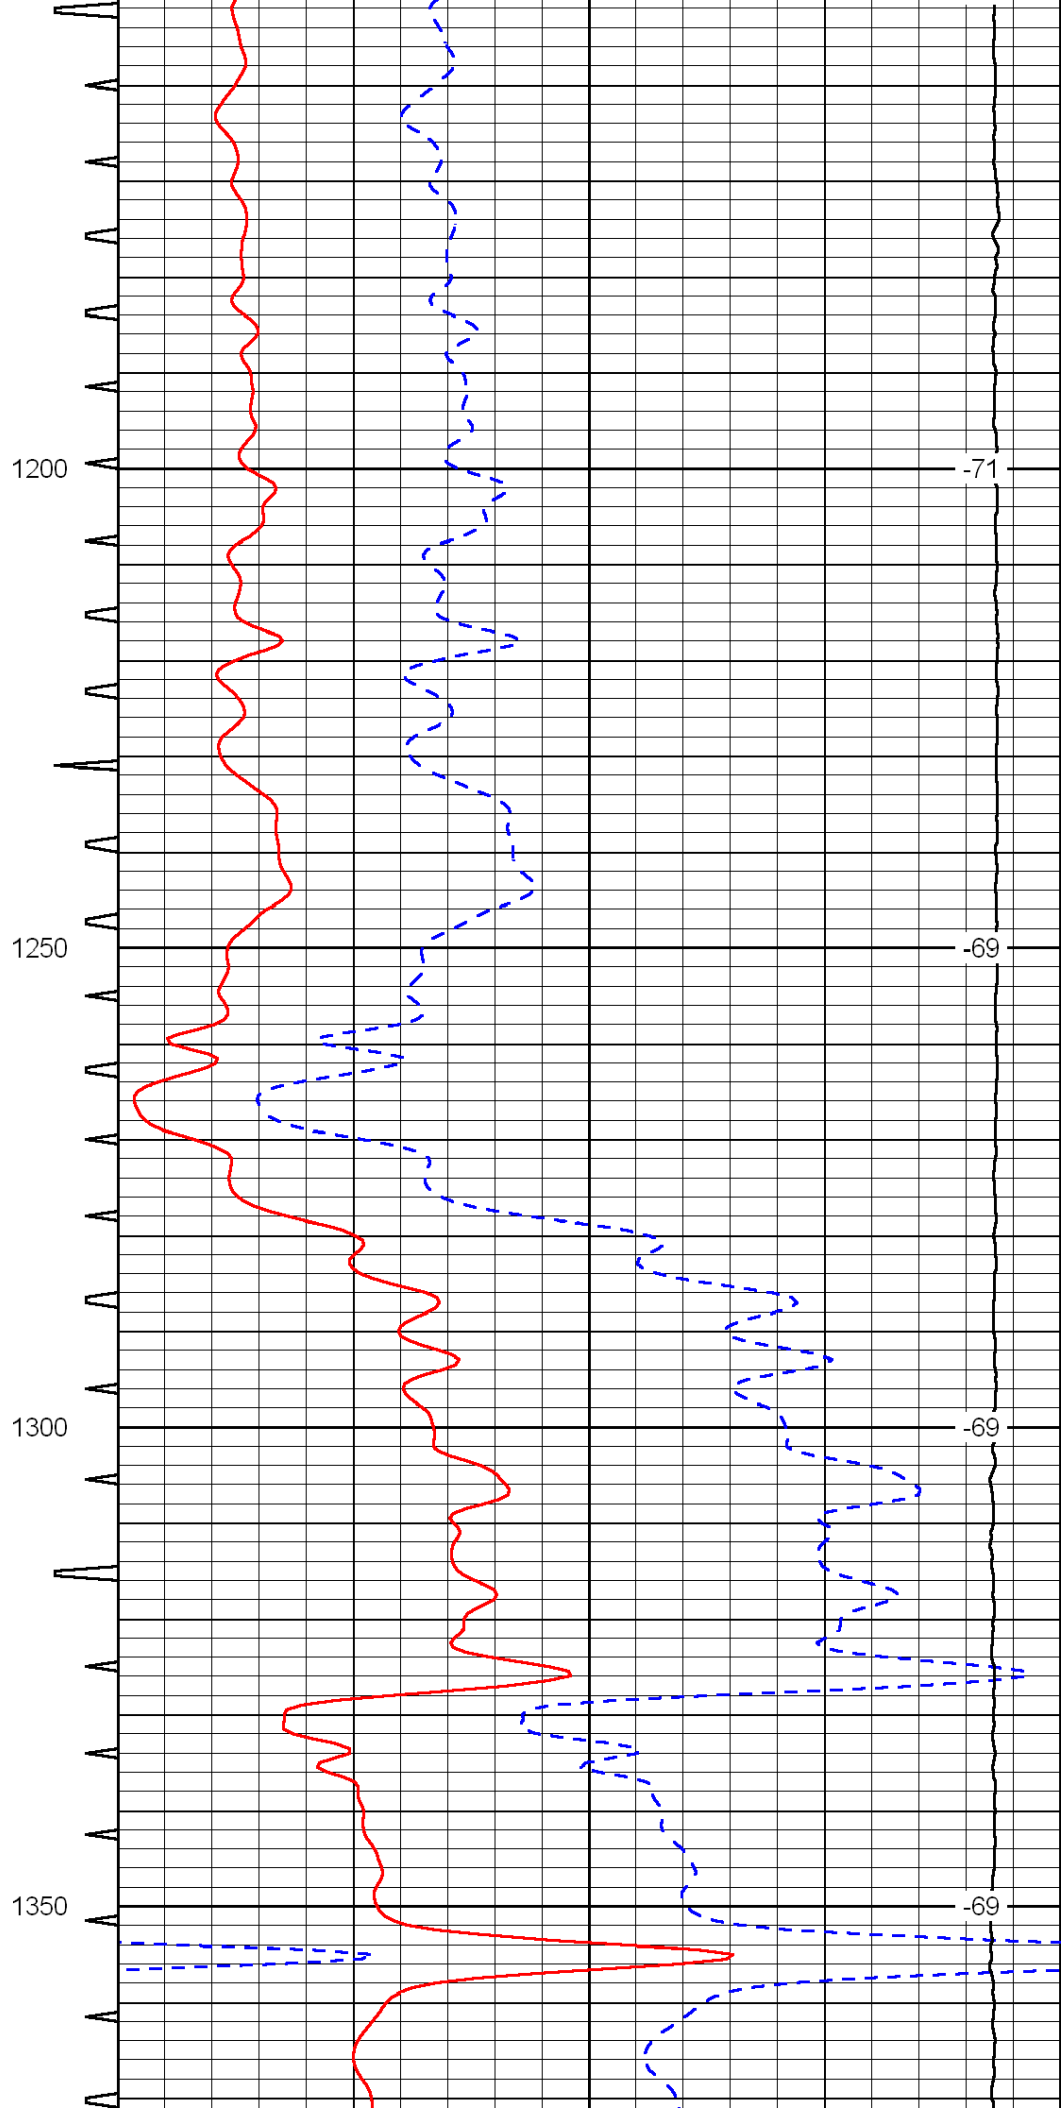
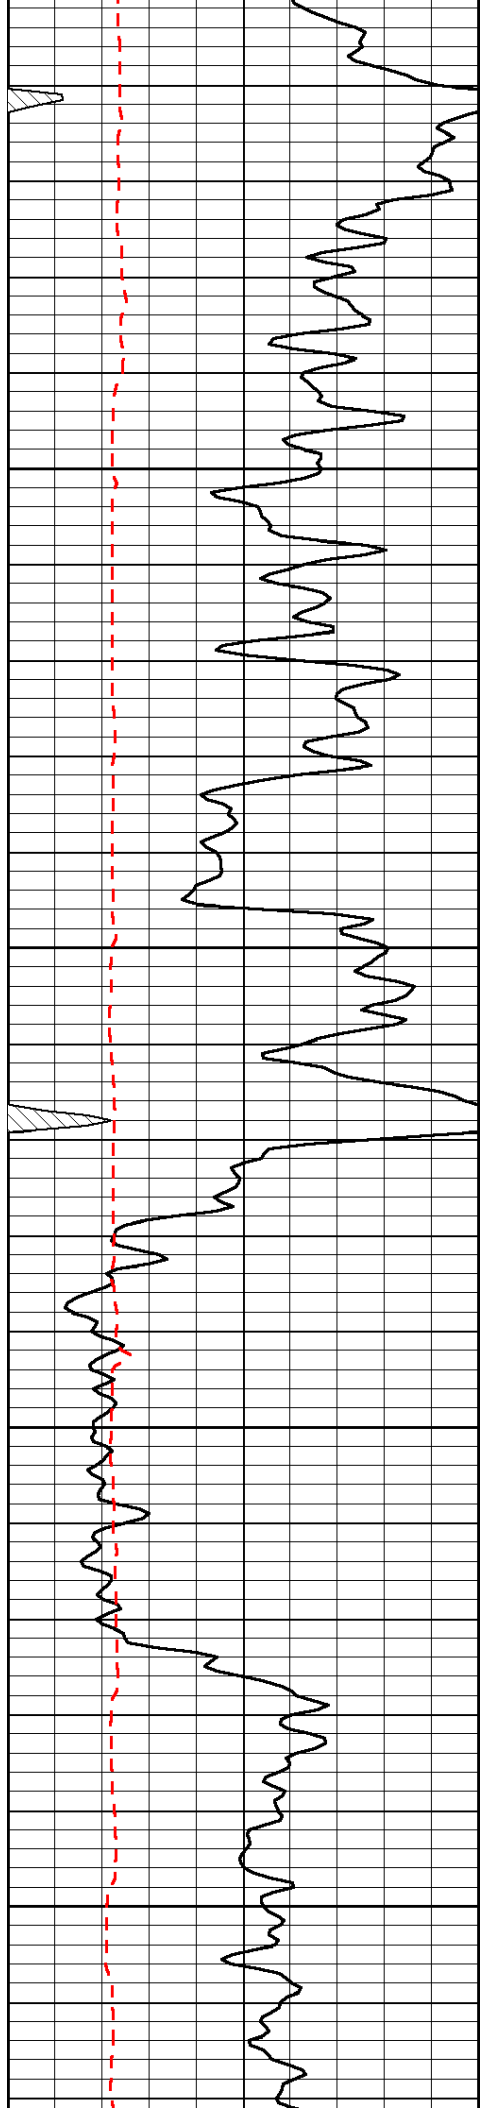


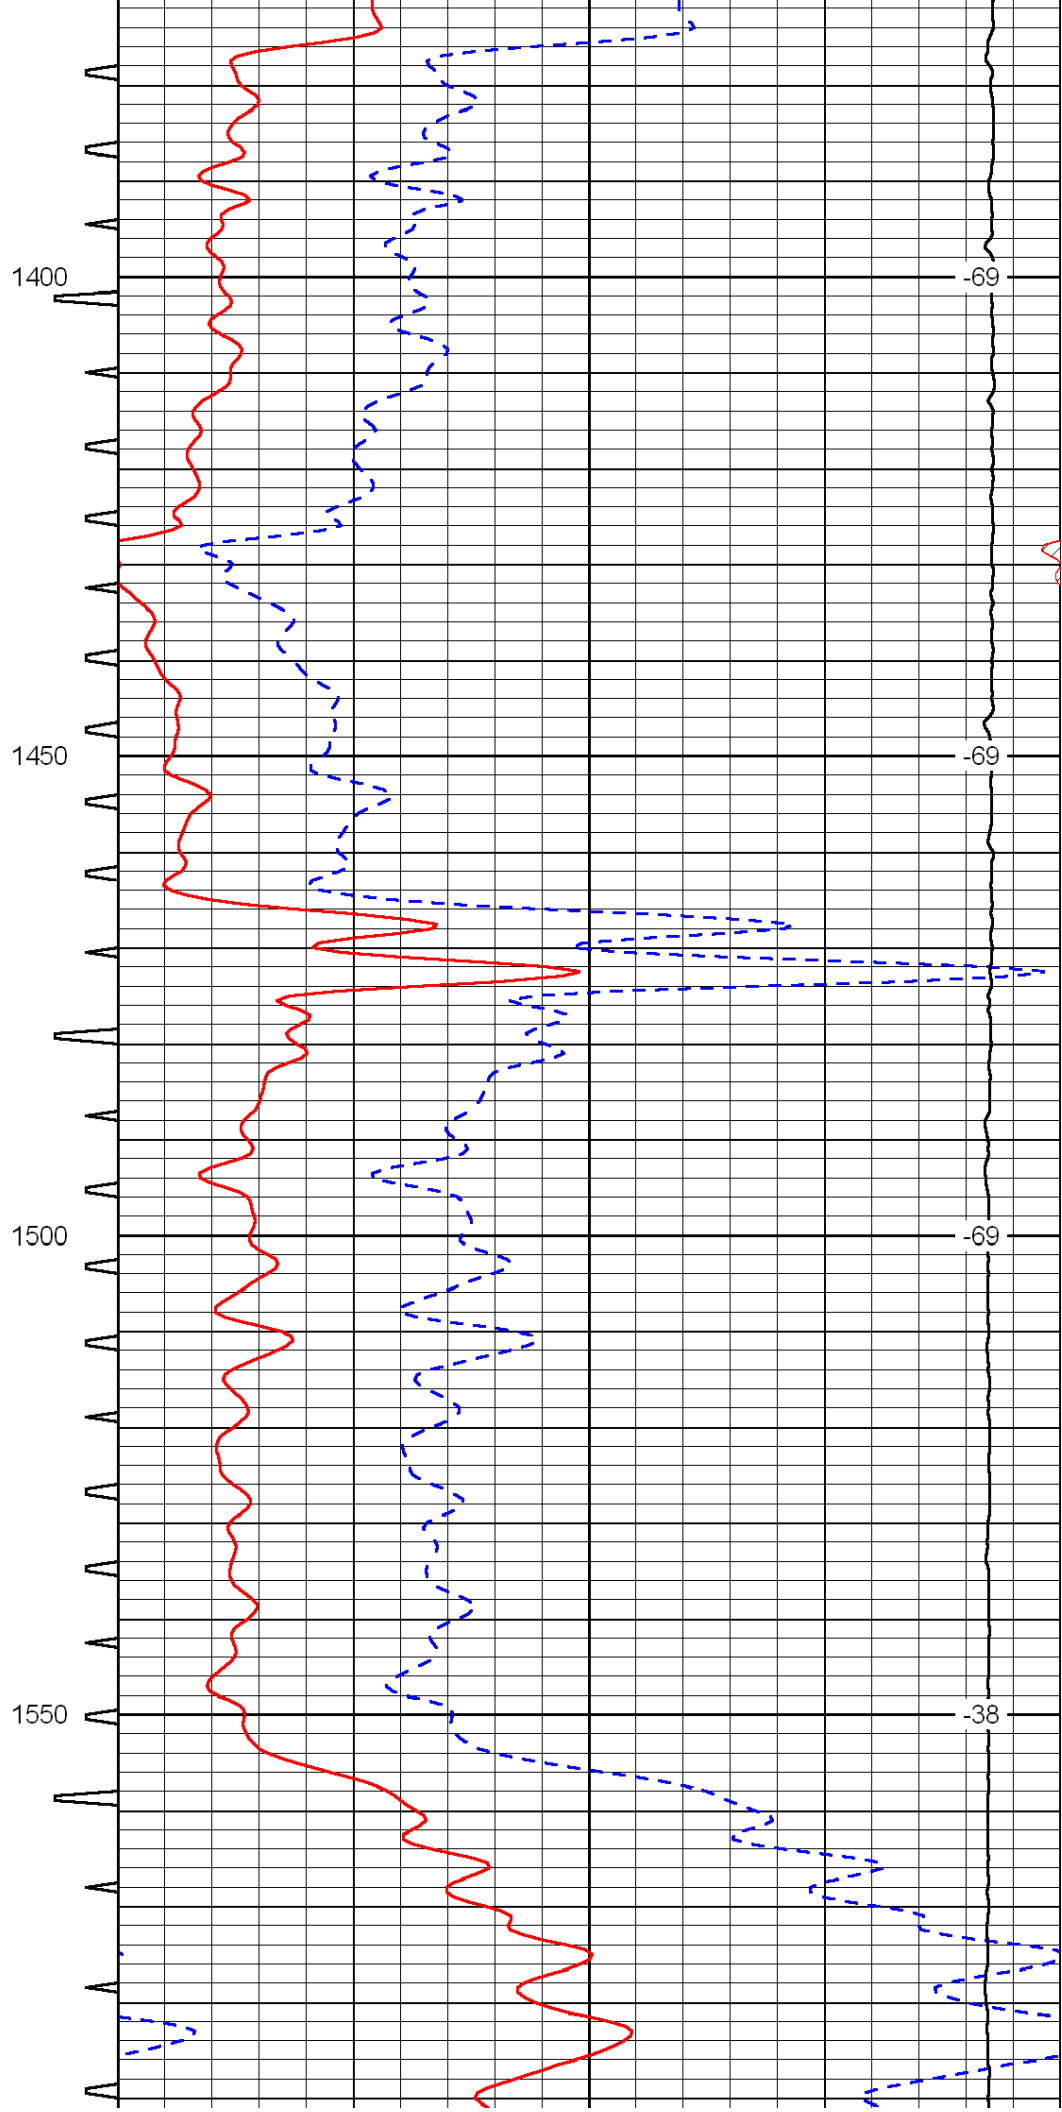
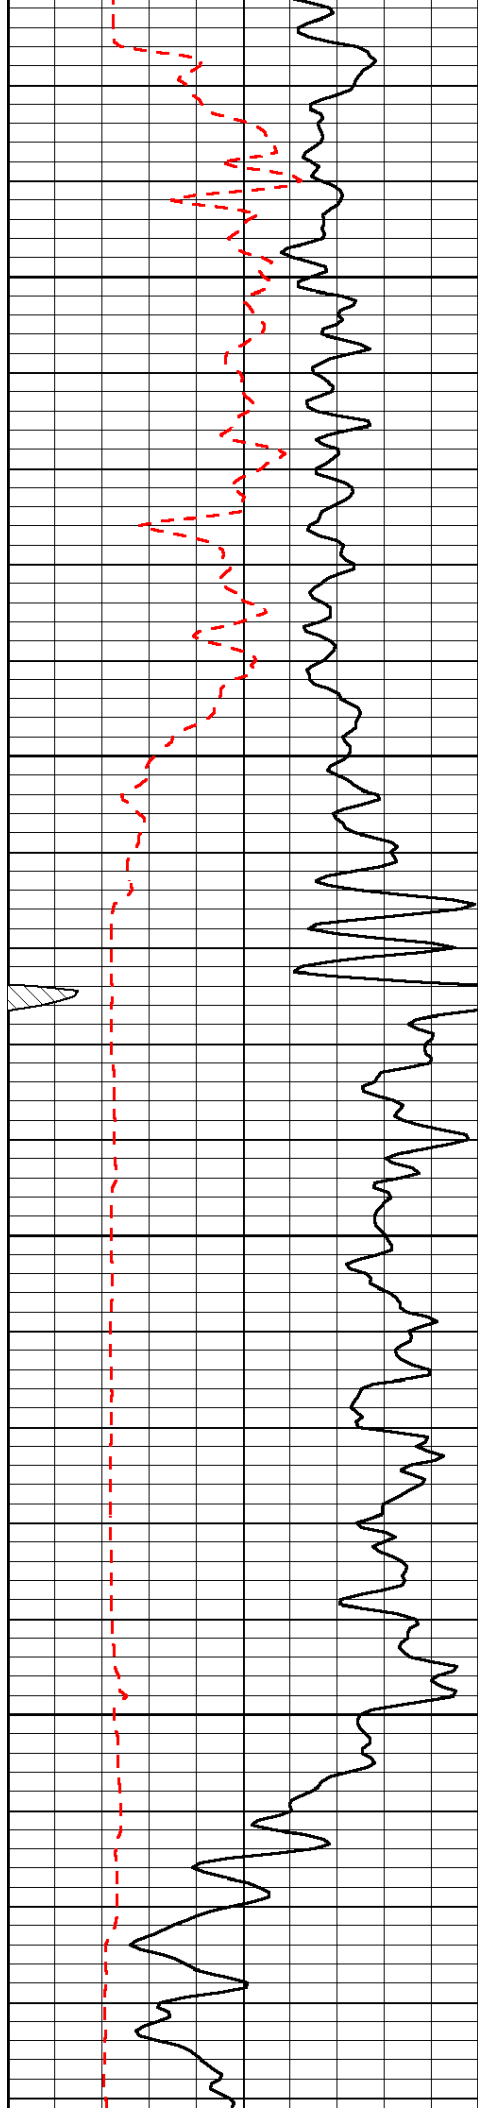


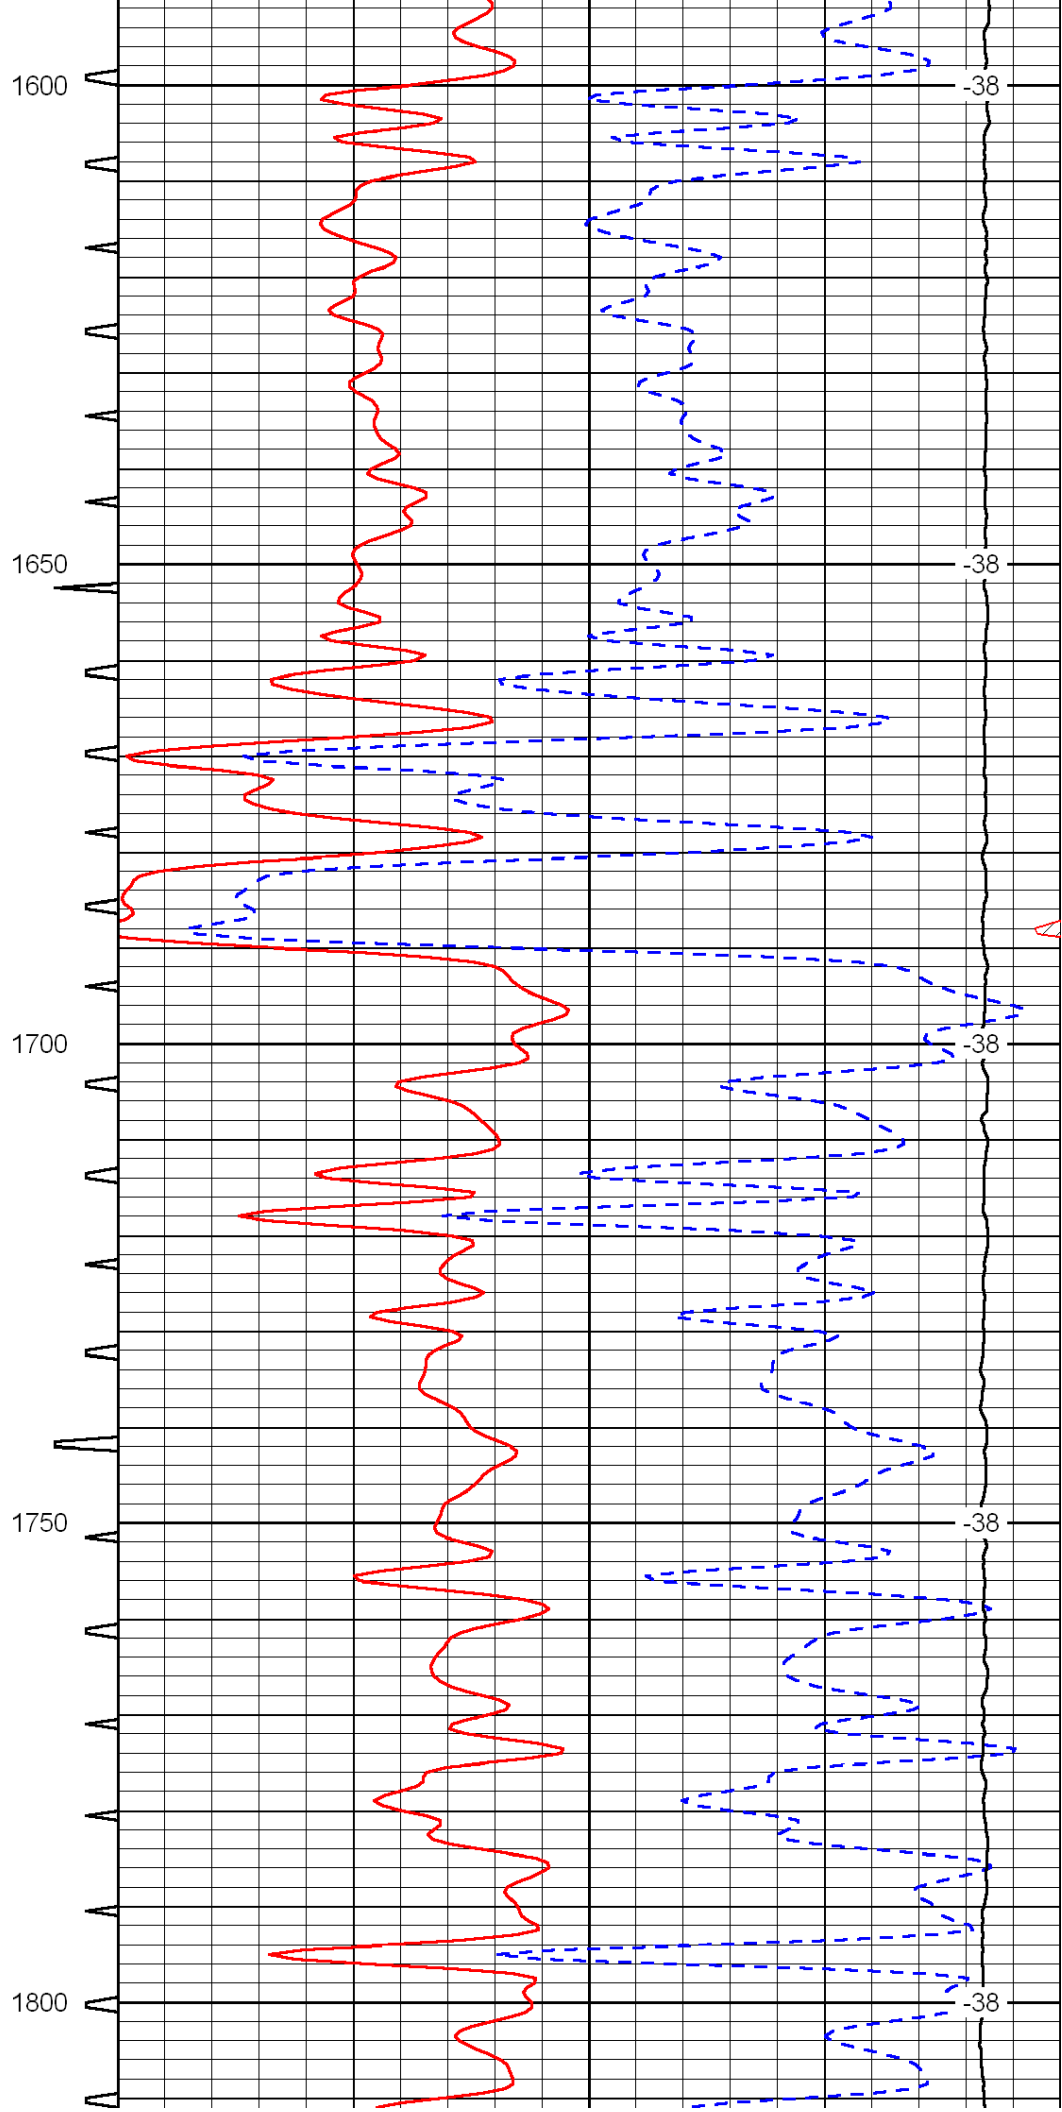
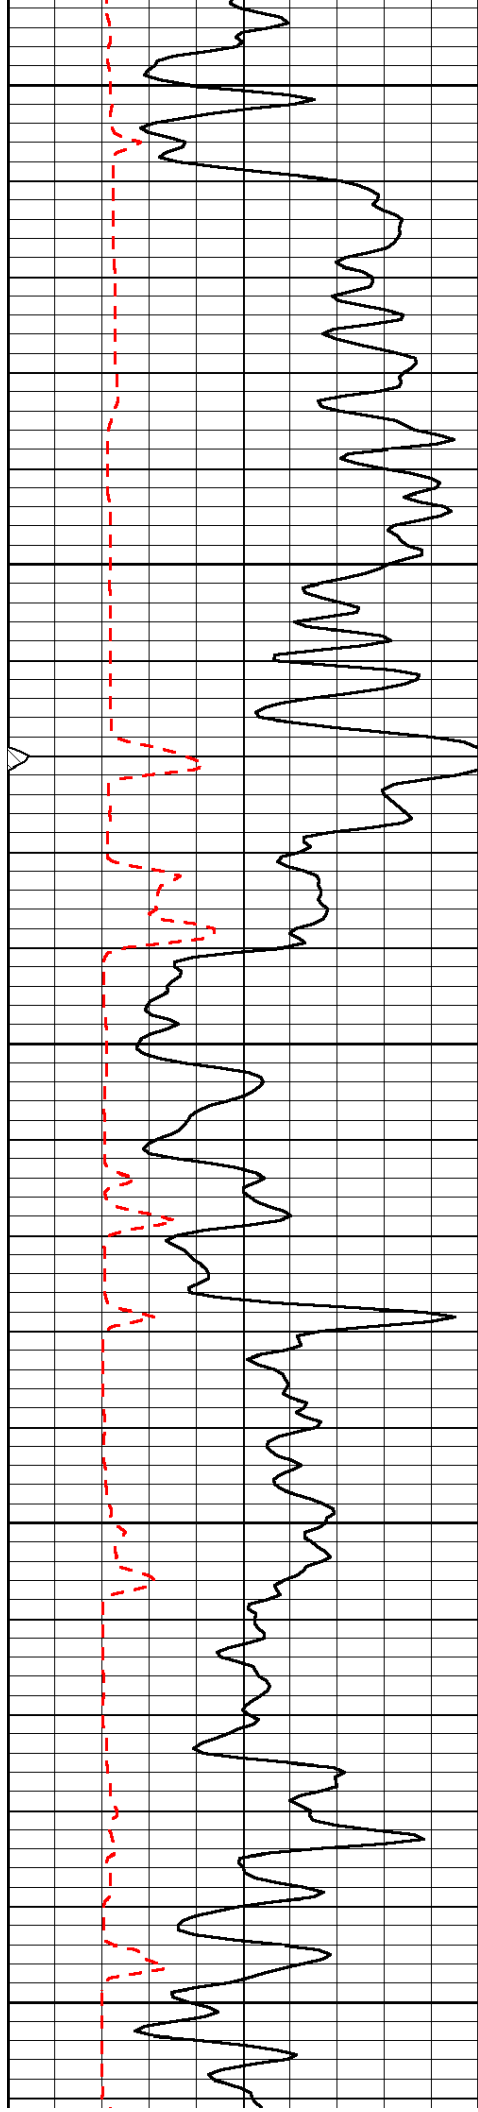


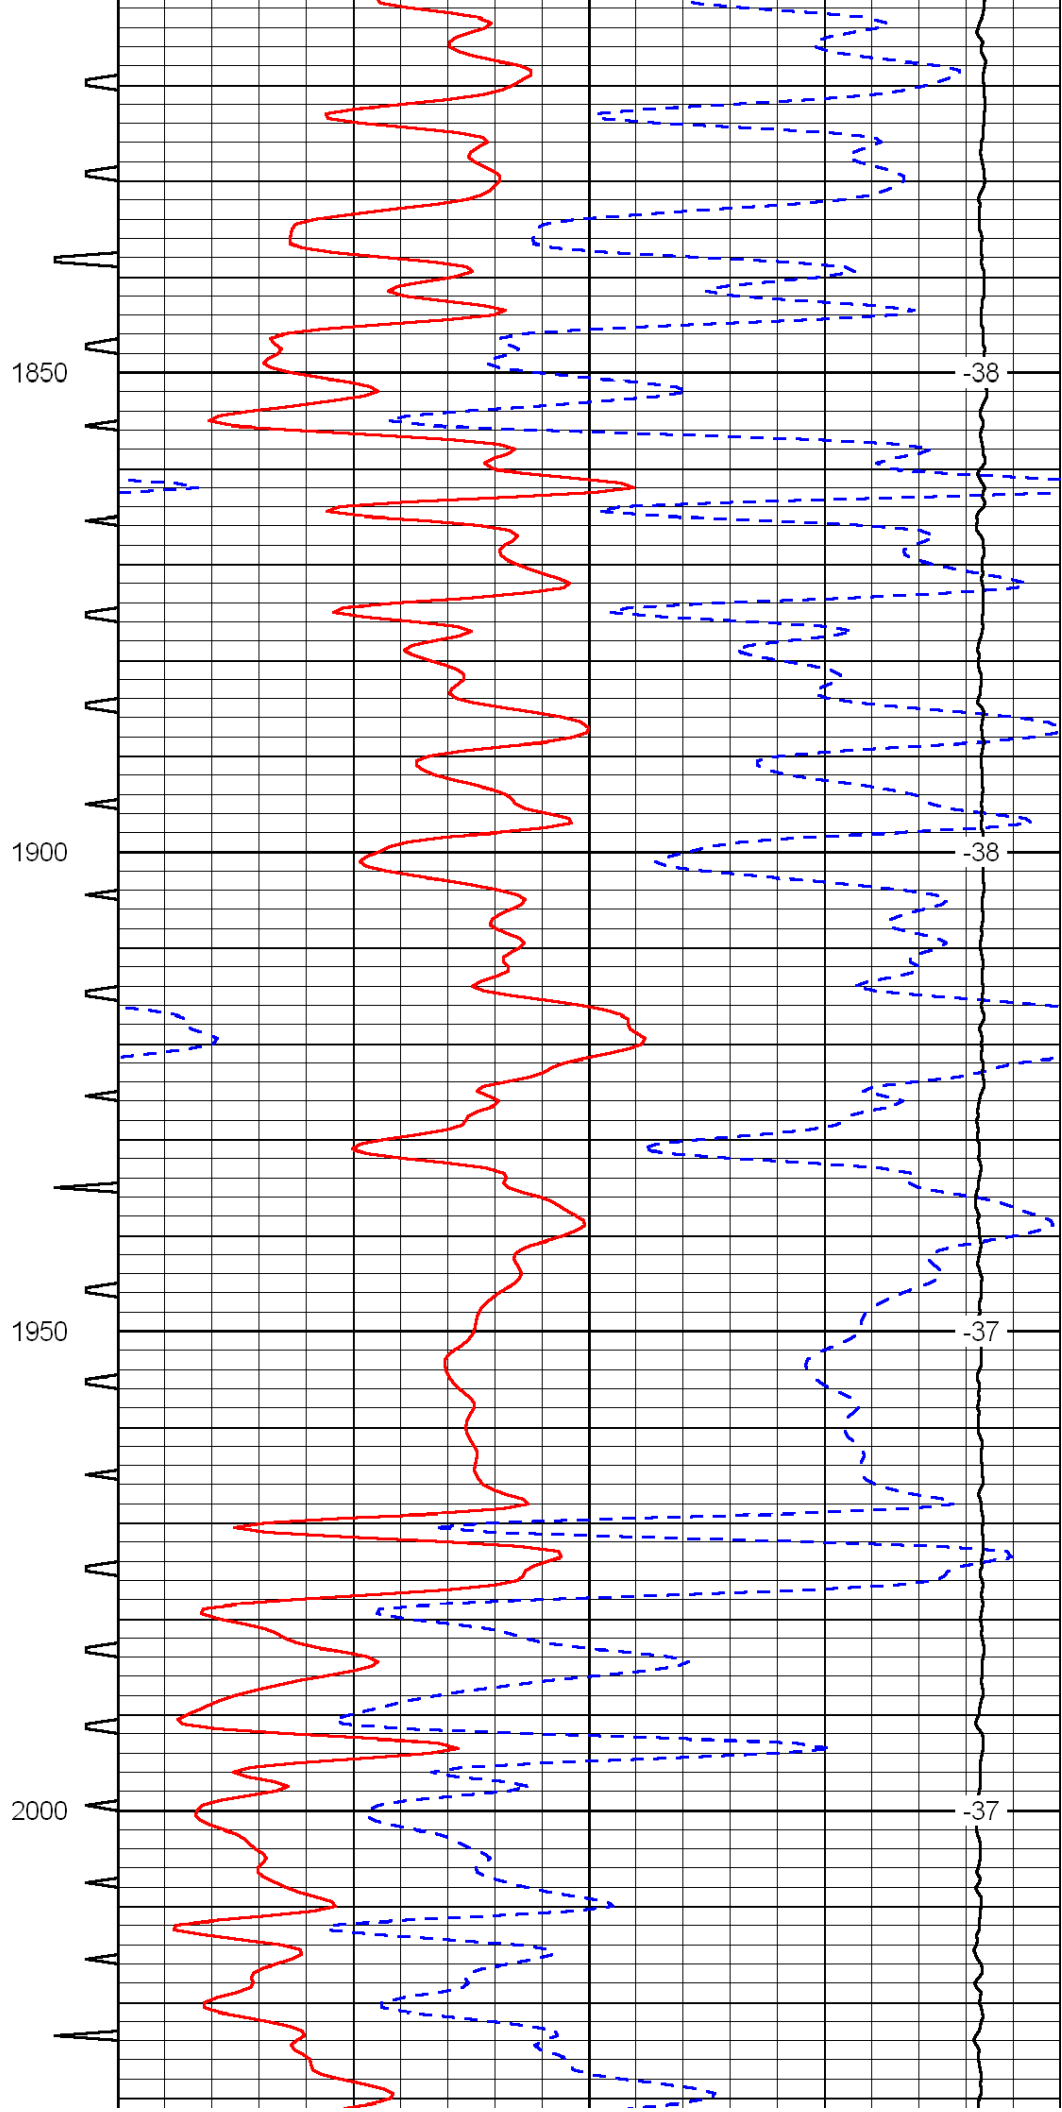
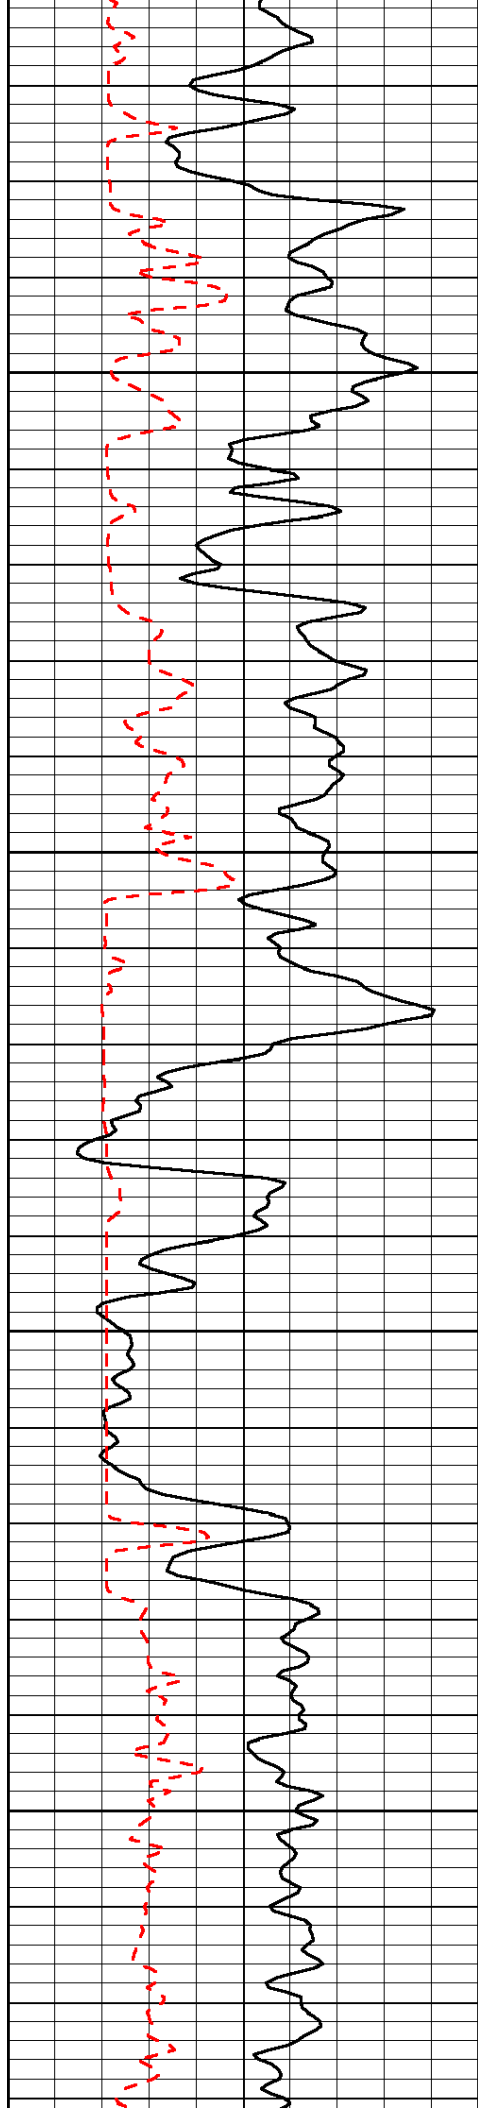


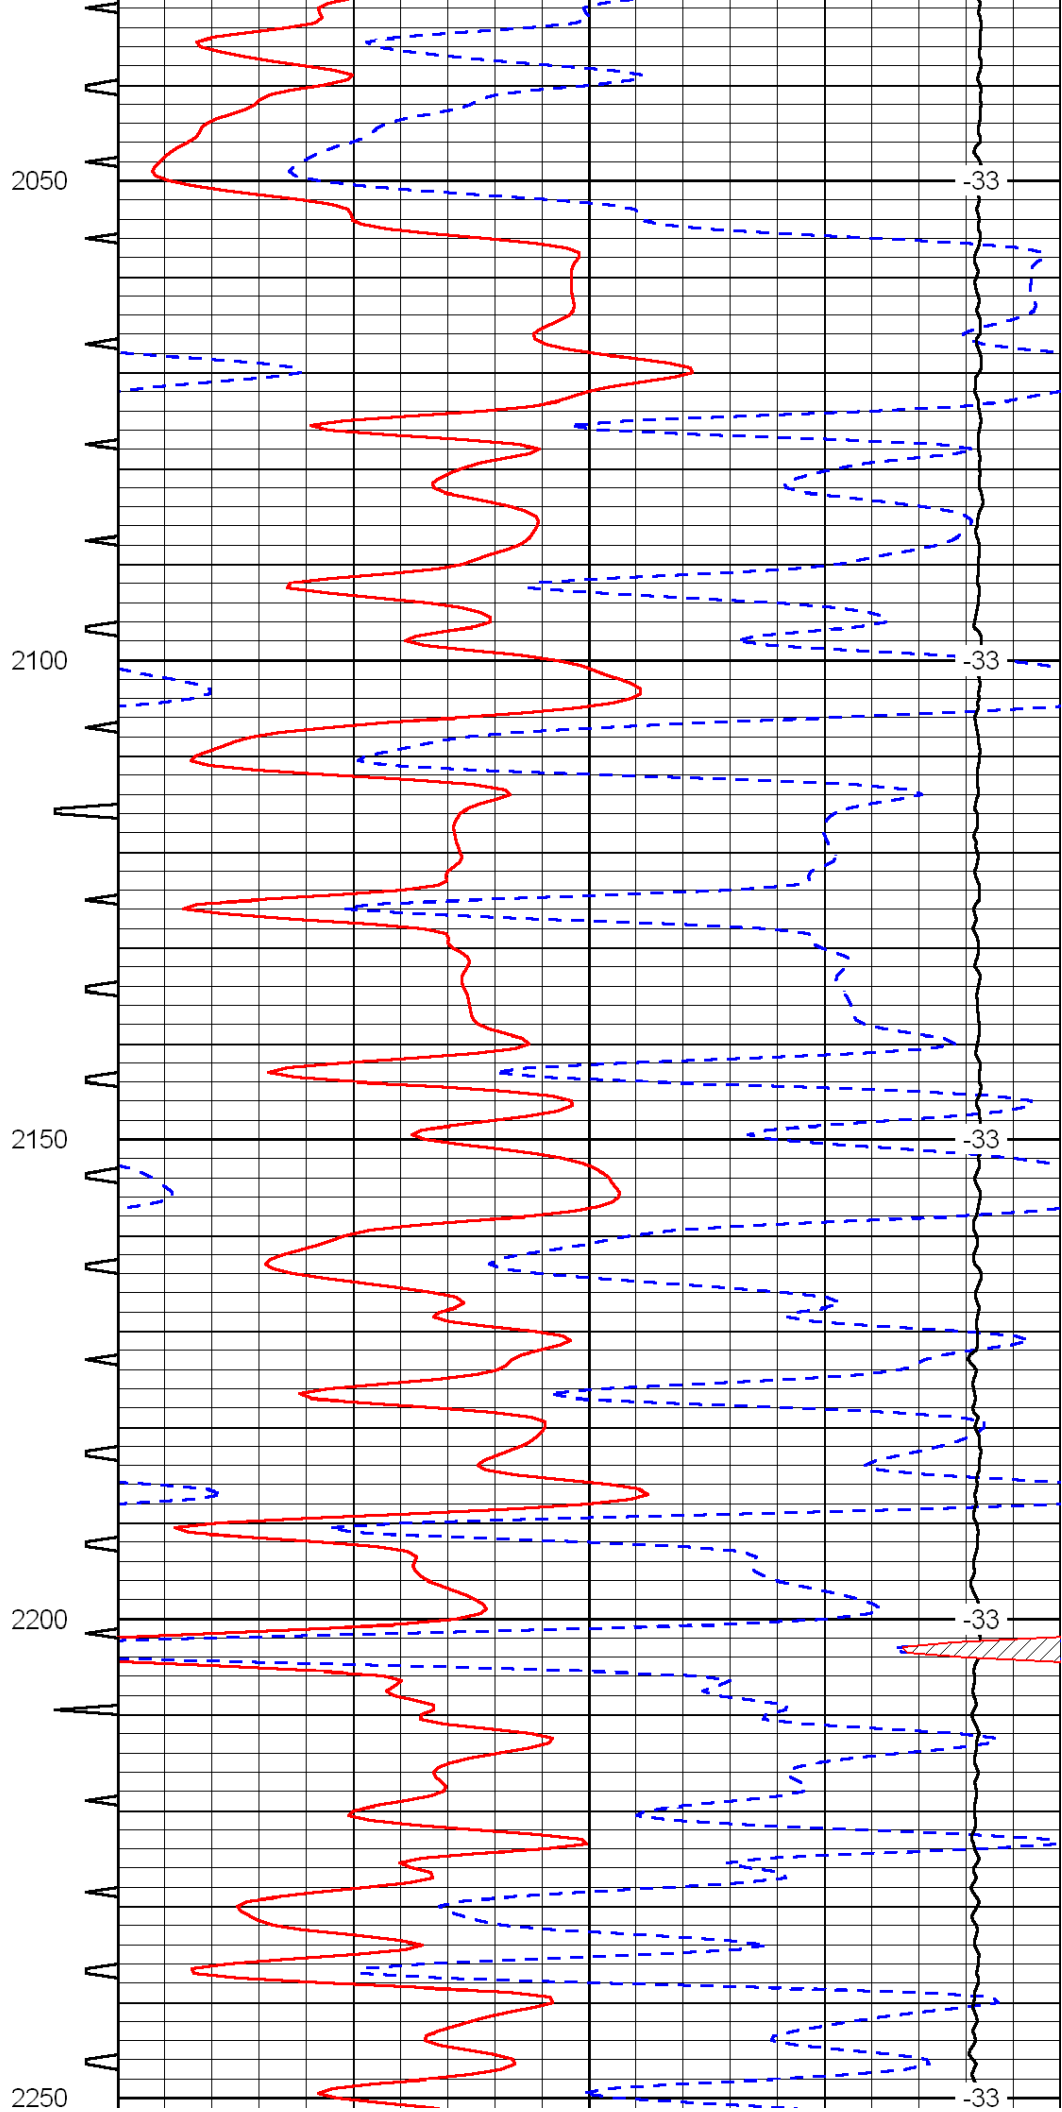
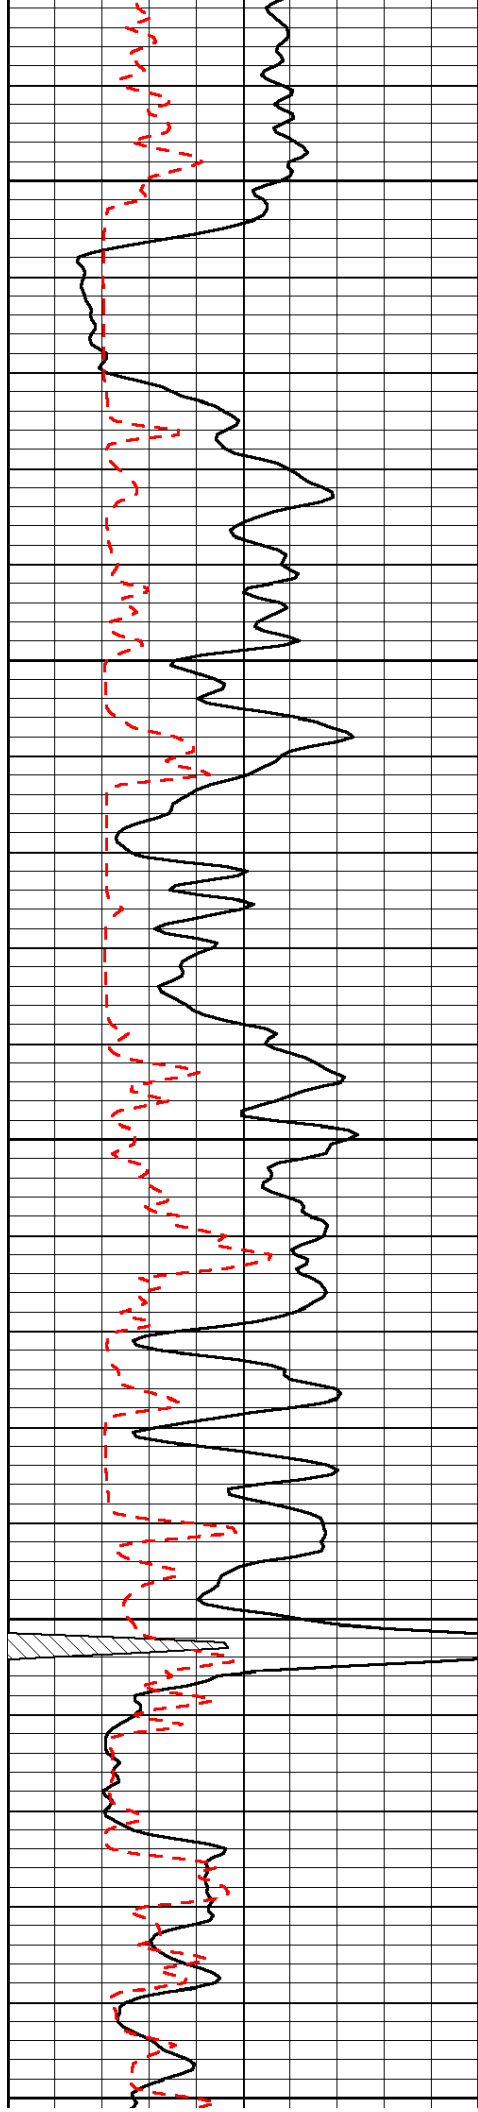


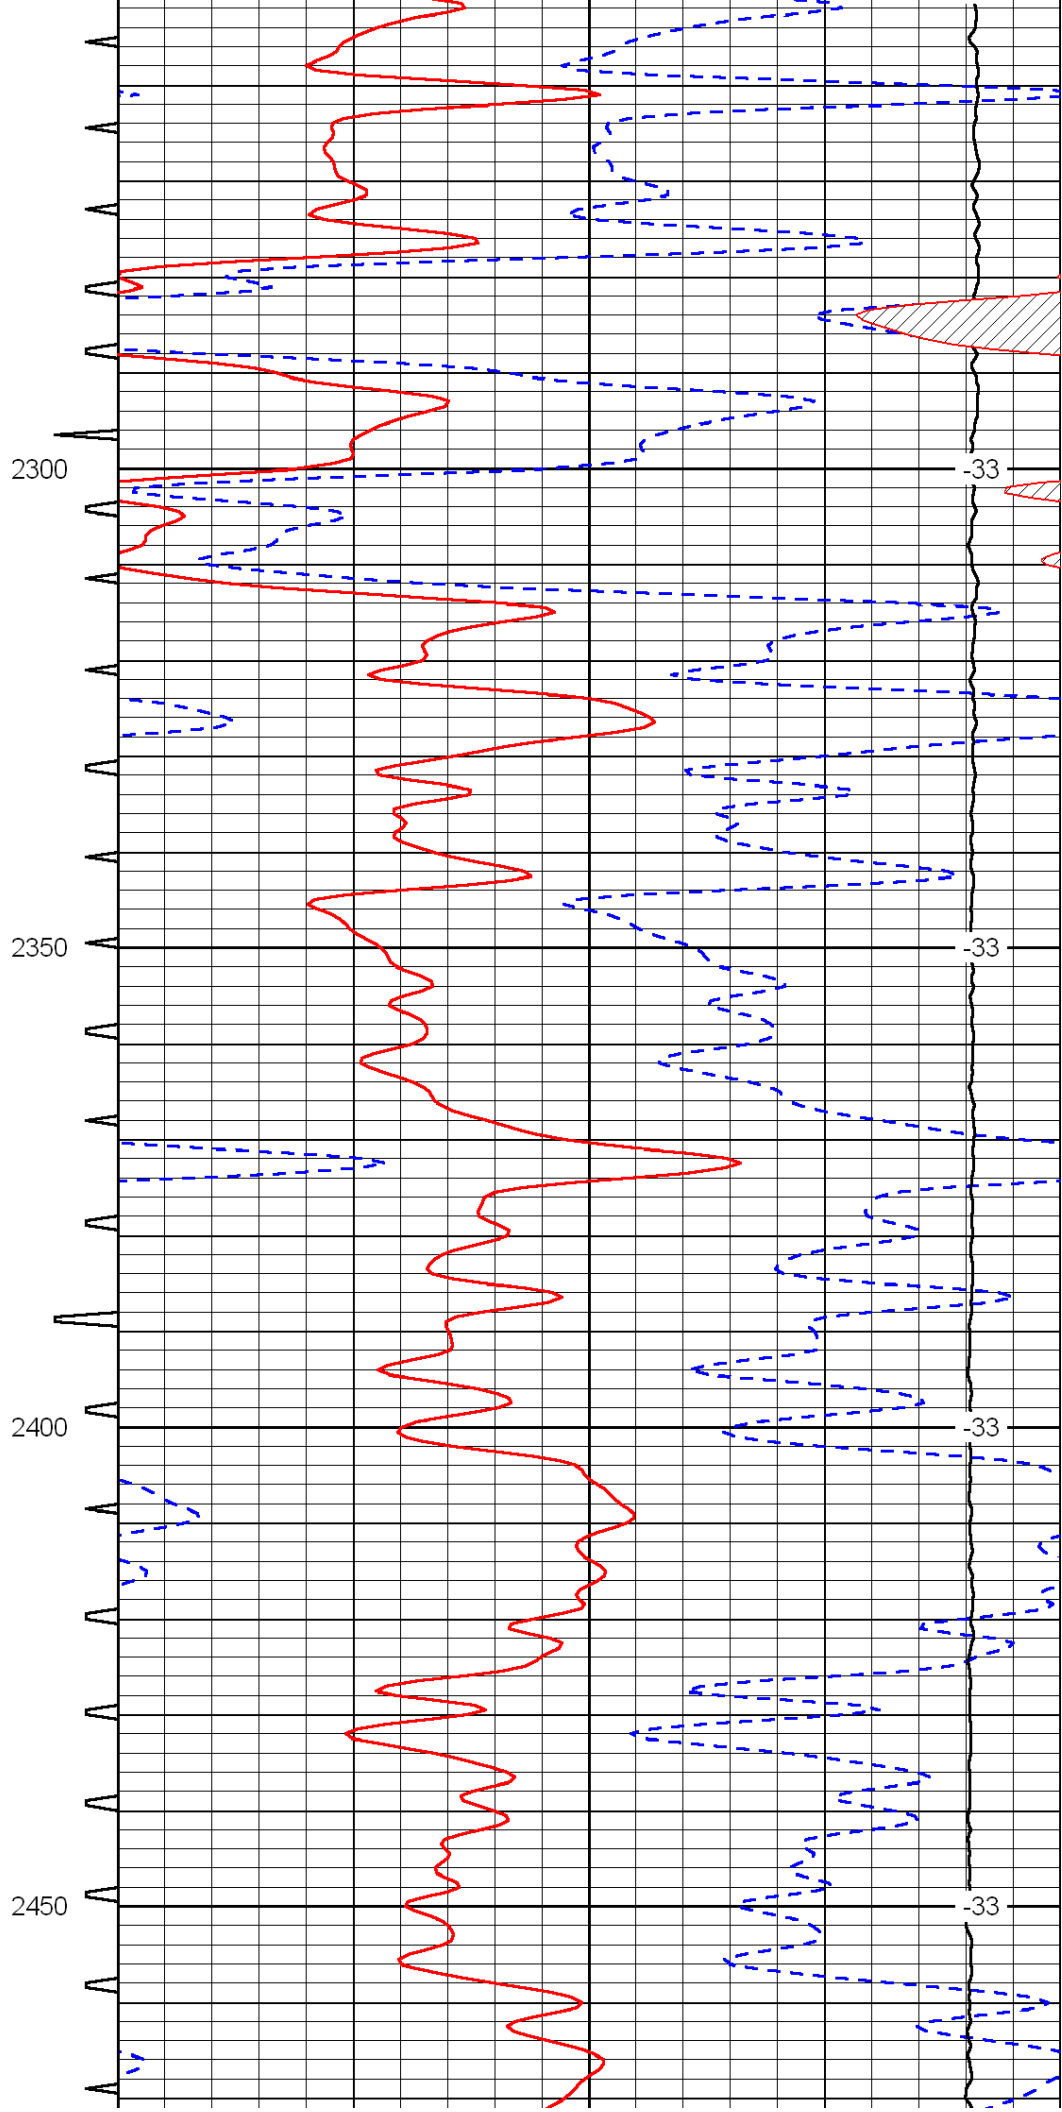
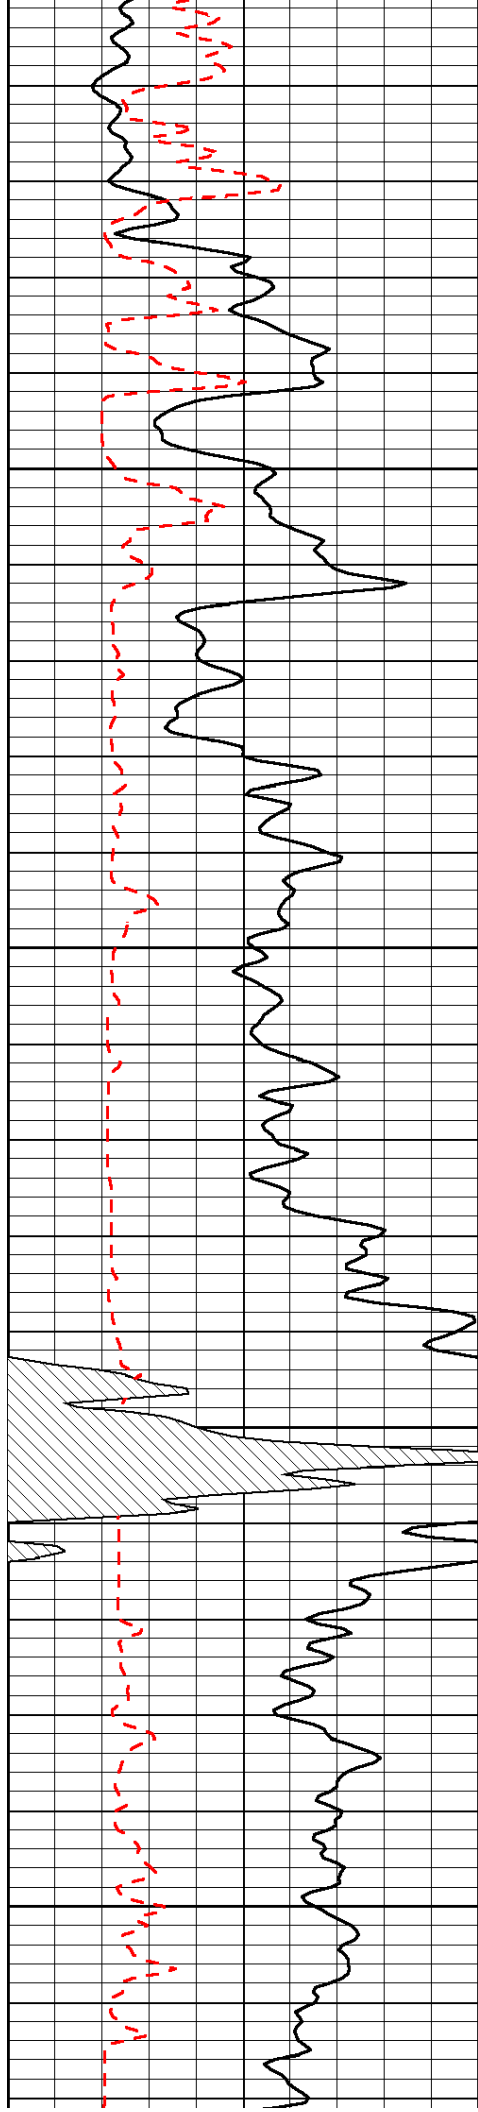


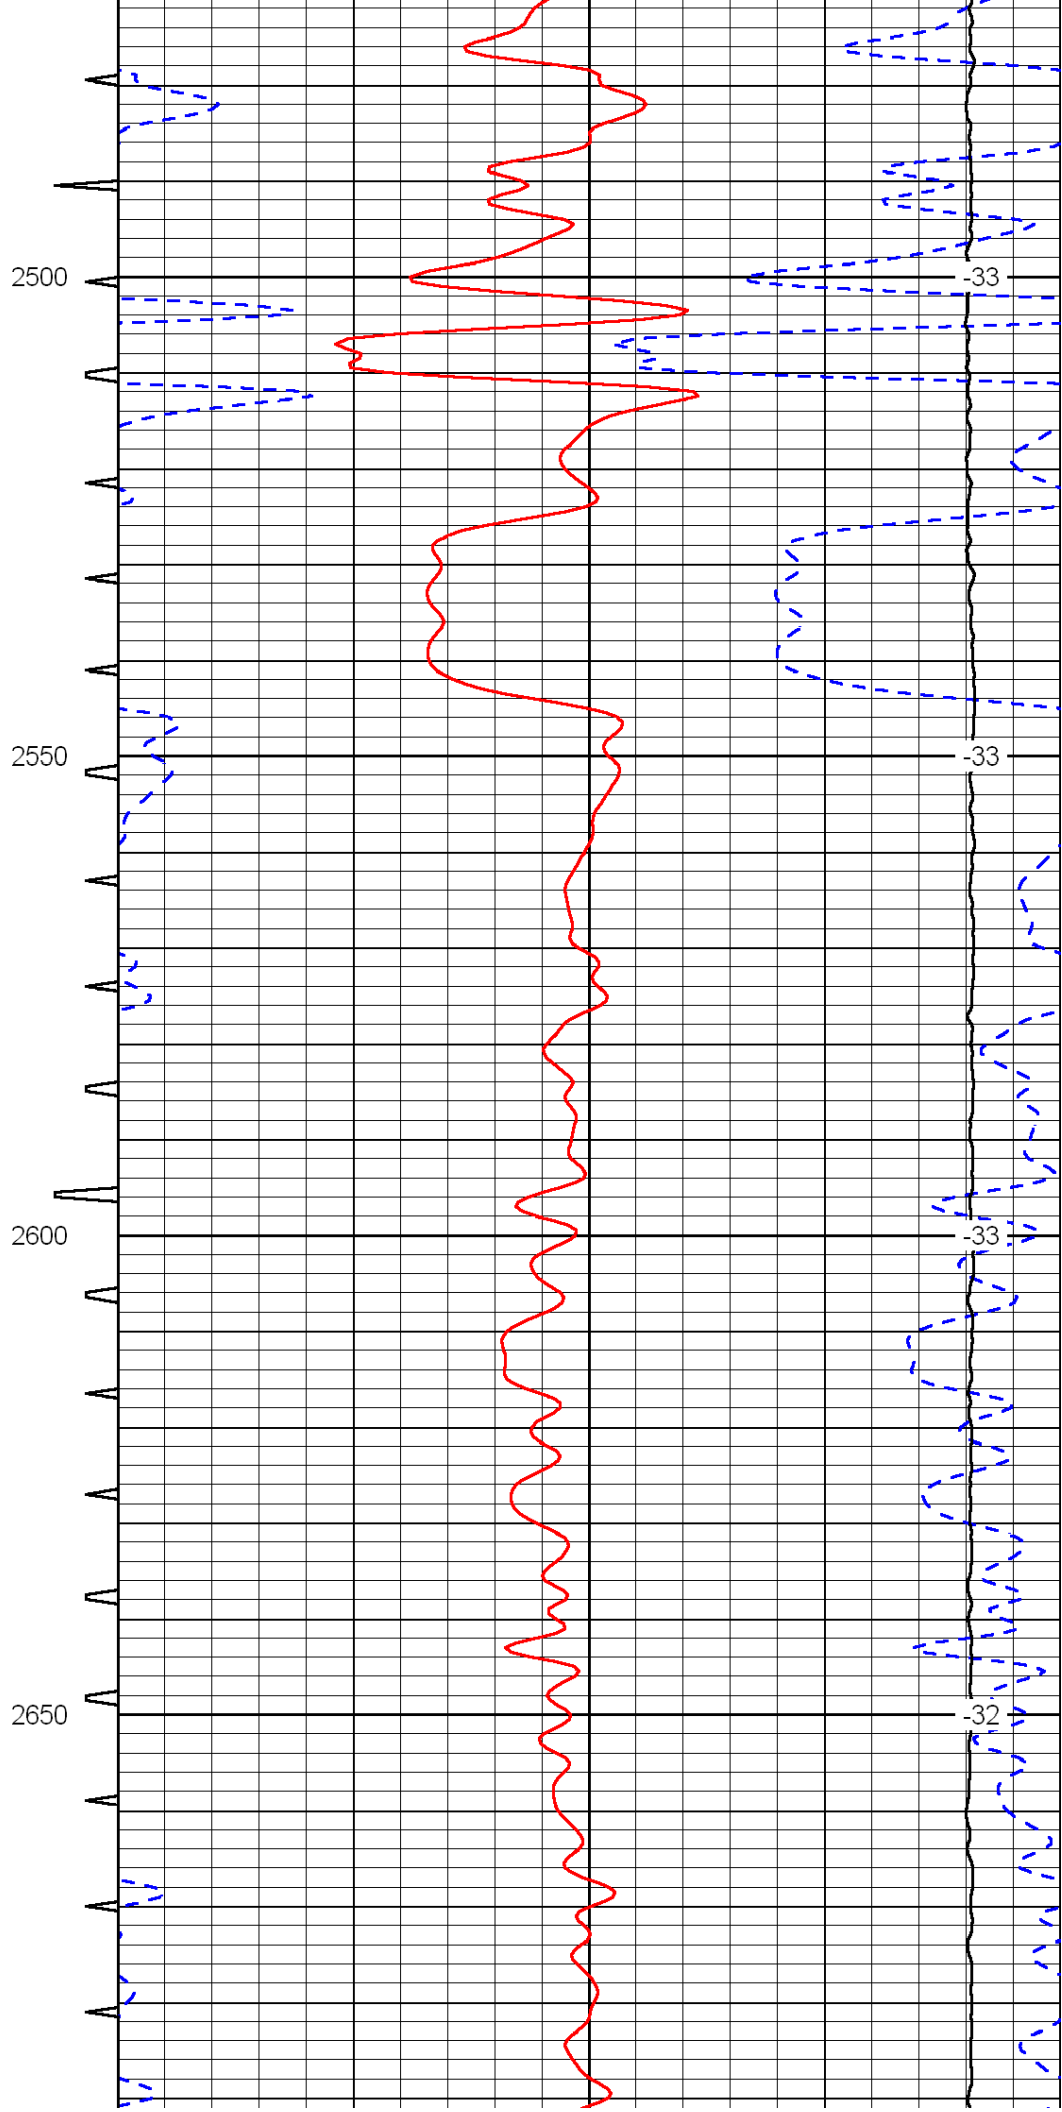
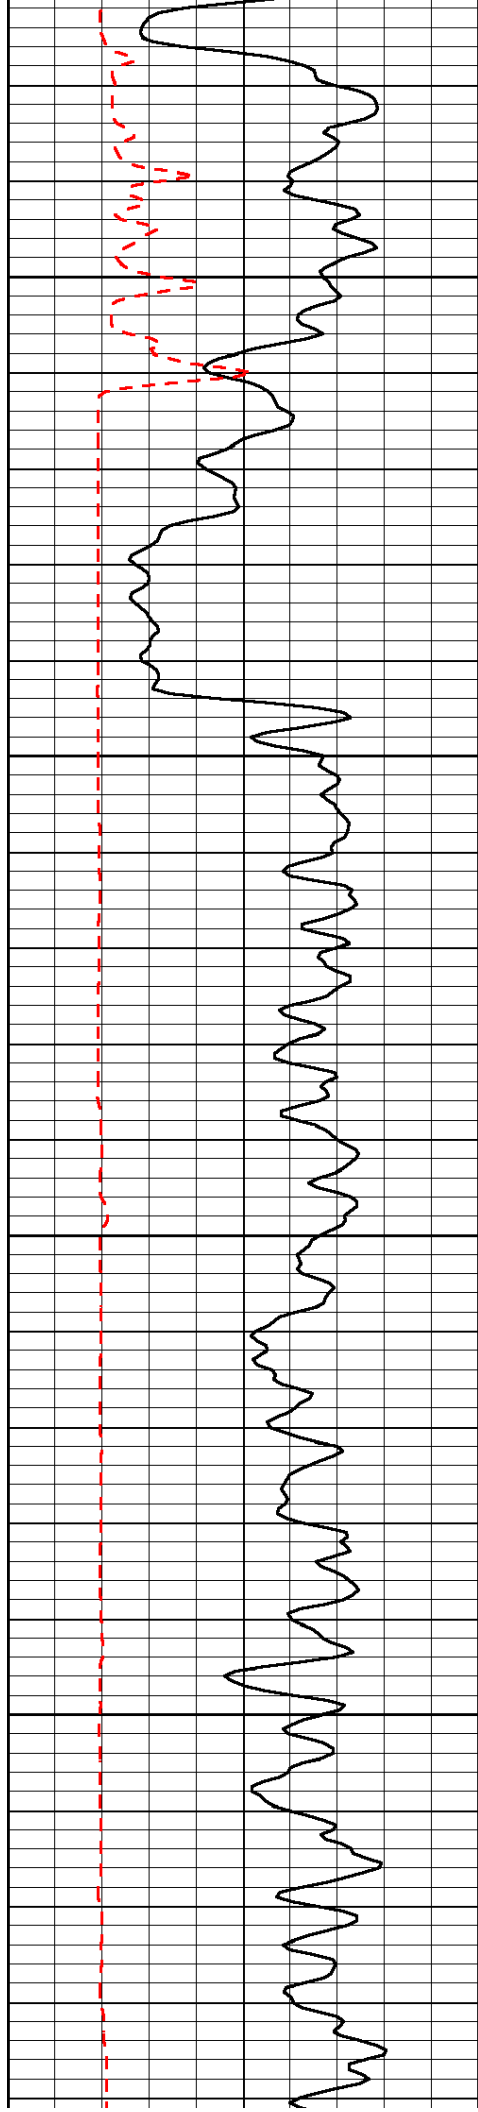


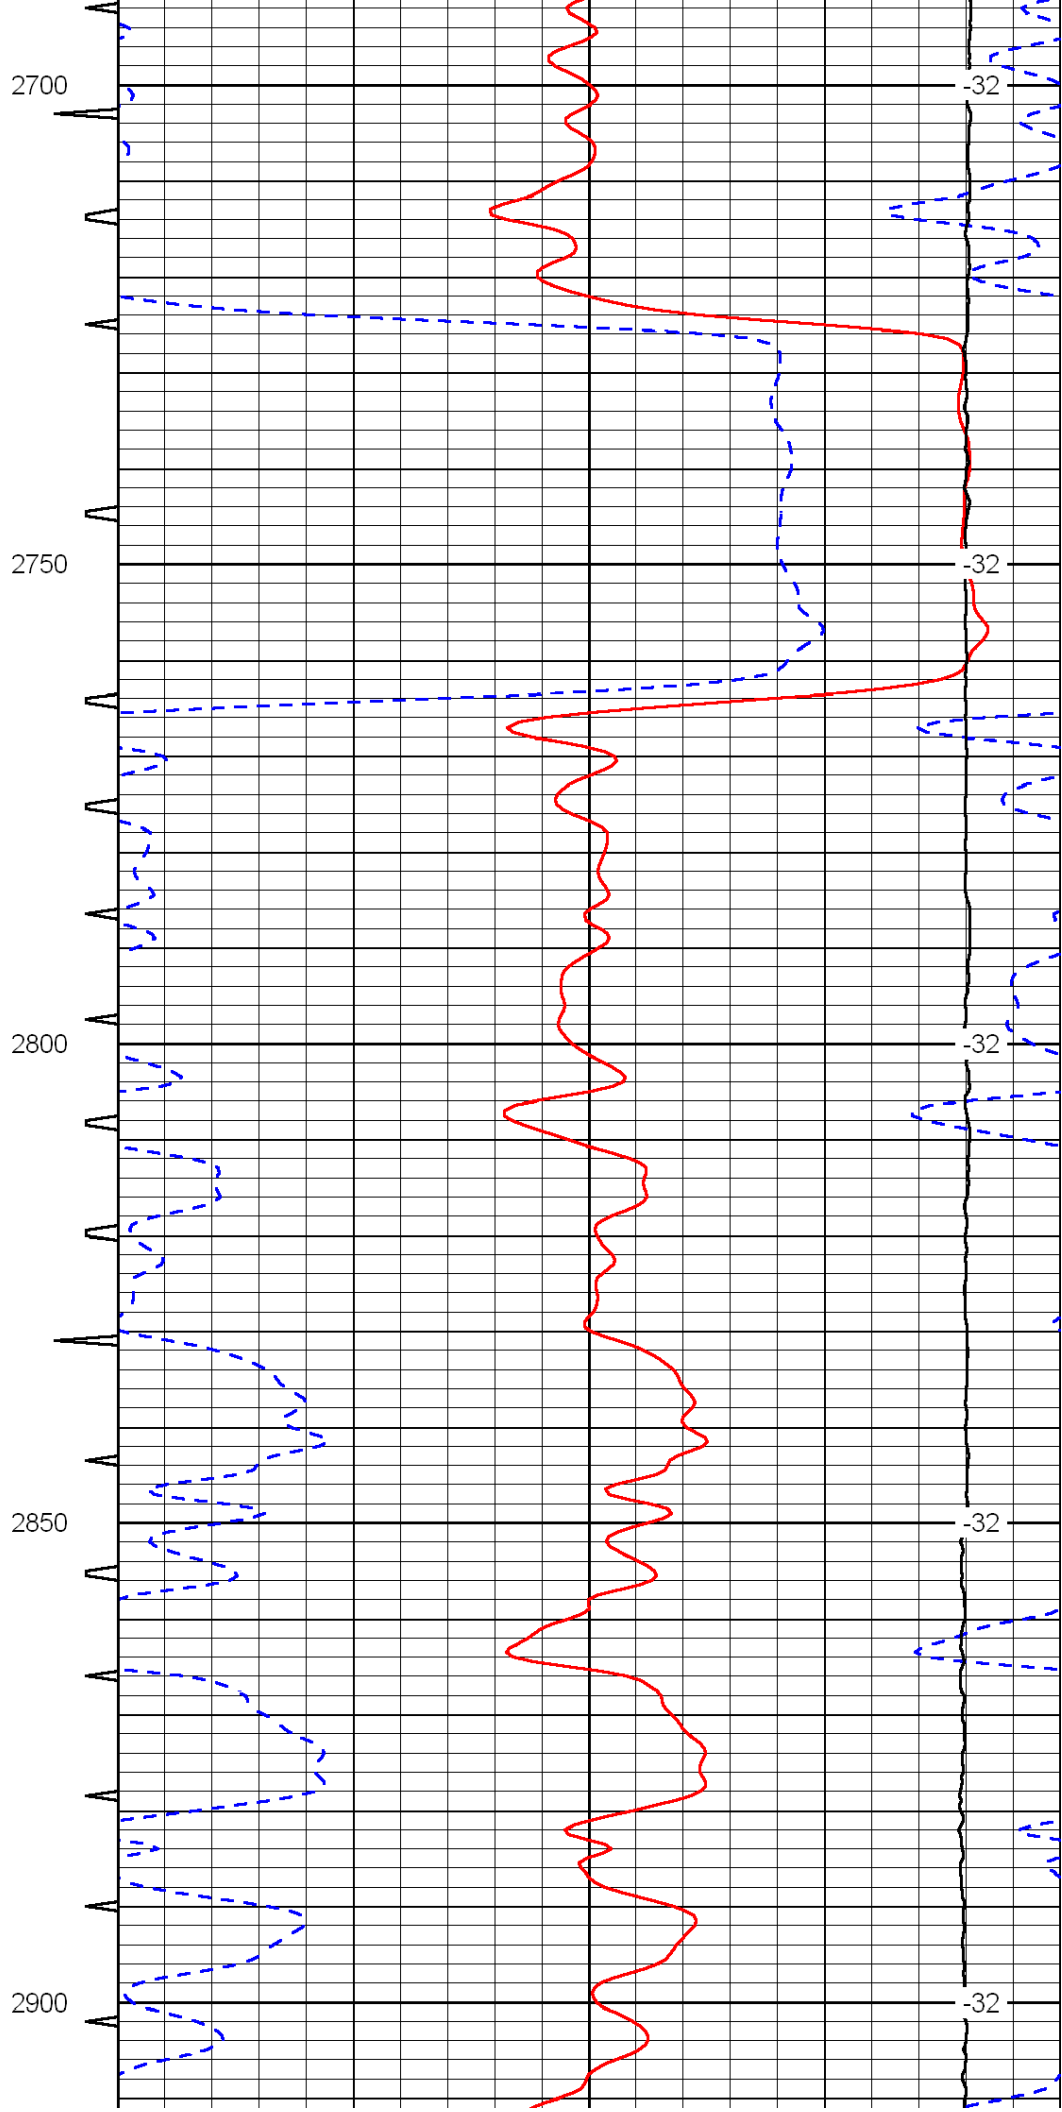
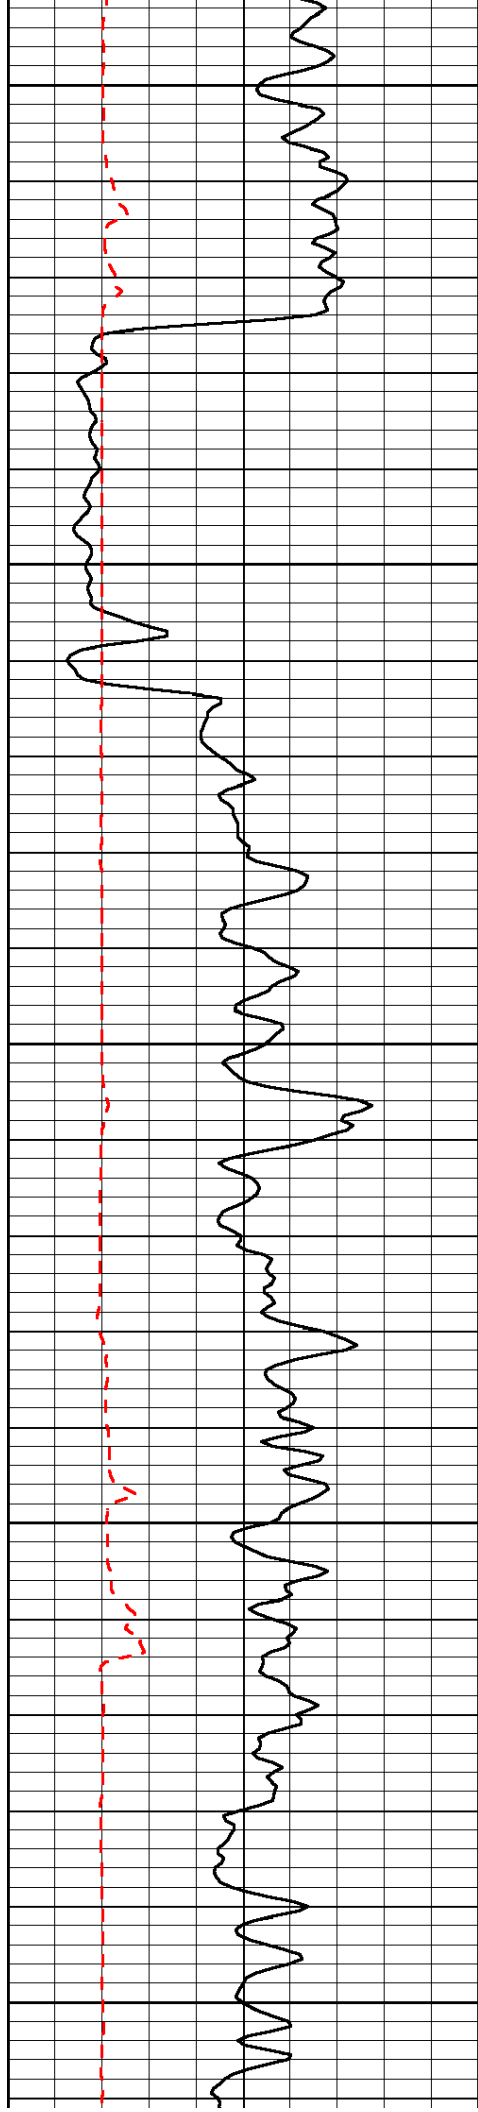


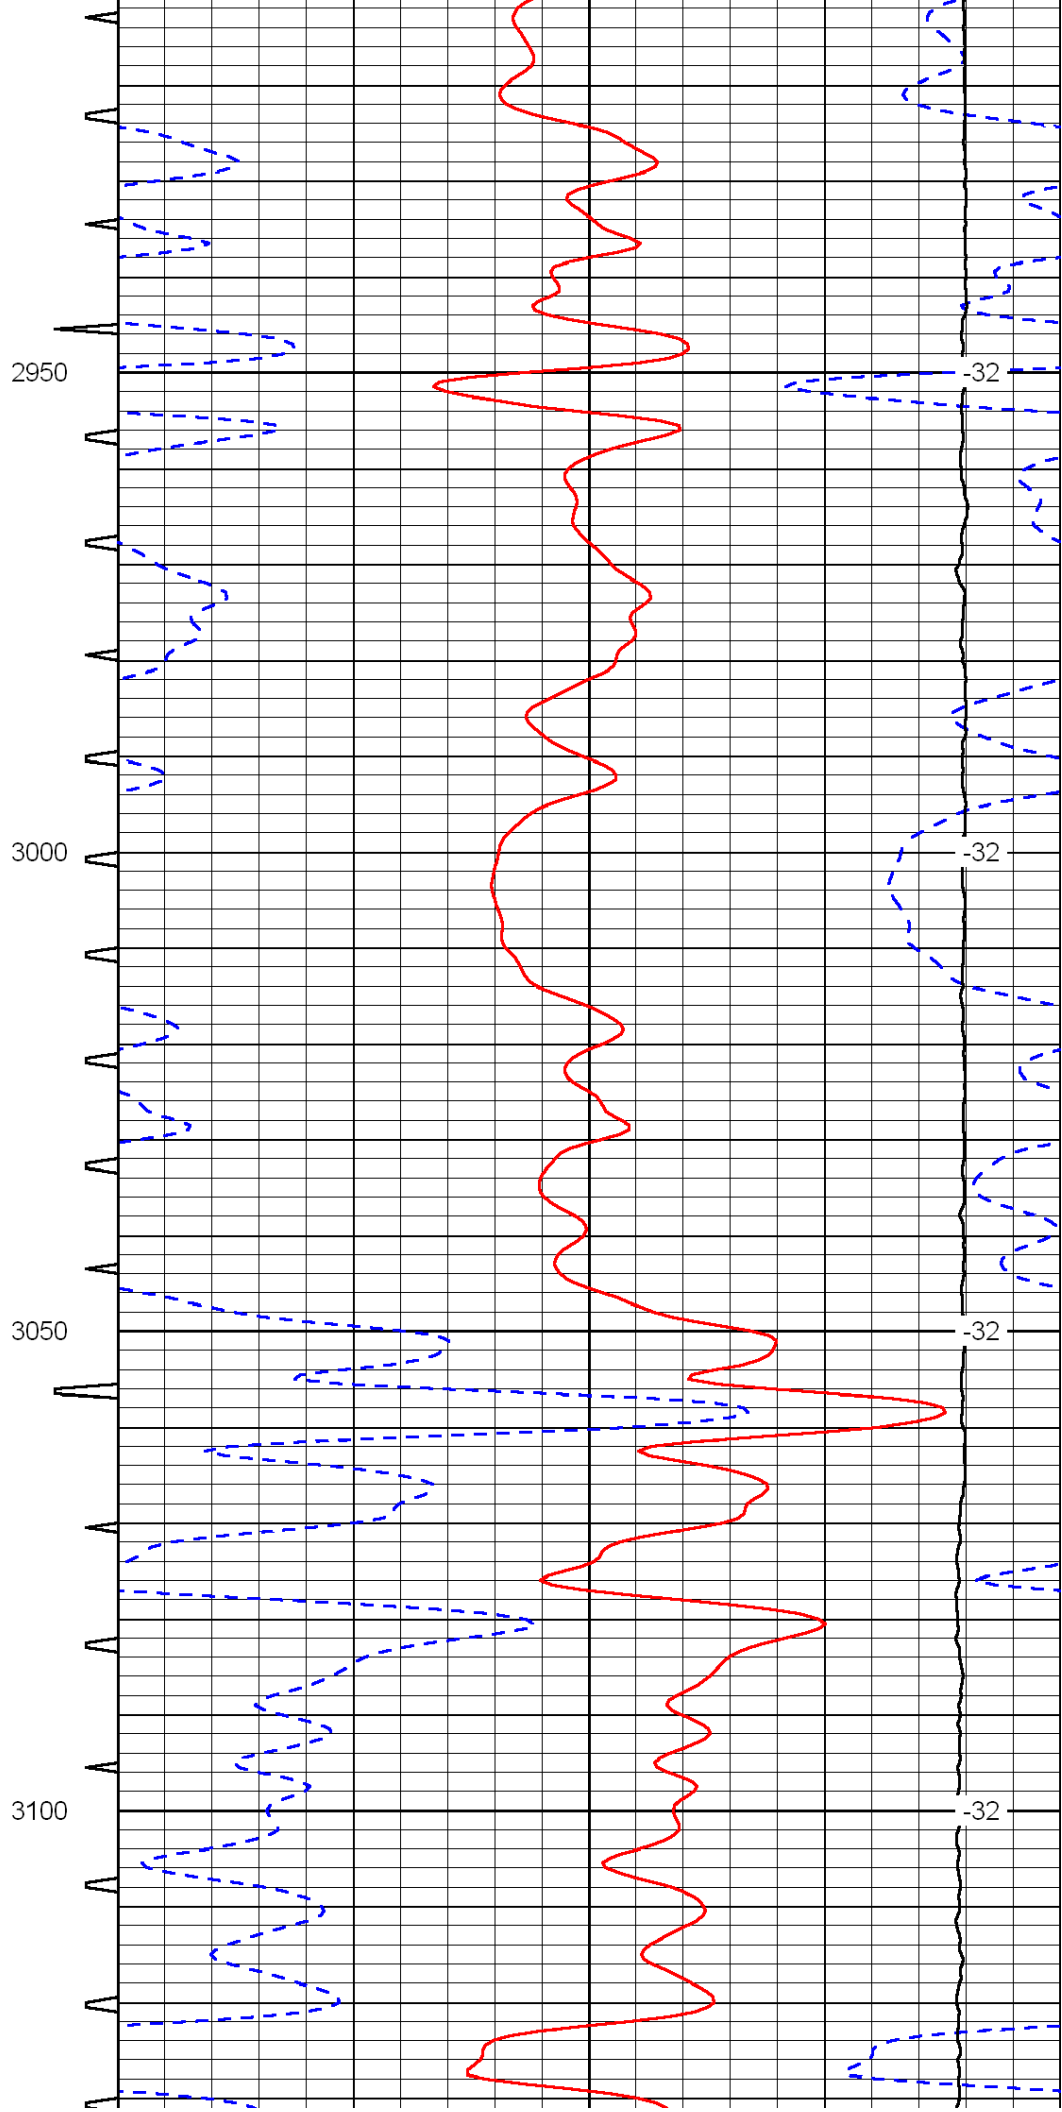
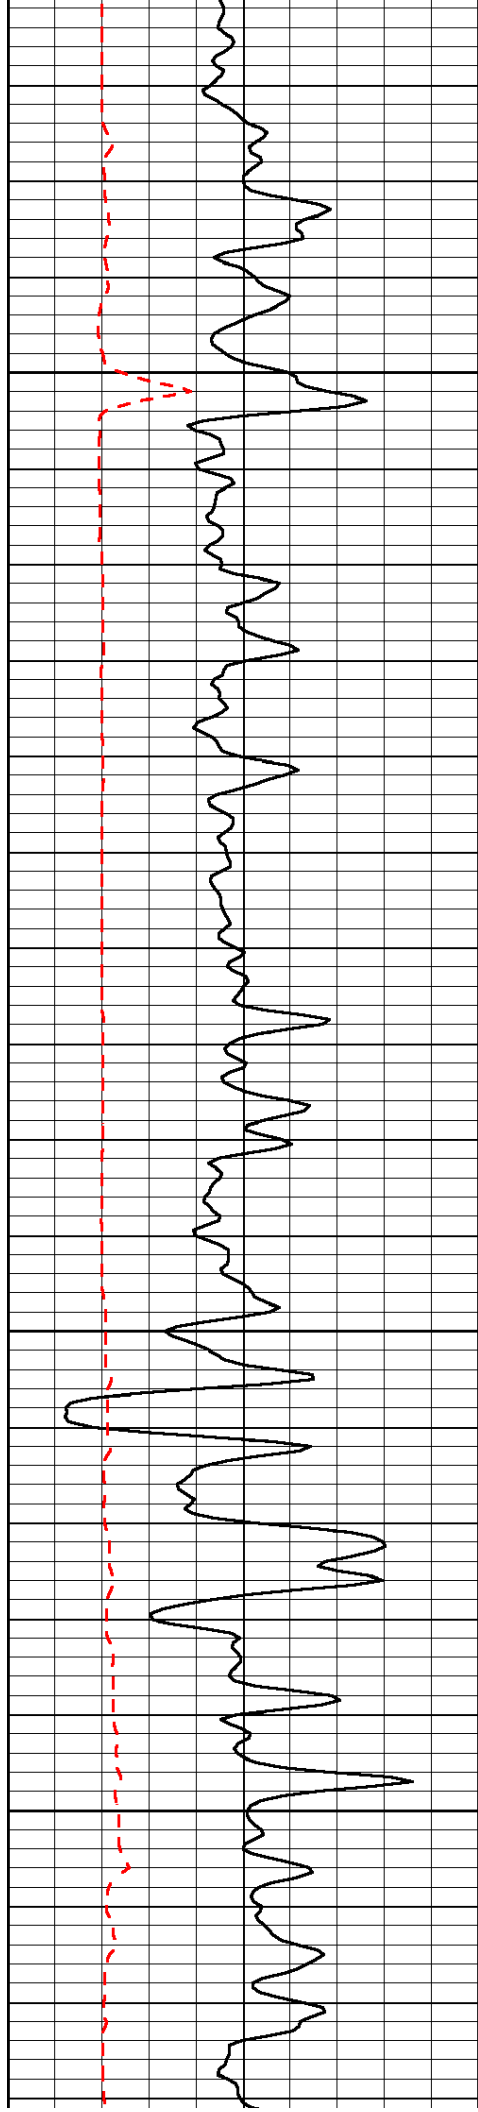


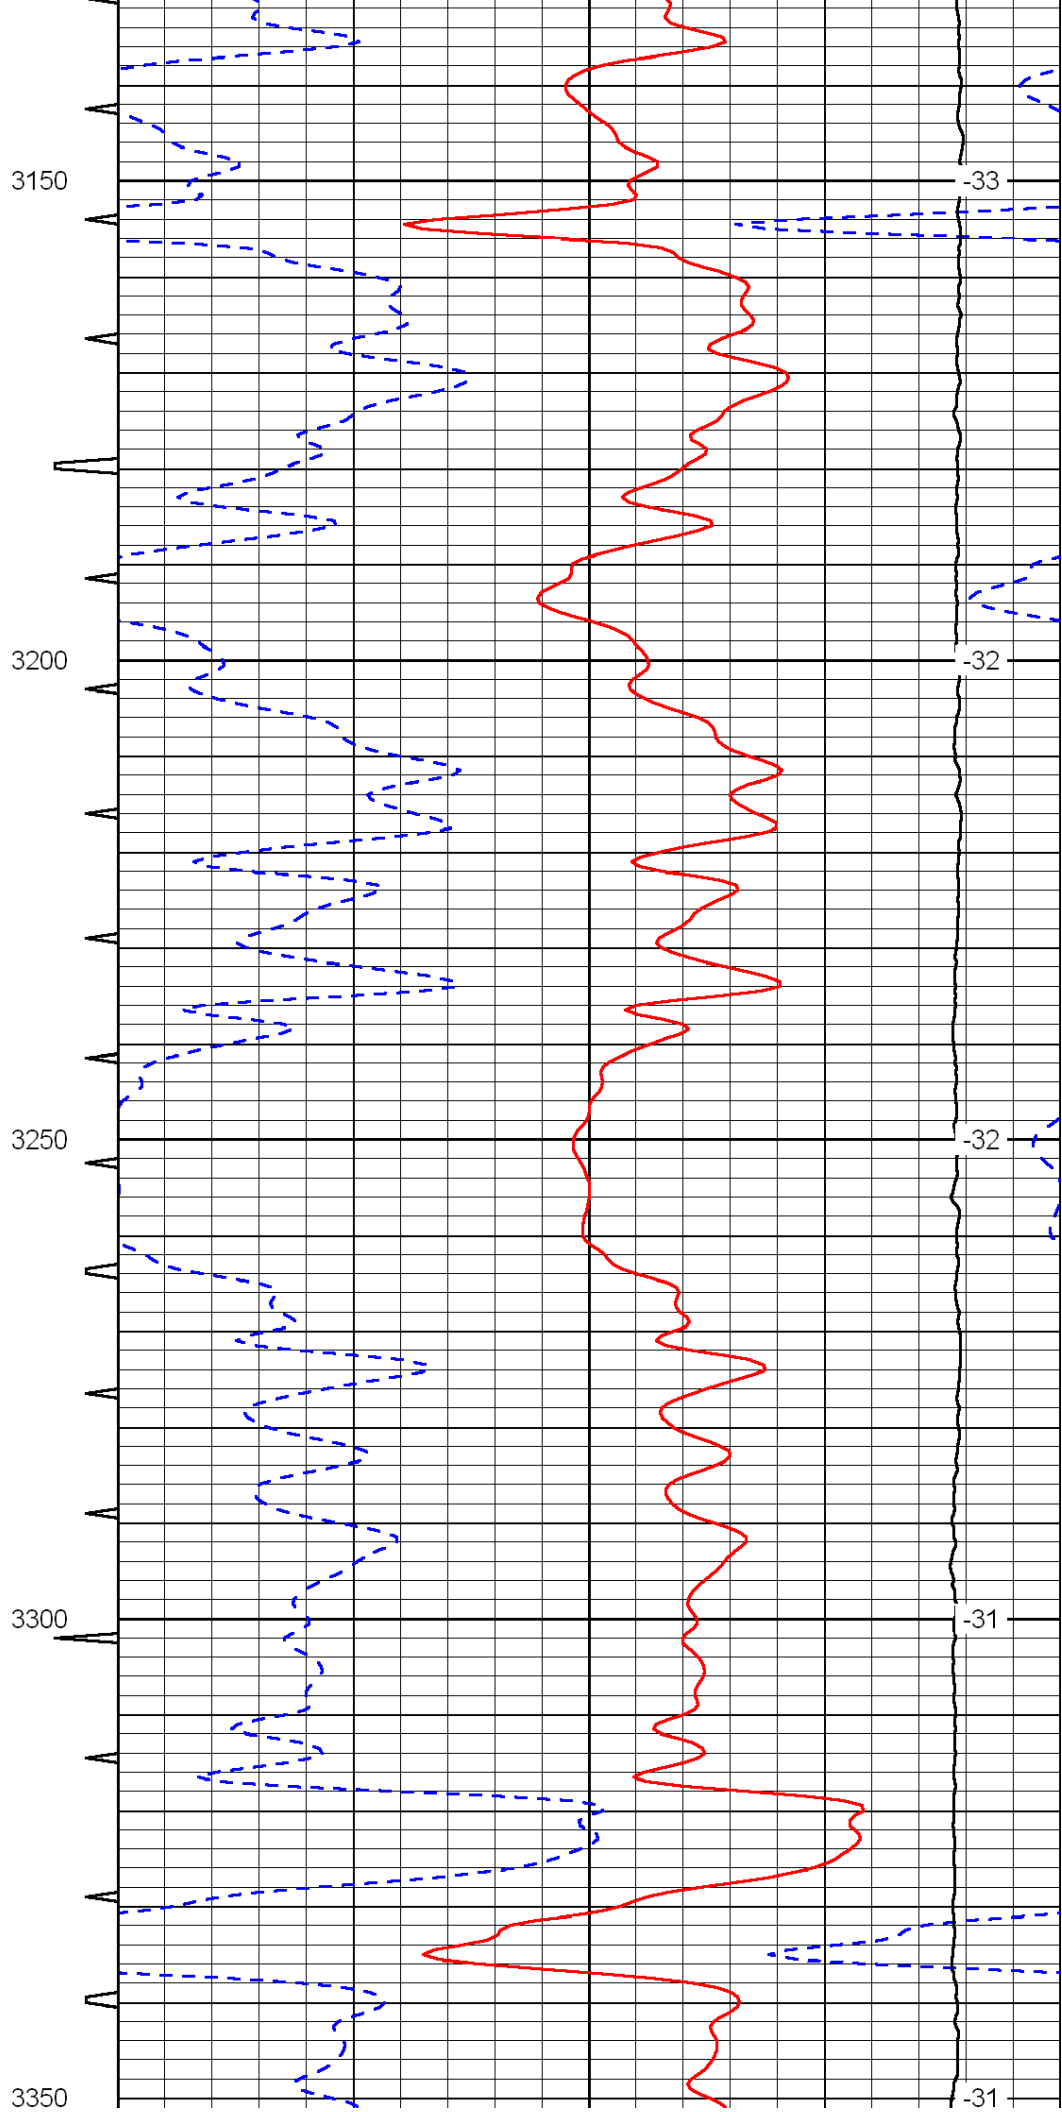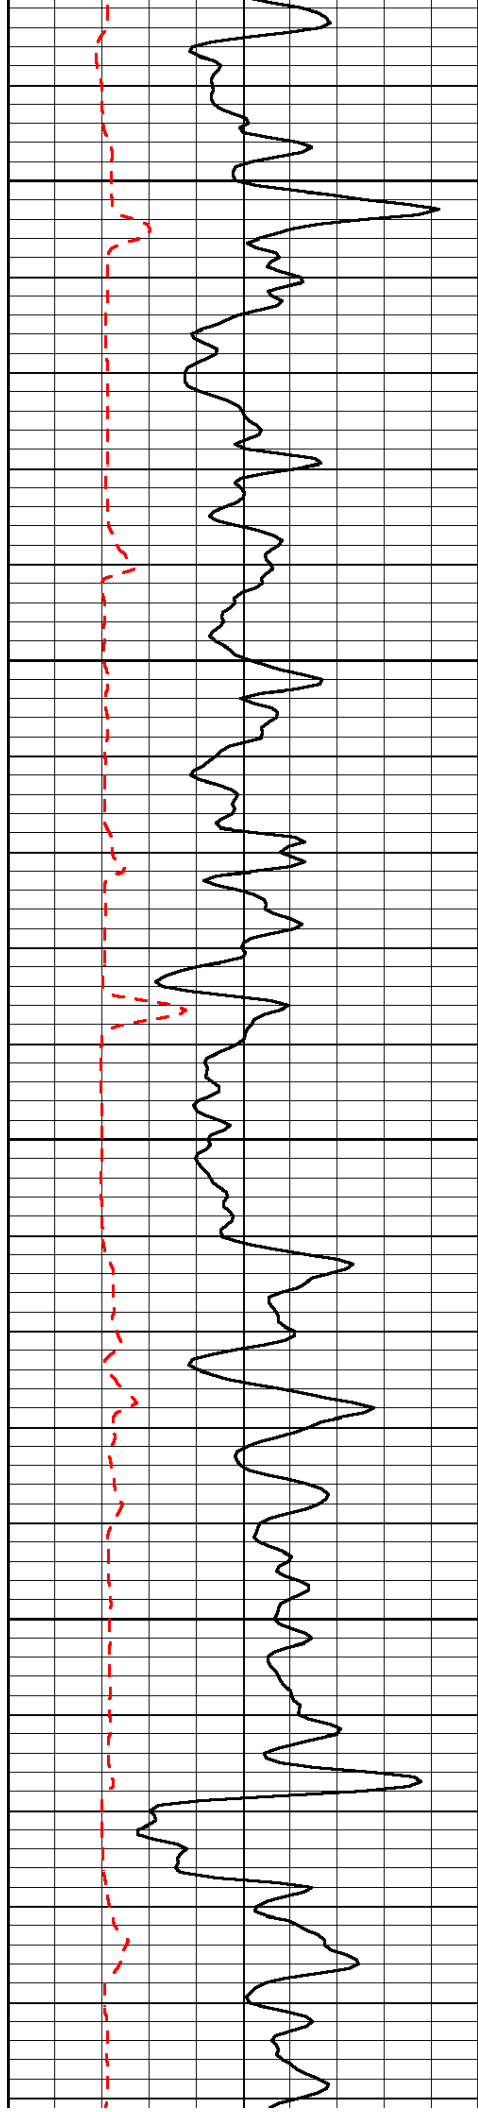

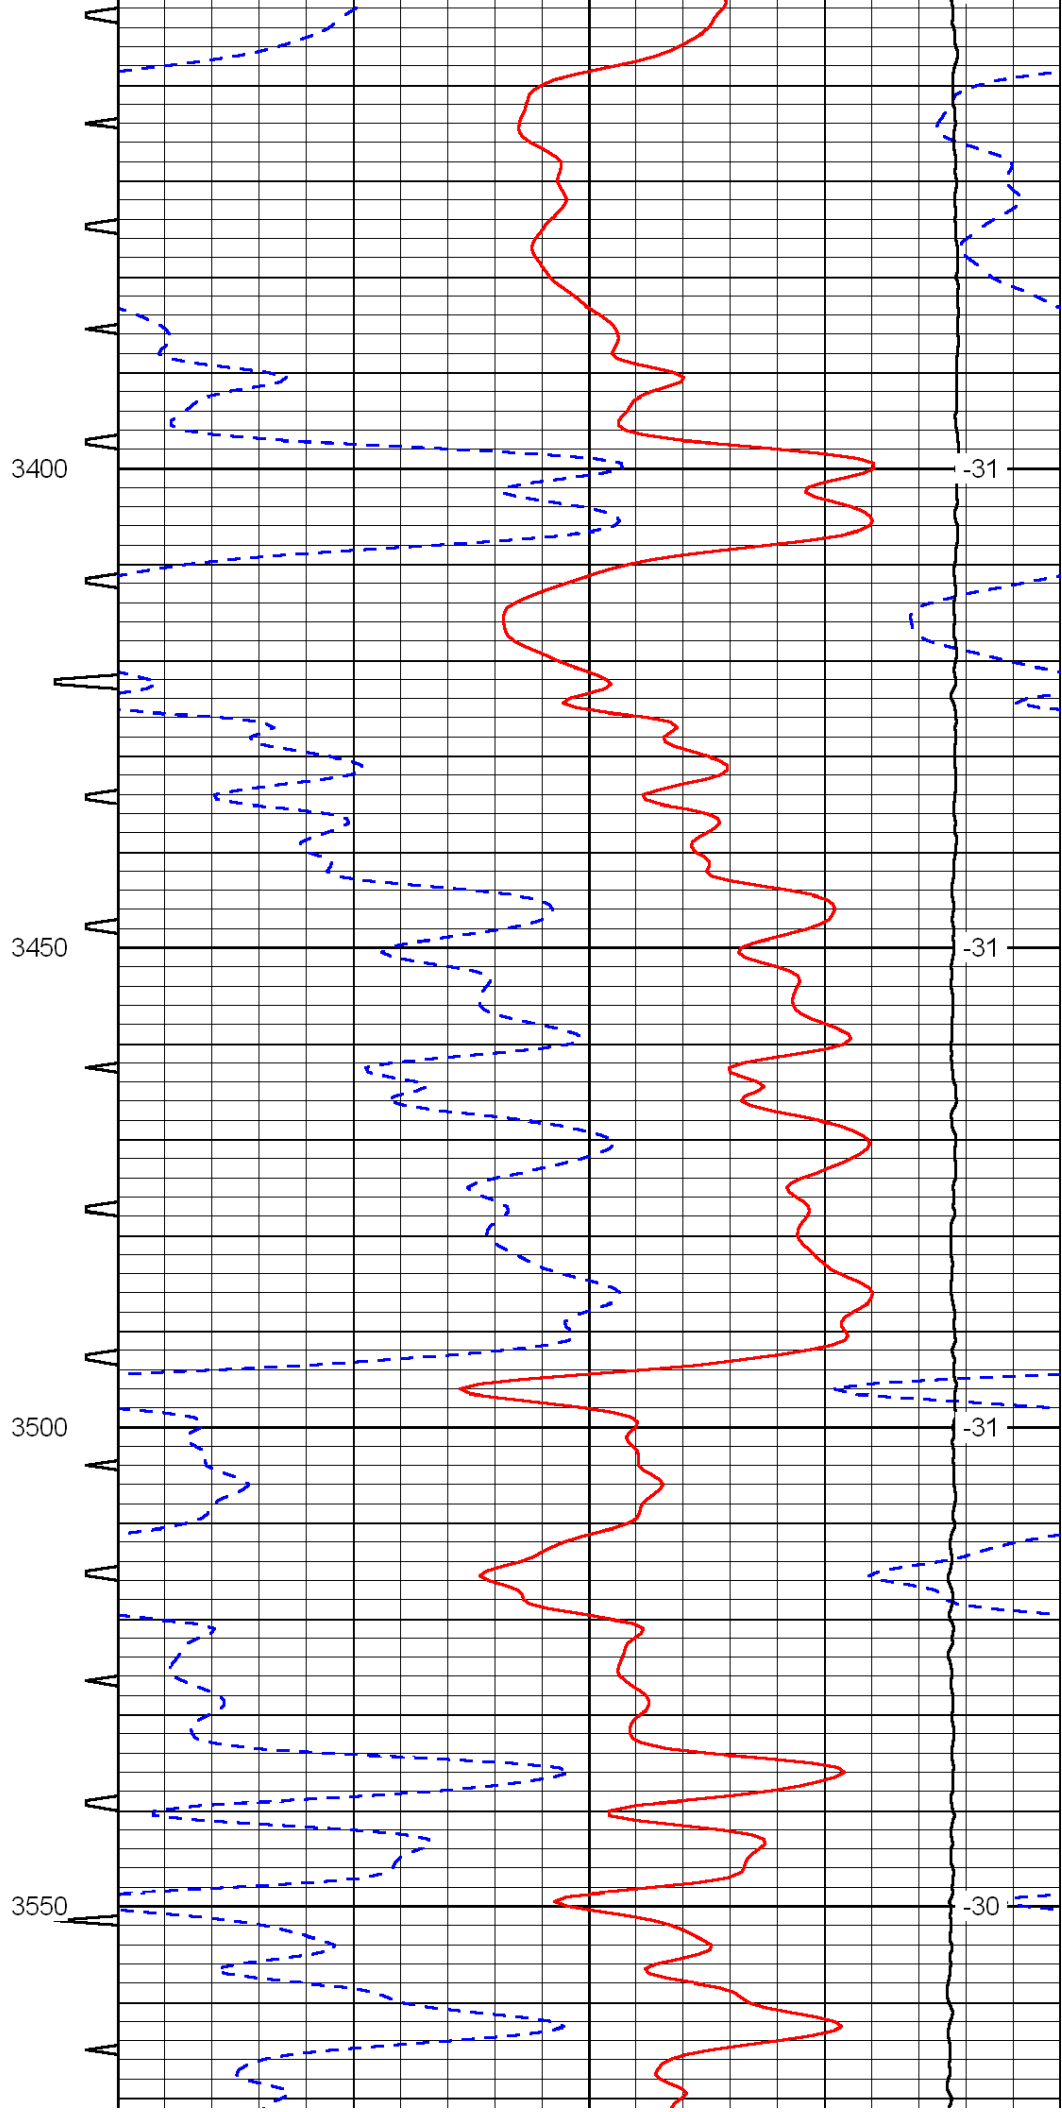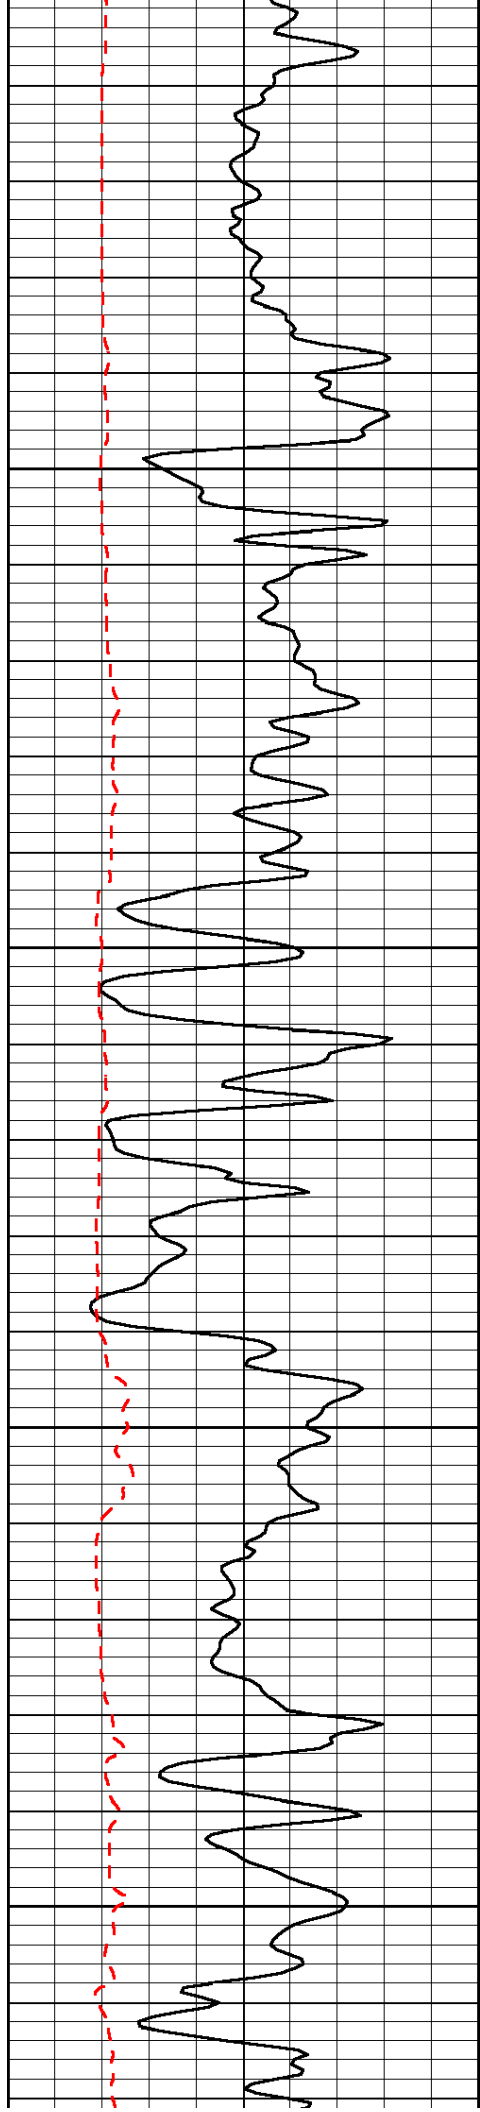

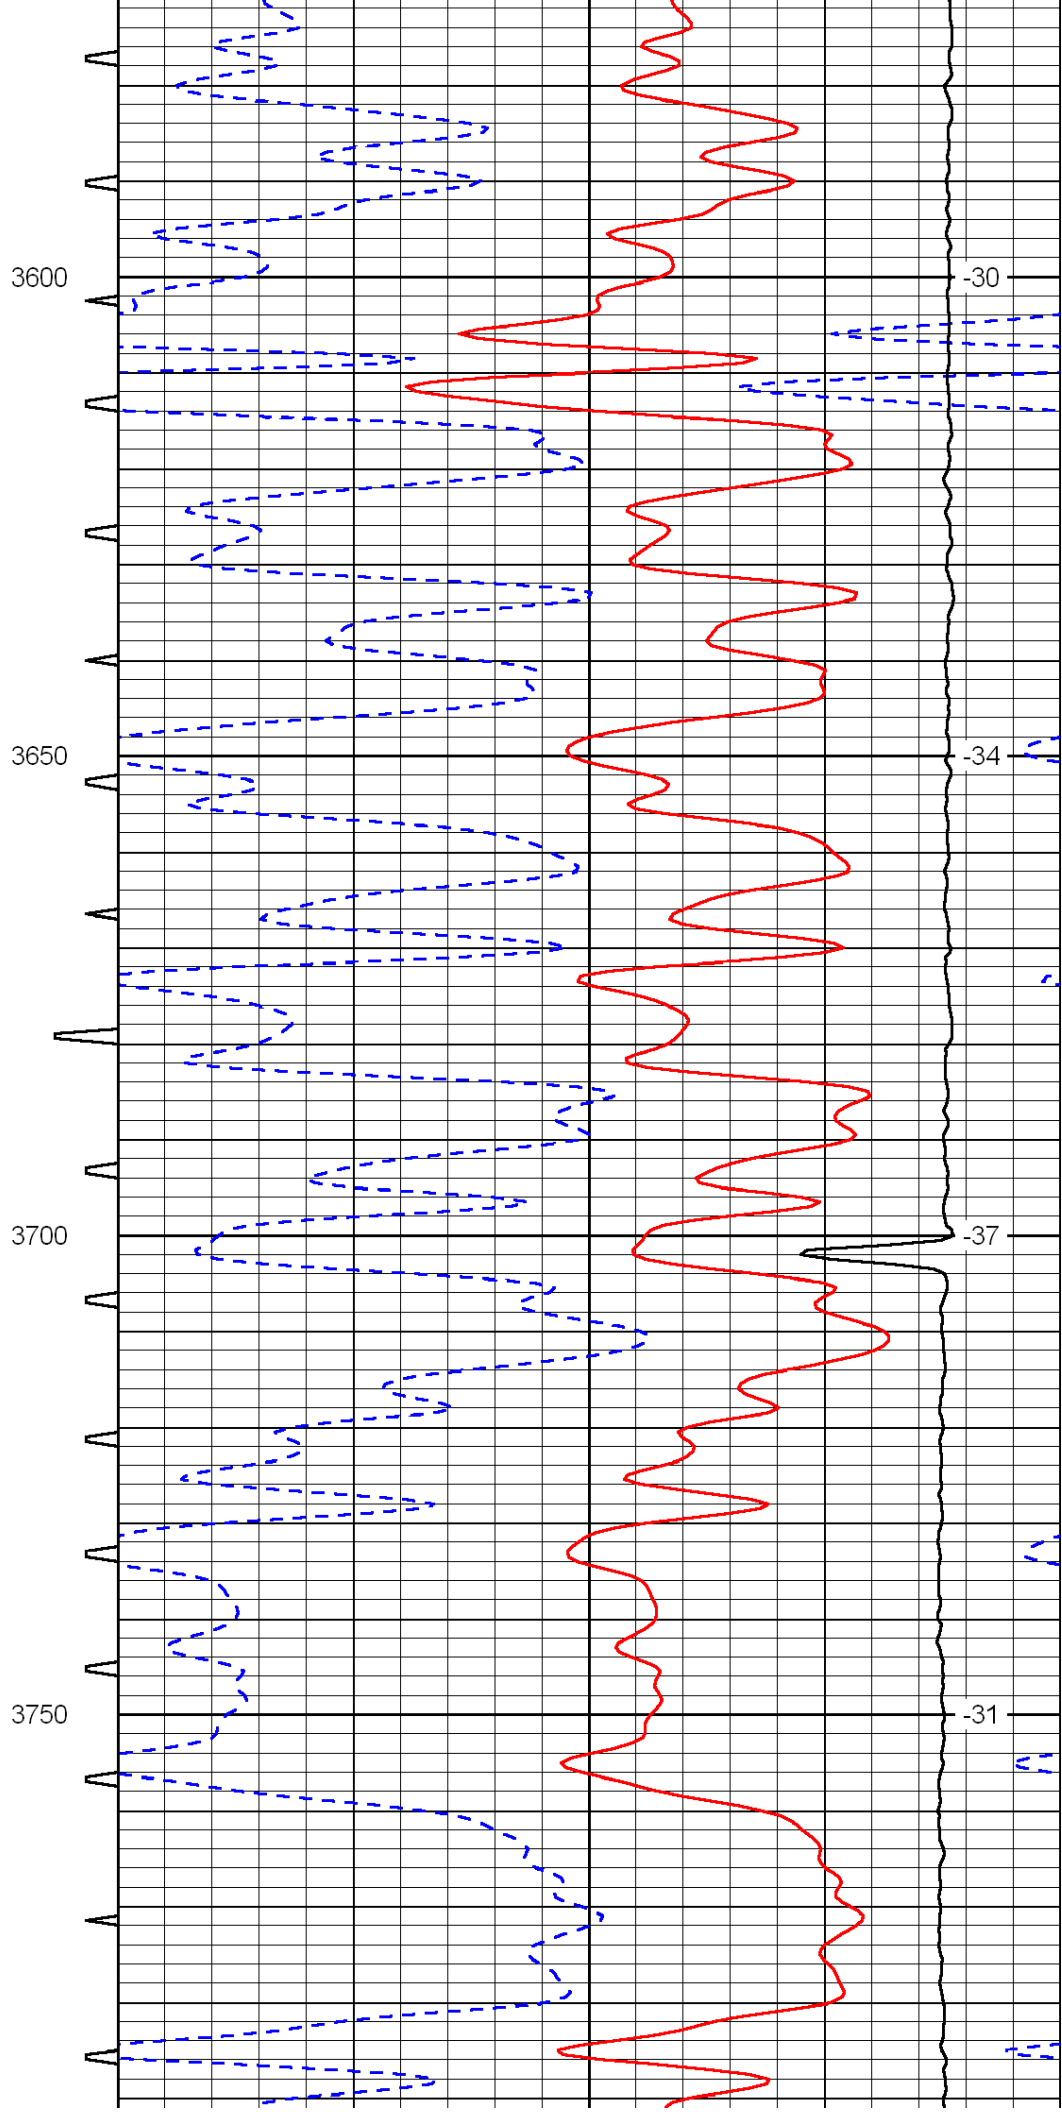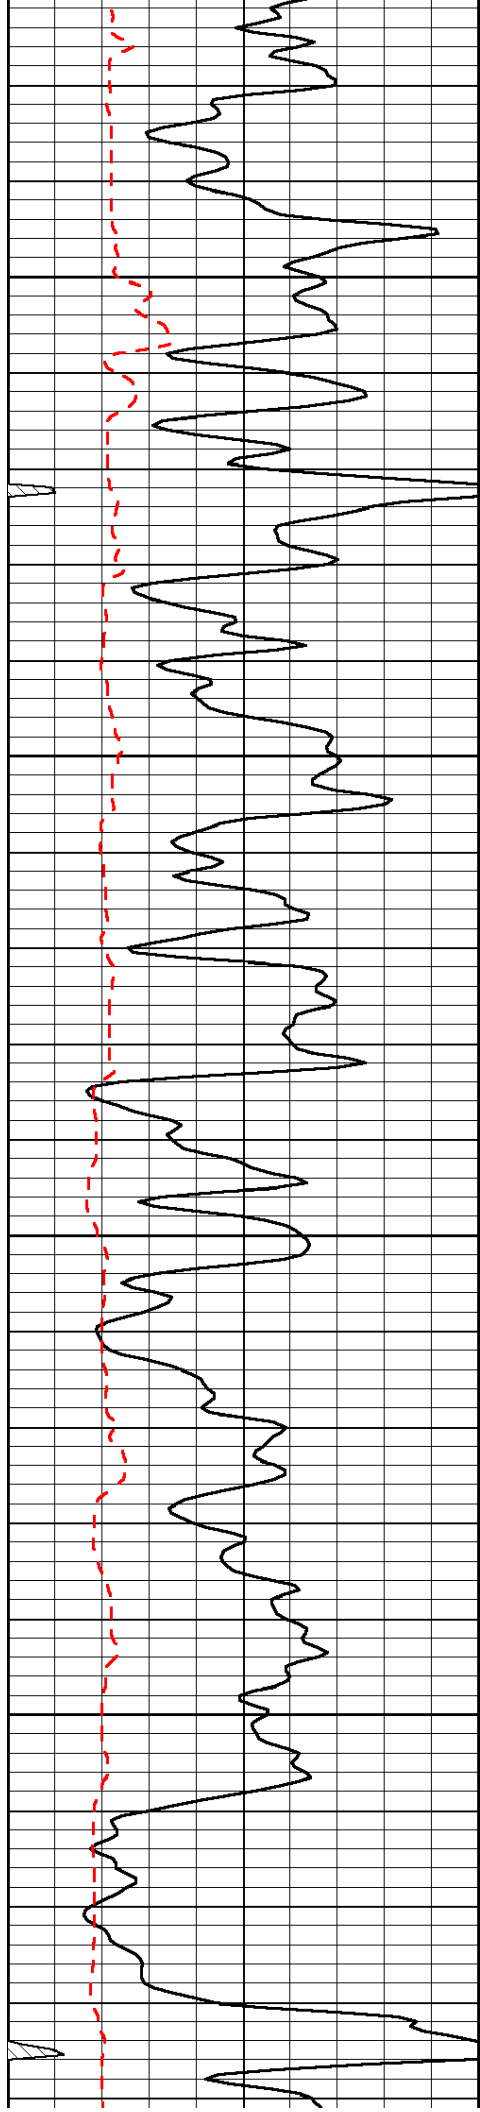

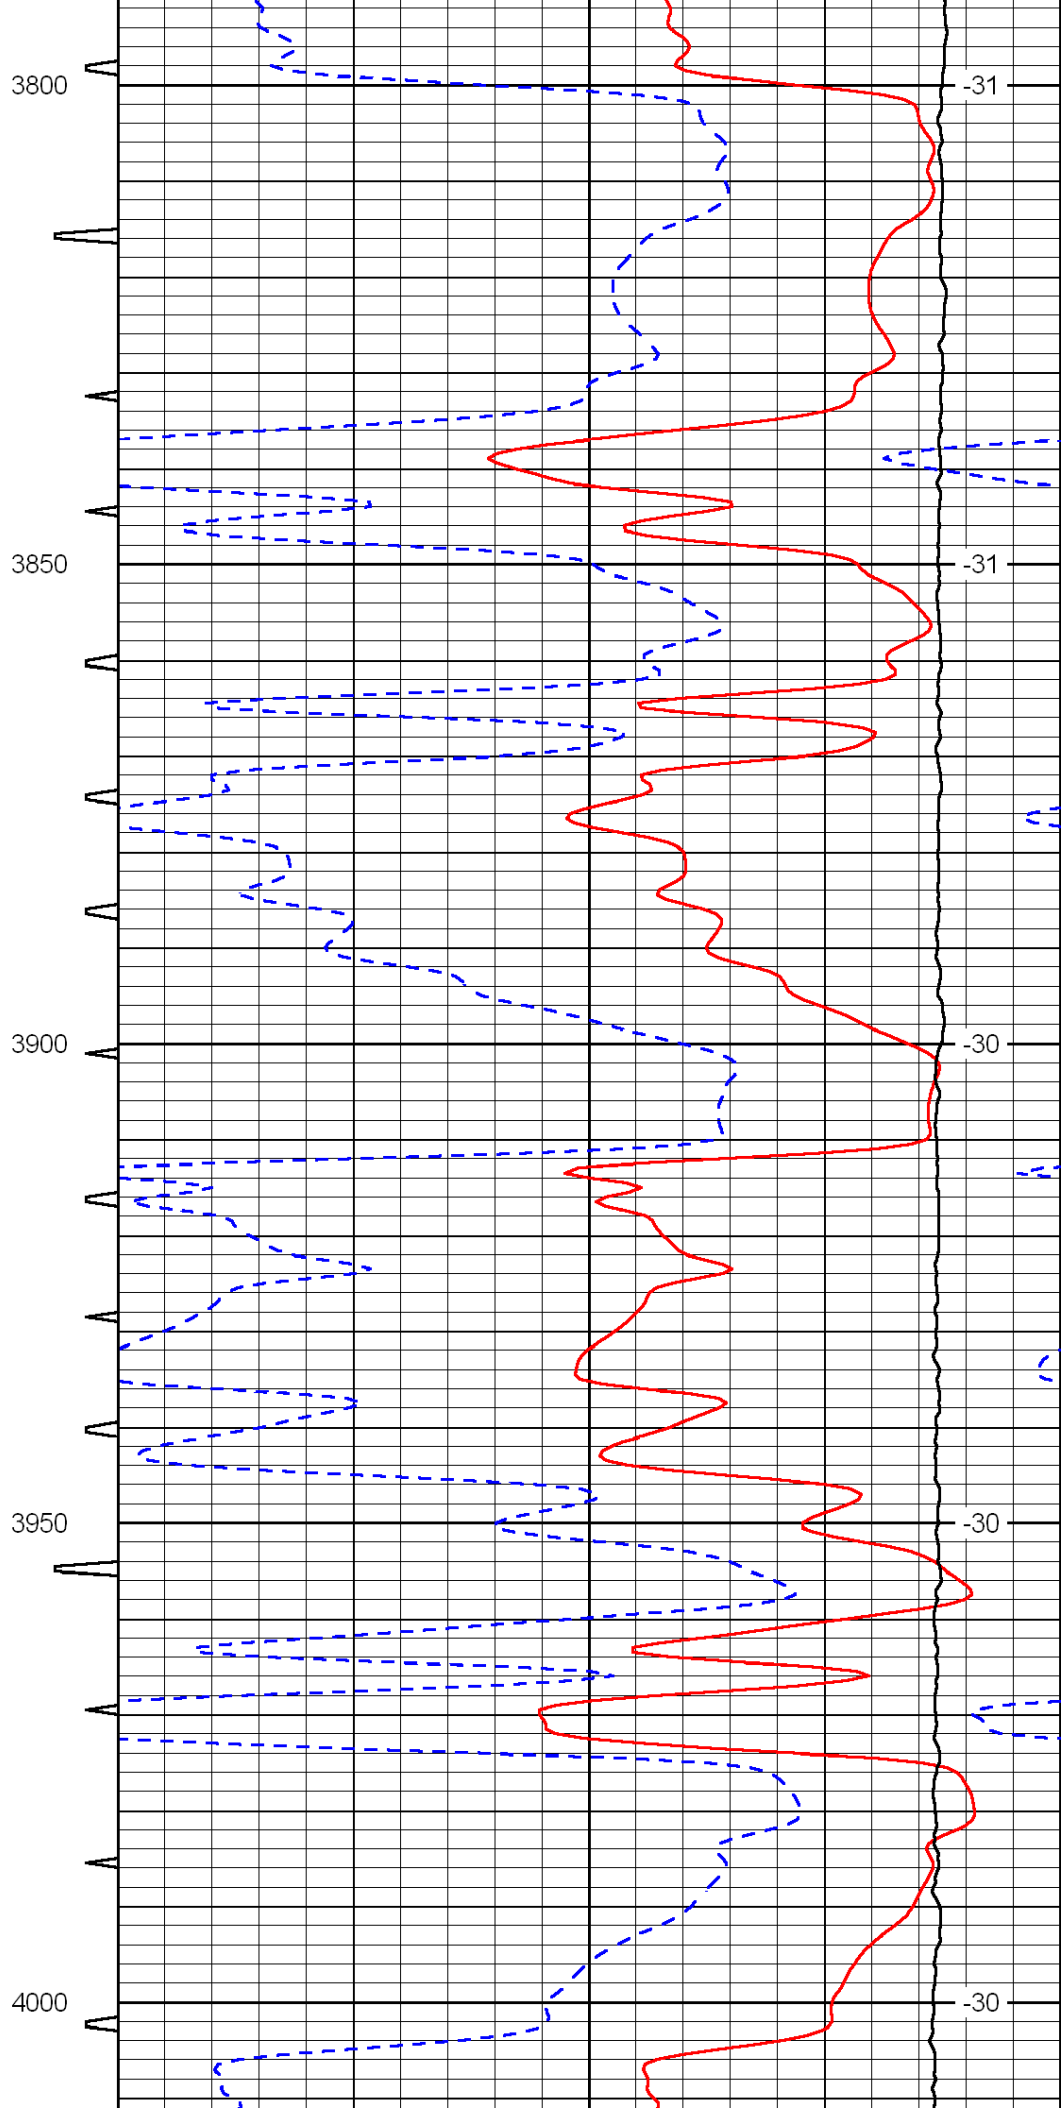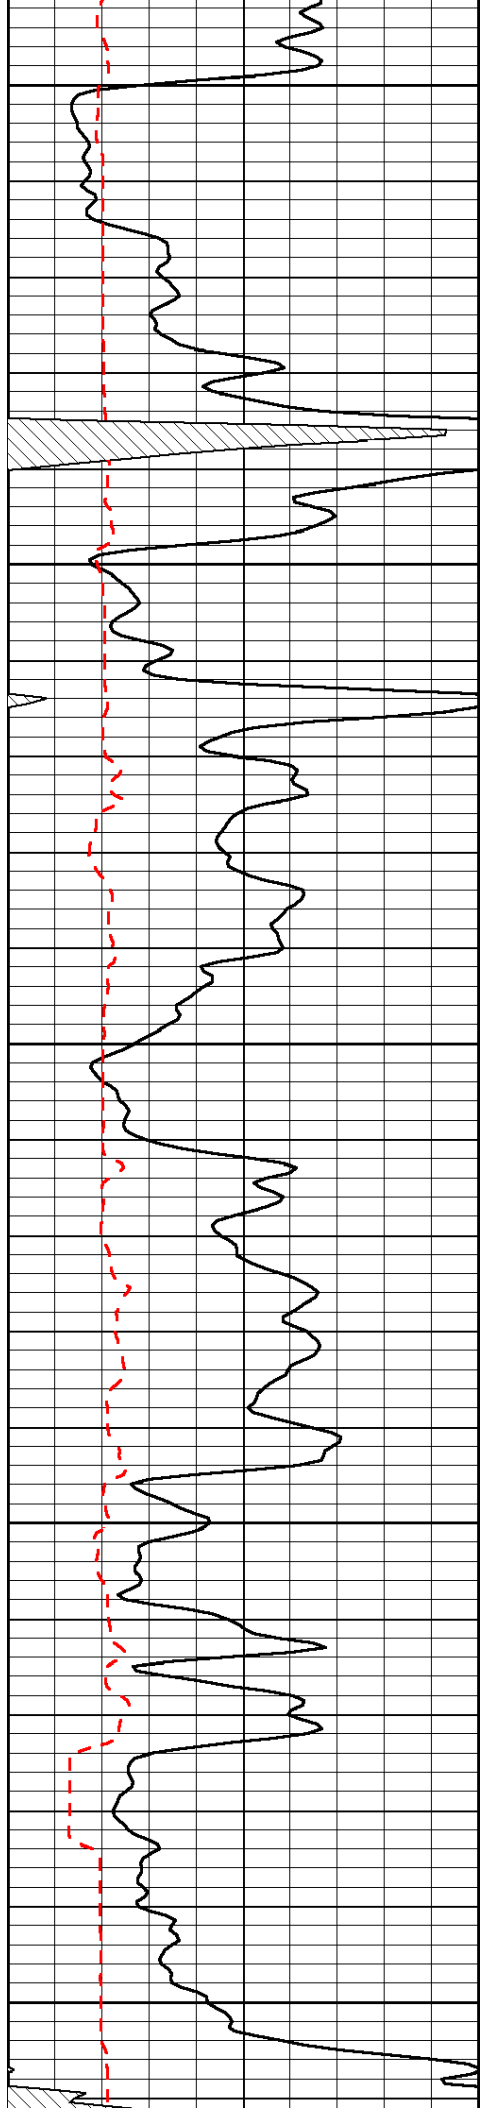

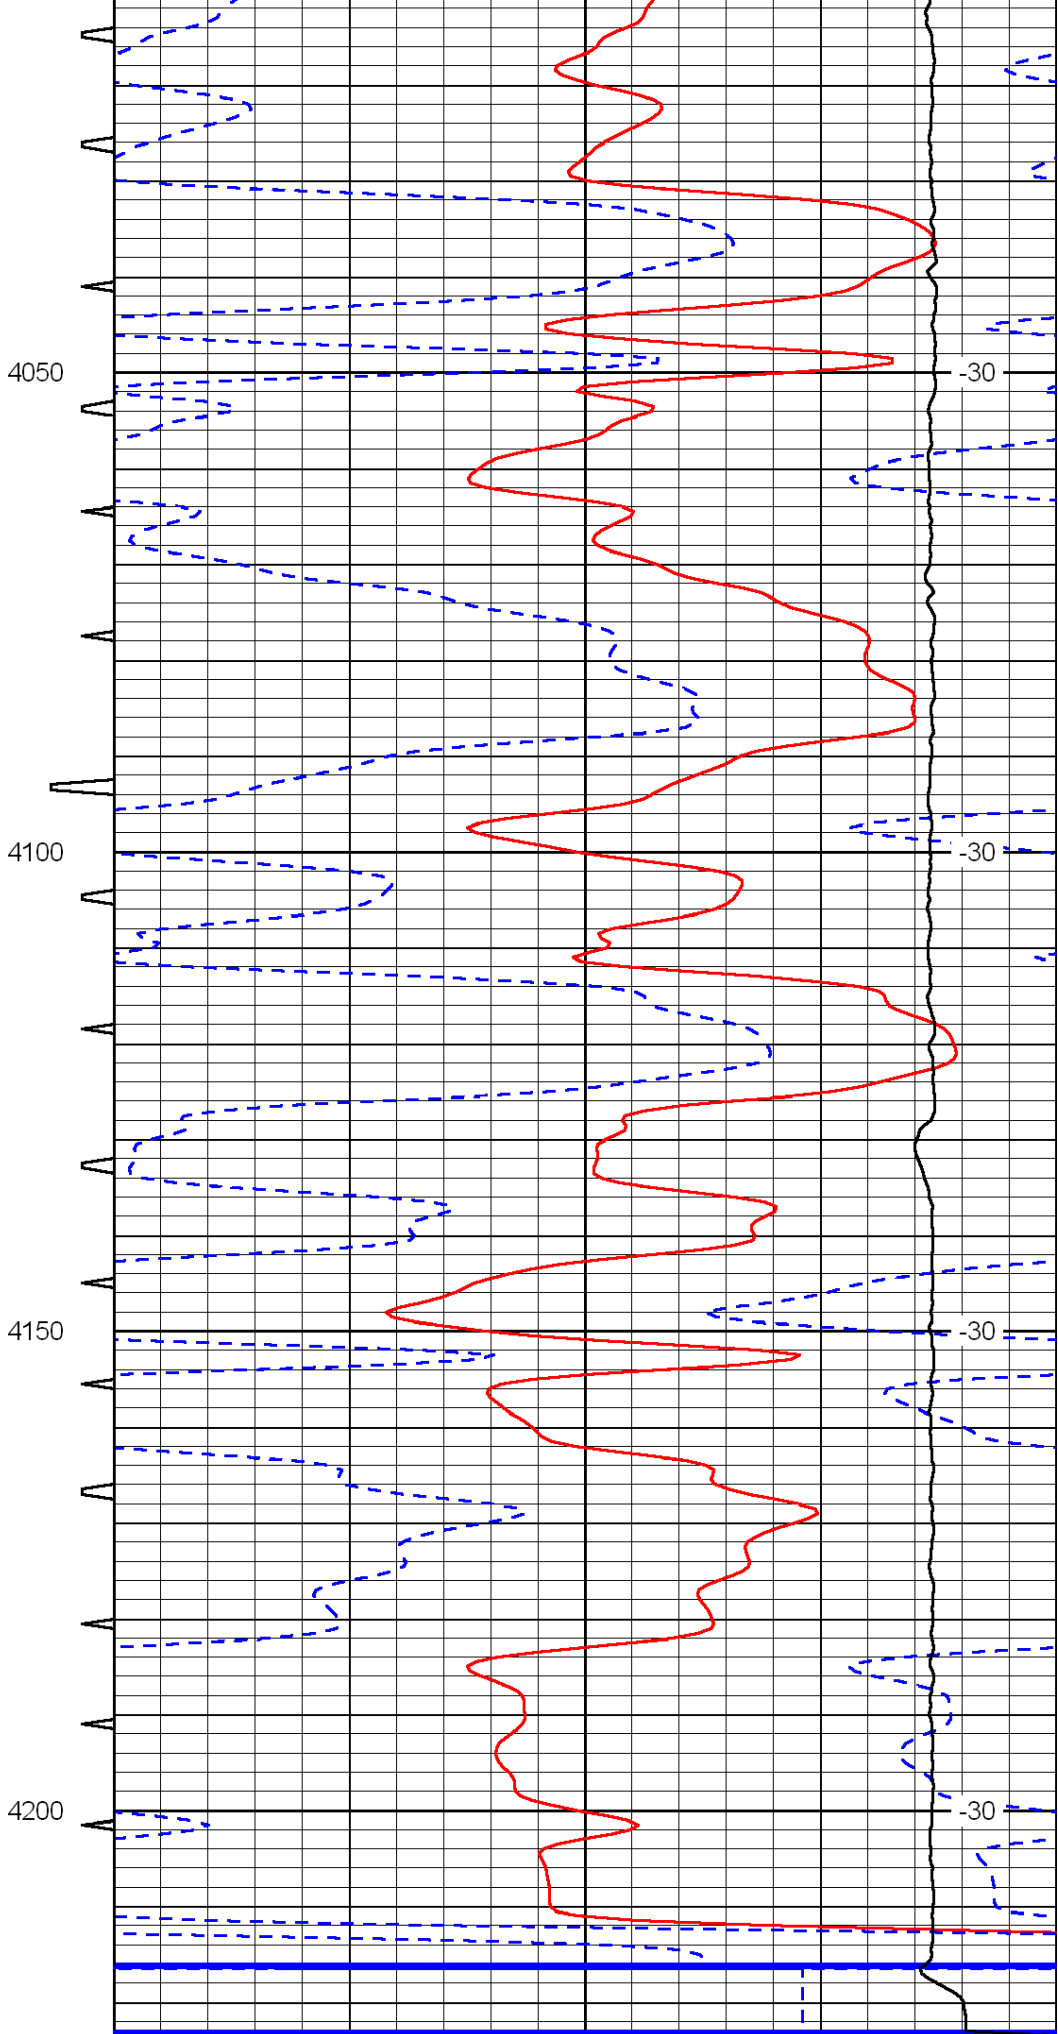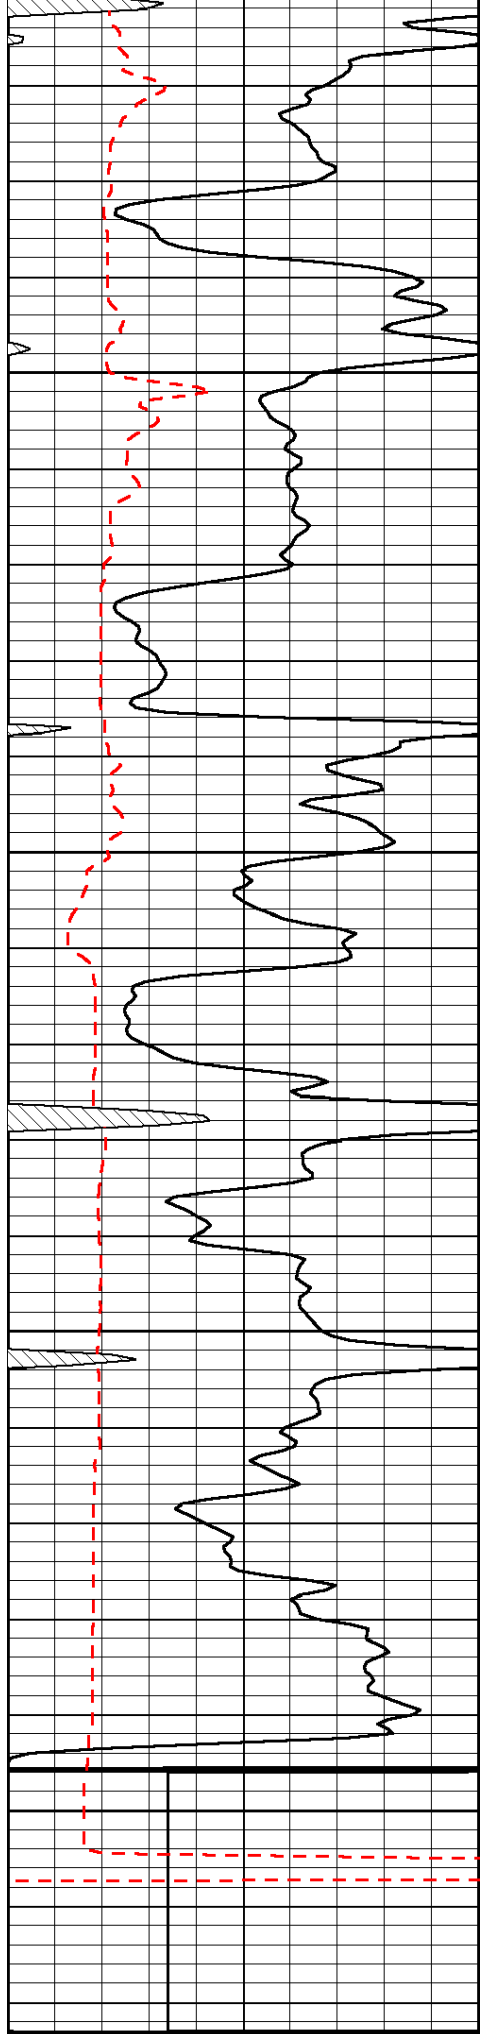

0 Gamma Ray 150

150 Gamma Ray 300.5

Sonic Int 140

130

Delta Time (usec/ft)

40

-10

SPOR

