



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Credo Petroleum Corporation		
	Well Sattler No.1-19		
	Field		
	County	Rawlins	State Kansas
	Location	NE SW NW NE 725' FNL & 2000' FEL	
	Sec: 19	Twp: 1S	Rge: 31W
Permanent Datum	Ground Level	Elevation 2928	
Log Measured From	Kelly Bushing	8 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 2936 D.F. 2928 G.L. 2928	
Date	6/5/2010		
Run Number	Two		
Depth Driller	4225		
Depth Logger	4218		
Bottom Logged Interval	4217		
Top Log Interval	1550		
Casing Driller	8.625 @ 333		
Casing Logger	334		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	1,200		
Density / Viscosity	9.1 58		
pH / Fluid Loss	10.0 7.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.6 @ 80		
Rmf @ Meas. Temp	1.2 @ 80		
Rmc @ Meas. Temp	2.16 @ 80		
Source of Rmf / Rmc	Charts		
Rm @ BHT	1.08 @ 118		
Operating Rig Time	5 1/2 Hours		
Max Rec. Temp. F	118		
Equipment Number	15		
Location	Hays		
Recorded By	C. Desaire		
Witnessed By	Don Guy	Jim Musgrove	

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Herndon, 1/2 N, 1 3/4 W,
1/2 N, 1/4 W, 1/2 N, 3/4 W,
1N, 1/2 W, 1/2 N, E Into

Database File: c:\warrior\data\credo_sattler no.1-19\credohd.db
Dataset Pathname: dil/crdostk
Presentation Format: micro
Dataset Creation: Sat Jun 05 17:15:27 2010
Charted by: Depth in Feet scaled 1:240

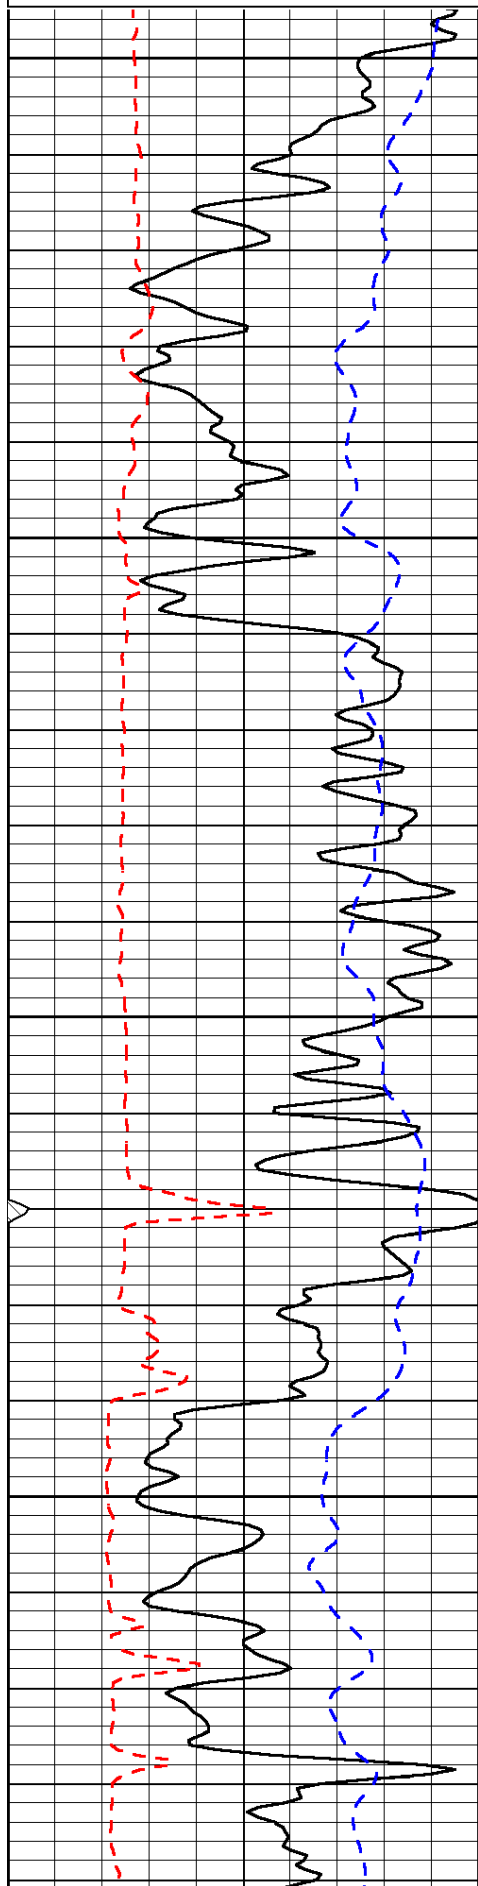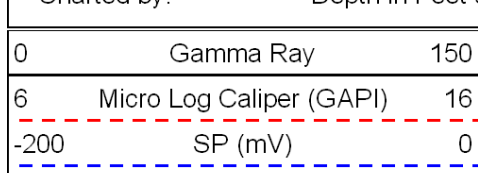


1550

1600

1650

1700

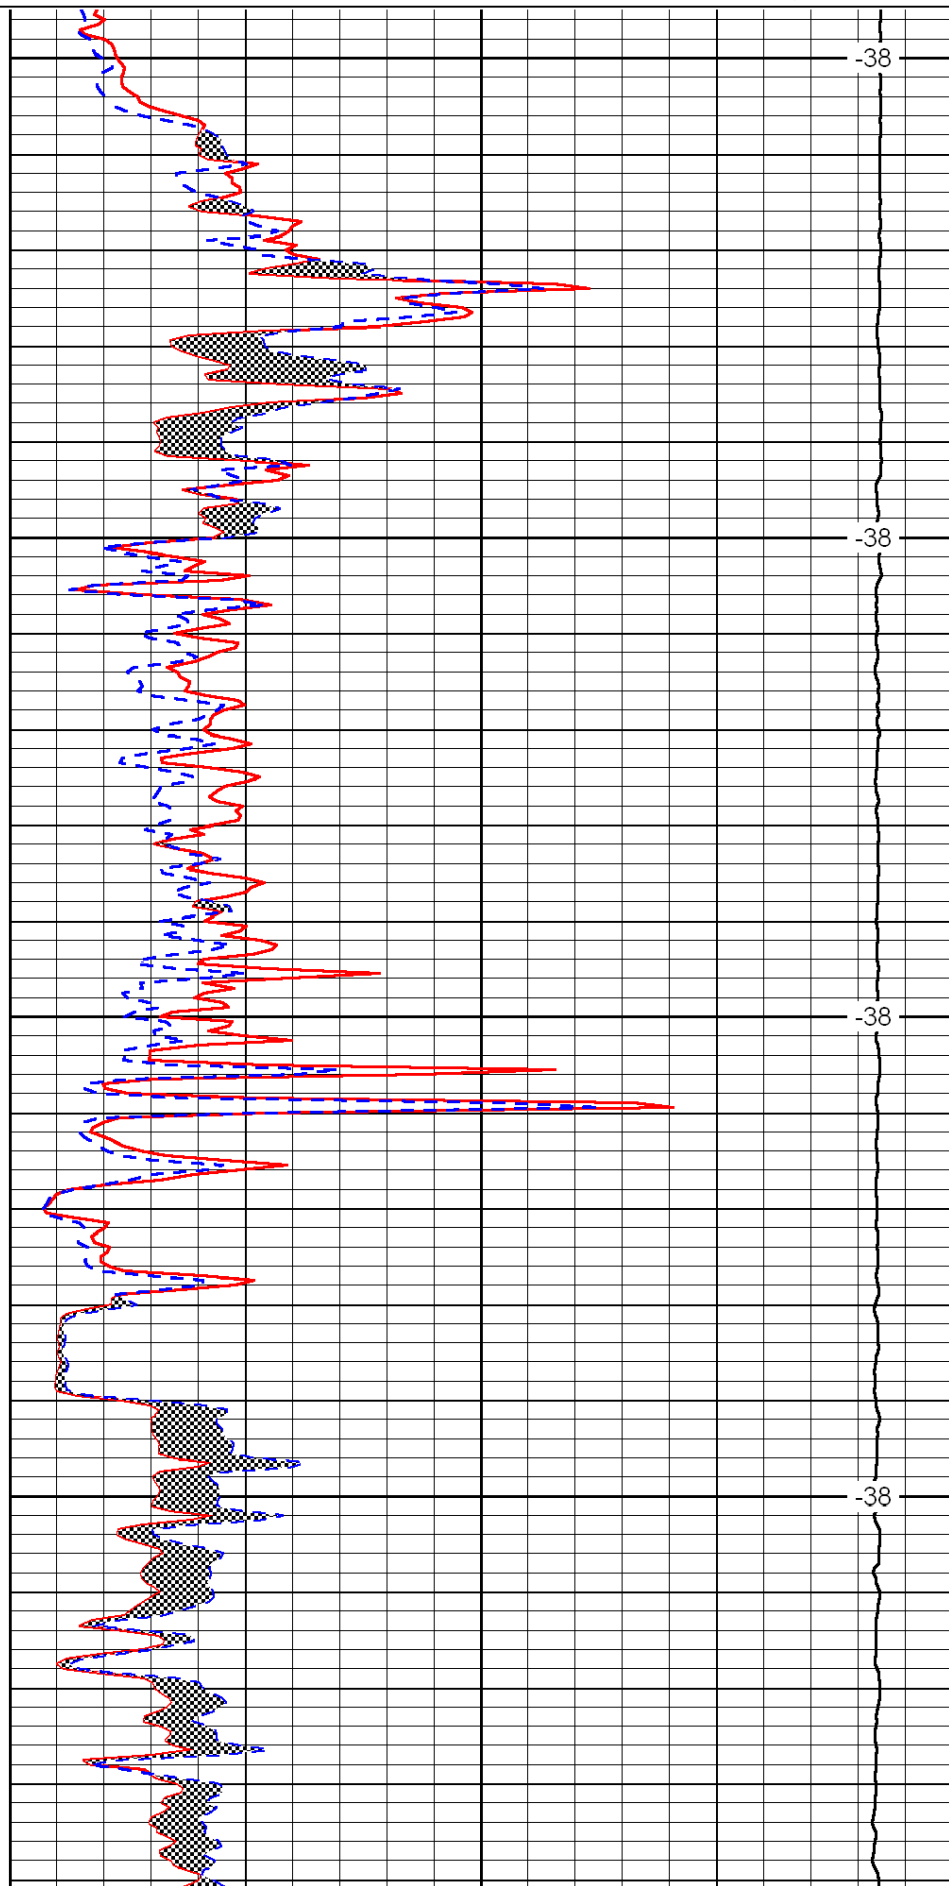


-38

-38

-38

-38

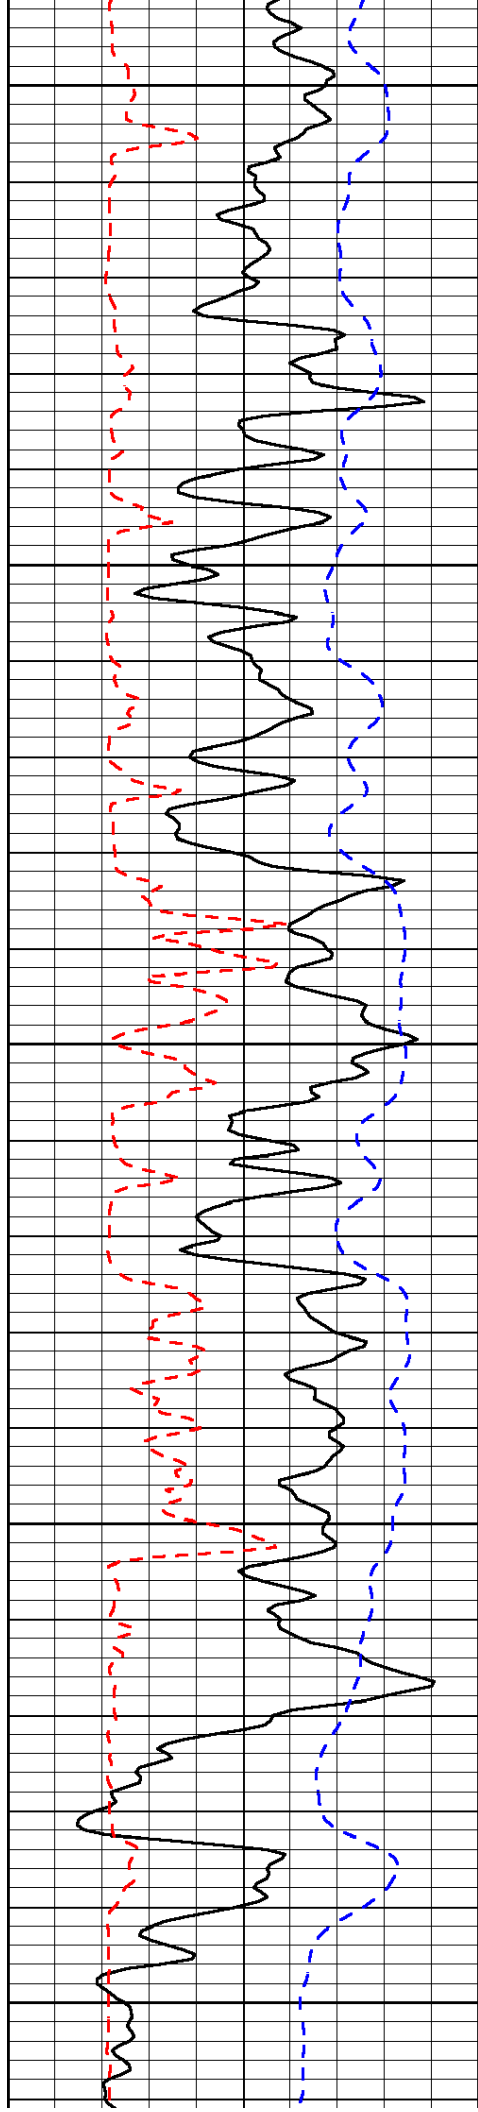


1750

1800

1850

1900

1950

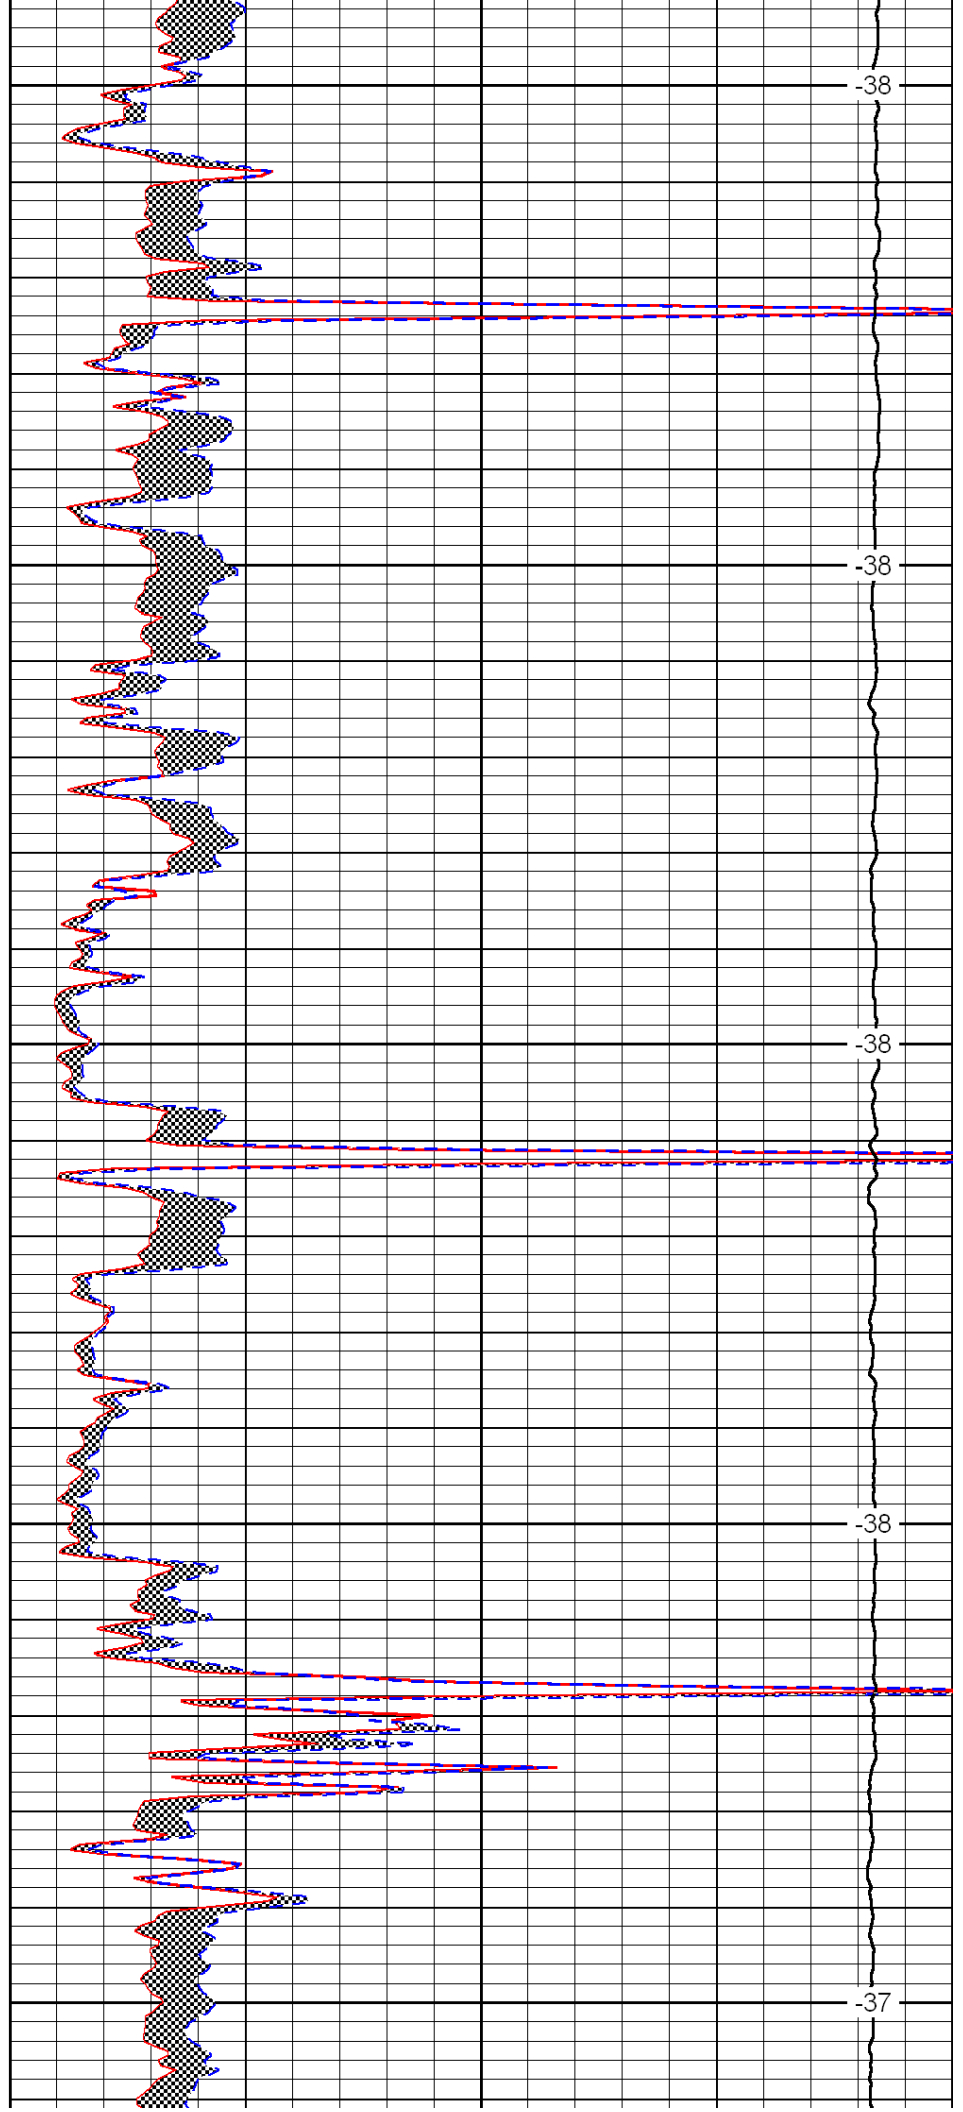


-38

-38

-38

-38

-37

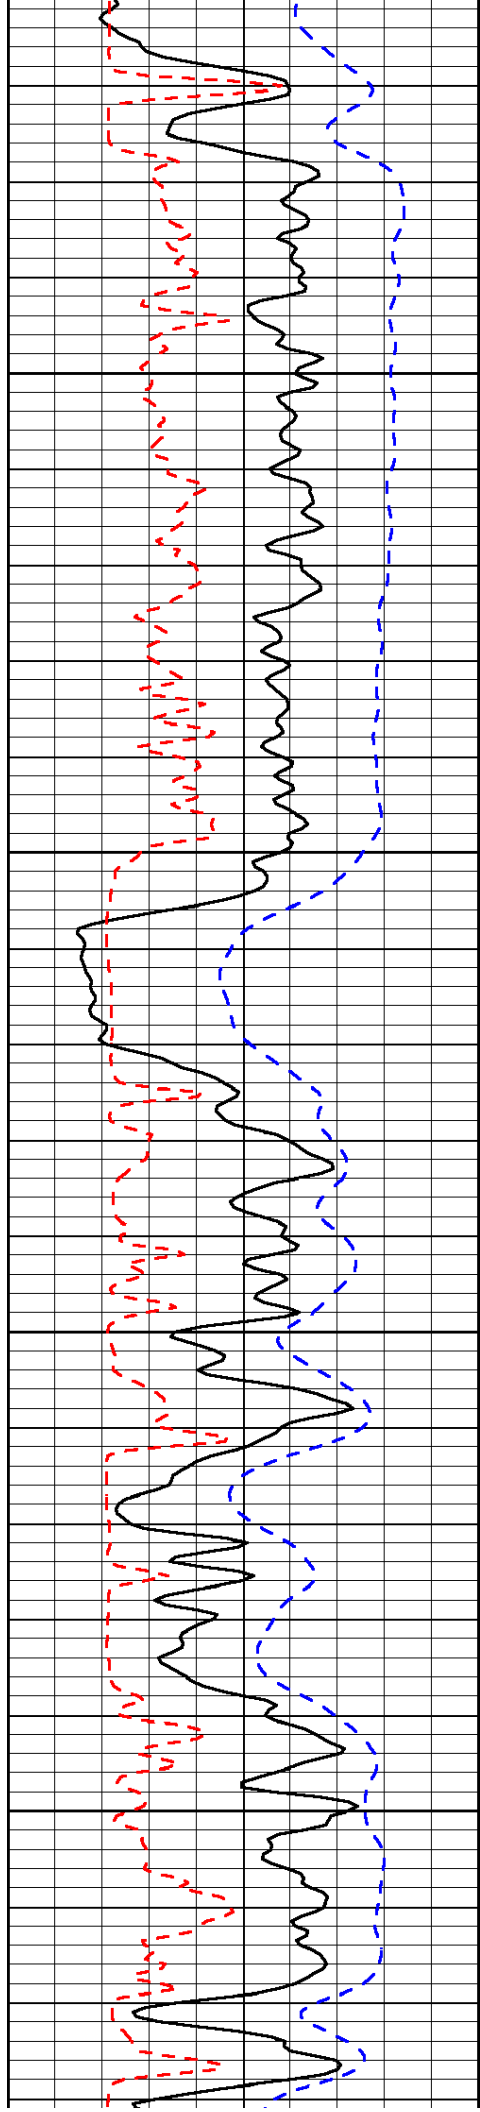


2000

2050

2100

2150

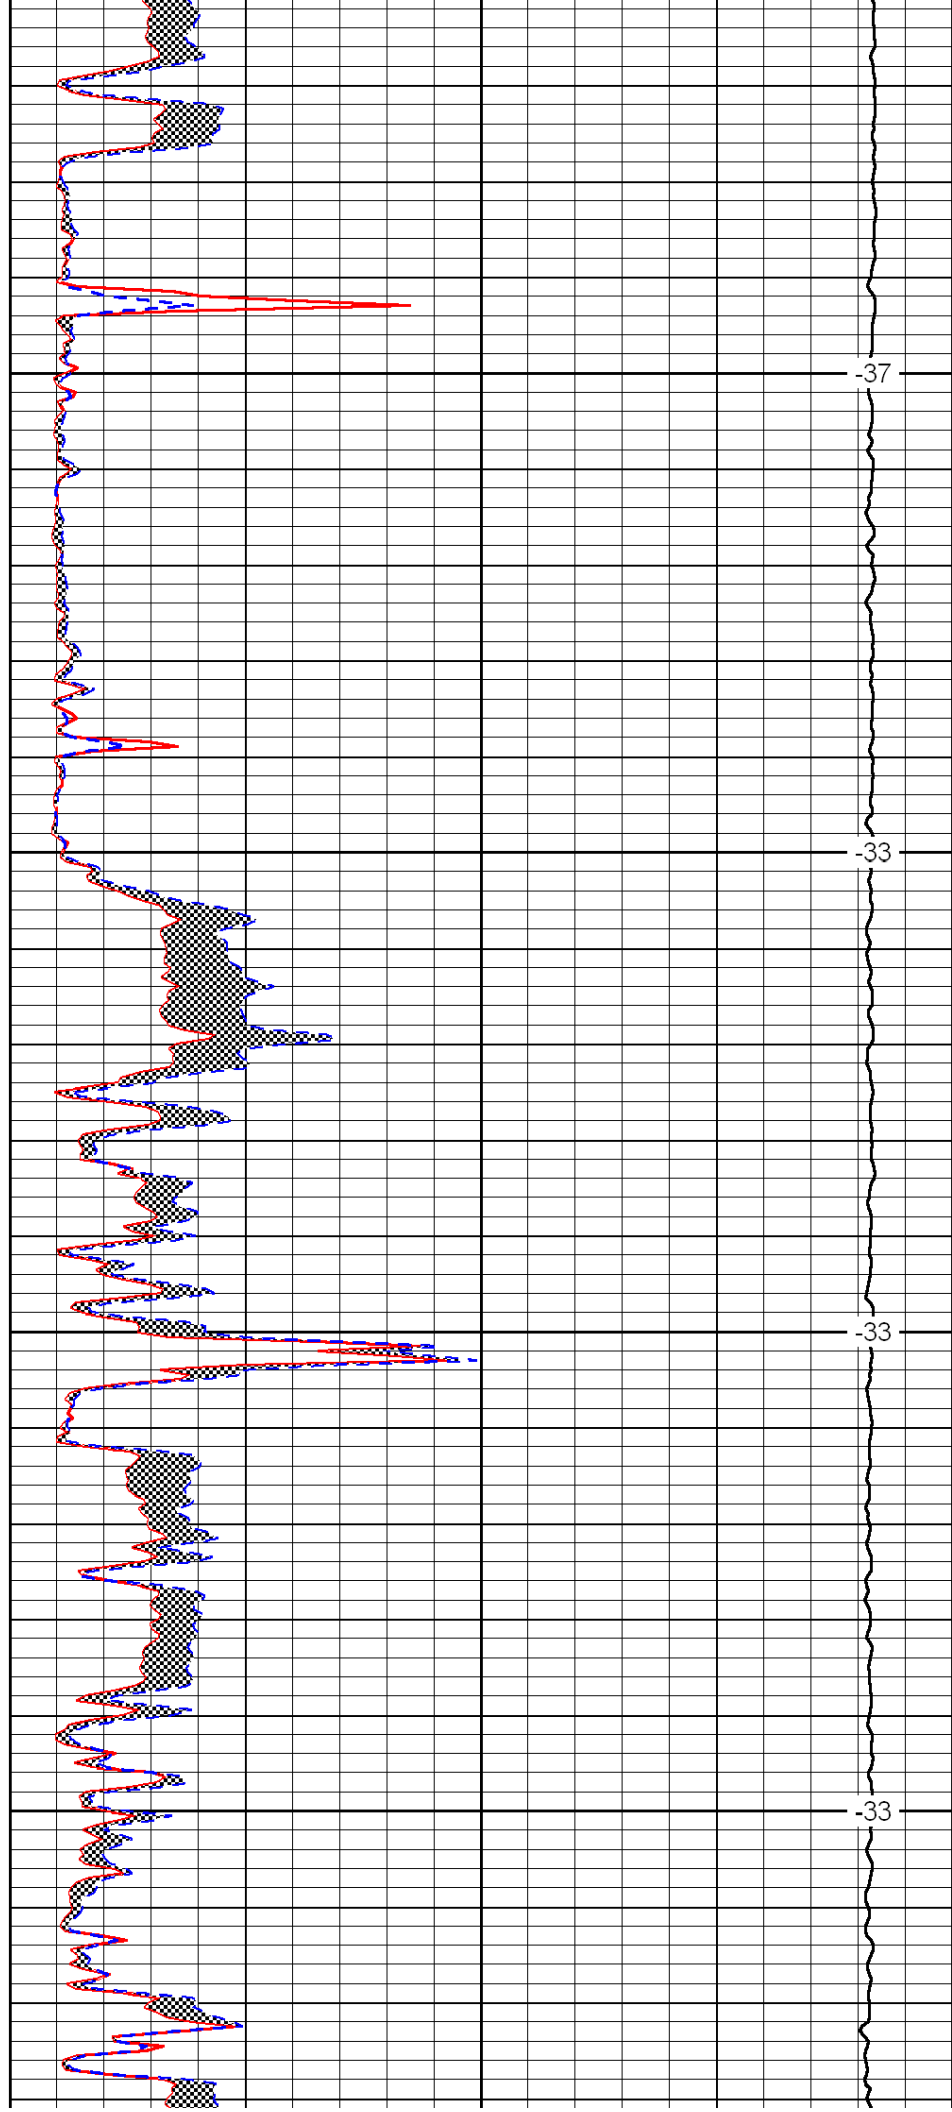


-37

-33

-33

-33

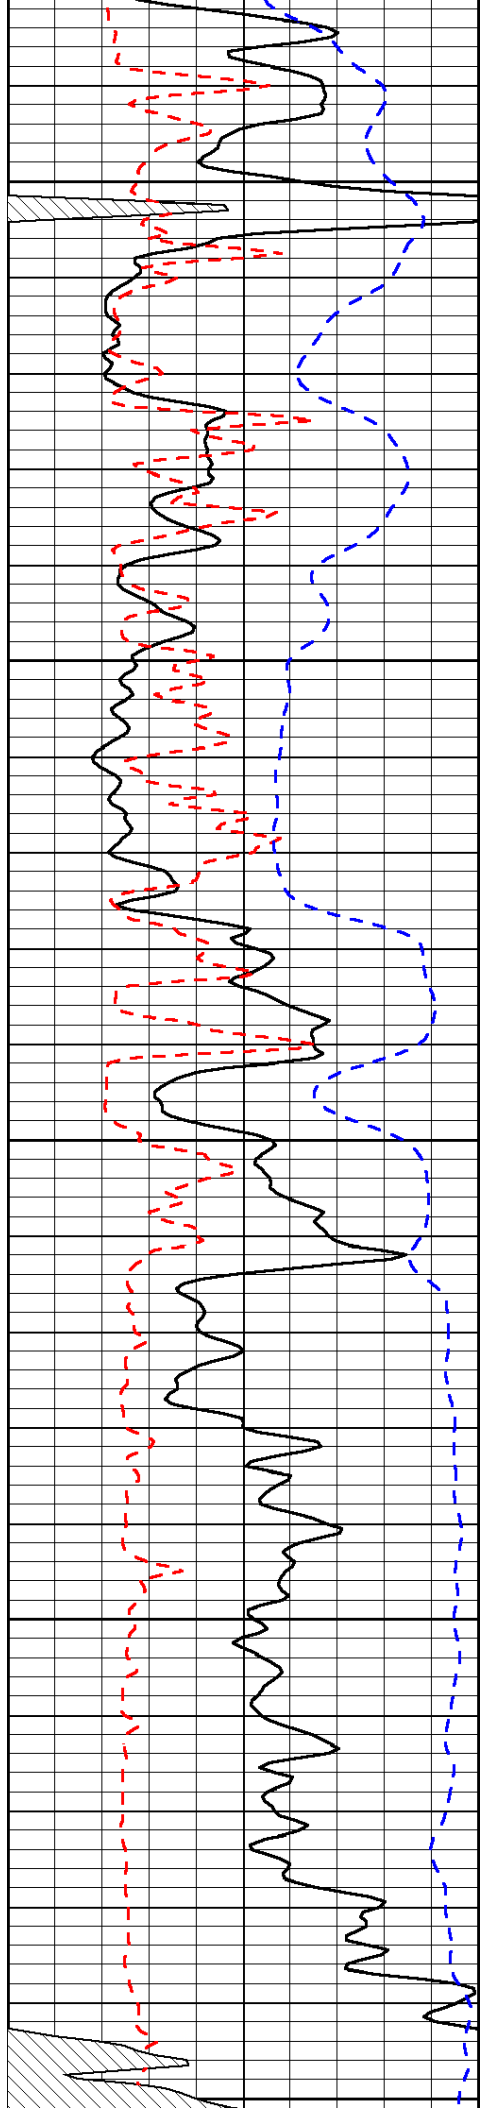


2200

2250

2300

2350

2400

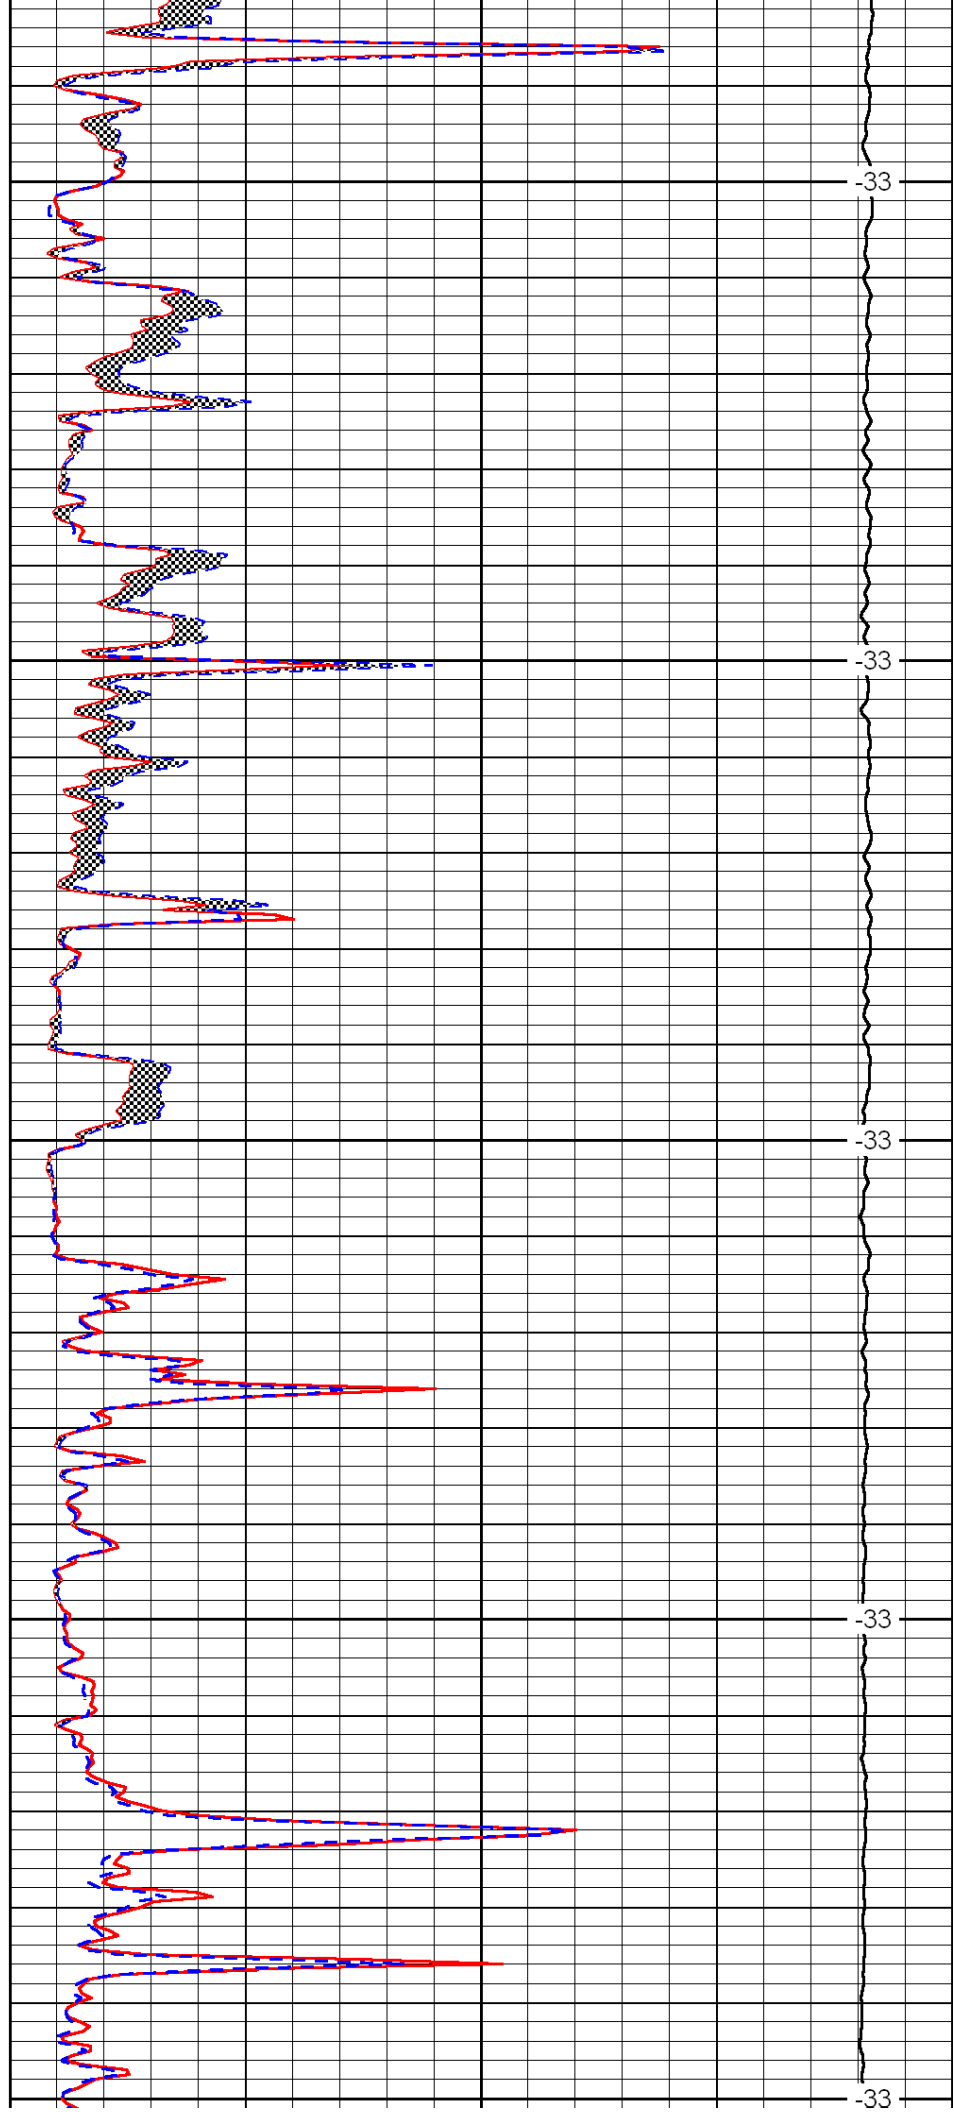


-33

-33

-33

-33

-33

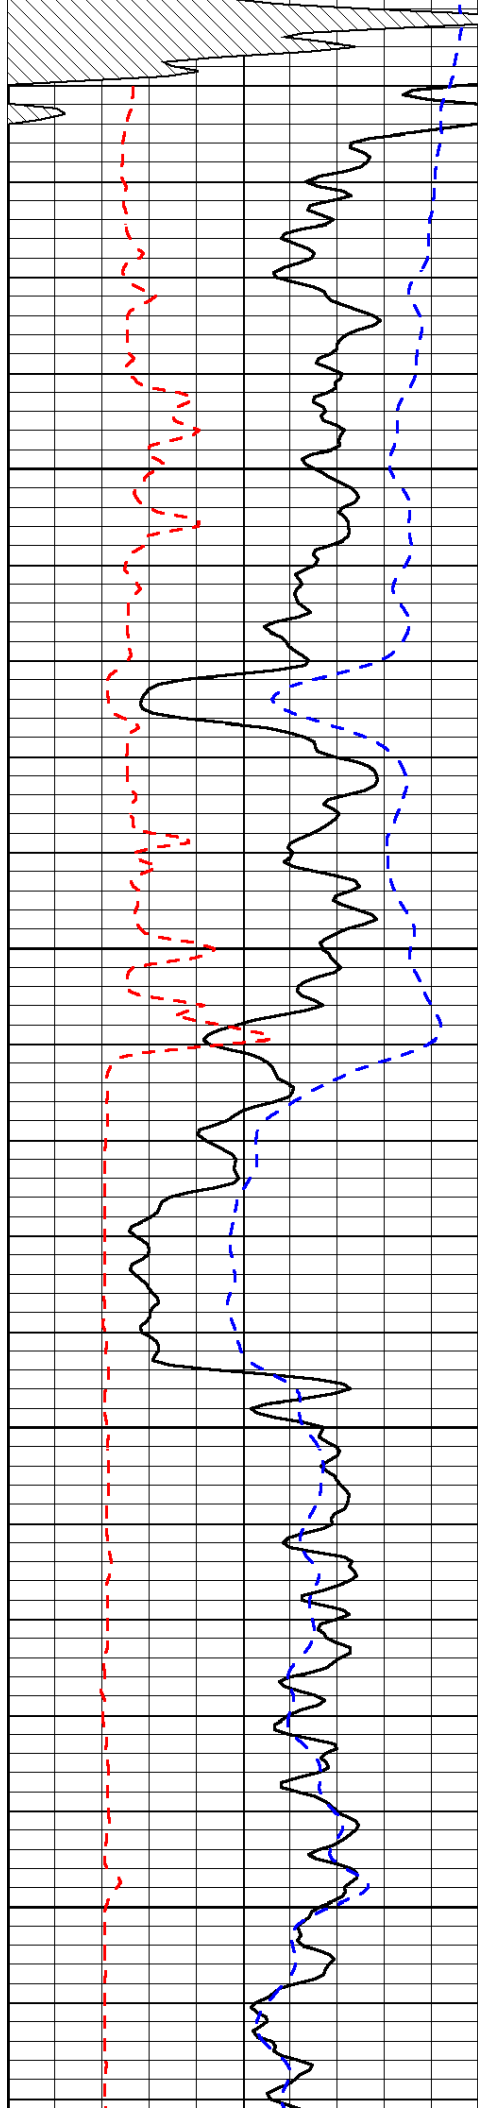


2450

2500

2550

2600

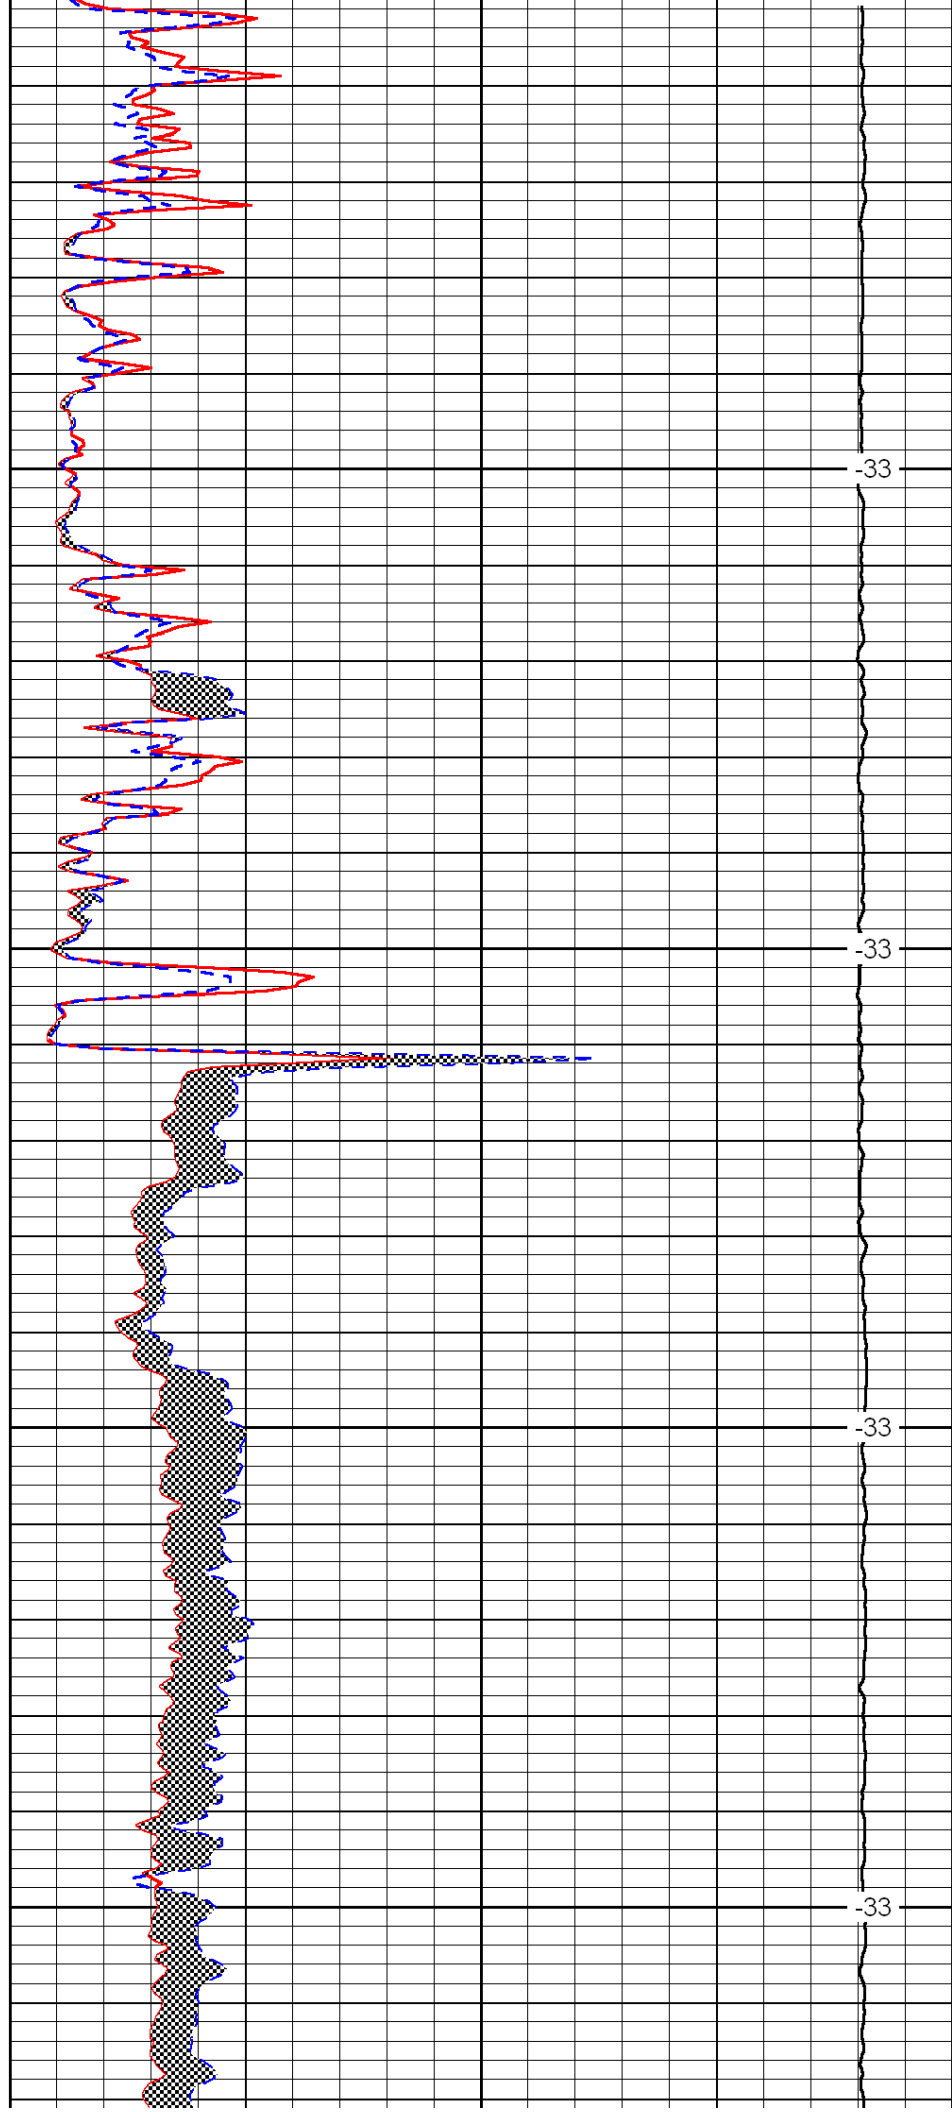


-33

-33

-33

-33

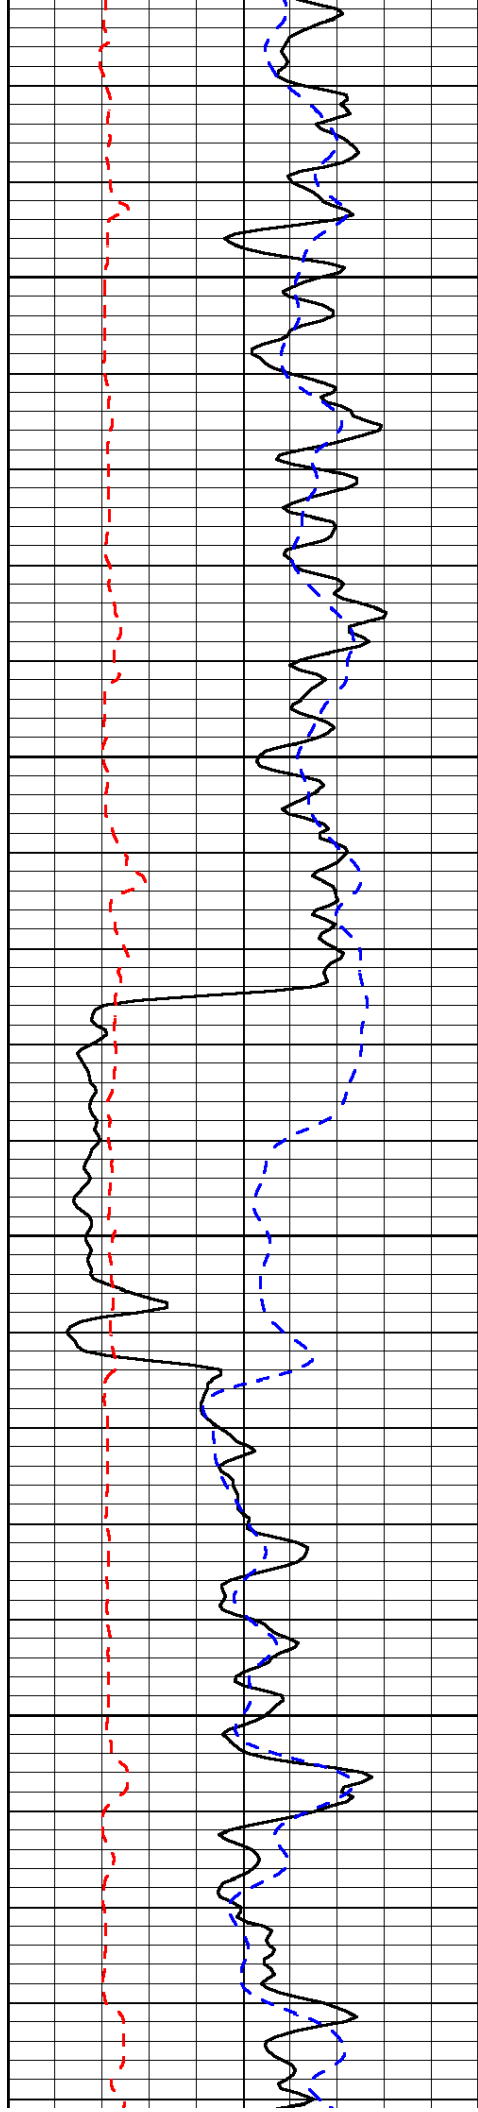


2650

2700

2750

2800

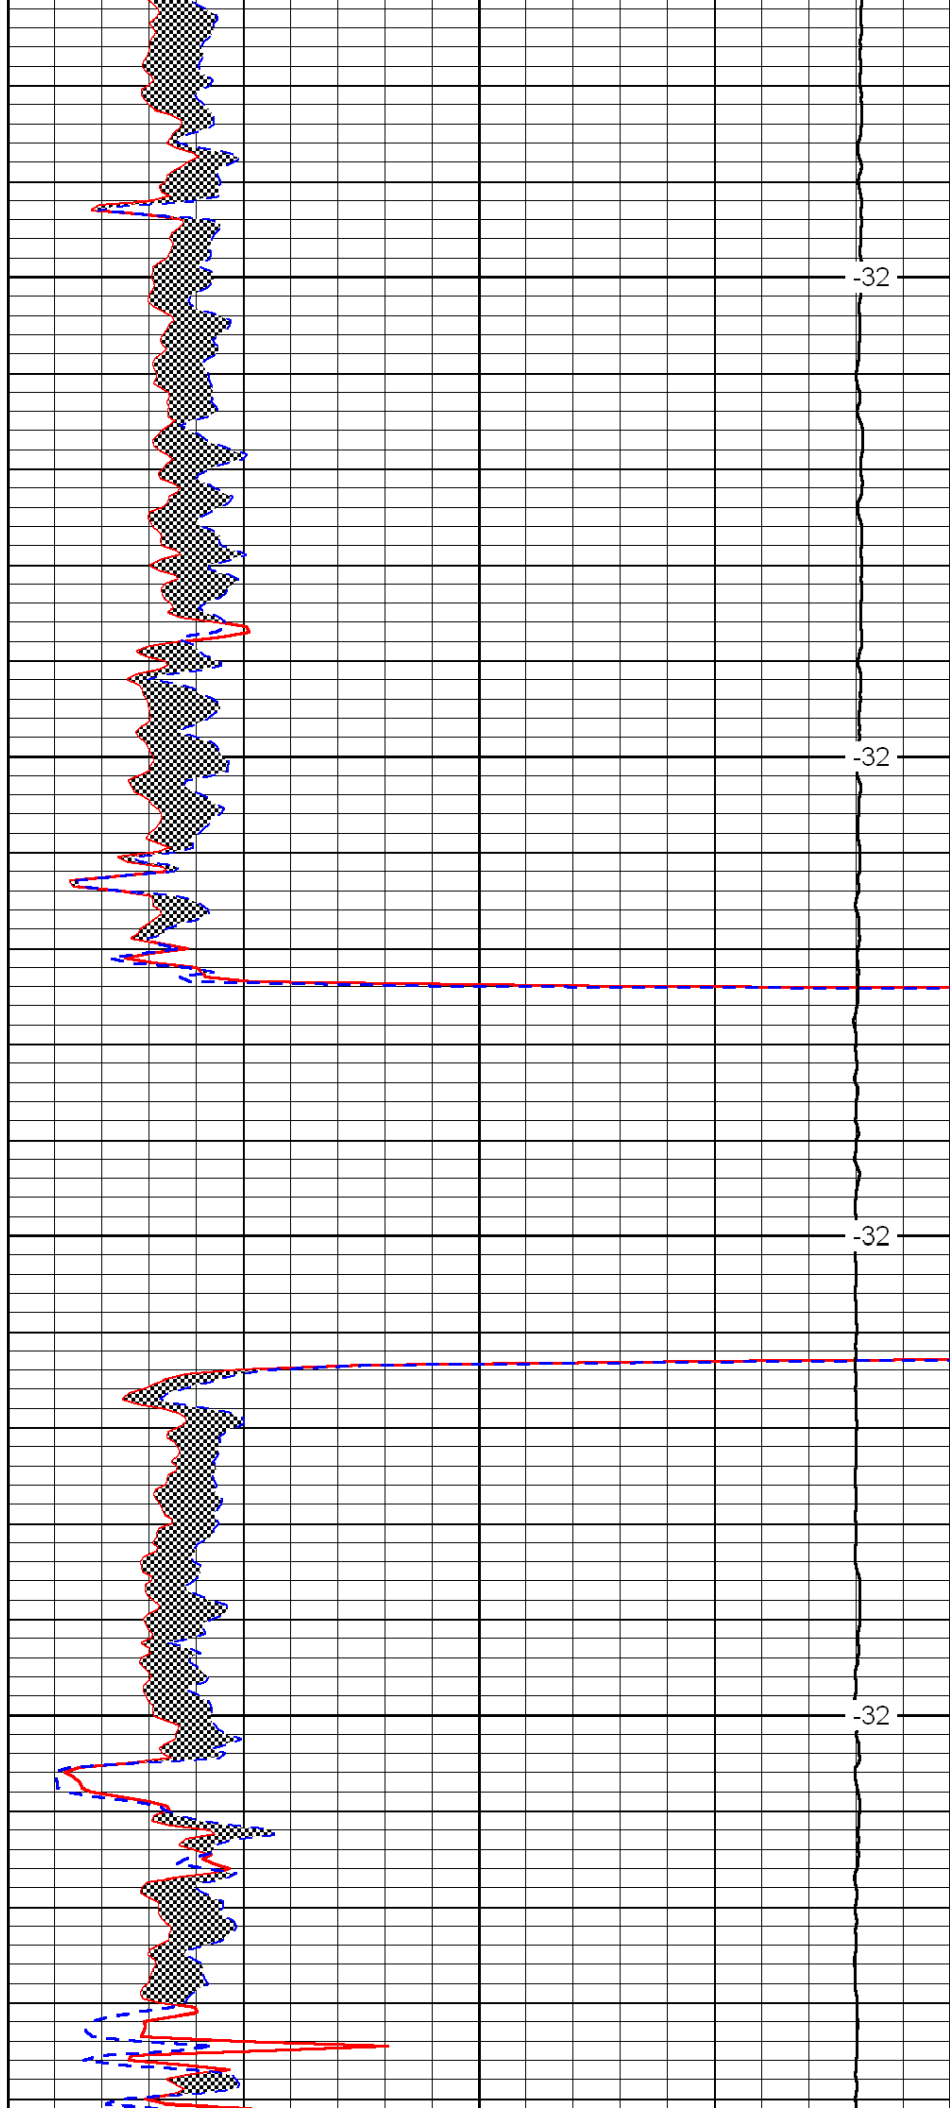


-32

-32

-32

-32

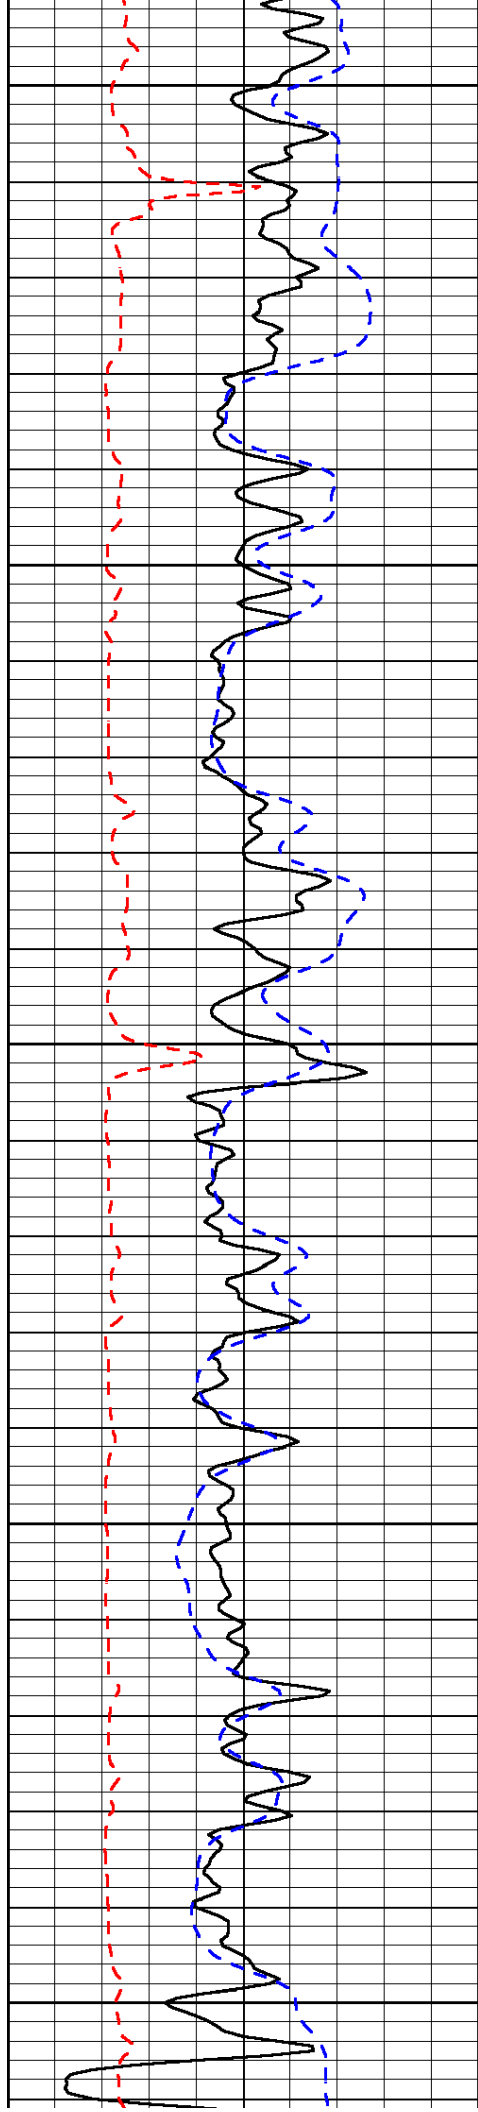


2850

2900

2950

3000

3050

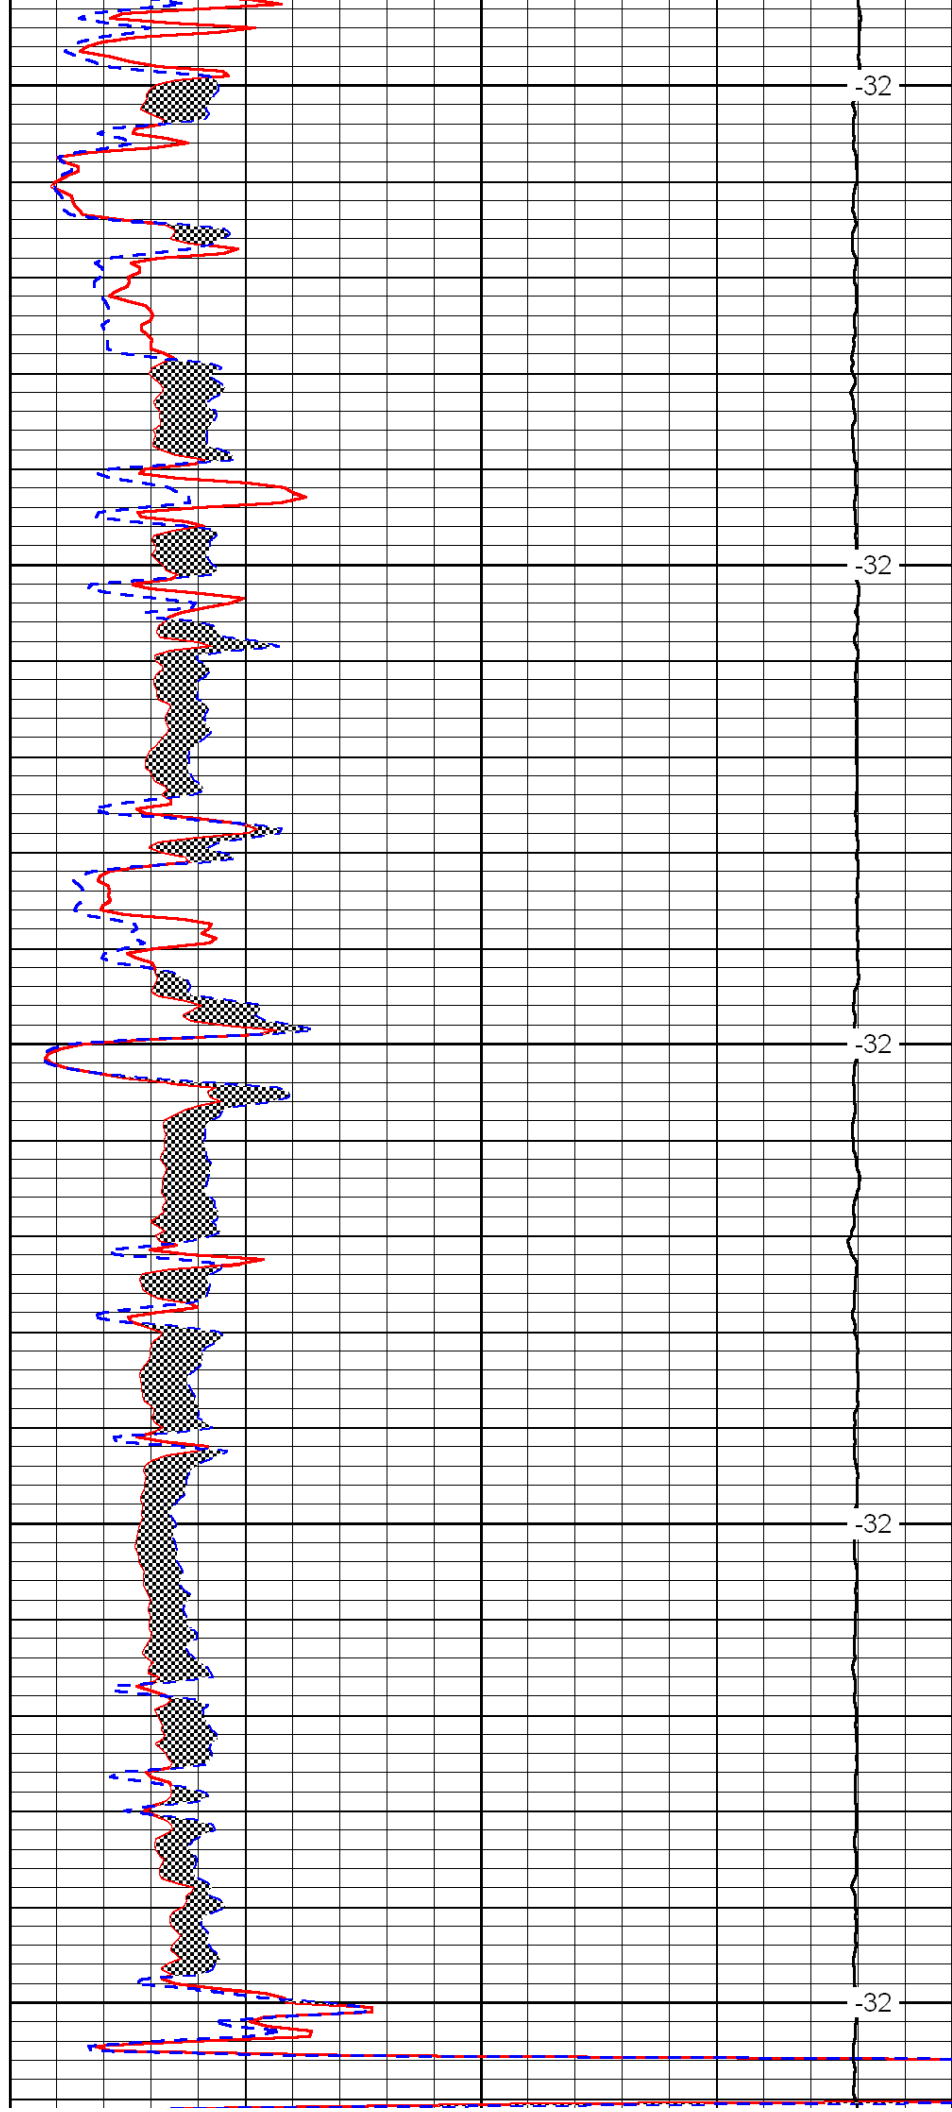


-32

-32

-32

-32

-32

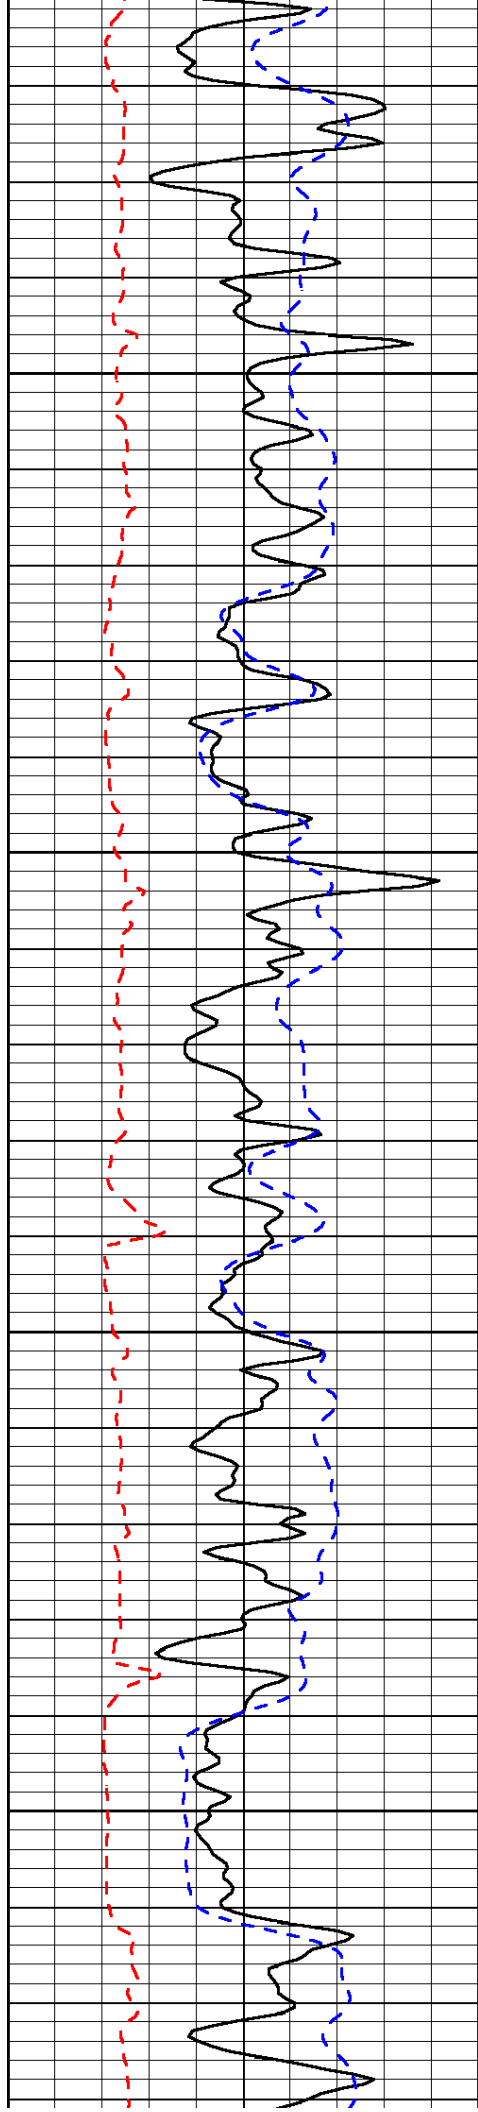


3100

3150

3200

3250

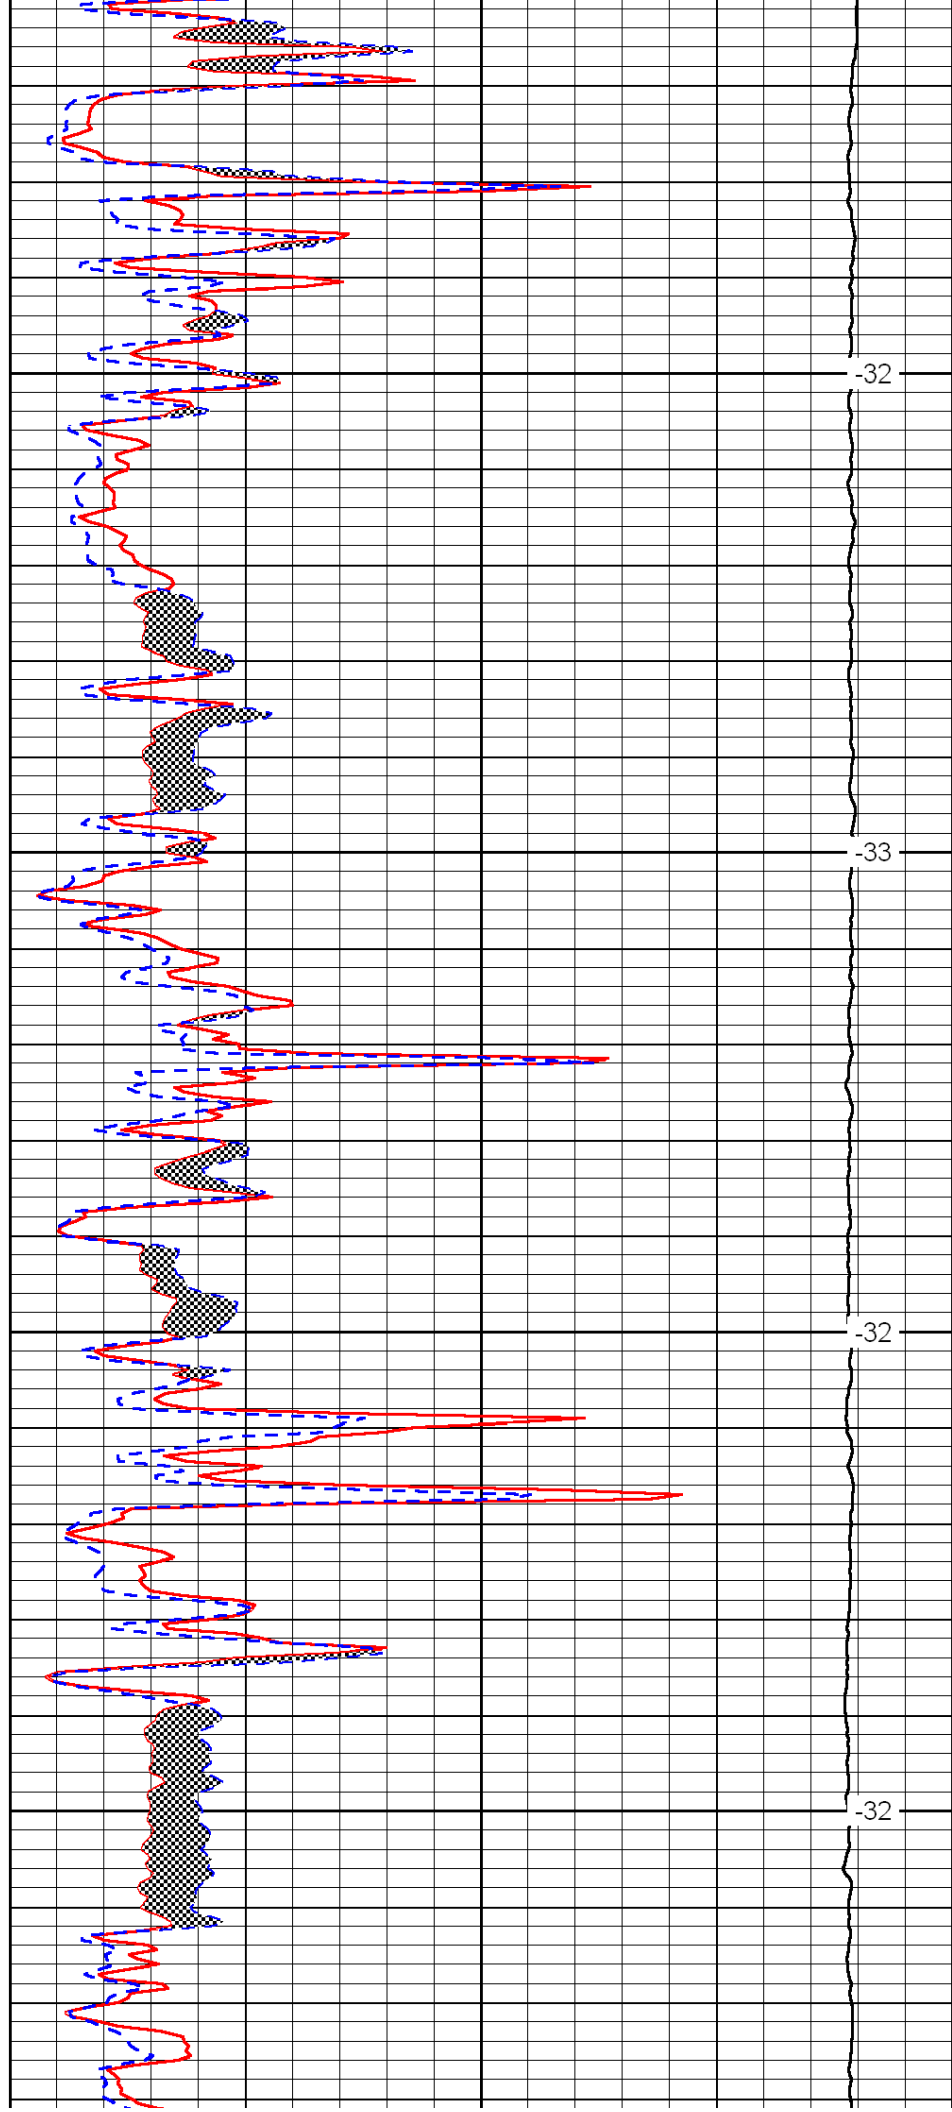


-32

-33

-32

-32

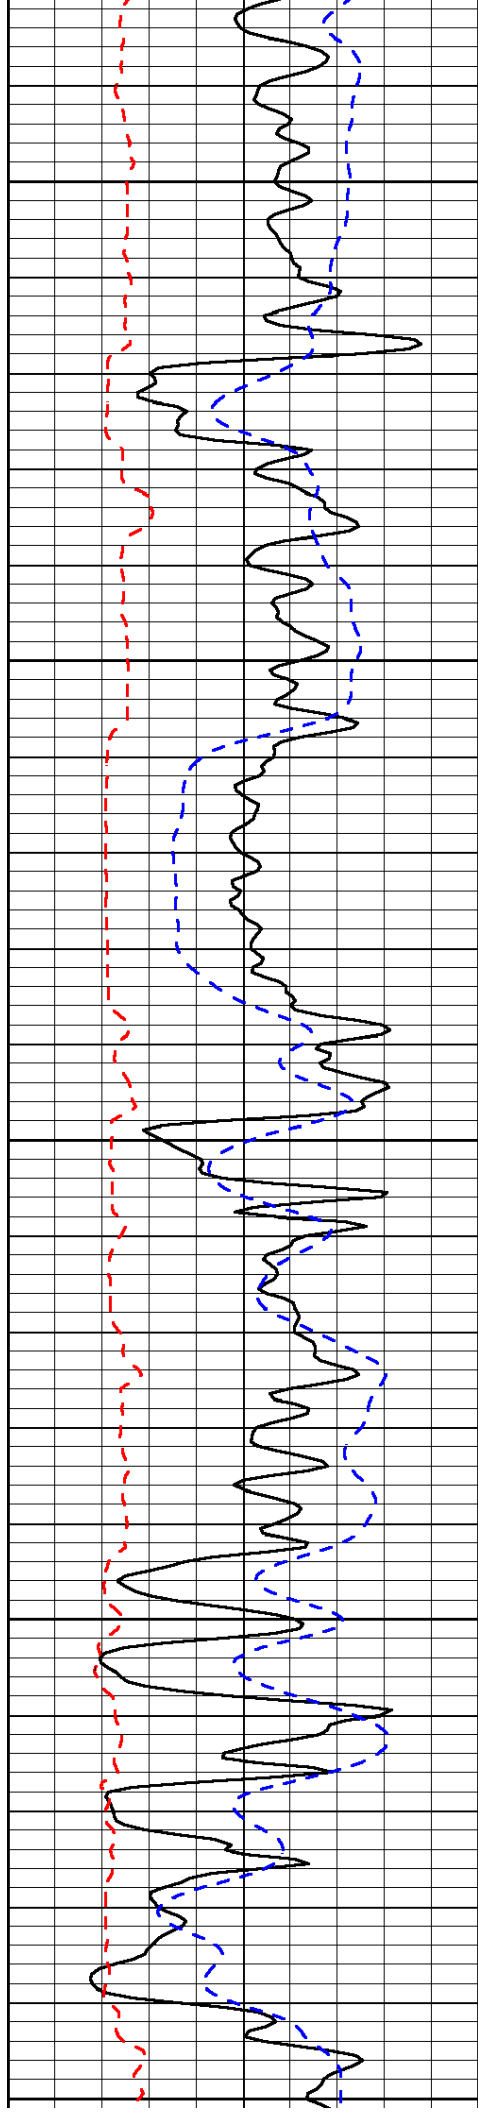


3300

3350

3400

3450

3500

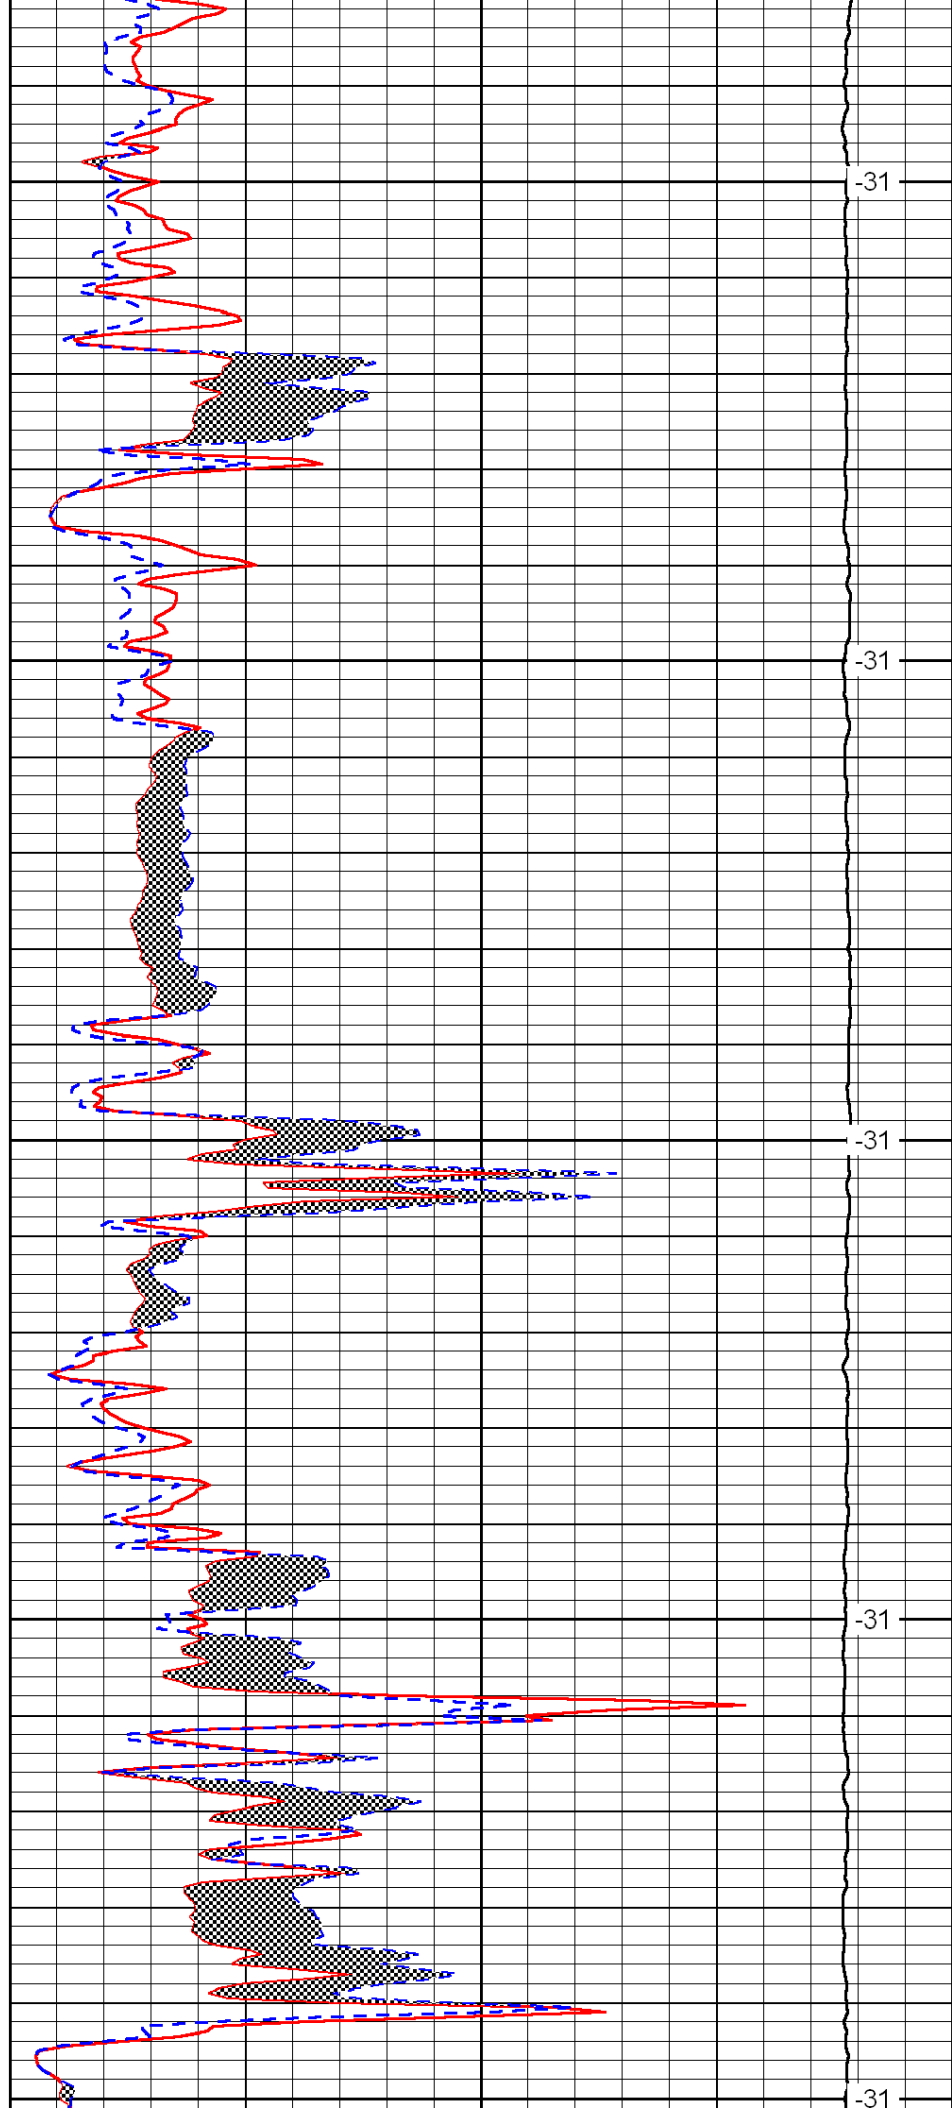


-31

-31

-31

-31

-31

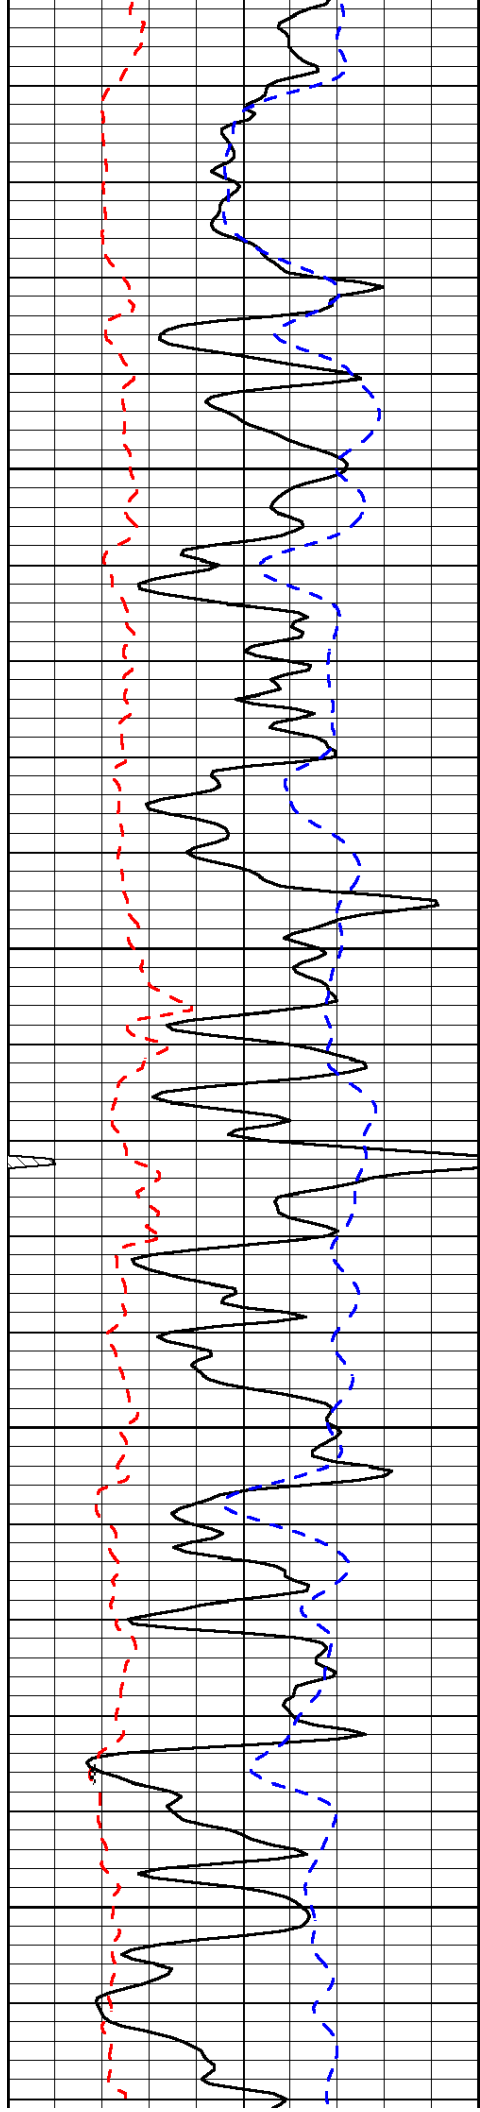


3550

3600

3650

3700

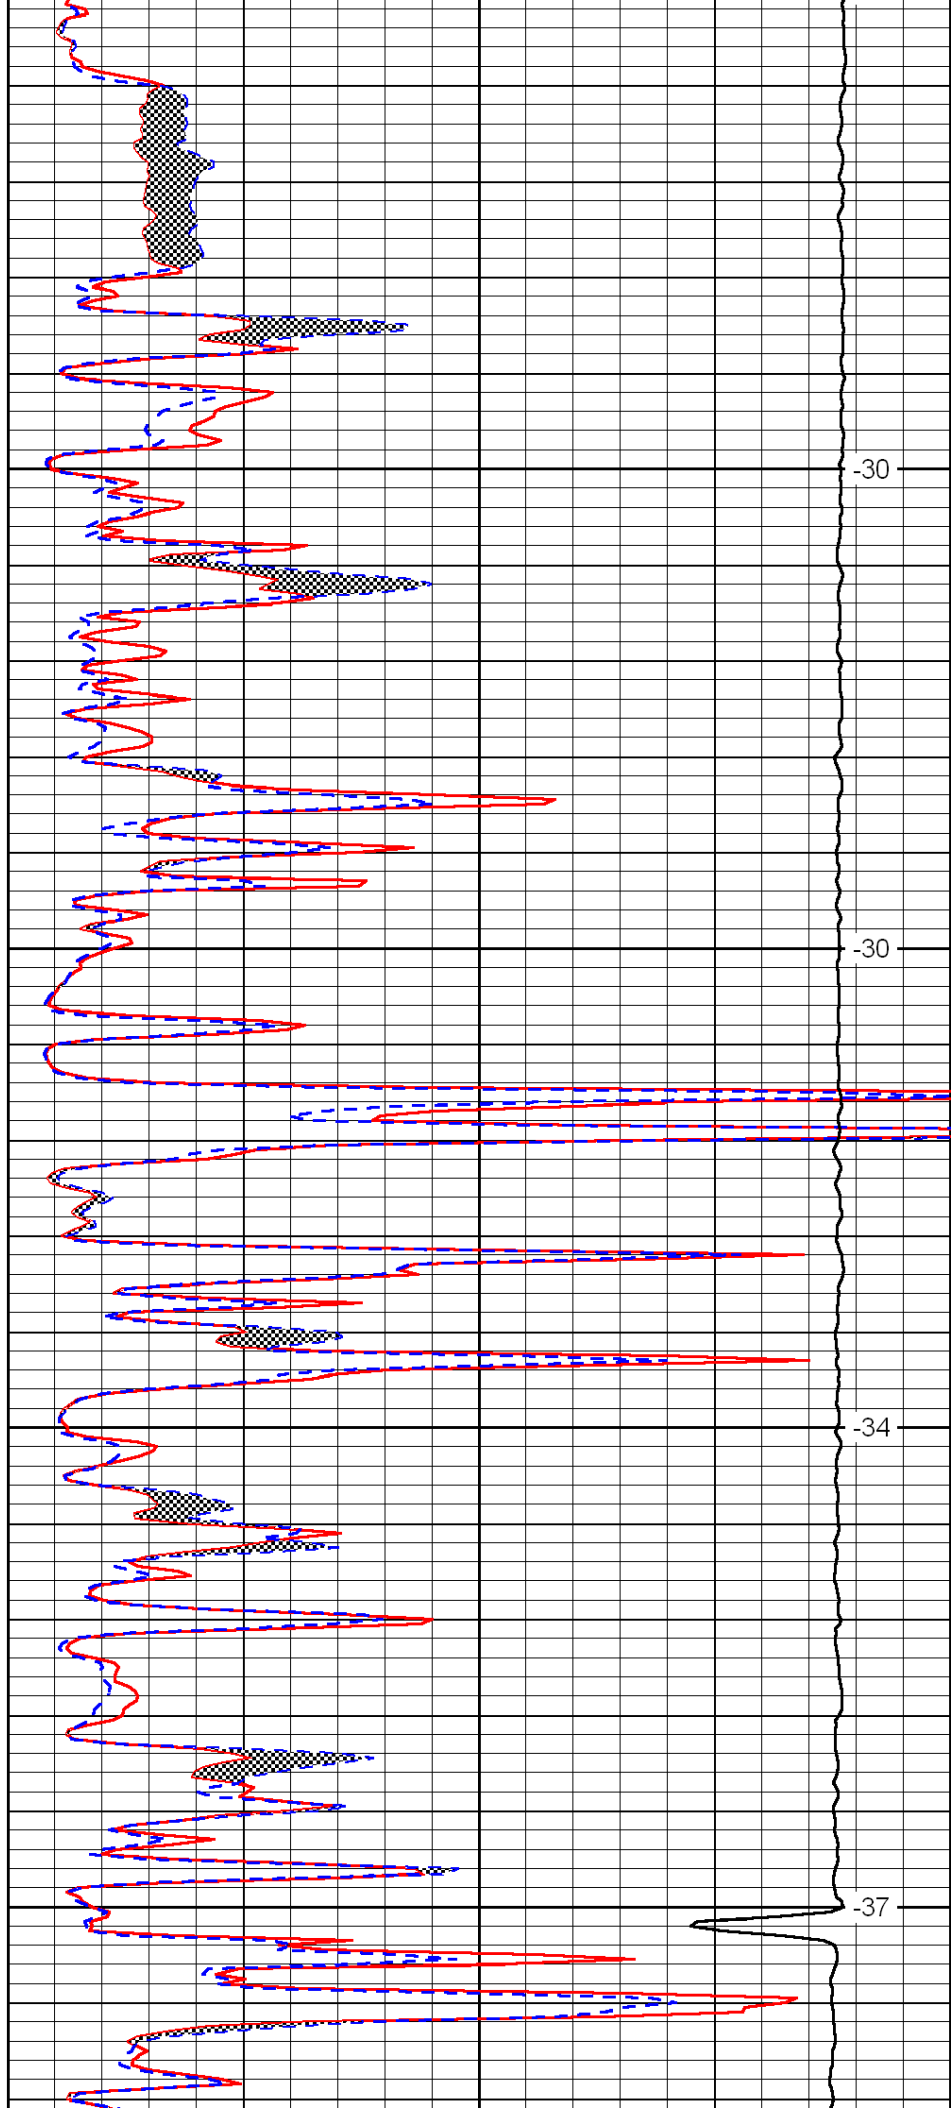


-30

-30

-34

-37

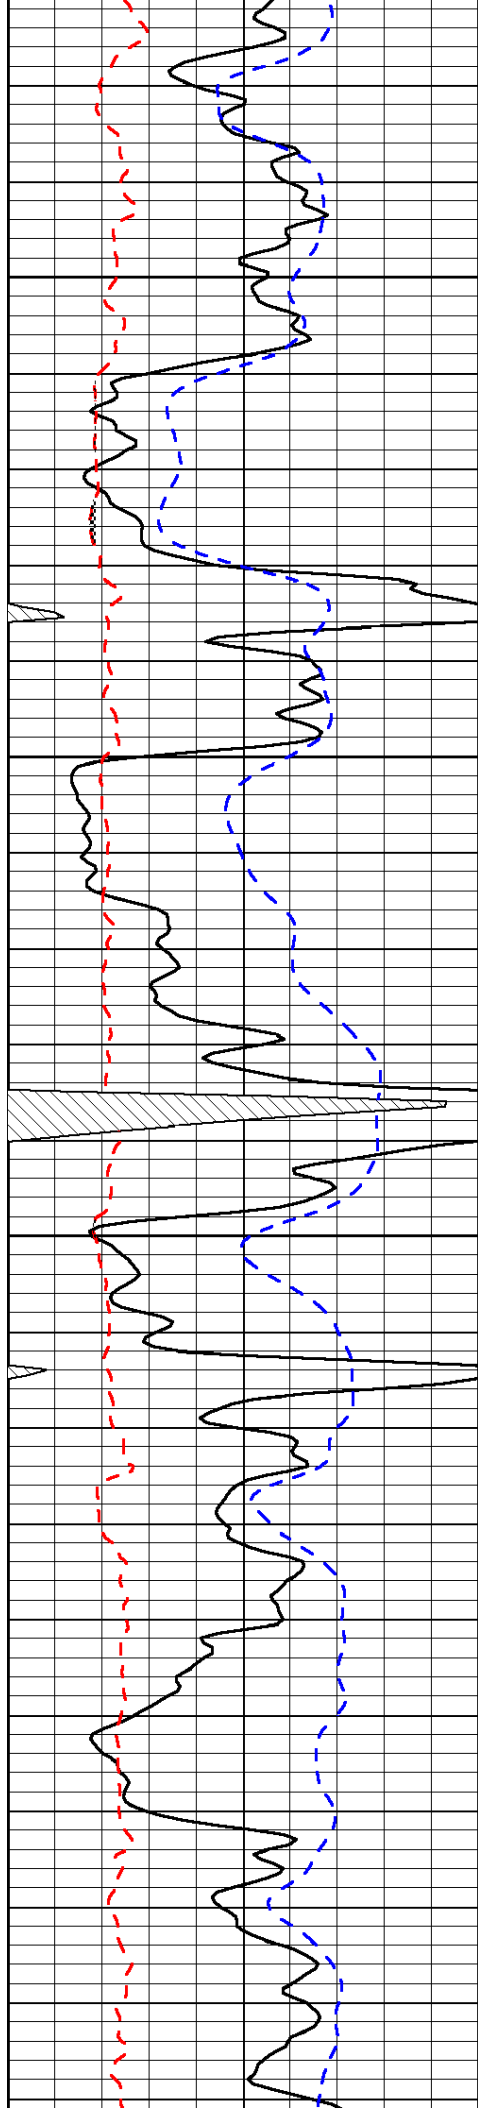

3750

3800

3850


3900

-31

-31

-31

-30

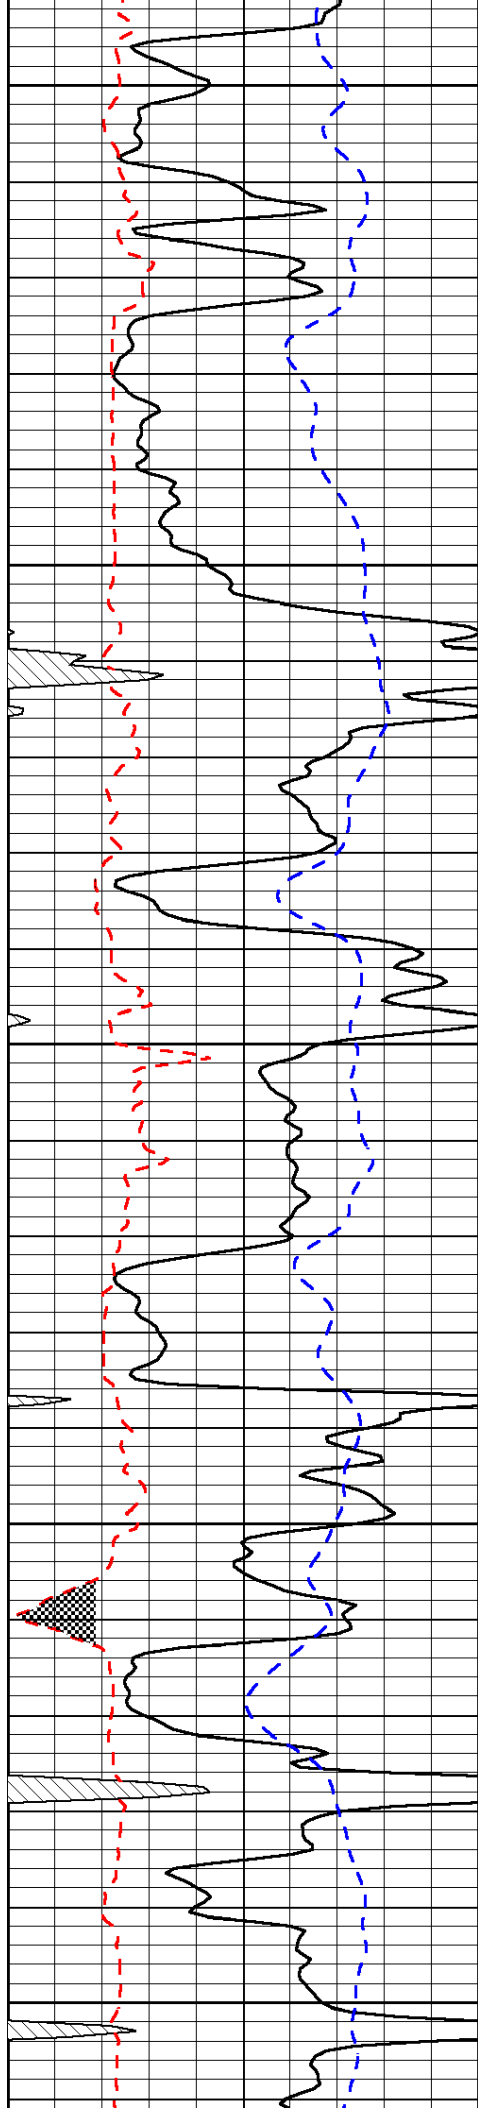


3950


4000

4050

4100

4150

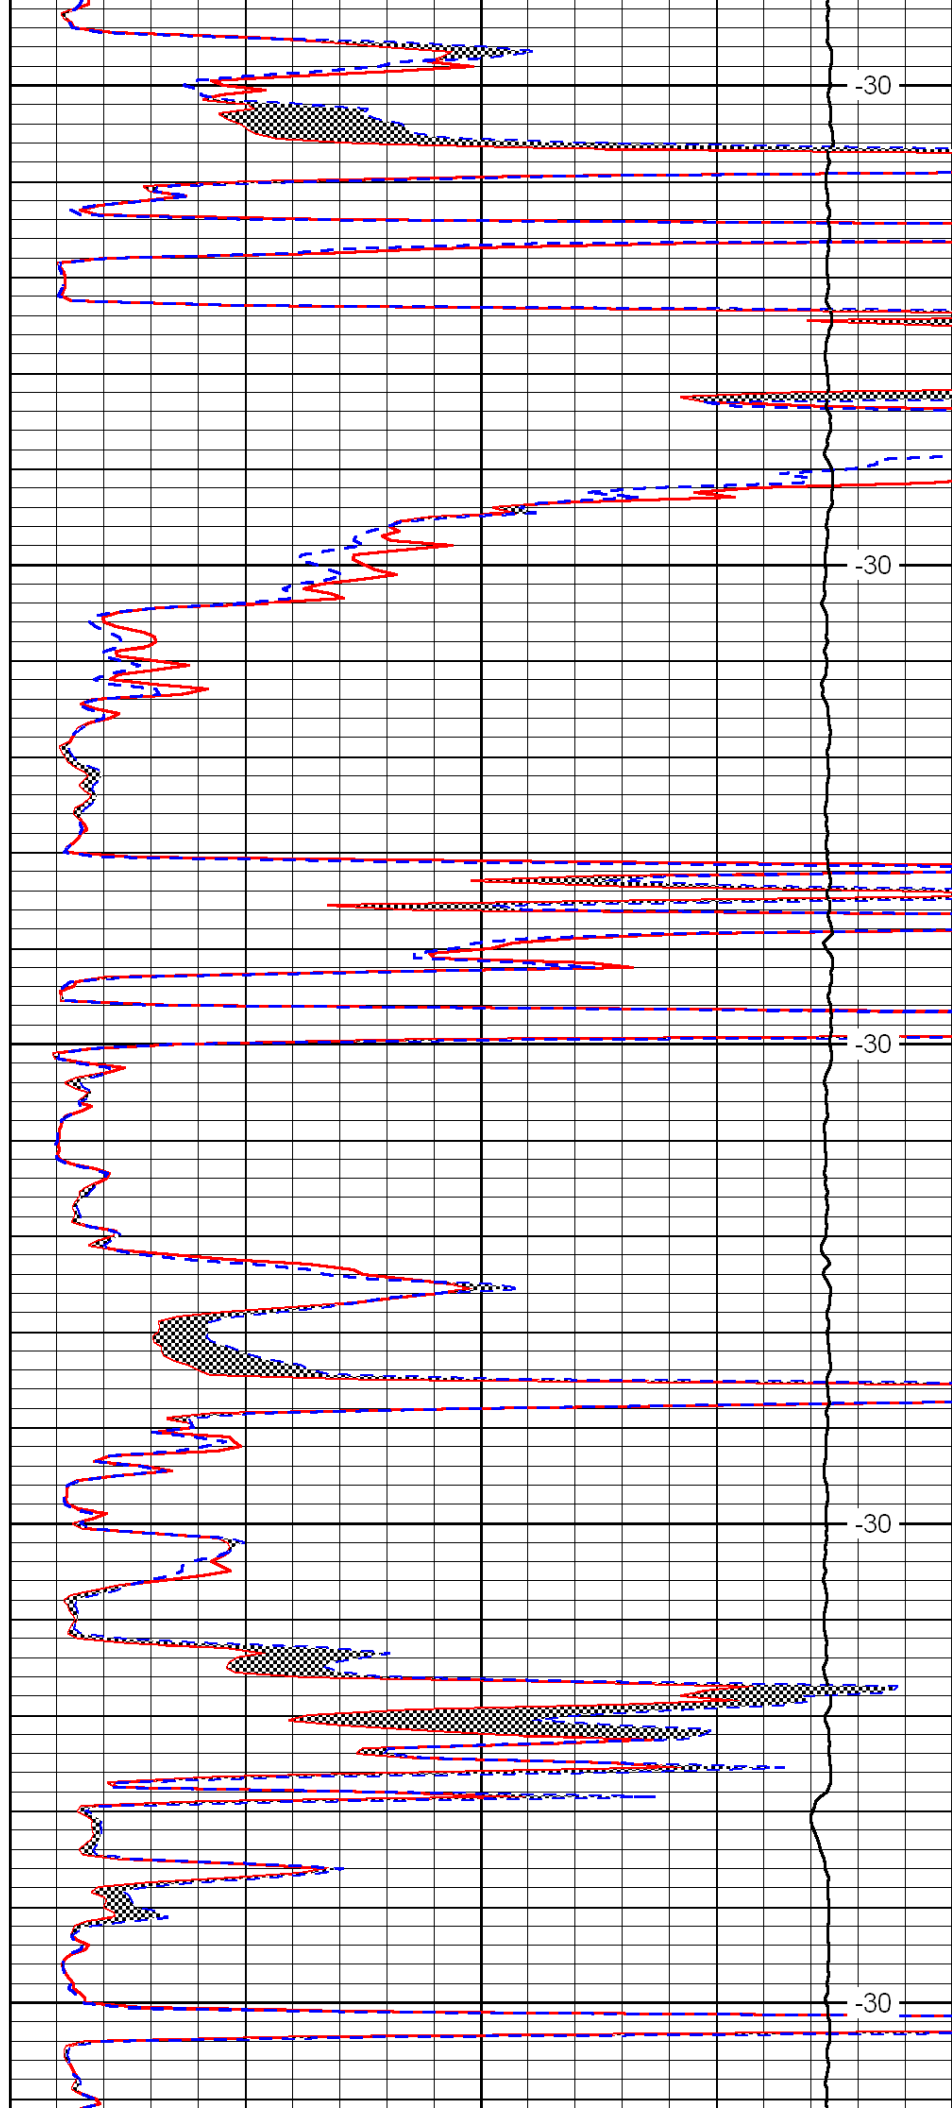

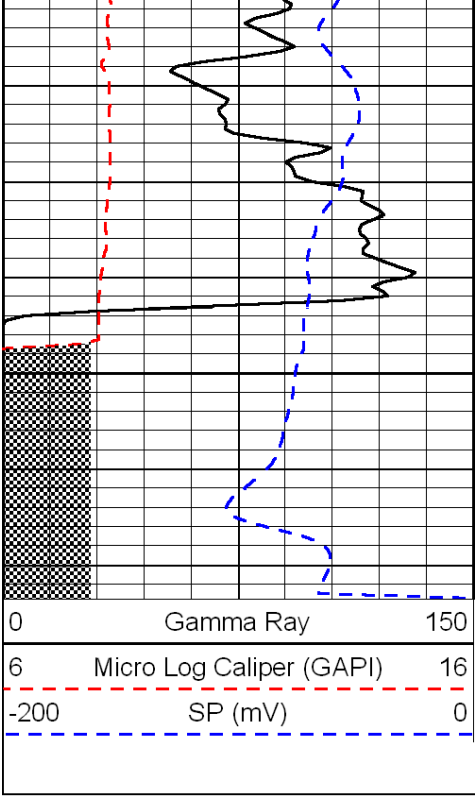

4200

