

RECEIVED  
STATE CORPORATION COMMISSION

15-039-00576-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION


SEP 8 1964  
9-8-64

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

CONSERVATION DIVISION  
Wichita, Kansas

WELL PLUGGING RECORD

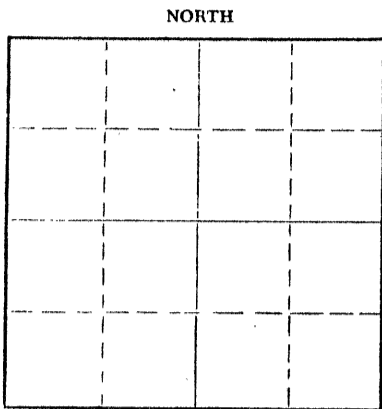

NORTH

Locate well correctly on above  
Section Plat

Decatur County, Sec. 22 Twp. 5S Rge. 27 (E) (W) X  
Location as "NE/CNW/SW" or footage from lines 1650 FN 990 FE

Lease Owner Continental Oil Company

Lease Name C. E. Feely Well No. A-1

Office Address Jennings, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19

Plugging commenced 8-19-64 19

Plugging completed 8-25-64 19

Reason for abandonment of well or producing formation

Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3898 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	255	None
				5 1/2	None	1212

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Started to clean out cellar.

Finished cleaning out cellar. Sanded to 3650'. Dumped 5 sacks of cement. Working pipe.

Working pipe. Shot pipe at 2200' - 1827'. Circulating. Spotted 50 bbl. of oil.

Working pipe.

Working pipe. Shot pipe at 1600' - 1100' - 1300' - 1210'. Pulling pipe.

Mixing and circulating 8 sacks of mud. Pumped 20 sacks of cement to 540'. Pumped 30 sacks of cement to 240'. Capped well with 15 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. (So help me God.)

(Signature)

J. O. Forbes  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 4 day of September, 1964

Glad Ochs  
Notary Public.

My commission expires May 27, 1965