



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-135-24,918-00-00

Company American Warrior, Inc.

Well Bateman No.4-24

Field Aldrich

County Ness State Kansas

Location 2310' FSL & 2310' FWL

Sec: 24 Twp: 18S Rge: 26W

Other Services
CNL/CDL
DIL

Elevation

K.B. 2568
D.F.
G.L. 2560

Permanent Datum Ground Level Elevation 2560

Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Date 6-19-2009

Run Number Two

Depth Driller 4550

Depth Logger 4550

Bottom Logged Interval 4549

Top Log Interval 3700

Casing Driller 8.625 @ 219

Casing Logger 217

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 3.600

Density / Viscosity 9.4 56

pH / Fluid Loss 10.0 9.6

Source of Sample Flowline

Rm @ Meas. Temp 1.2 @ 85

Rmf @ Meas. Temp .9 @ 85

Rmc @ Meas. Temp 1.62 @ 85

Source of Rmf / Rmc Charts

Rm @ BHT .84 @ 122

Operating Rig Time 4 Hours

Max Rec. Temp. F 122

Equipment Number 15

Location Hays

Recorded By C. Desaire

Witnessed By Jason Alm

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Ness City, W to G Rd, 2N, 2 W, S Into

Database File: amwarrhd.db
Dataset Pathname: dil/amwrstk
Presentation Format: micro
Dataset Creation: Fri Jun 19 15:51:01 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

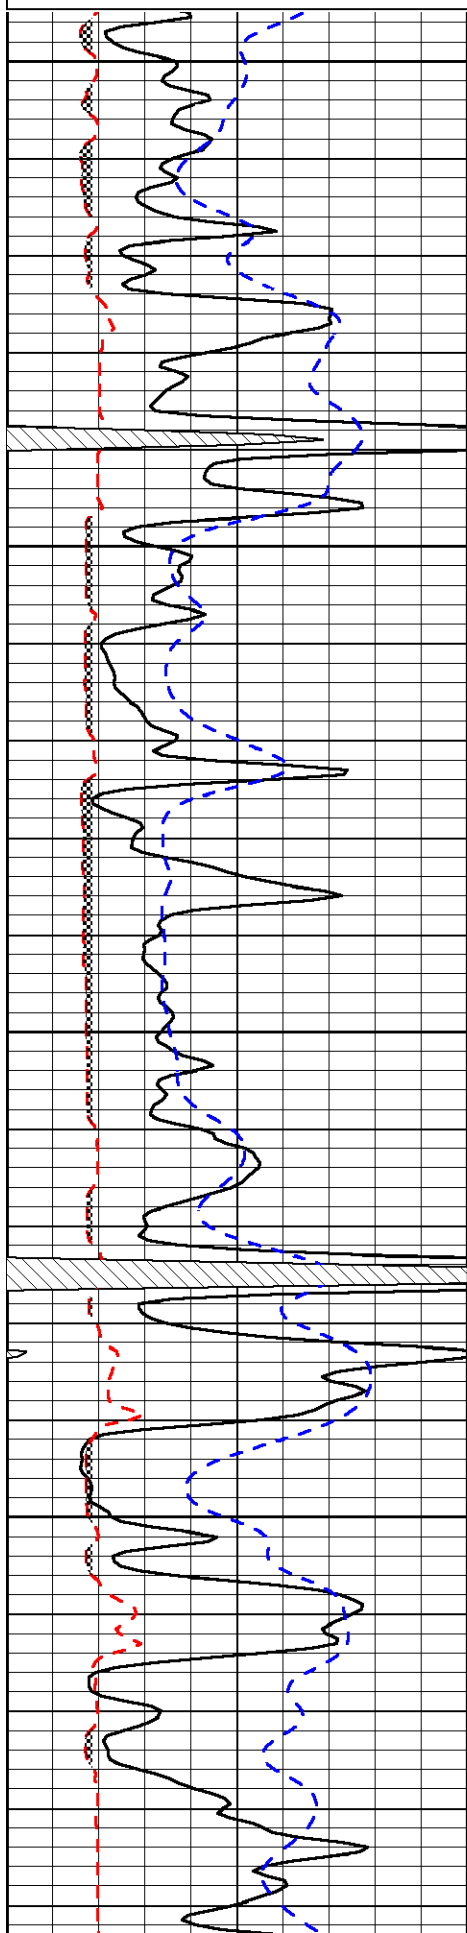


3700

3750

3800

3850

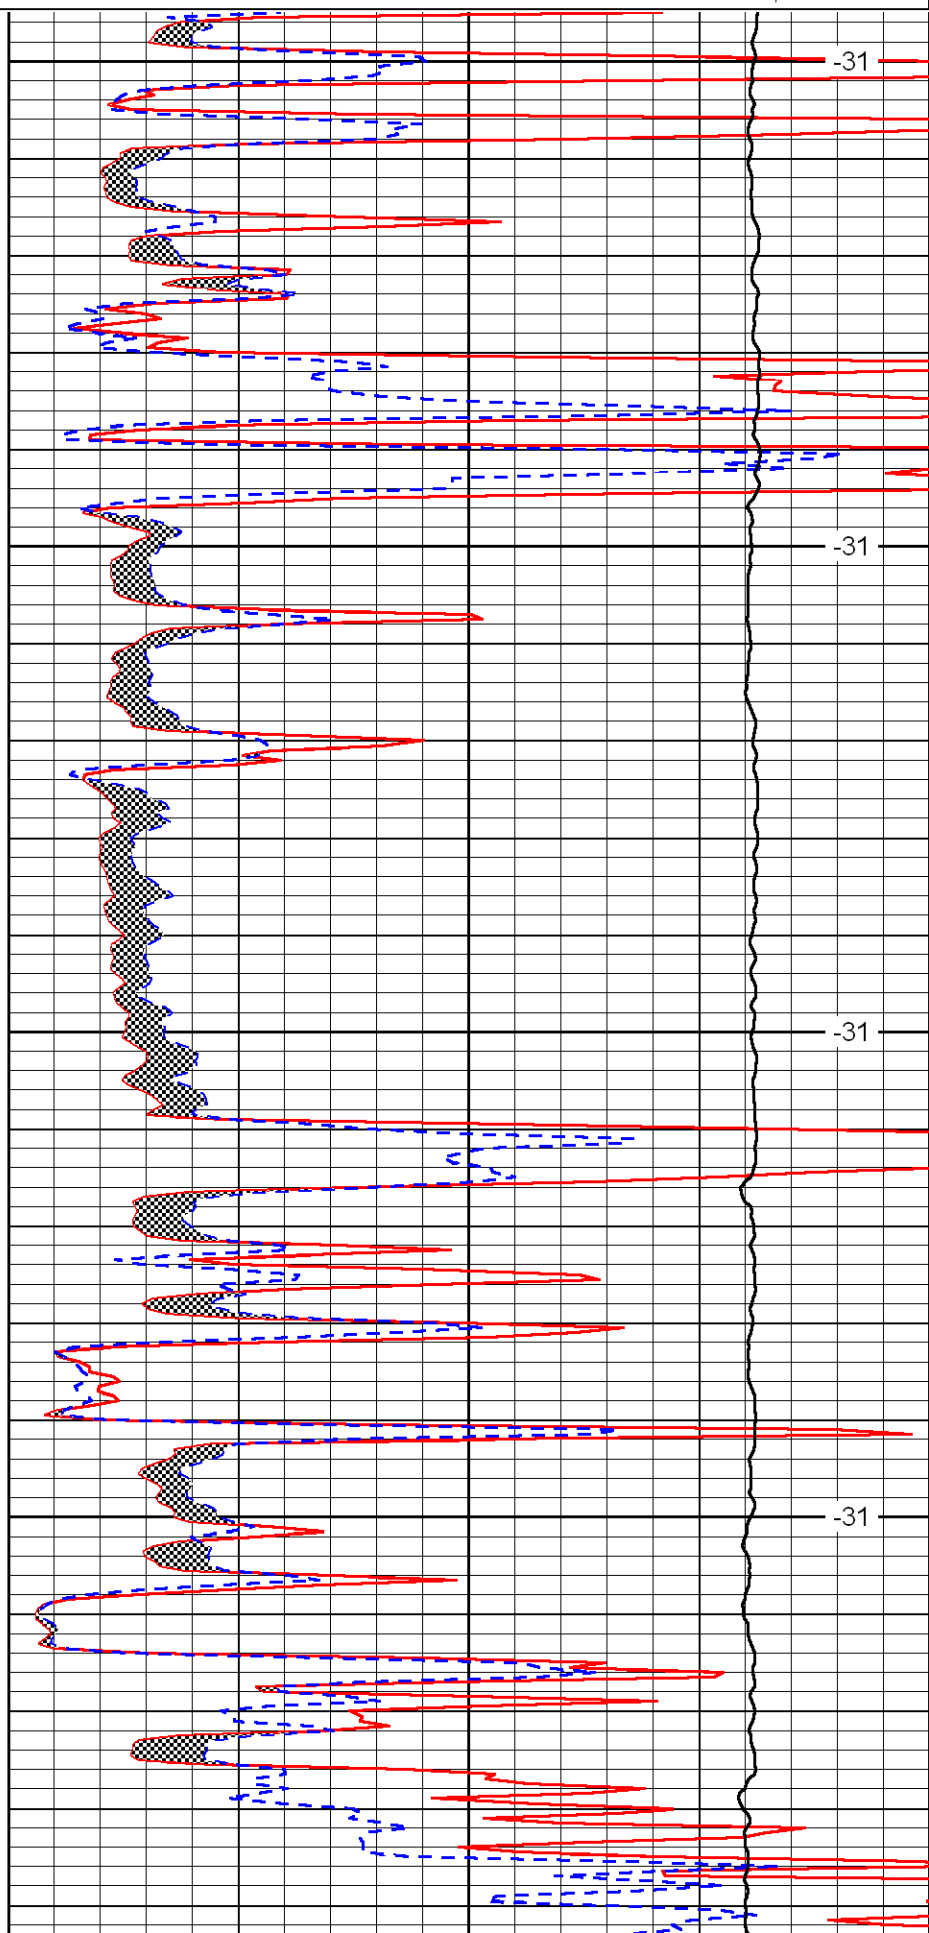


-31

-31

-31

-31

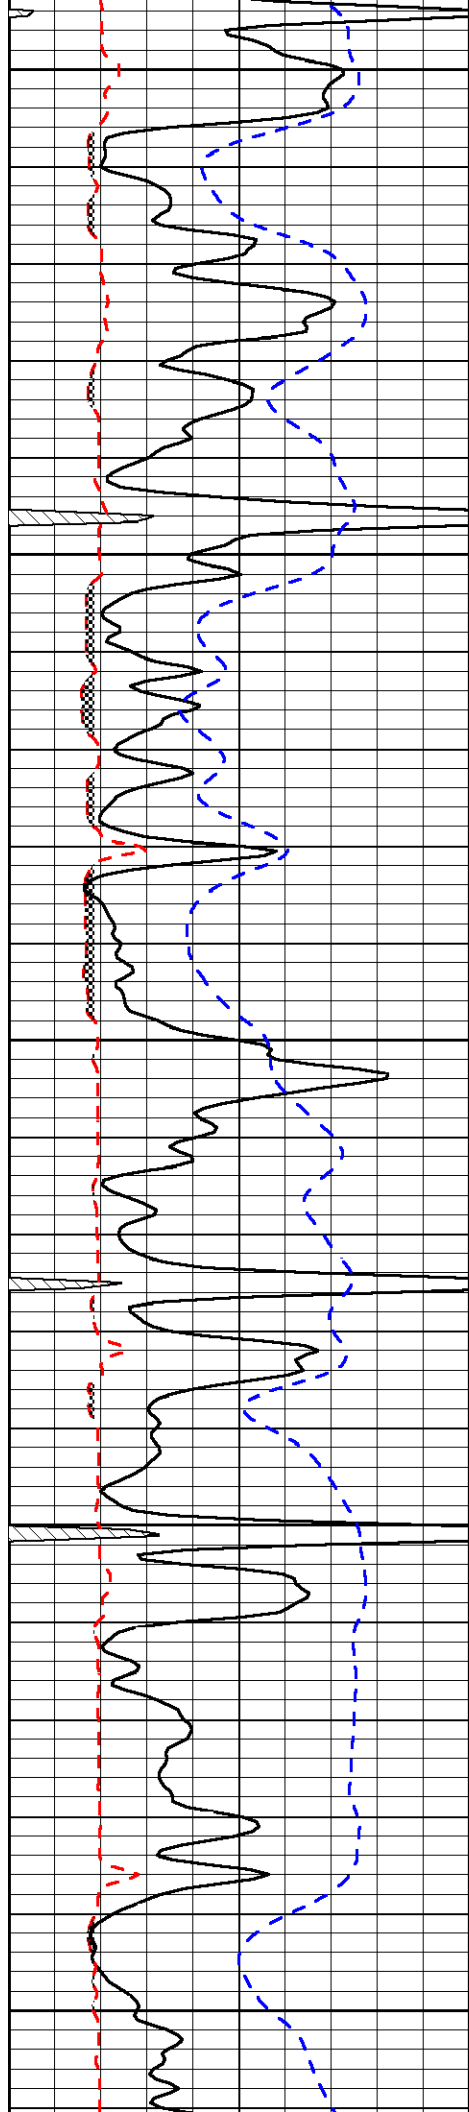


3900

3950

4000

4050

4100

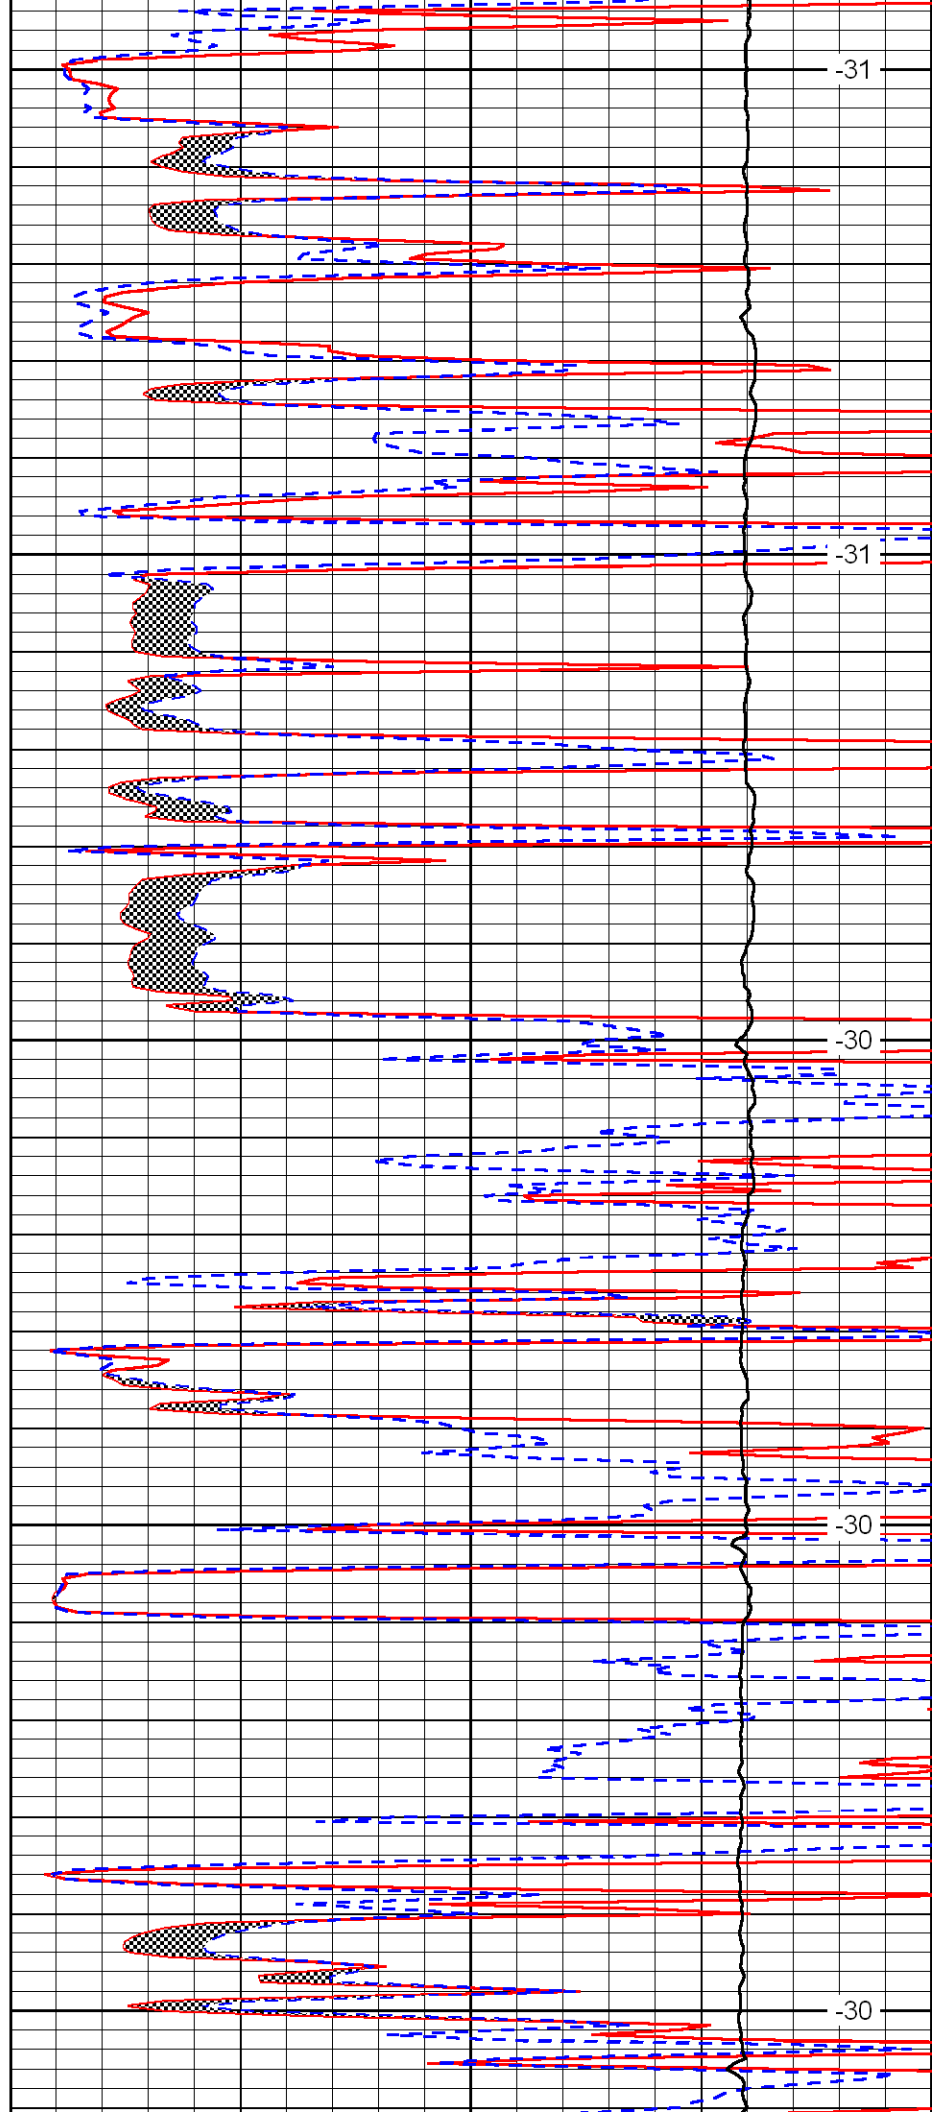


-31

-31

-30

-30

-30

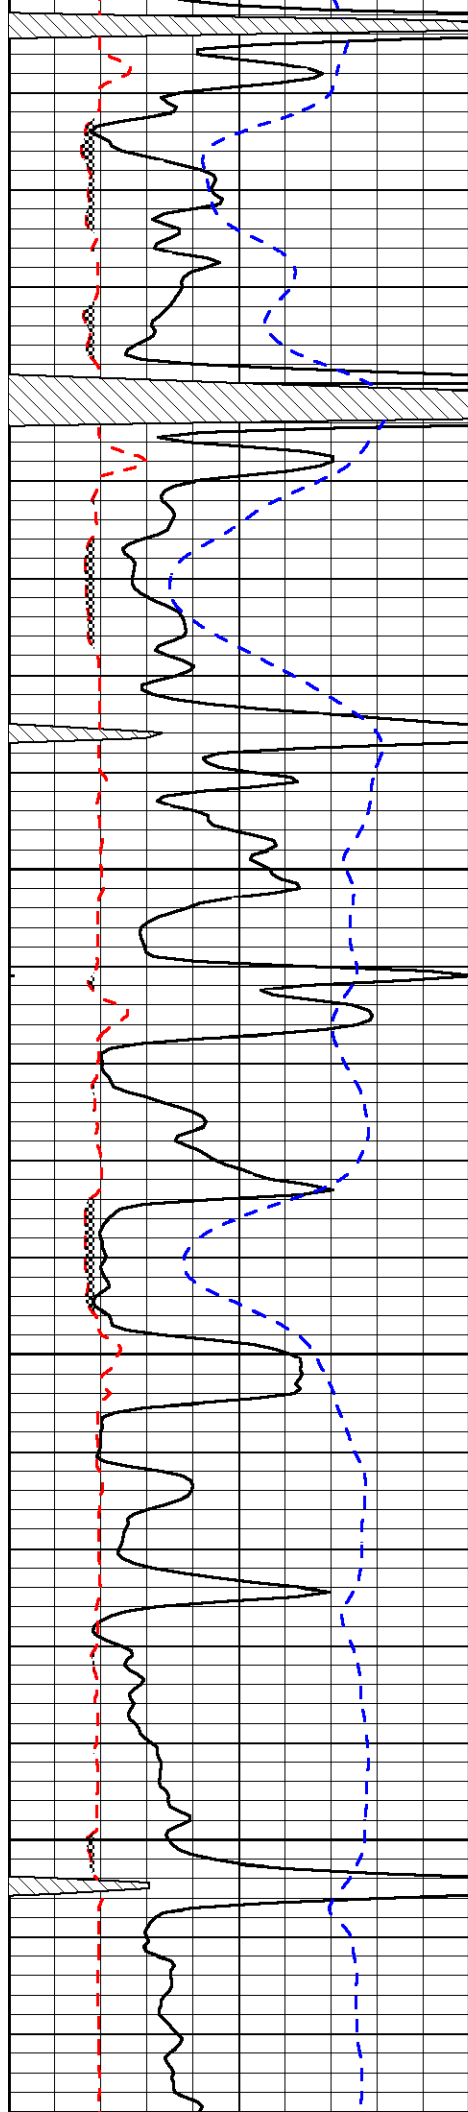


4150

4200

4250

4300

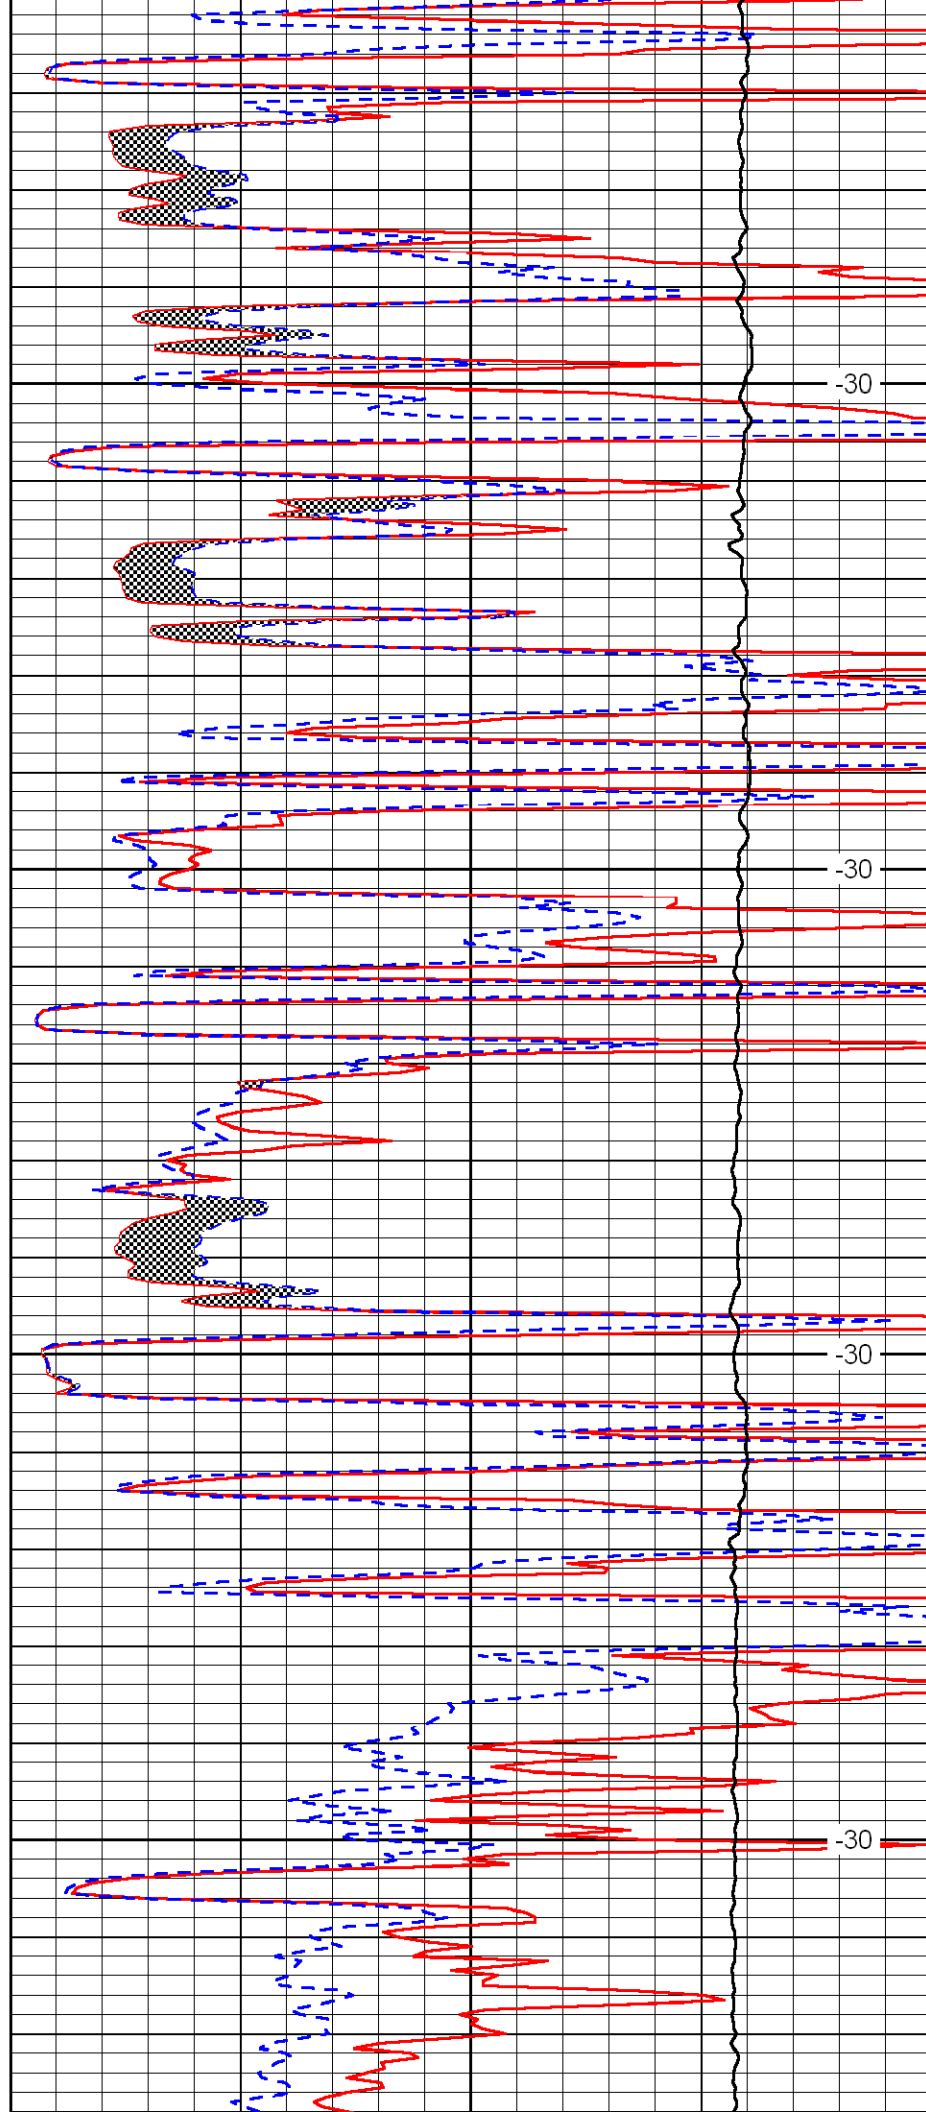


-30

-30

-30

-30

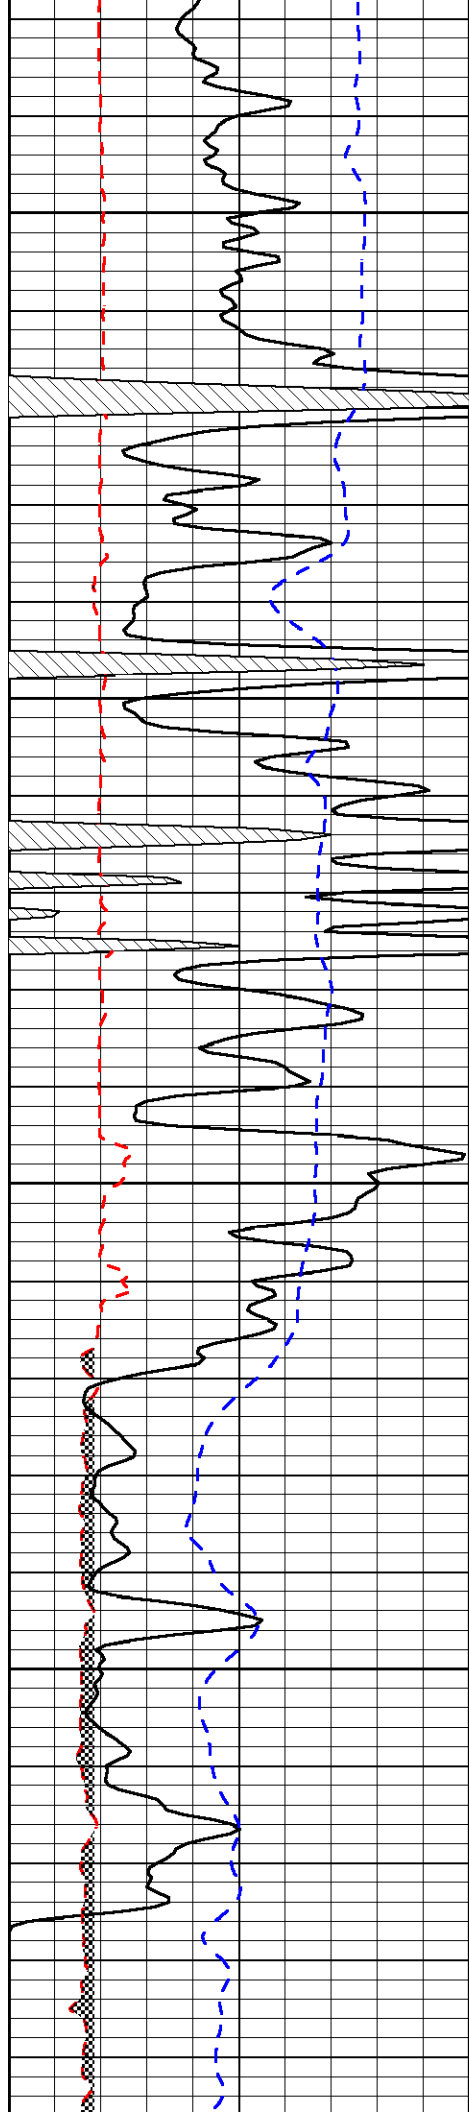


4350

4400

4450

4500

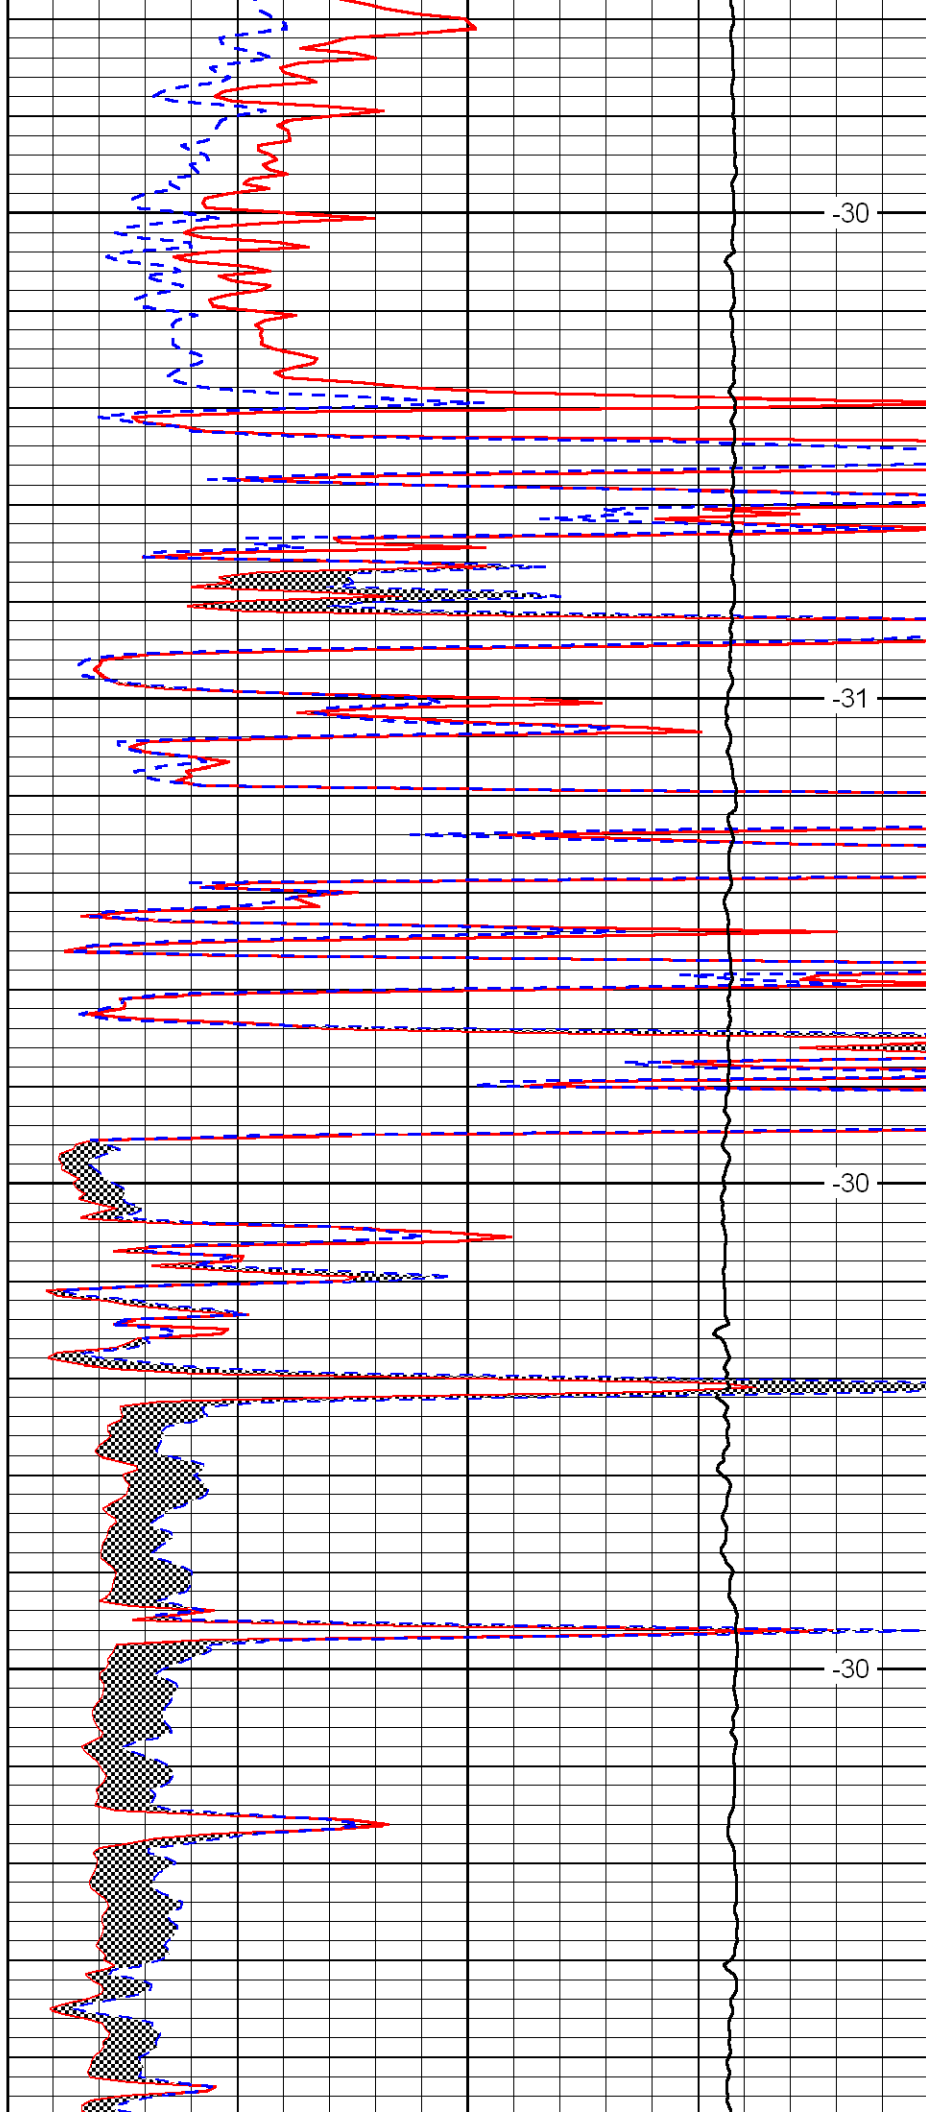


-30

-31

-30

-30

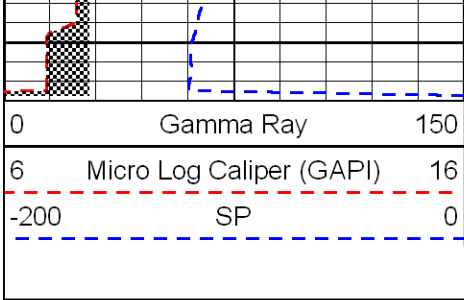

4550

