SUPERIOR WELL SERVICES

SUPERIOR
Hays,
Kansas

COMPENSATED NEUTRON/DENSITY PE LOG

Company ABARTA OIL & GAS COMPANY, INC.

Well HOFFMAN #1

Field KRAFT-PRUSA

County BARTON State KANSAS

Location: API # : 15-009-25458-0000

1582' FSL & 856' FWL

SEC 18 TWP 16S RGE 11W

Other Services

DIL
MEL/SON

Elevation

Permanent Datum	GROUND LEVEL	Elevation	1899
Log Measured From	KELLY BUSHING 7' A.G.L.		
Drilling Measured From	KELLY BUSHING		

K.B. 1906
D.F. 1904
G.L. 1899

Date	8-4-10		
Run Number	ONE		
Depth Driller	3400		
Depth Logger	3400		
Bottom Logged Interval	3376		
Top Log Interval	2500		
Casing Driller	8 5/8" @ 769'		
Casing Logger	769		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4000 PPM	
Density / Viscosity	9.4/56		
pH / Fluid Loss	8.0/9.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.65 @ 95F		
Rmf @ Meas. Temp	.48 @ 95F		
Rmc @ Meas. Temp	.76 @ 95F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.56 @ 110F.		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	110F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	SCOTT ALBERG	DENNIS BORDER	

Company ABARTA OIL & GAS CO., INC.
Well HOFFMAN #1
Field KRAFT-PRUSA
County BARTON
State KANSAS

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395

DIRECTIONS

BEAVER KS. - 3 E. TO ODIN BLKTOP - 1 N. - 1 1/2 E. - N. & W. INTO


MAIN SECTION


SUPERIOR
Hays,
Kansas


SUPERIOR WELL SERVICES


Database File: 005421pe.db
Dataset Pathname: pass3.1
Presentation Format: _ldt_neu
Dataset Creation: Wed Aug 04 23:11:11 2010 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240


0 GAMMA RAY (GAPI) 150	ABHV	30 COMPENSATED DENSITY (pu) -10
6 CALIPER (in) 16	10 (ft3) 0	30 COMPENSATED NEUTRON (pu) -10
	TBHV	0 PE 10 -0.25 CORRECTION (g/cc) 0.25
	0 (ft3) 10	

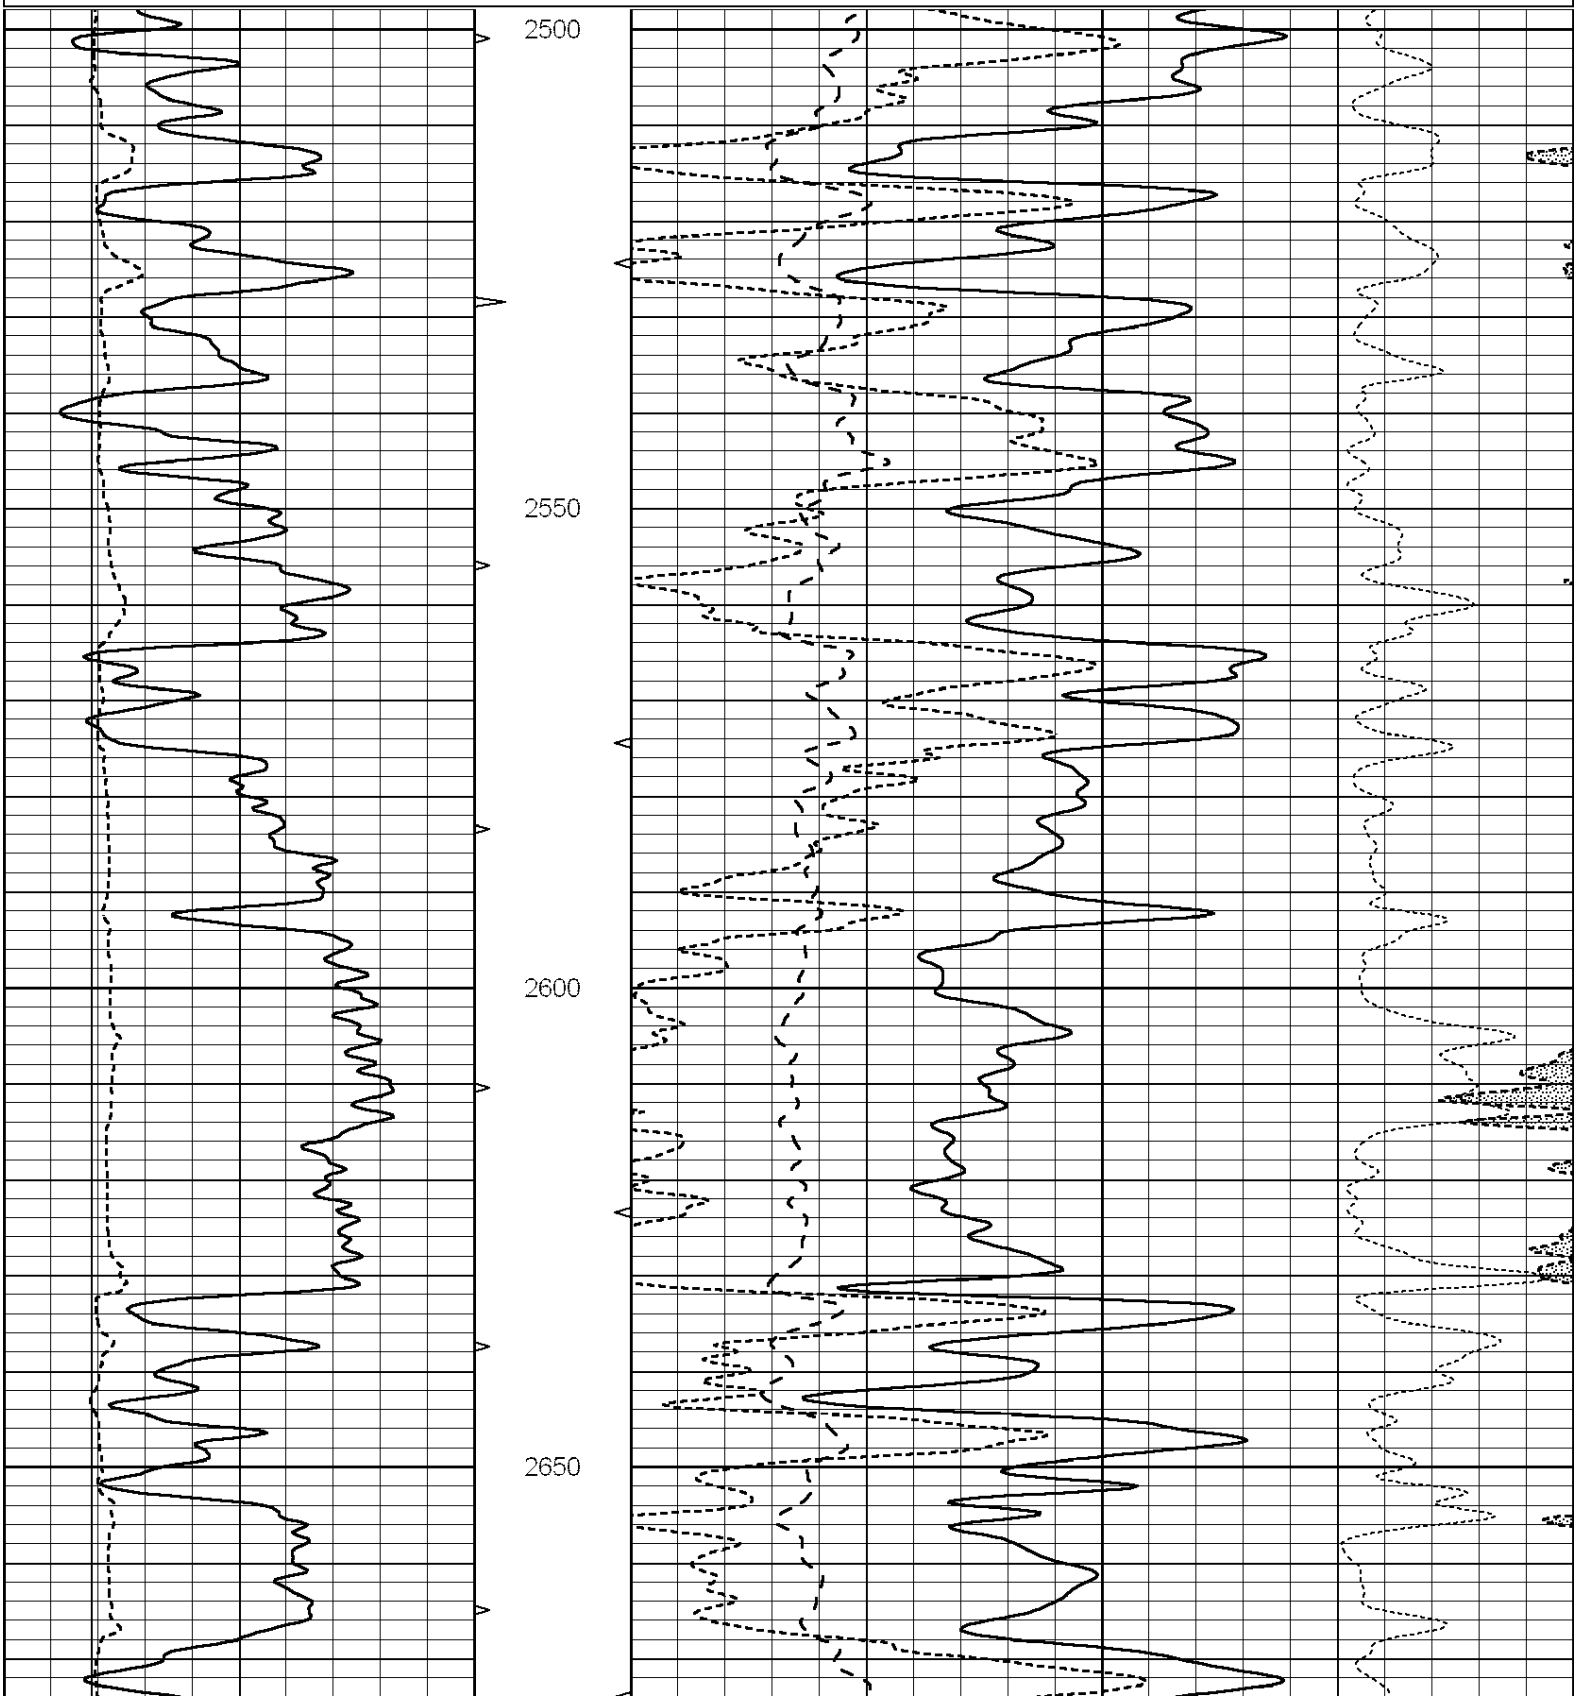

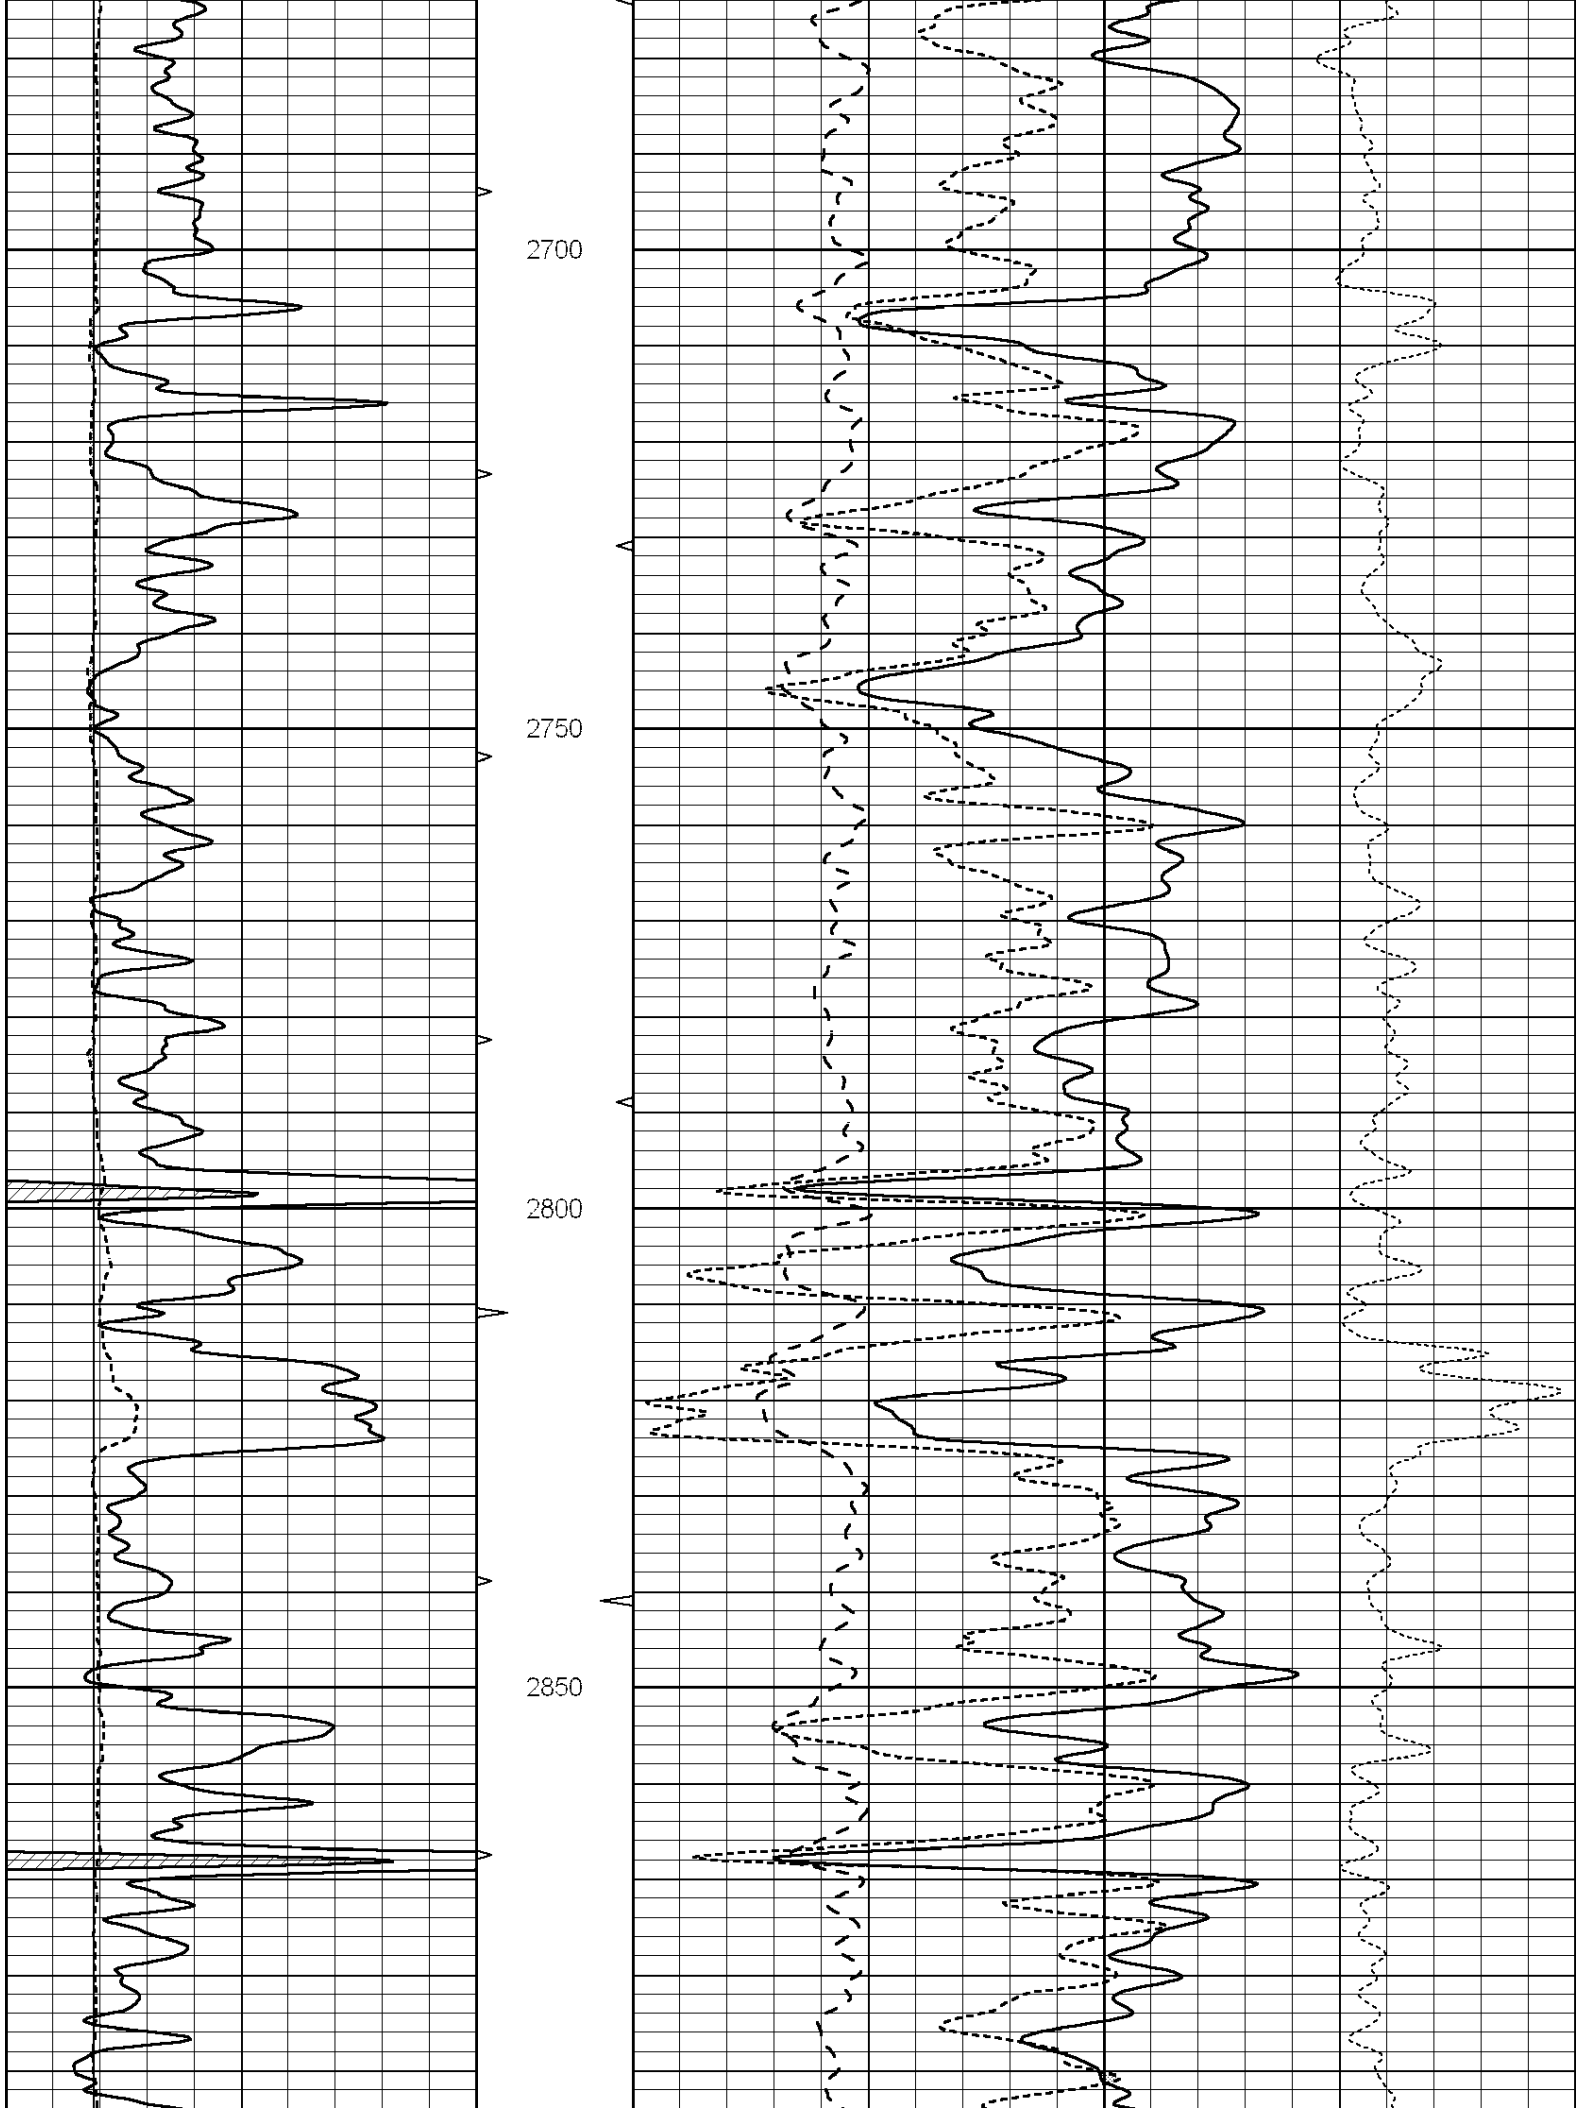
2700
2750
2800
2850

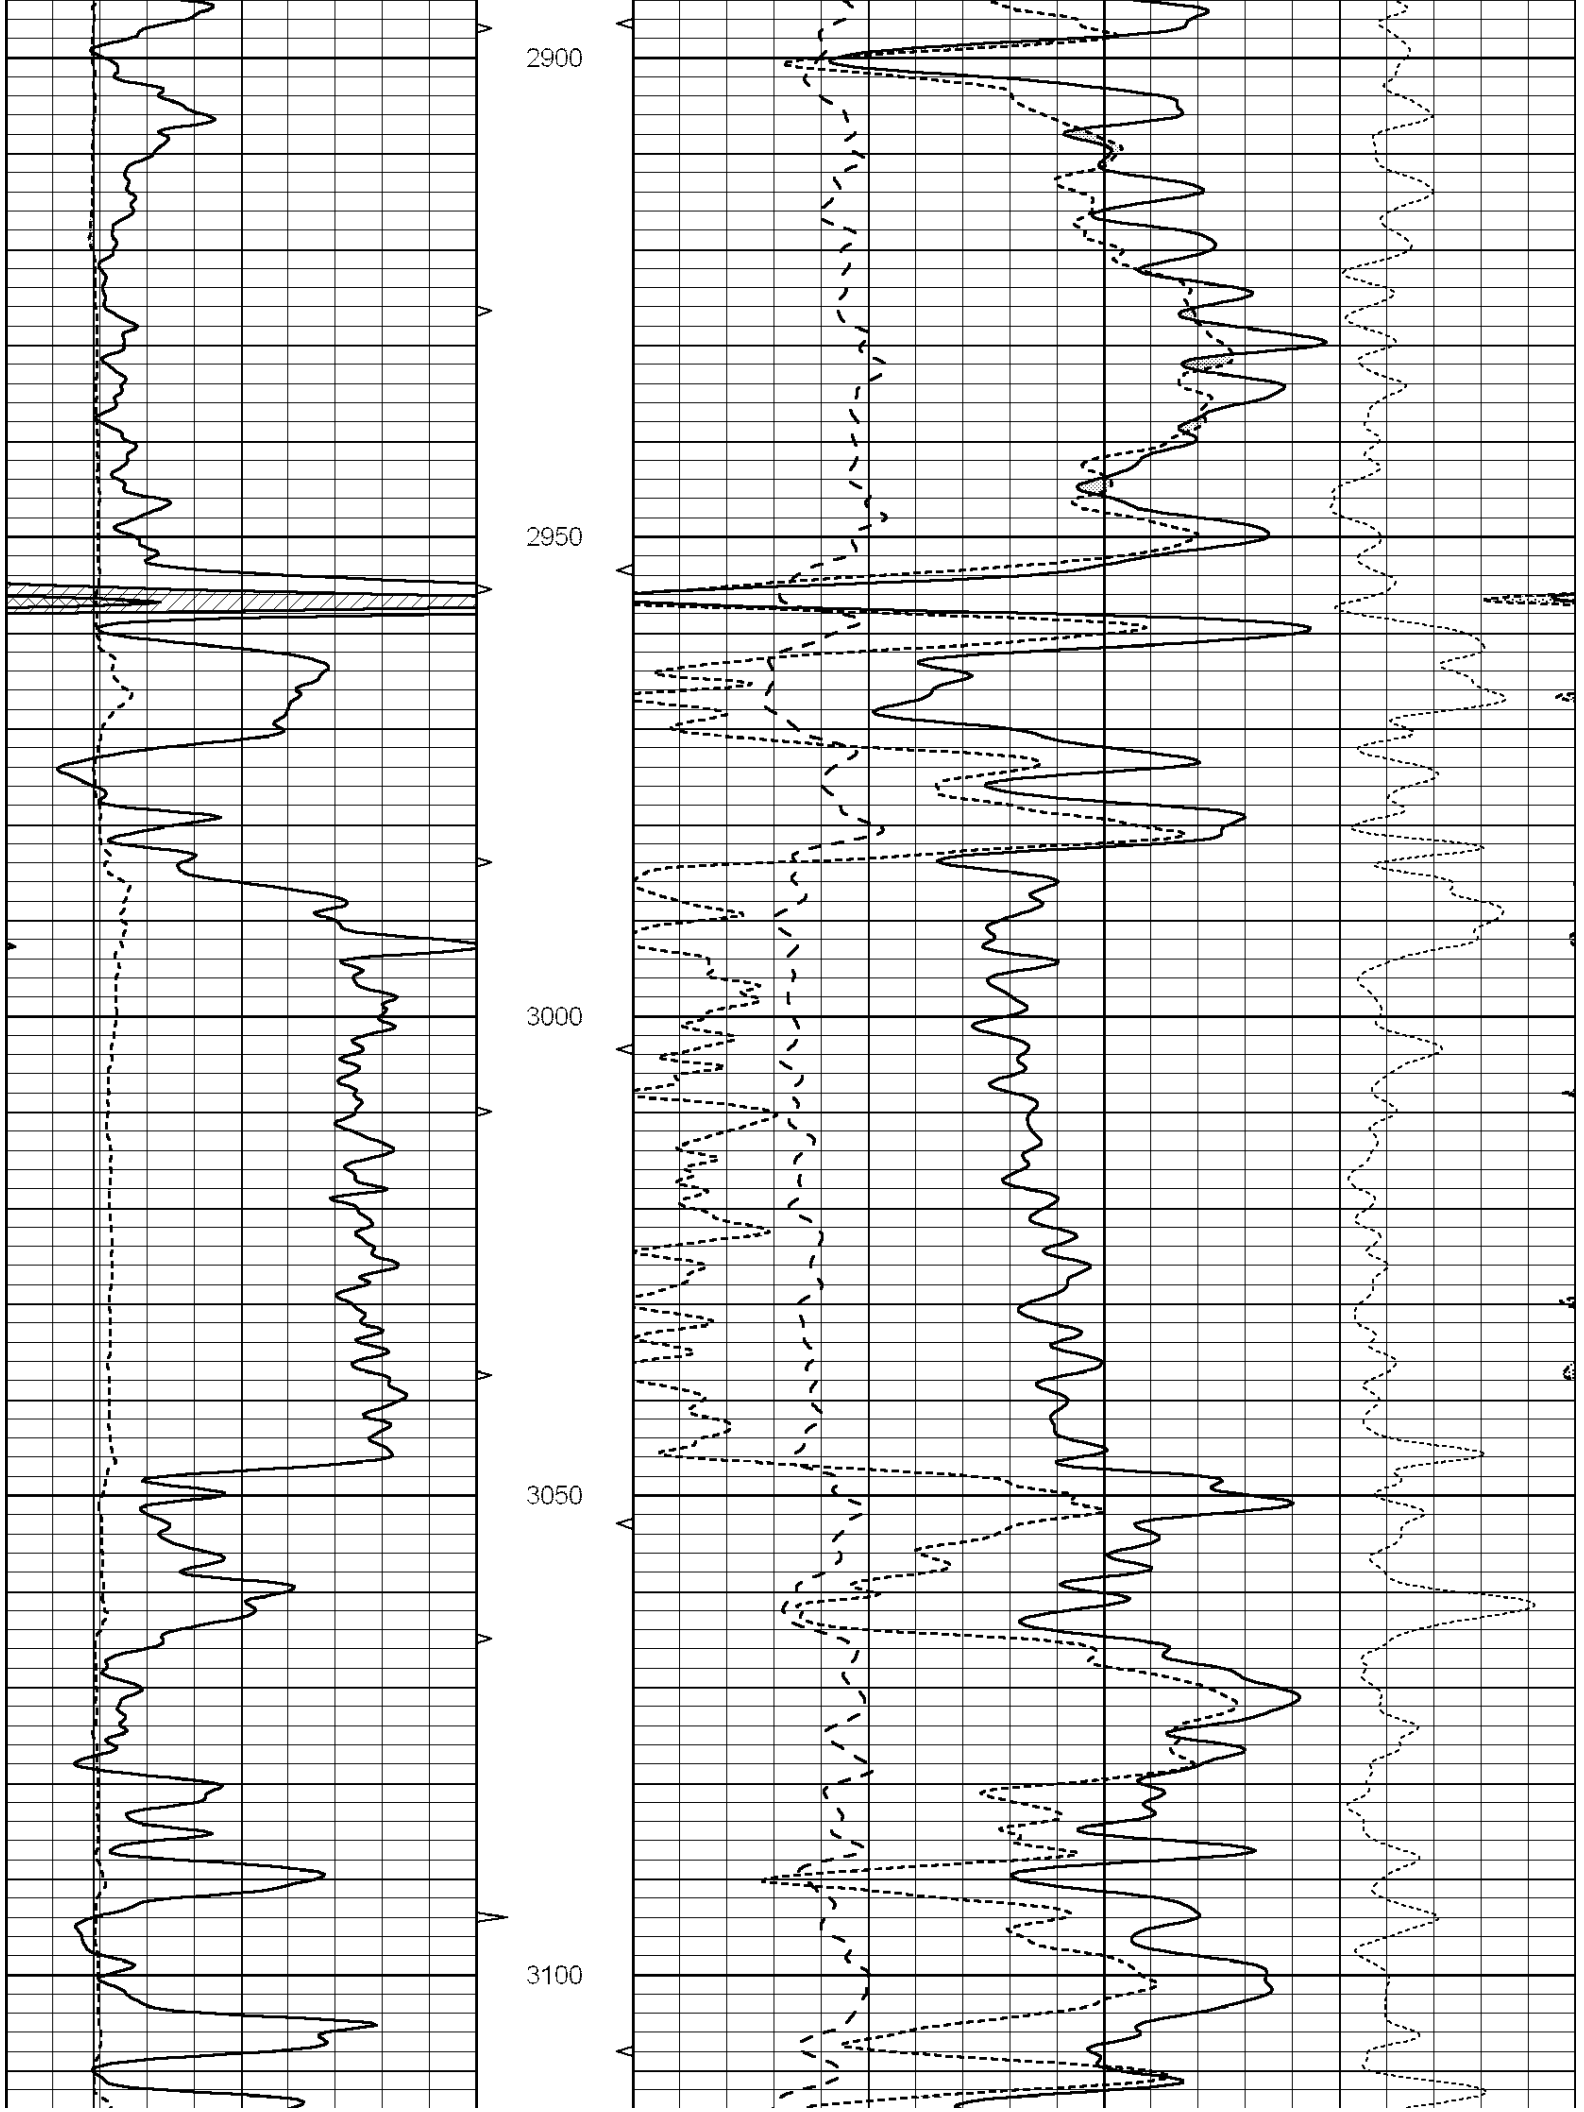
2900
2950
3000
3050
3100

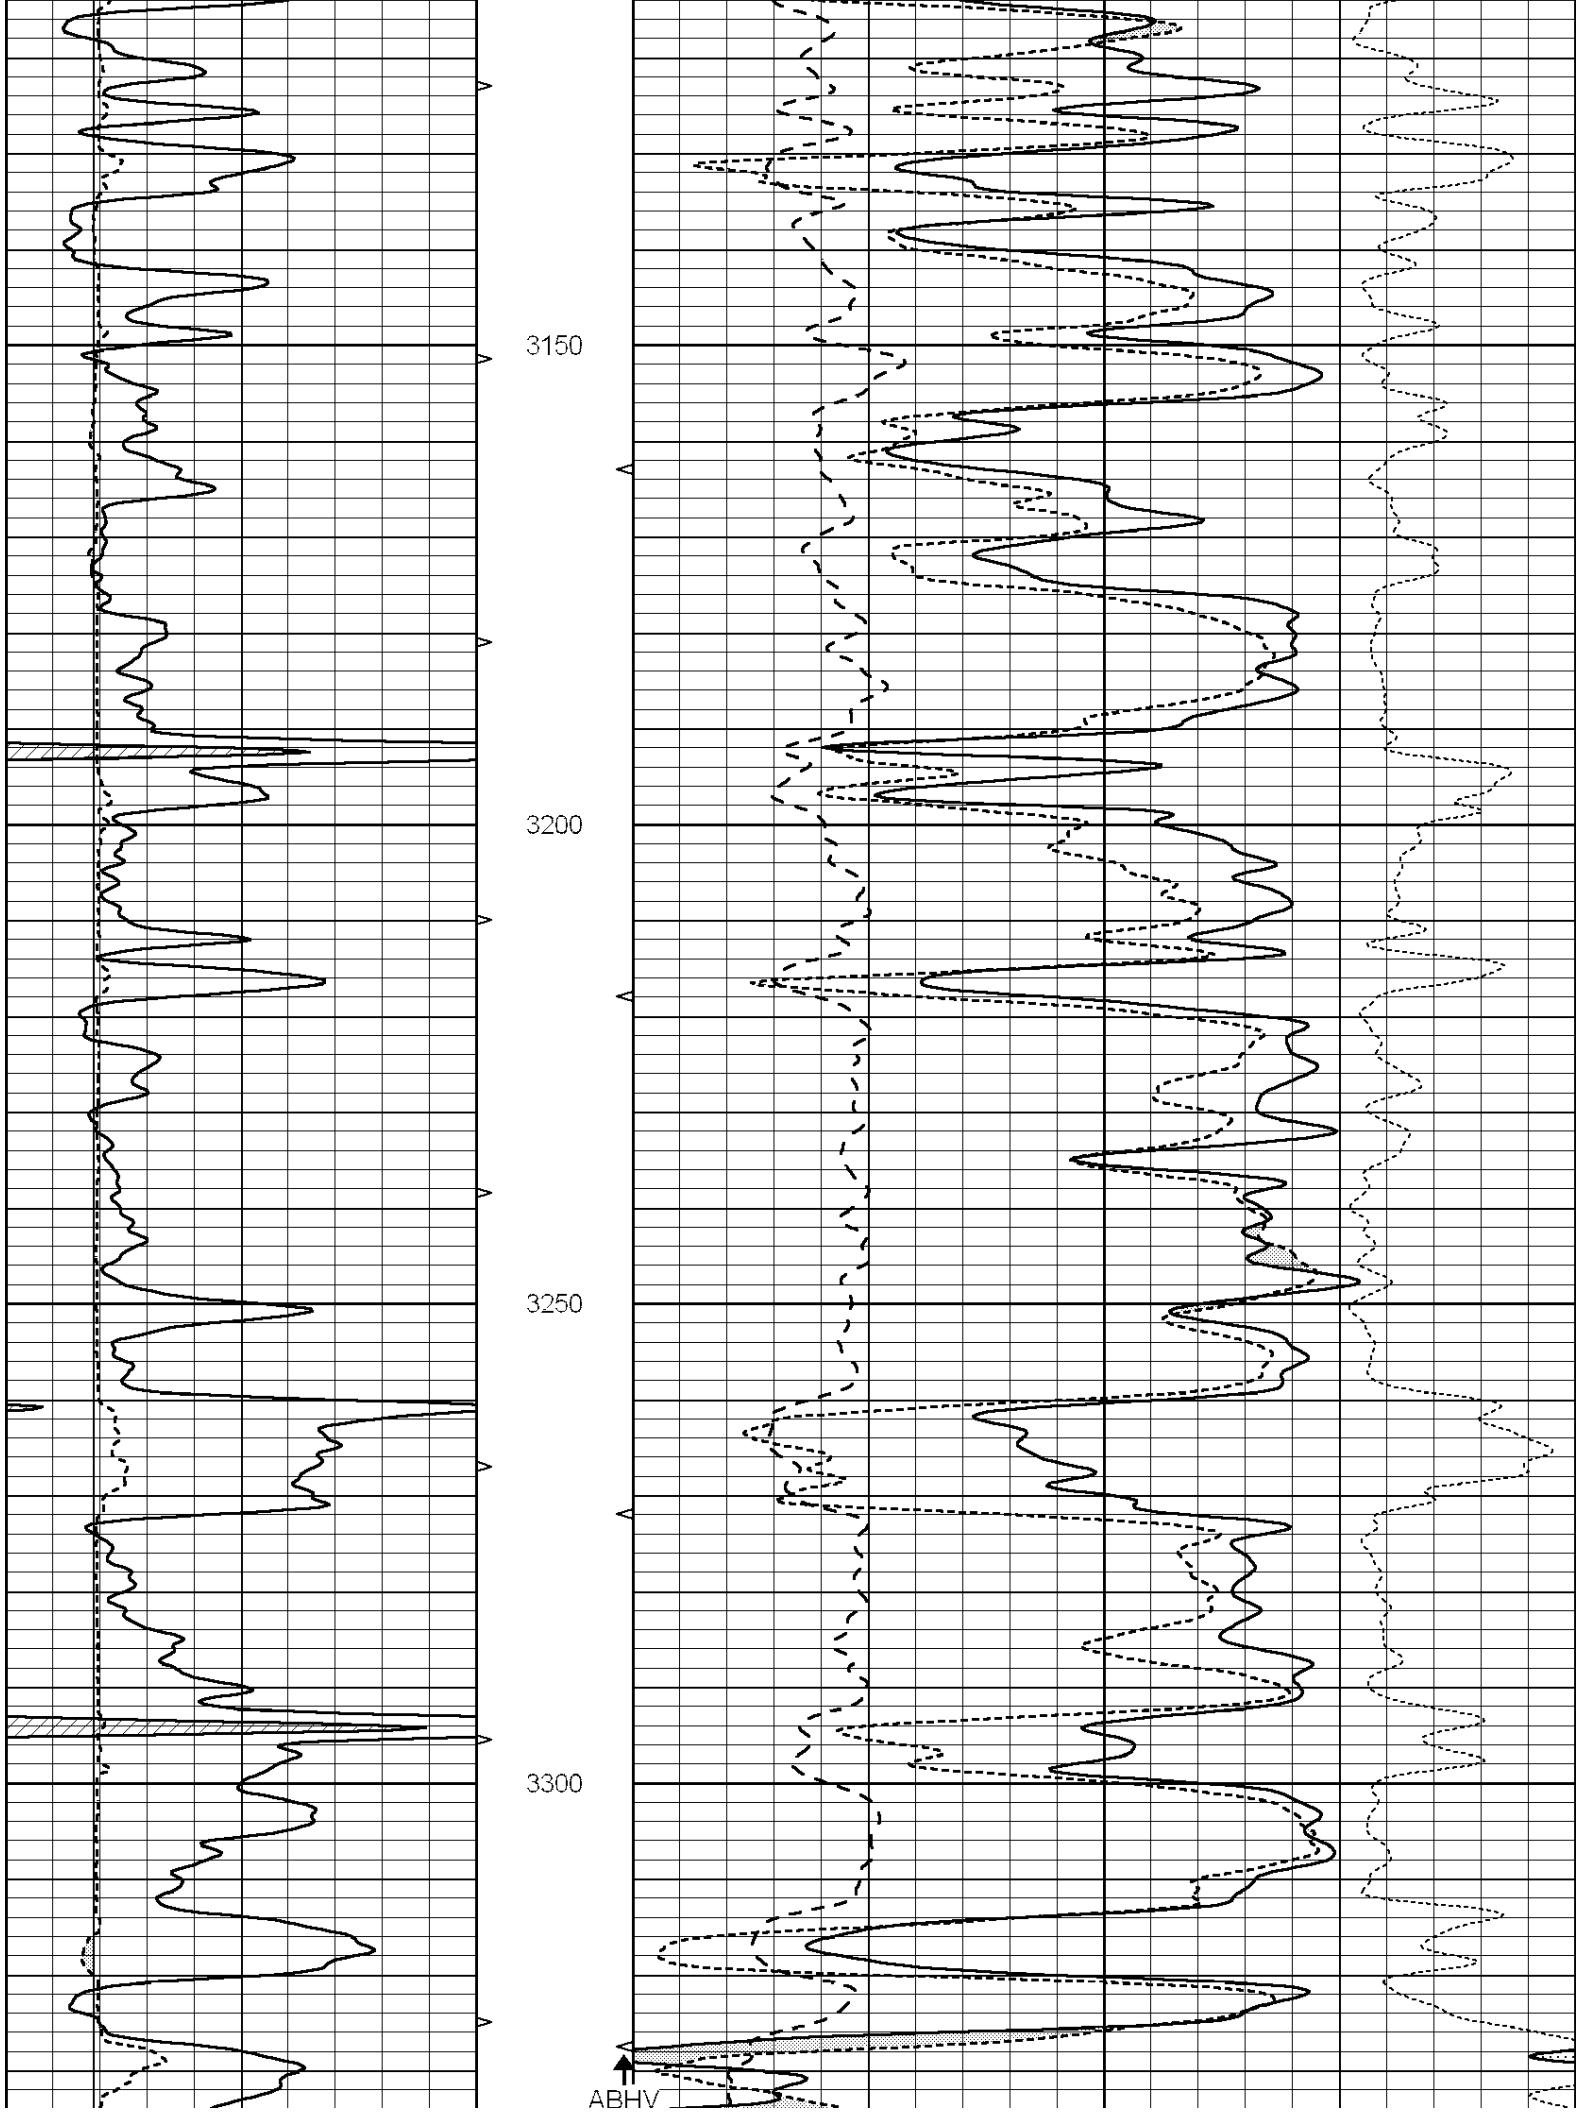
3150
3200
3250
3300
ABHV

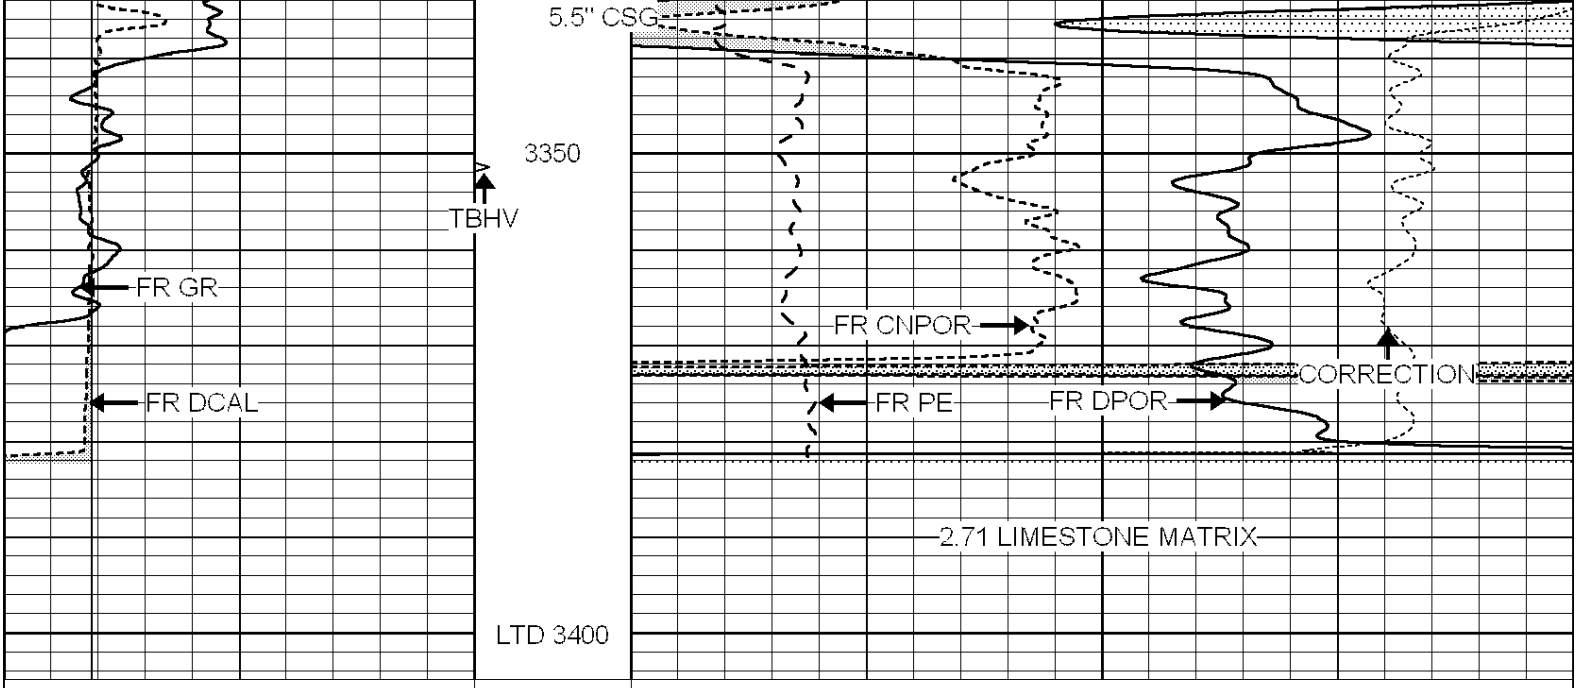

0	GAMMA RAY (GAPI) 150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in) 16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
		TBHV	0	PE 10	-0.25 CORRECTION (g/cc) 0.25
		0 (ft3) 10			


SUPERIOR WELL SERVICES


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File:	005421pe.db
Dataset Pathname:	pass2.1
Presentation Format:	_ldt_neu
Dataset Creation:	Wed Aug 04 23:08:35 2010 by Calc Open-Cased 090629
Charted by:	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI) 150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in) 16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
		TBHV	0	PE 10	-0.25 CORRECTION (g/cc) 0.25
		0 (ft3) 10			

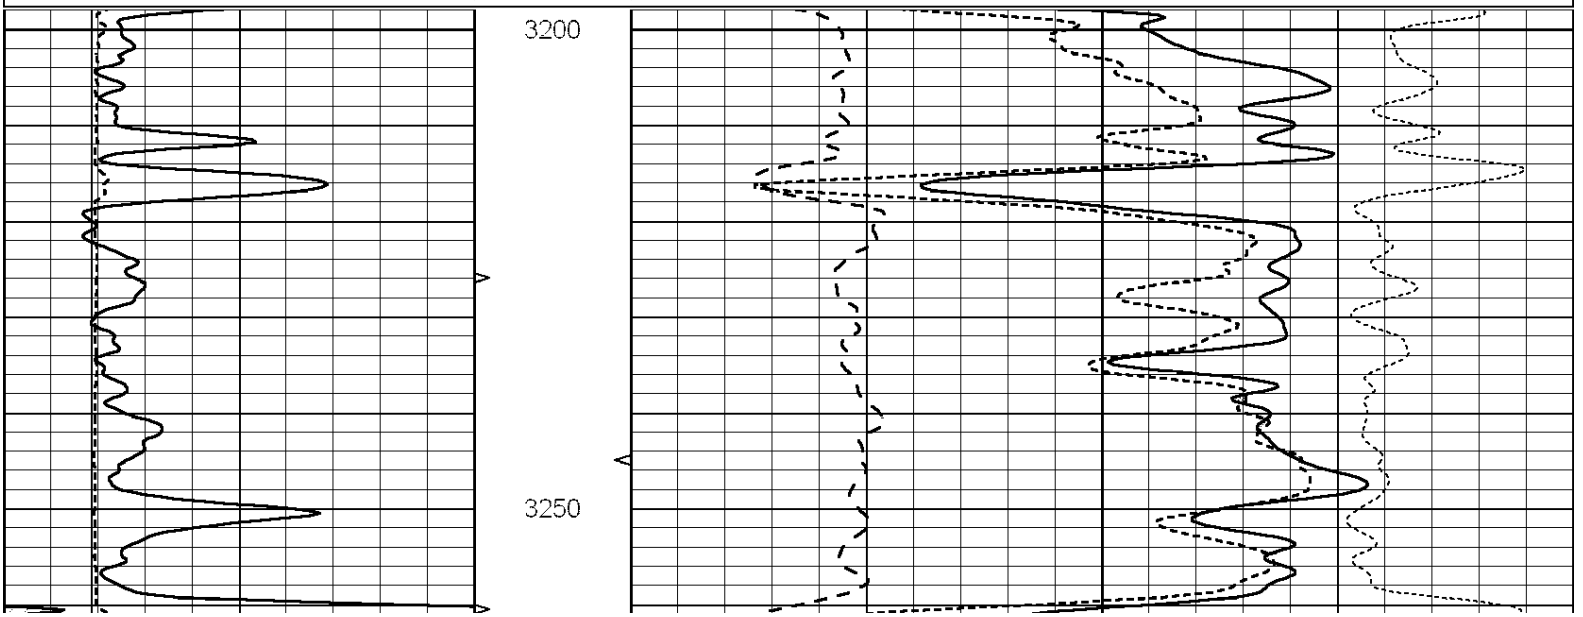

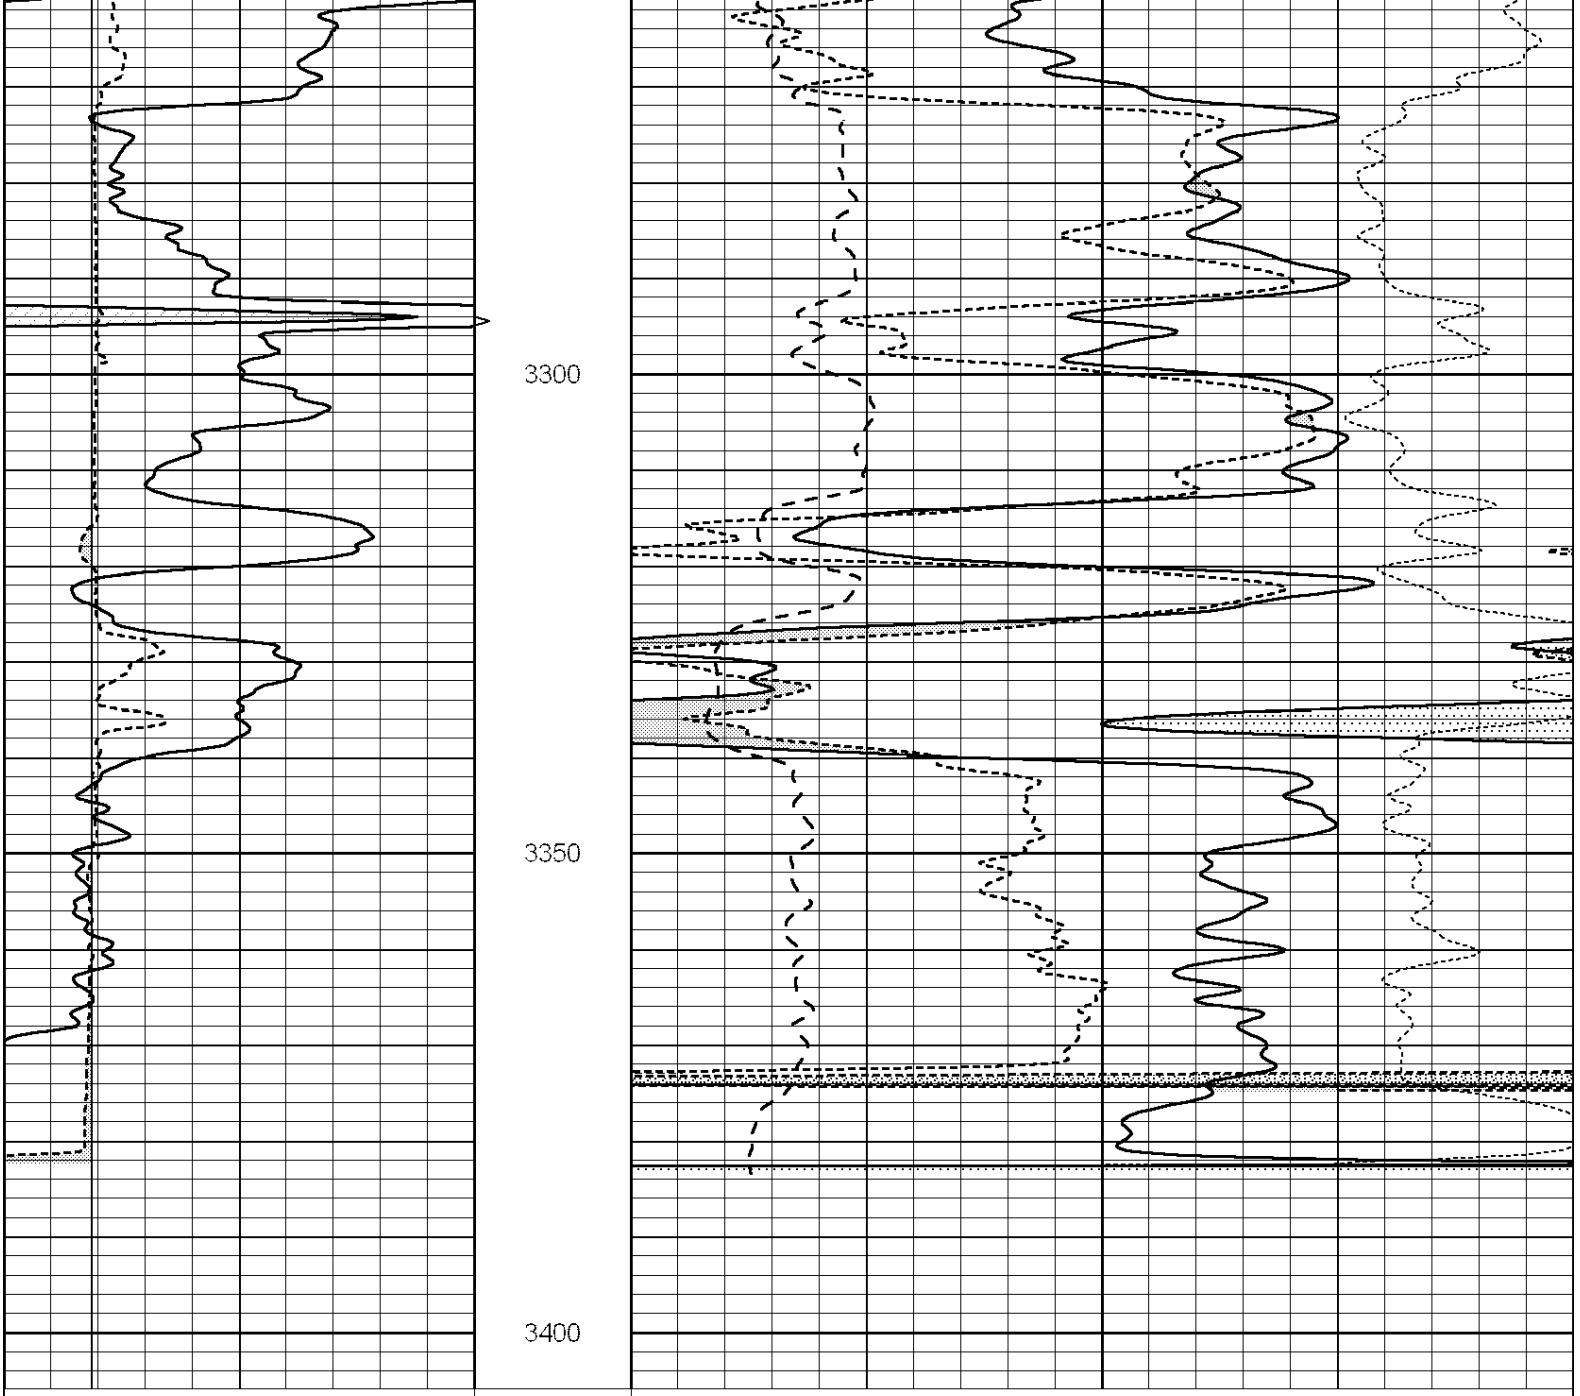

Calibration Report

Database File: 005421pe.db
Dataset Pathname: pass3.1
Dataset Creation: Wed Aug 04 23:11:11 2010 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model:	PROBE7-DILG
Surface Cal Performed:	Wed Jul 30 06:14:24 2008
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008

Surface Calibration

Readings	References	Results

Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	621.923	8.759
Medium	0.039	0.728	V	0.000	464.000	mmho/m	673.322	-26.058
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 002 Model: PRB
Performed Mon Oct 29 15:40:49 2007

Litho Density Calibration

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1056.3	9118.0	2809.7	10378.4	cps
Window 2	969.9	7671.9	2431.6	8565.8	cps
Window 3	683.8	2939.8	1161.0	3161.8	cps
Window 4	231.4	231.6	226.7	230.8	cps
Long Space	0.0	6702.0	1461.7	7595.9	cps
Short Space	1.2	1433.6	959.4	1568.6	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe			2.5700	1.5500	

Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio	: 0.559
Spine Angle	: 75.2	Spine Slope	: 3.791	Spine Intercept	: -18.7

Caliper

	Readings	Reference
Low Ref	3.1	8.0
High Ref	5.4	14.0
	Gain: 2.5	Offset: 2.2

Compensated Neutron Calibration Report

Serial Number: 5I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

Long Spaced	1.00	cps	1.00	cps	1.0000

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Wed Jul 14 14:14:30 2010	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5335	GAPI/cps